

V CB12H – VCB18H – VCB24H



VCB 18H

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

VCB12H – VCB18H – VCB24H

VCB12H – VCB18H – VCB24H			
Operating temp	-15°C / -18°C		
Climate class	7 (35°C, 75%HR)		
Capacity (l)	182		
	228		
	274		
Overall dimensions LxDxH (mm)	1.170 x 1.052 x 1.207 1.681 x 1.052 x 1.207 2.189 x 1.052 x 1.207		
Cabinet Construction			
Exterior Material		Epoxy painted Steel	
Interior Material		AISI 304 Stainless Steel	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	Polyuréthane d'une densité de 40 kg/m3, sans CFC, sans ODP et à faible GWP
Insulation thickness (mm)	70		
Blowing Agent	HFO		
Features			
Doors	2/2		
Door construction		Methacrylate sliding door	
Door lock	✗		
Shelving	✗		
Shelves dimensions LxD (mm)	-		
Legs, casters		Wheels	
Refrigeration			
Thermostat		Digital controller	
Defrost		Automatic	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	280		
	140 + 120		
	150 + 150		


Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	1.011		
	723 +583		
	723 + 583		
Power (W)	900		
	1.354		
	1.359		
Amps (A)	4,52		
	6,81		
	6,87		
Energy Consumption (kWh/24h)*	19,30		
	29,83		
	39,79		
	D		
	E		
	E		
Crating			
Crated dimensions L x l x H (mm)	1.275 x 1.160 x 1.450		
	1.800 x 1.160 x 1.450		
	2.295 x 1.160 x 1.450		
Crated volume (l)	1.477		
	2.127		
	2.765		
Net Weight (kg)	180		
	260		
	280		
Crated Weight (kg)	340		
	465		
	570		
Options			
		220 V / 1 ph / 60 Hz	
		Combination of 1/3 or 1/2 buckets	

VCB12H –VCB18H –VCB24H

ELEVATION

RIGHT VIEW

PLAN VIEW

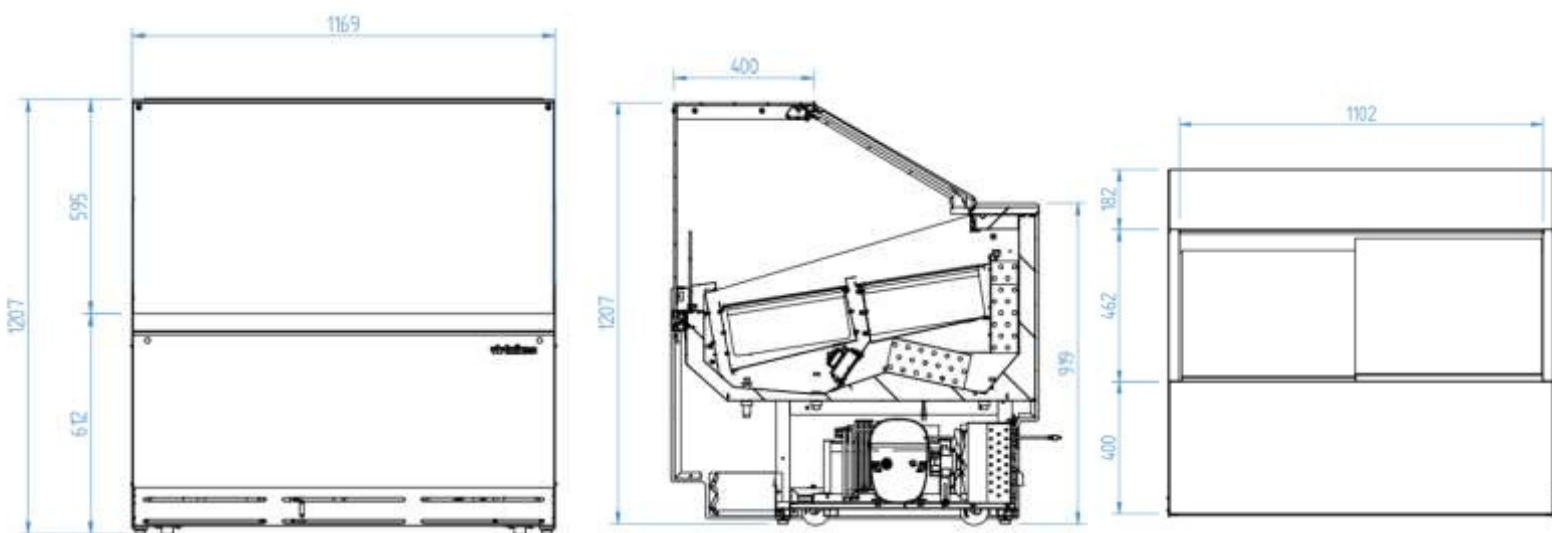

VCB12H

ELEVATION

RIGHT VIEW




VCB18H

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis


PLAN VIEW

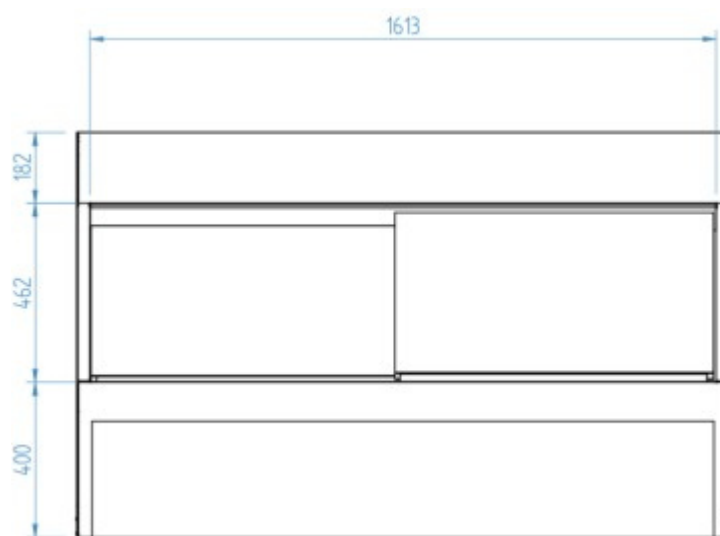


VCB18H

ELEVATION

RIGHT VIEW

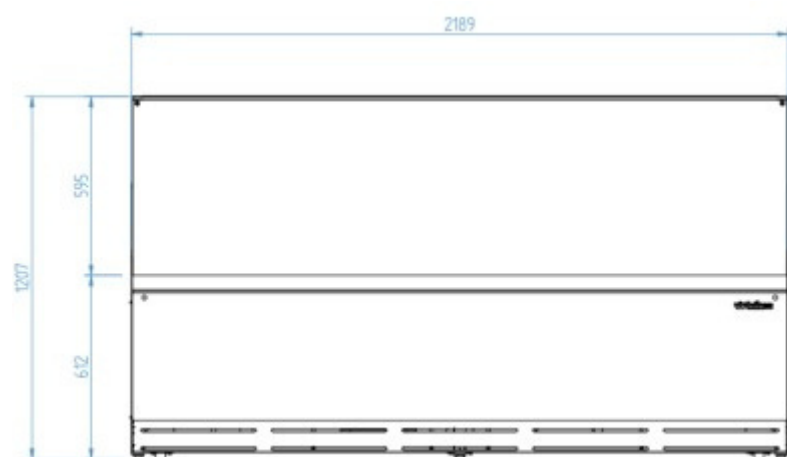


VCB24H

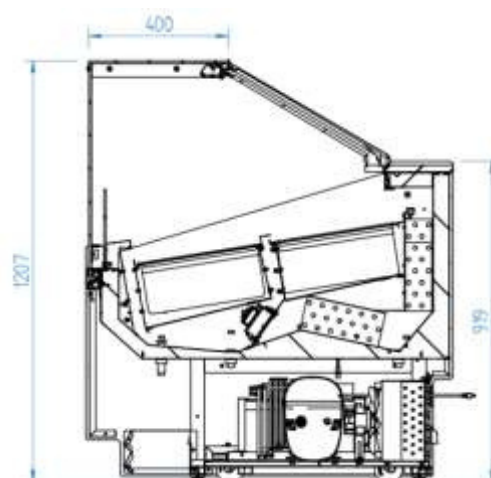

www.infrico.com
info@infrico.com
 Ctra. de Aguilar A-318 por Moriles Km. 15,5 - A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis


PLAN VIEW

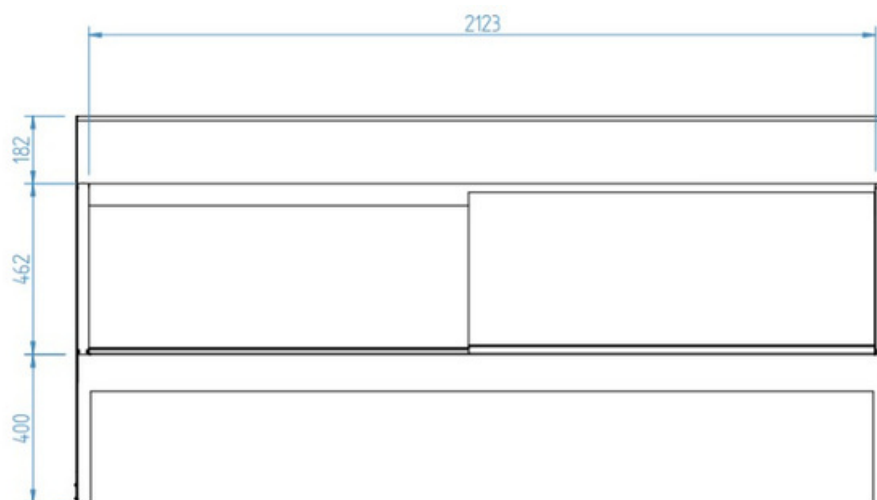

VCB24H

OPTIONAL FEATURES

- Option 1

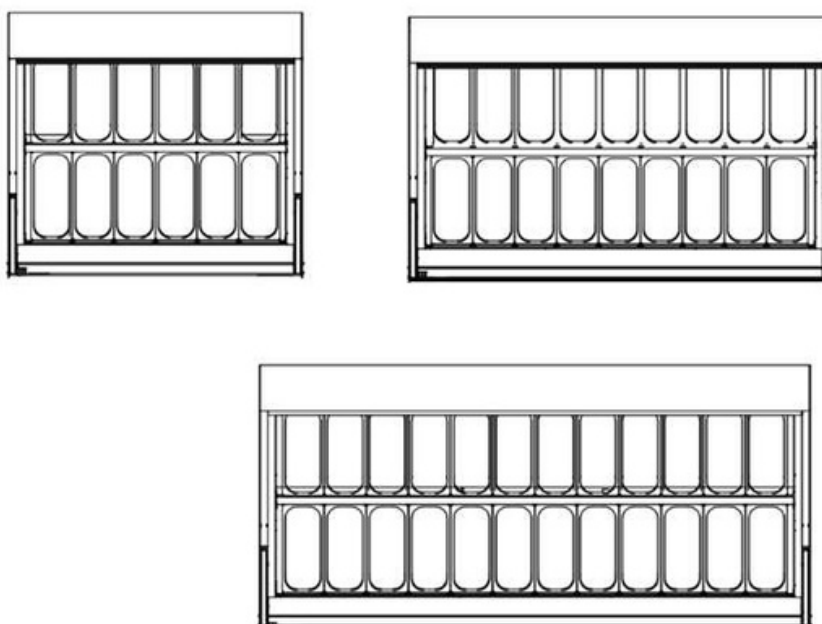

www.infrico.com
info@infrico.com


Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

- Option 2

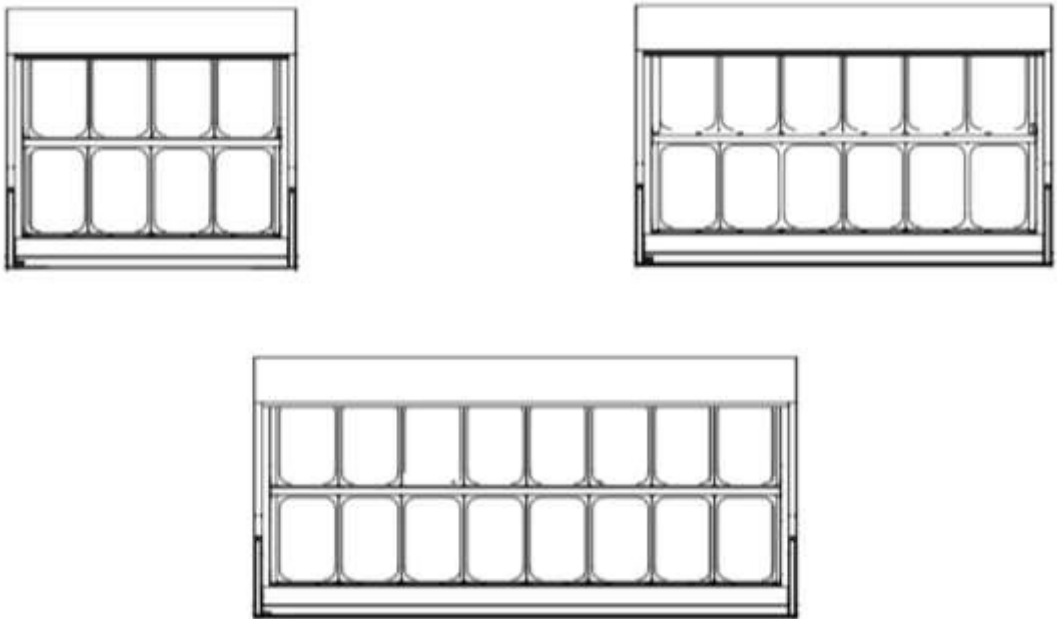

OPTIONAL FEATURES



Dimensions mm		
Width	Depth	Height
(250)	(360)	(235)

www.infrico.com
info@infrico.com
 Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent etre sujettes à modifications, sans préavis