

VAR12H / VAR18H / VAR24H

**VAR18H**

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Curved panoramic glass for better visibility of the product.

VAR12H / VAR18H / VAR24H

	VAR12H / VAR18H / VAR24H		
Operating temp	-15°C / -18°C		
Climate class	7 (35°C, 75%HR)		
Capacity (l)	182 228 274		
Overall dimensions LxDxH (mm)	1.169 x 1.049 x 1.207 1.681 x 1.040 x 1.207 2.189 x 1.049 x 1.207		
Cabinet Construction			
Exterior Material		AISI 304	
Interior Material		Exhibition plan: AISI 304	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	70		
Blowing Agent	HFO		
Features			
Doors	2/2		
Door construction		Plexi rear sliding doors.	
Shelving	X		
Shelves dimensions LxD (mm)	X		
Refrigeration			
Thermostat		Digital controller	
Defrost		Hot gas	
Expansion Device	✓		
Electronic fans		Ventilated	
Condensation		Forced-air evaporator with anti corrosion epoxy coating	
Evaporation			
Technical Features			
Refrigerant	R290		
Ref amount (gr)	280 140 + 120 150 + 150		
Power Supply	230 V / 1 / 50Hz		

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis






Refrigeration Capacity (W)	1.011 723 + 583 723 + 583
Power (W)	900 1.354 1.359
IAmps (A)	4,52 6,81 6,87
Energy Consumption (kWh/24h)	19,30 29,83 39,79
Energy Class	D E E
Crating	
Crated dimensions L x l x H (mm)	1.275 x 1.160 x 1.450 1.800 x 1.160 x 1.450 2.295 x 1.160 x 1.450
Crated volume (l)	1.477 2.127 2.765
Net Weight (kg)	180 260 280
Crated Weight (kg)	340 465 570
Options	
	220 V / 1ph / 60 Hz
	Combination of 1/3 or 1/2 buckets

VAR12H / VAR18H / VAR24H




ELEVATION

RIGHT VIEW

PLAN VIEW

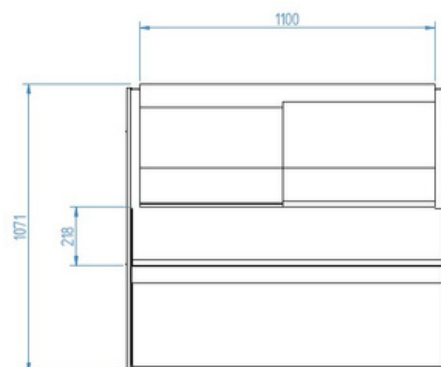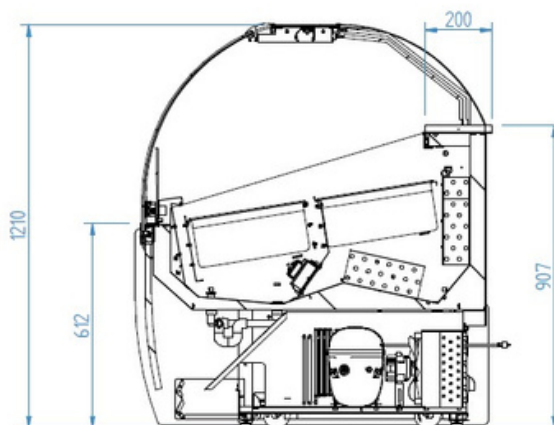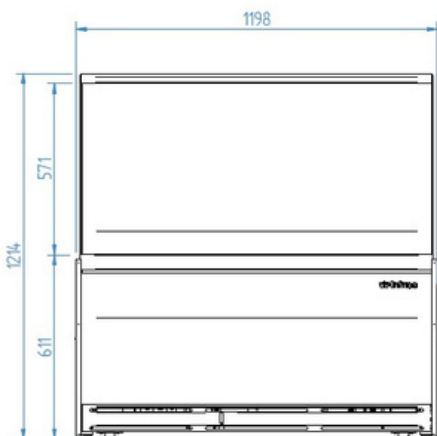

VAR12H

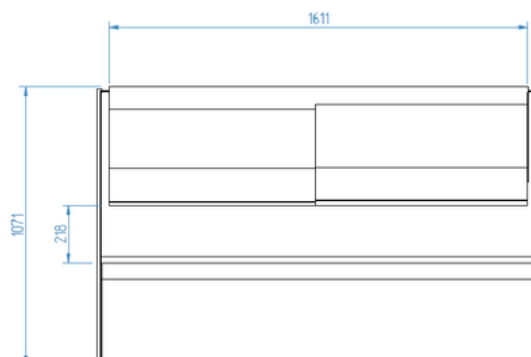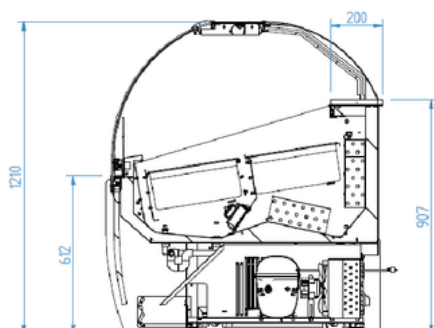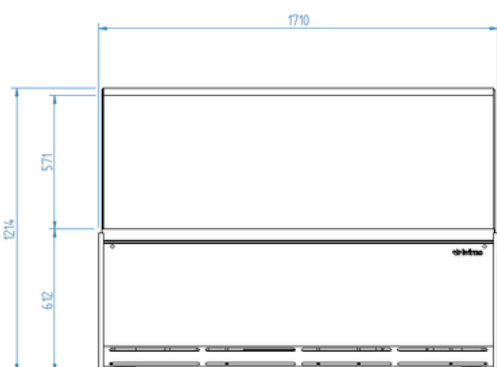

VAR18H

Rev: 01 Fecha/Date: 19/03/2026 FT_VAR12H_18H_24H_00_01

ELEVATION


RIGHT VIEW

PLAN VIEW

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



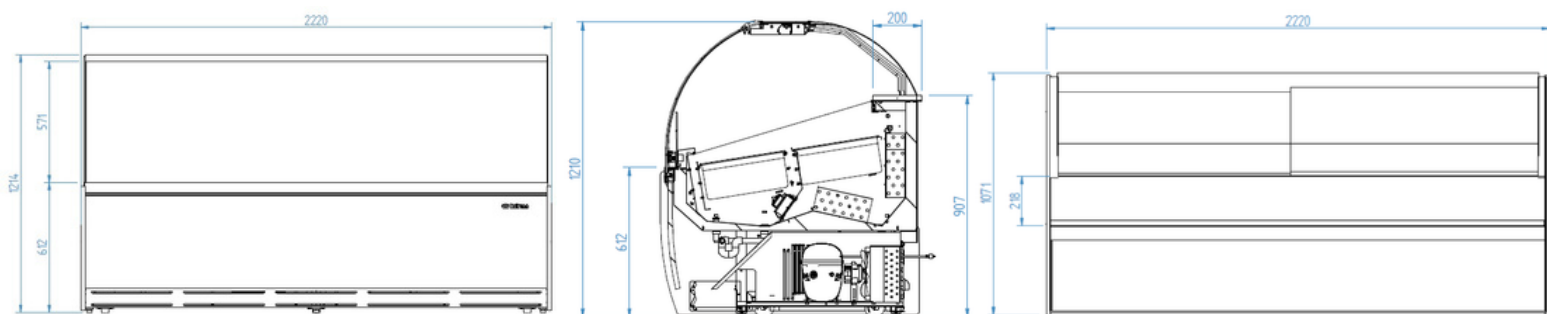

VAR24H

Rev: 01 Fecha/Date: 19/03/2026 FT_VAR12H_18H_24H_00_01

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

