

AGB701PDC



AGB701PDC

STRENGTHS

- ✓ The range of GN2 / 1 monoblock cabinets offer design and robustness, manufactured with high quality materials and components.
- ✓ The interiors with embedded guides and curved joints are easy to clean and hygienic.
- ✓ They have a high energy efficiency thanks to the use of R290, LED lighting and electronic fans.
- ✓ Its high precision digital controller guarantees optimum temperature and safe food storage.

Rev: 01 Fecha/Date: 24/03/2026 FT_AGB701_00_ES_EN_FR_19_01

AGB701PDC

	AGB701PDC		
Operating temp	-2°C / +8°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	565		
Overall dimensions LxDxH (mm)	687 x 794 x 2.130		
Cabinet Construction			
Exterior Material		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Interior Material		AISI 304 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	75		
Blowing Agent	HFO		
Features			
Doors	2		
Door construction		Solid door with integrated double-trip handle and pivoting hinge and stay open door mechanism. Pressed rear door with four chamber cleanless door gasket, easily replaceable.	
Door lock	✓		
Door frame heaters	✗		
Shelving	6		
Shelves dimensions LxD (mm)	480X650		
Legs, casters		Wheels 4” diameter	
Refrigeration			
Thermostat		Touch-screen, IP65	

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Refrigeration system	Monoblock		
Defrost		Hot gas defrost	
Expansion Device		Thermostatic expansion valve	
Electronic fans	✓		
Condensation		Forced-air	
Evaporation		Forced-air evaporator with anti corrosion epoxy coating	
Condensate pan		Hot gas condensate pan	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	115		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	690		
Power (W)	404		
Amps (A)	2,94		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	790 x 870 x 2.180		
Crated volume (l)	1.256		
Net Weight (kg)	120		
Crated Weight (kg)	145		
Options			
		Extradense wire shlef	
		Casters	
		Digital control by bluetooth	
		115V/1ph/60Hz	
		230V/1ph/60Hz	
		Meat bar set	

Rev: 01 Fecha/Date: 24/03/2026 FI_AG8701_00_ES_EN_FR_19_01

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis




AGB701PDC

ELEVATION

RIGHT VIEW

PLAN VIEW

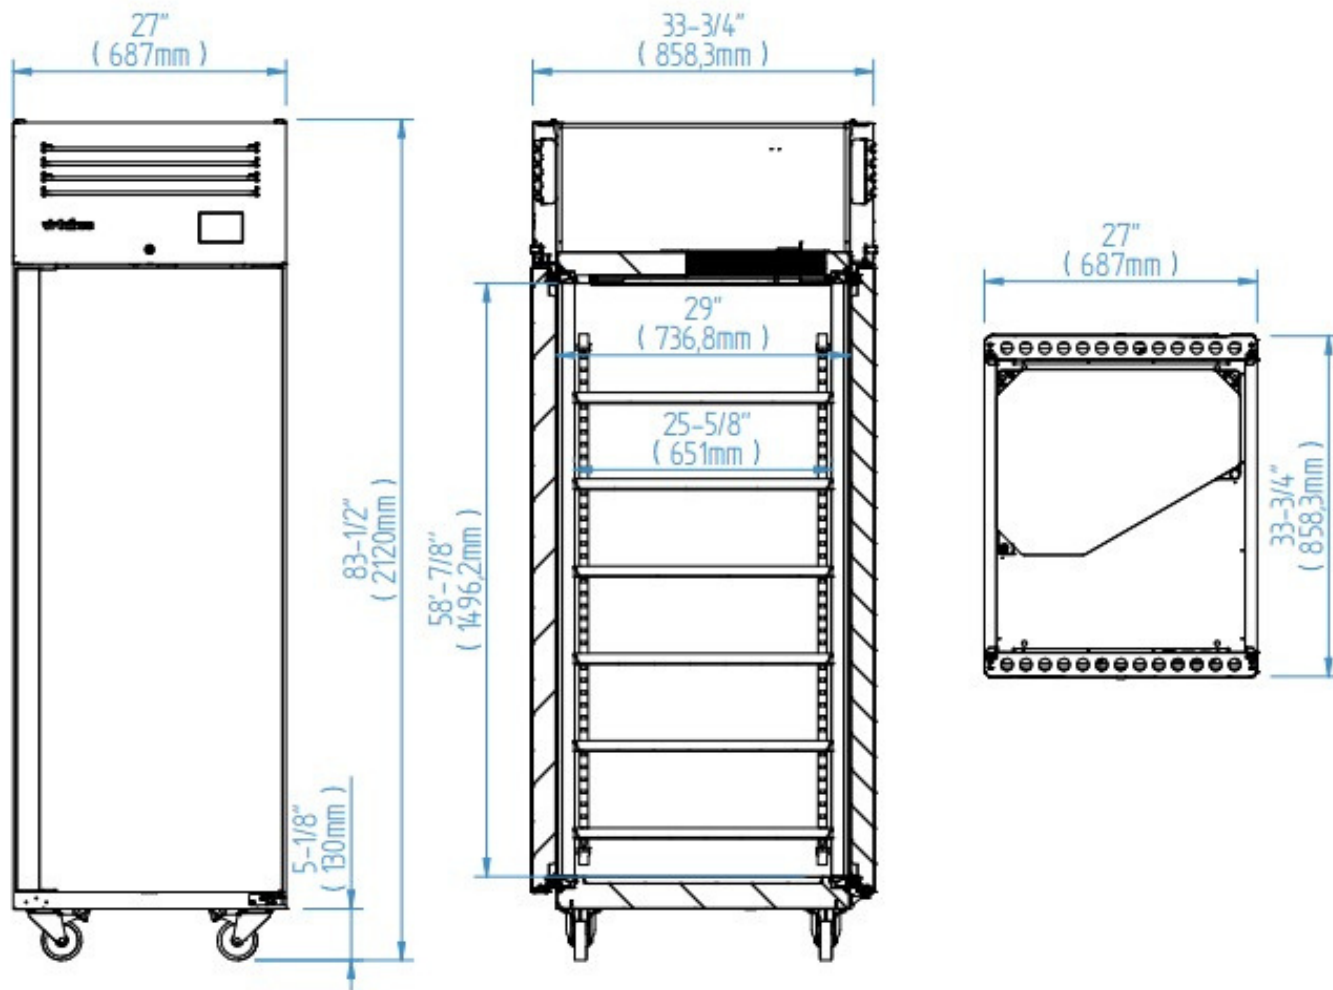

Rev: 01 Fecha/Date: 24/03/2026 FT_AGB701_00_ES_EN_FR_19_01

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 - A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

