

DATA SHEET
REACH IN REFRIGERATOR
AGB901PDCR



Rev: 24/03/2026



AGB901PDCR

AGB901PDCR

STRENGTHS

- ✓ The range monoblock cabinets offer design and robustness, manufactured with high quality, materials and components.
- ✓ The interiors with curved joints are easy to clean and hygienic.
- ✓ They have a high energy efficiency thanks to the use of R290, LED lighting and electronic fans.
- ✓ Its high precision digital controller guarantees optimum temperature and safe food storage.

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 02 Fecha/Date: 24/03/2026 FI_AGB+901_00_ES_EN_FR_24_01

DATA SHEET
REACH IN REFRIGERATOR
AGB901PDCR



Rev: 24/03/2026

	AGB901PDCR		
Operating temp	-2°C/+8°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	840		
Overall dimensions LxDxH (mm)	796 x960 x 2.130		
Cabinet Construction			
Exterior Material		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Interior Material		AISI 304 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	75		
Blowing Agent	HFO		
Features			
Doors	2		
Door construction		Double pane glass door, tempered and low-e	
Door lock	✓		
Door frame heaters	✗		
Shelving	6		
Shelves dimensions LxD (mm)	600x800		
Legs, casters		Wheels 4” diameter	
Refrigeration			
Thermostat		Touch-screen, IP65	
Refrigeration system	Monoblock		
Defrost		Hot gas defrost	
Expansion Device		Thermostatic expansion valve	

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

aracterísticas técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 02 Fecha/Date: 24/03/2026 FI_AGB+901_00_ES_EN_FR_24_01

Electronic fans	✓		
Condensation		Forced-air	
Evaporation		Forced-air evaporator with anti corrosion epoxy coating	
Condensate pan		Hot gas condensate pan	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	115		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	931		
Power (W)	855		
Amps (A)	2,78		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	920 x 900 x 2.160		
Crated volume (l)	1.628		
Net Weight (kg)	143		
Crated Weight (kg)	168		
Options			
		Wire Shelf	
		Tray 600x400	
		Digital control by bluetooth	
		115V/1ph/60Hz	
		230V/1ph/60Hz	
		5L Ice cream tray	
		Lock door	

Rev: 02 Fecha/Date: 24/03/2026 FI_AGB+901_00_ES_EN_FR_24_01

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



DATA SHEET
REACH IN REFRIGERATOR
AGB901PDCR






Rev: 24/03/2026

ELEVATION

RIGHT VIEW

PLAN VIEW

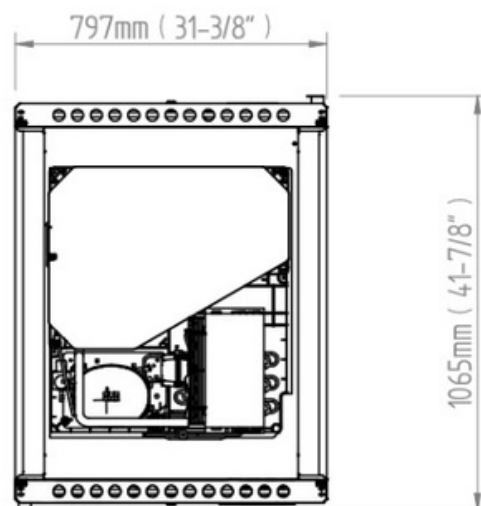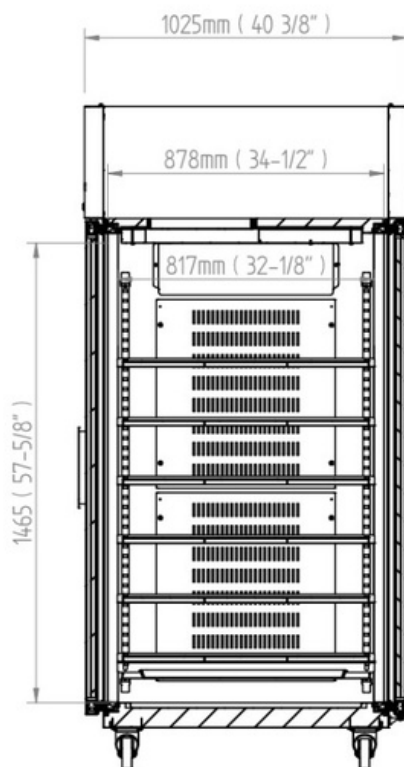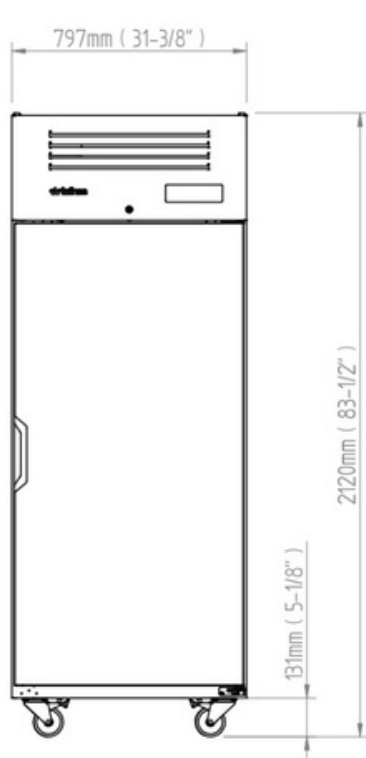

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 - A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 02 Fecha/Date: 24/03/2026 FI_AGB+901_00_ES_EN_FR_24_01