



Codice

TAAA3000000000

Modello

EASY S 175.70.85 TNV

Caratteristiche costruttive - Building characteristics

Rivestimento INTERNO / INSIDE covering IAISI304; Technical Box, External Back/Bottom panel galvanized sheet metal
Rivestimento ESTERNO / OUTSIDE covering Acciaio INOX AISI 304 / STAINLESS STEEL AISI 304

Temp. interna Internal temp **TNV +0° +10°C**

Classe **Alte prestazioni** -High performance **5**
Class 40°C-40%

Spessore di isolamento Thickness of isolation **mm.** **50**

Tensione V - Ph - Hz Tension V-Ph-Hz **230/1/50-60 Hz**

Capacità netta Net capacity **Lt.** **338**

Dotazioni Equipment **n°3 griglie plastificate- plastic-coated wire shelves 325 x 530 GN1/1**

Centralina elett. Electronic central **DIGITAL**

Gestione HACCP HACCP Function **-**

Connessione remota Remote Connection **-**

Chiusura con chiave Key lock **-**

Condensazione ad acqua Watercondensing unit **O**

Tensione 60Hz Voltage 60Hz **O**

Peso netto Net Weight **Kg.** **161**
Con imballo / Packed **167**
T. evap.-10° / +55°T.condTN

Potenza frigorifera Refrigeration power **ASHRAE** **Watt** **647**

Capillare / Valvola termostatica Capillary / Thermostatic Valve **Cap.**

Ventilatore evap. Evaporator fan **Ø - Watt-Volt** **TG-10W -230V**

Resistenza Sbrinamento Defrosting heater **Watt** **-**

Compressore Compressor **ERMETICO**

Ventilatore cond. Condenser fan **Ø - Watt-Volt** **1x230Ø-12W -230V**


Gas Gas **Kg.** **R290 GWP: 3**
0,11

Assorbimento Absorption **Watt 460 / A 2,7**

Rumorosità Noise **Db(A)**

Code	TAAA3000000000
Model	EASY S 175.70.85 TNV
External dimensions packed	1820x760x1110

BASIC GREEN S-P-A 175-70-85

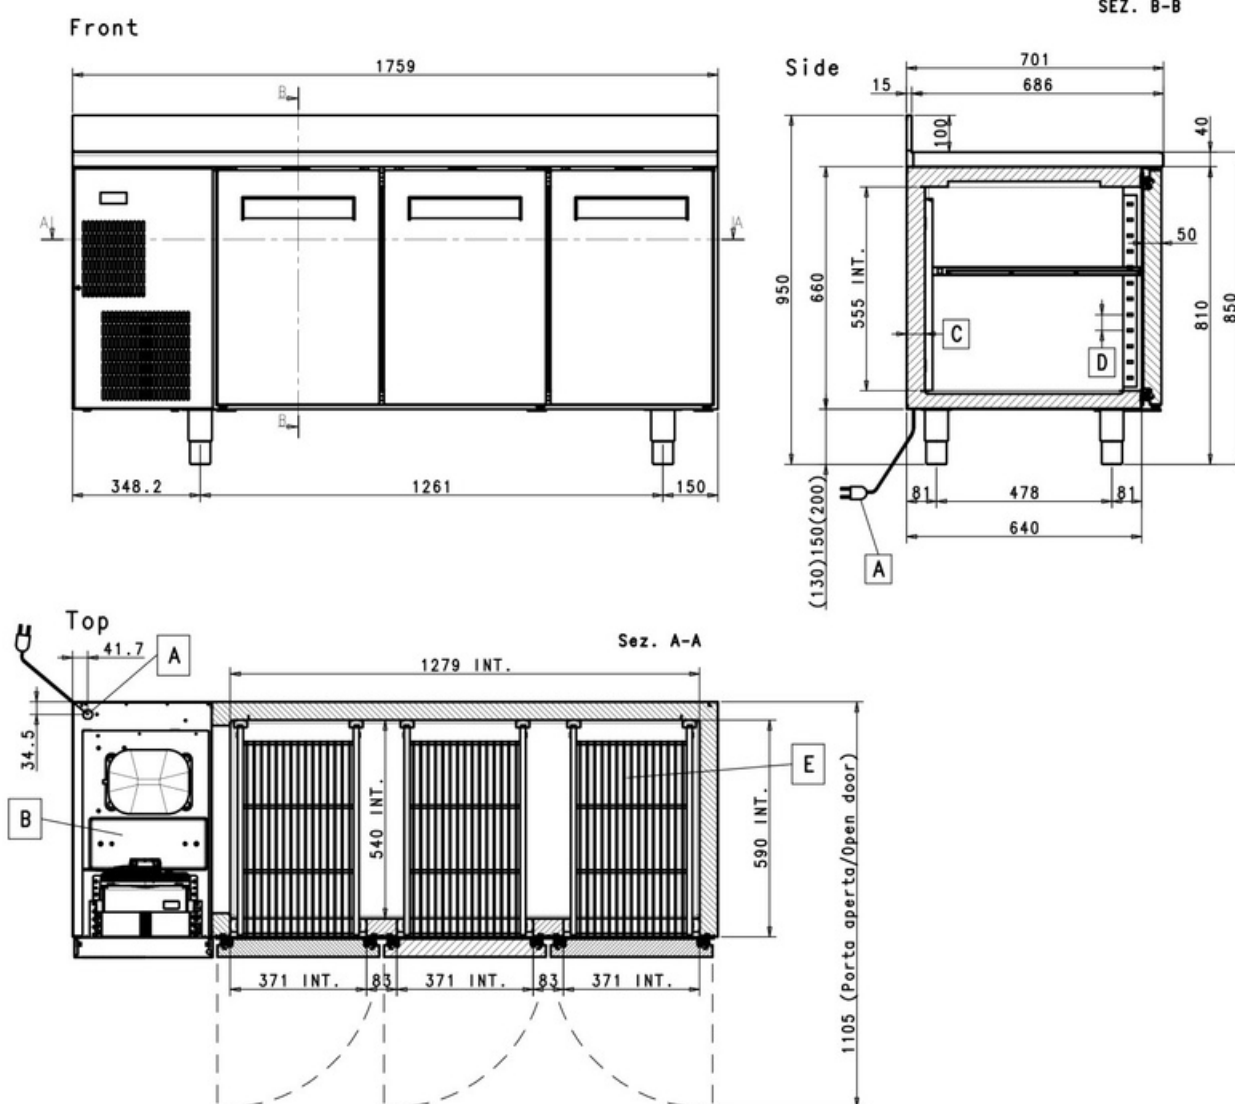

- A - Cavo Alimentazione L.2100 / Line cable 2100 mm lenght
B - Vaschetta Evaporazione Condensa / Pan evaporation condensation water
C - Spessore Coibentazione 50mm / 50 mm insulation thickness
D - Passo Cremagliere 43mm / Slideways support with 43 mm pitch
E - Griglia 325x530mm N°3 in dotazione / N° 3 plastified wire shelves 325x530mm included



Codice

TAAA3100000000

Modello

EASY P 175.70.85 TNV

Caratteristiche costruttive - Building characteristics

Rivestimento INTERNO / INSIDE covering IAISI304; Technical Box, External Back/Bottom panel galvanized sheet metal
Rivestimento ESTERNO / OUTSIDE covering Acciaio INOX AISI 304 / STAINLESS STEEL AISI 304

Temp. interna Internal temp **TNV +0° +10°C**

Classe **Alte prestazioni** -High performance **5**
Class **40°C-40%**

Spessore di isolamento Thickness of isolation **mm.** **50**

Tensione V - Ph - Hz Tension V-Ph-Hz **230/1/50-60 Hz**

Capacità netta Net capacity **Lt.** **338**

Dotazioni Equipment **n°3 griglie plastificate- plastic-coated wire shelves 325 x 530 GN1/1**

Centralina elett. Electronic central **DIGITAL**

Gestione HACCP HACCP Function **-**

Connessione remota Remote Connection **-**

Chiusura con chiave Key lock **-**

Condensazione ad acqua Watercondensing unit **O**

Tensione 60Hz Voltage 60Hz **O**

Peso netto Net Weight **Kg.** **161**
Con imballo / Packed **167**
T. evap.-10° / +55°T.condTN

Potenza frigorifera Refrigeration power **ASHRAE** **Watt** **647**

Capillare / Valvola termostatica Capillary / Thermostatic Valve **Cap.**

Ventilatore evap. Evaporator fan **Ø - Watt-Volt** **TG-10W -230V**

Resistenza Sbrinamento Defrosting heater **Watt** **-**

Compressore Compressor **ERMETICO**

Ventilatore cond. Condenser fan **Ø - Watt-Volt** **1x230Ø-12W -230V**


Gas Gas **Kg.** **R290 GWP: 3**
0,11

Assorbimento Absorption **Watt 460 / A 2,7**

Rumorosità Noise **Db(A)**

Code	TAAA3100000000
Model	EASY P 175.70.85 TNV
External dimensions packed	1820x760x1110

BASIC GREEN S-P-A 175-70-85

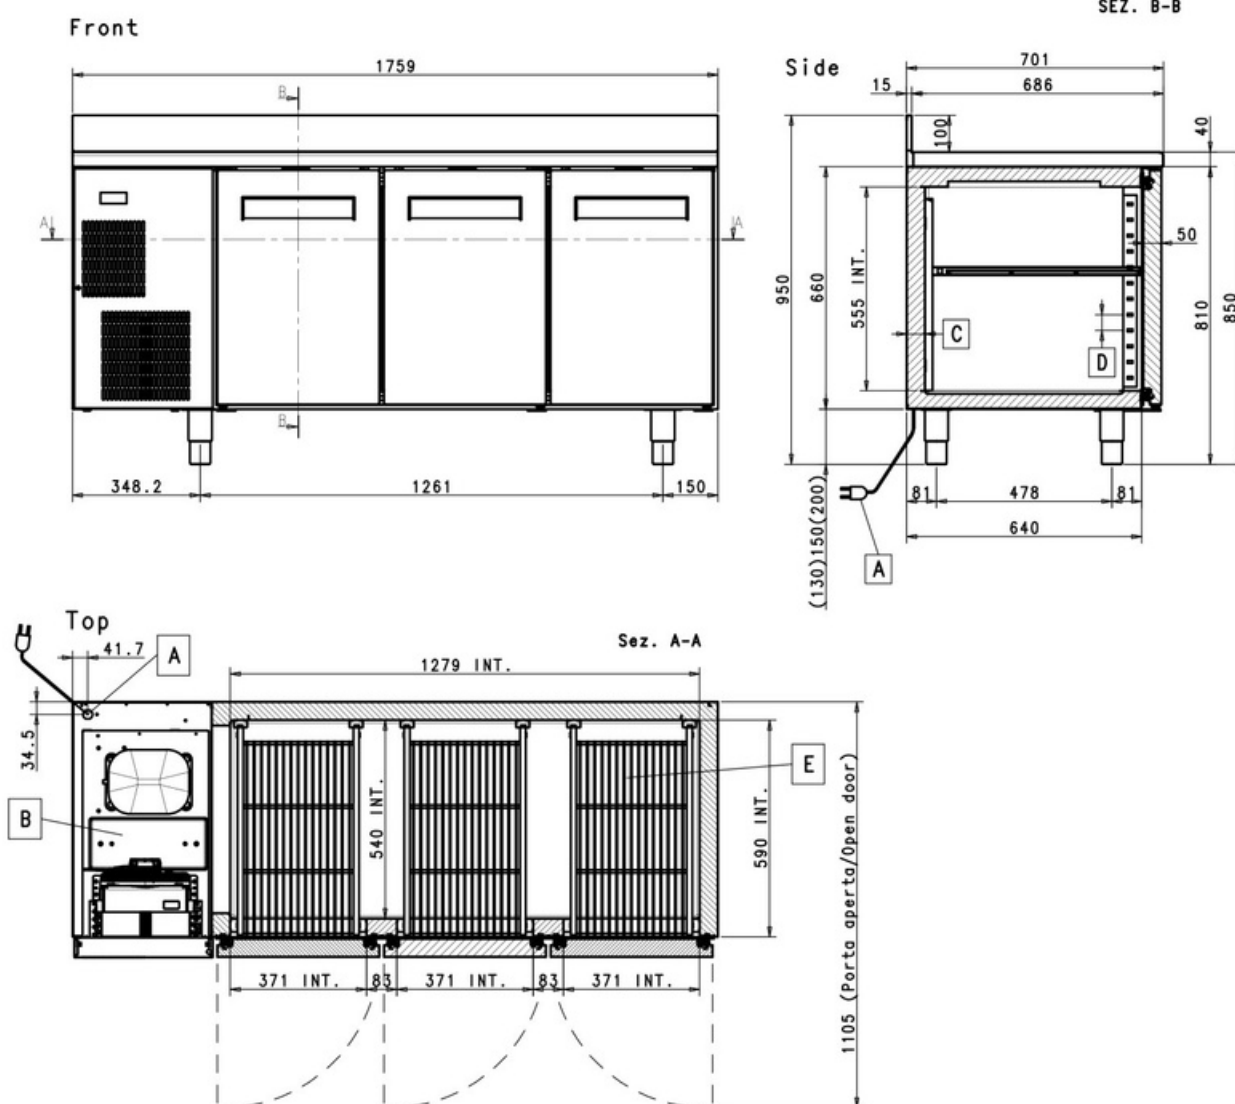

- A - Cavo Alimentazione L.2100 / Line cable 2100 mm lenght
B - Vaschetta Evaporazione Condensa / Pan evaporation condensation water
C - Spessore Coibentazione 50mm / 50 mm insulation thickness
D - Passo Cremagliere 43mm / Slideways support with 43 mm pitch
E - Griglia 325x530mm N°3 in dotazione / N° 3 plastified wire shelves 325x530mm included



Codice

TAAA3200000000

Modello

EASY A 175.70.85 TNV

Caratteristiche costruttive - Building characteristics

Rivestimento INTERNO / INSIDE covering IAISI304; Technical Box, External Back/Bottom panel galvanized sheet metal
Rivestimento ESTERNO / OUTSIDE covering Acciaio INOX AISI 304 / STAINLESS STEEL AISI 304

Temp. interna Internal temp **TNV +0° +10°C**

Classe **Alte prestazioni** -High performance **5**
Class 40°C-40%

Spessore di isolamento Thickness of isolation **mm.** **50**

Tensione V - Ph - Hz Tension V-Ph-Hz **230/1/50-60 Hz**

Capacità netta Net capacity **Lt.** **338**

Dotazioni Equipment **n°3 griglie plastificate- plastic-coated wire shelves 325 x 530 GN1/1**

Centralina elett. Electronic central **DIGITAL**

Gestione HACCP HACCP Function **-**

Connessione remota Remote Connection **-**

Chiusura con chiave Key lock **-**

Condensazione ad acqua Watercondensing unit **O**

Tensione 60Hz Voltage 60Hz **O**

Peso netto Net Weight **Kg.** **161**
Con imballo / Packed **167**
T. evap.-10° / +55°T.condTN

Potenza frigorifera Refrigeration power **ASHRAE** **Watt** **647**

Capillare / Valvola termostatica Capillary / Thermostatic Valve **Cap.**

Ventilatore evap. Evaporator fan **Ø - Watt-Volt** **TG-10W -230V**

Resistenza Sbrinamento Defrosting heater **Watt** **-**

Compressore Compressor **ERMETICO**

Ventilatore cond. Condenser fan **Ø - Watt-Volt** **1x230Ø-12W -230V**


Gas Gas **Kg.** **R290 GWP: 3**
0,11

Assorbimento Absorption **Watt 460 / A 2,7**

Rumorosità Noise **Db(A)**




Code	TAAA3200000000
Model	EASY A 175.70.85 TNV
External dimensions packed	1820x760x1110

BASIC GREEN S-P-A 175-70-85

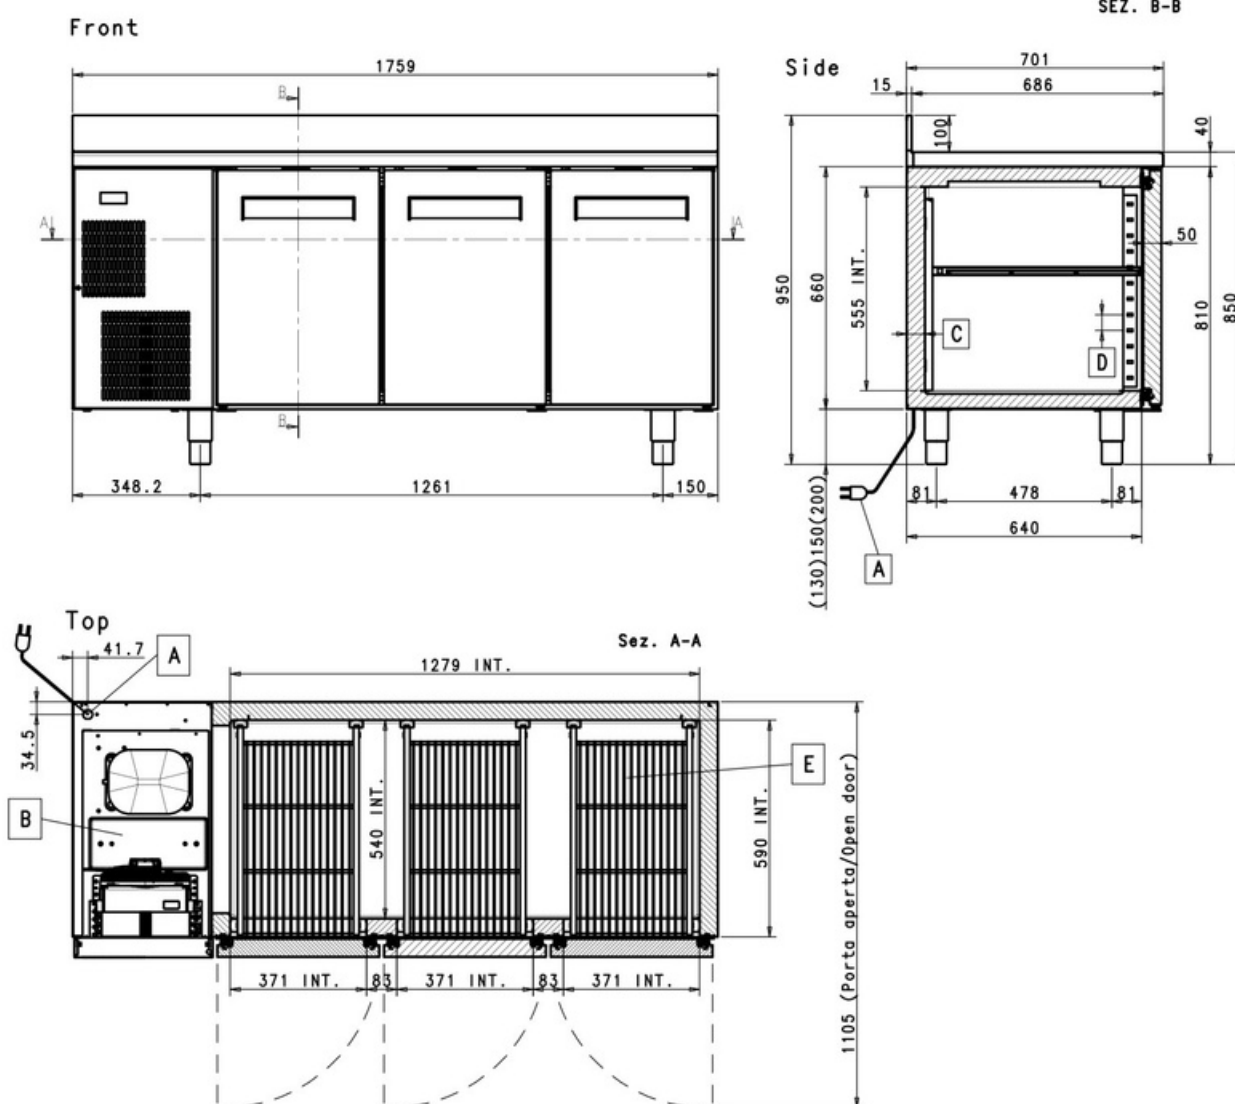

- A - Cavo Alimentazione L.2100 / Line cable 2100 mm lenght
B - Vaschetta Evaporazione Condensa / Pan evaporation condensation water
C - Spessore Coibentazione 50mm / 50 mm insulation thickness
D - Passo Cremagliere 43mm / Slideways support with 43 mm pitch
E - Griglia 325x530mm N°3 in dotazione / N° 3 plastified wire shelves 325x530mm included

EASY Versione a cassetti - Drawers version

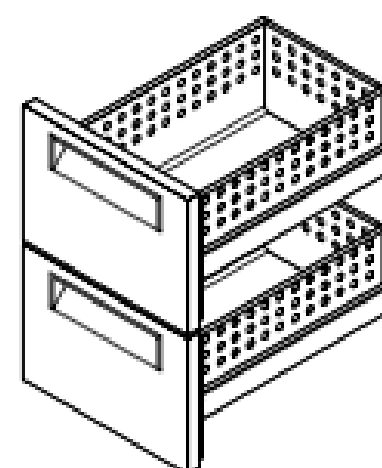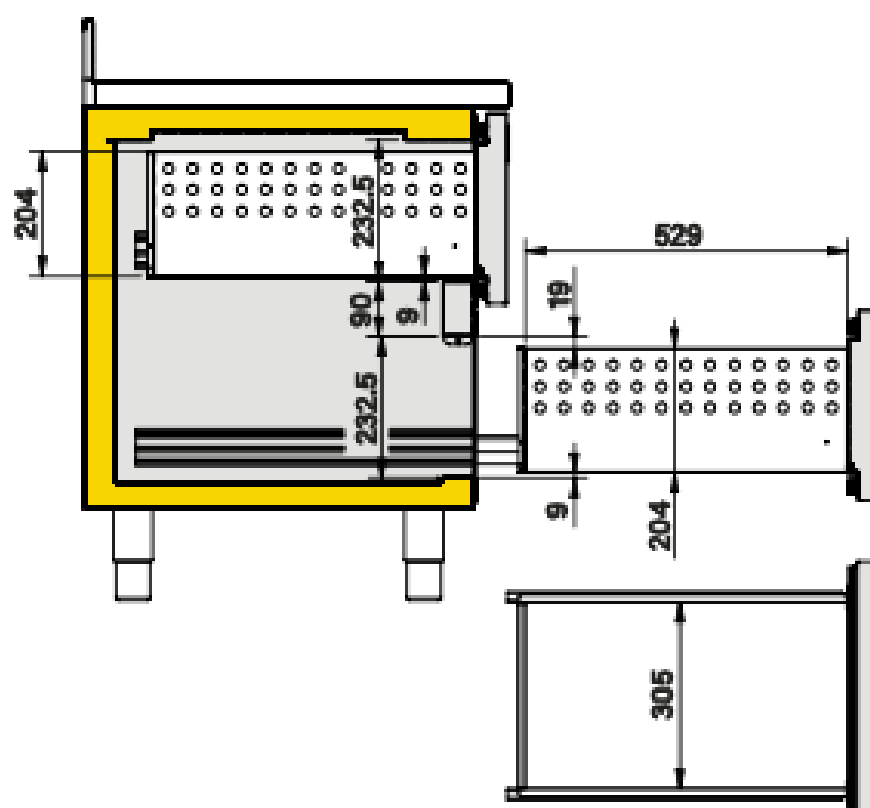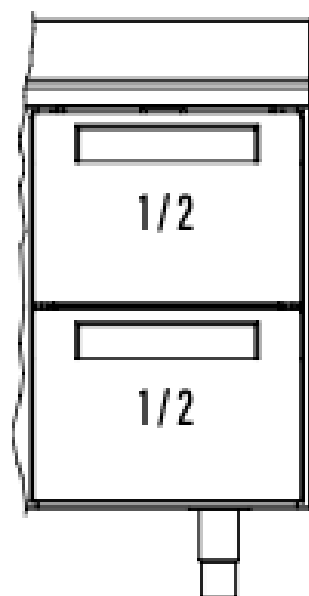

Cassetto - Drawer 1/2

**Supplemento per cassetiera da 1/2
in sostituzione di una porta**
Extra charge for 1/2 drawer unit instead of one door

Codice

Code

OPTT6080