

SUPERCooler INFRICO 20/26

SUPER COOLER



 **Infrico**

SERIE · SÉRIE SPC

Enfriador de botellas Supercooler
Chest bottle cooler Supercooler



SPC501B



SERIE SPC · SÉRIE SPC

ENFRIADOR DE BOTELLAS SUPERCooler CHEST BOTTLE COOLER SUPERCooler

The Supercooling phenomenon consists of cooling a liquid below its freezing point, staying in a liquid state stably without it actually freezing.



Drink in liquid form,
not frozen.



Below freezing
temperature in less than
2 hours



Technology applicable
to all kinds of drinks




ALCOHOLIC STRENGTH	SET POINT
5% < 5,5%	-7°
4% < 5%	-6°
3,5% < 4%	-5°
Cerveza/Beer/Bière 0,0%	-2°
Refrescos carbonatados Carbonated beverages	-2°


MODELO · MODEL	SPC501	SPC501B
PRECIO PRICE		
MEDIDAS MEASURES	687 x 728 x 2003 mm.	687 x 728 x 2003 mm.
TEMPERATURA TEMPERATURE	+0°C/-8°C	
CLASE CLIMÁTICA CLIMATIC CLASS	4 / 38°C	
TENSIÓN/FRECUENCIA ELECTRICAL DATA	230V/1ph/50Hz	
CONTROLADOR CONTROLLER	Digital / Digital	
MATERIAL MATERIAL (EXT/INT)	Int: acero Inox AISI 430 / Ext: acero Inox AISI 304 o Acero pintado epoxy (B) Int: Stainless Steel AISI 430 / Ext: Stainless Steel AISI 304 or Steel epoxy paint (B)	
ESPESOR THICKNESS (MM)	50	
AISLAMIENTO ISOLATION	40kg/m 3/ Free CFC's / Zero ODP-GWP	
CAPACIDAD CAPACITY (L)	500	
PUERTAS DOORS	1	
No ESTANTES SHELVING	5 (560x480)	
SISTEMA DE FRÍO COOLING SYSTEM	Forzado / Forced air	
DESESCARCHE DEFROST	Gas caliente / Hot gas	
EXPANSIÓN EXPANSION	Capilar / Capillary	
POTENCIA POWER (W)	629	
POTENCIA FRIG. COOLING CAPACITY	(W A Cooling capacity -10/-30°C) 567	
CONSUMO CONSUMPTION (KWH/ 24H)	6.32	
CLASE ENERGÉTICA ENERGY CLASS	C	
REFRIGERANTE REFRIGERANT	R290	
OPCIONAL OPTIONAL	Parrilla / Wire shelf (502x119)	

Nueva New SERIE · SÉRIE SPC

Enfriador de botellas Supercooler
Chest bottle cooler Supercooler

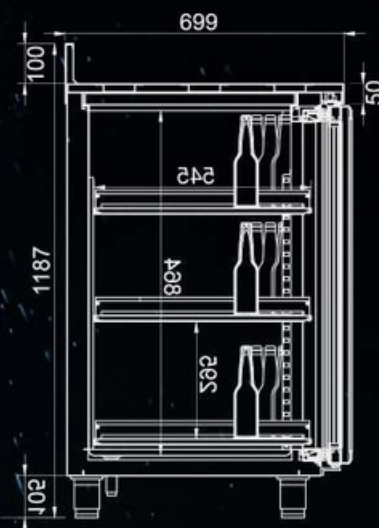

SPC1470B

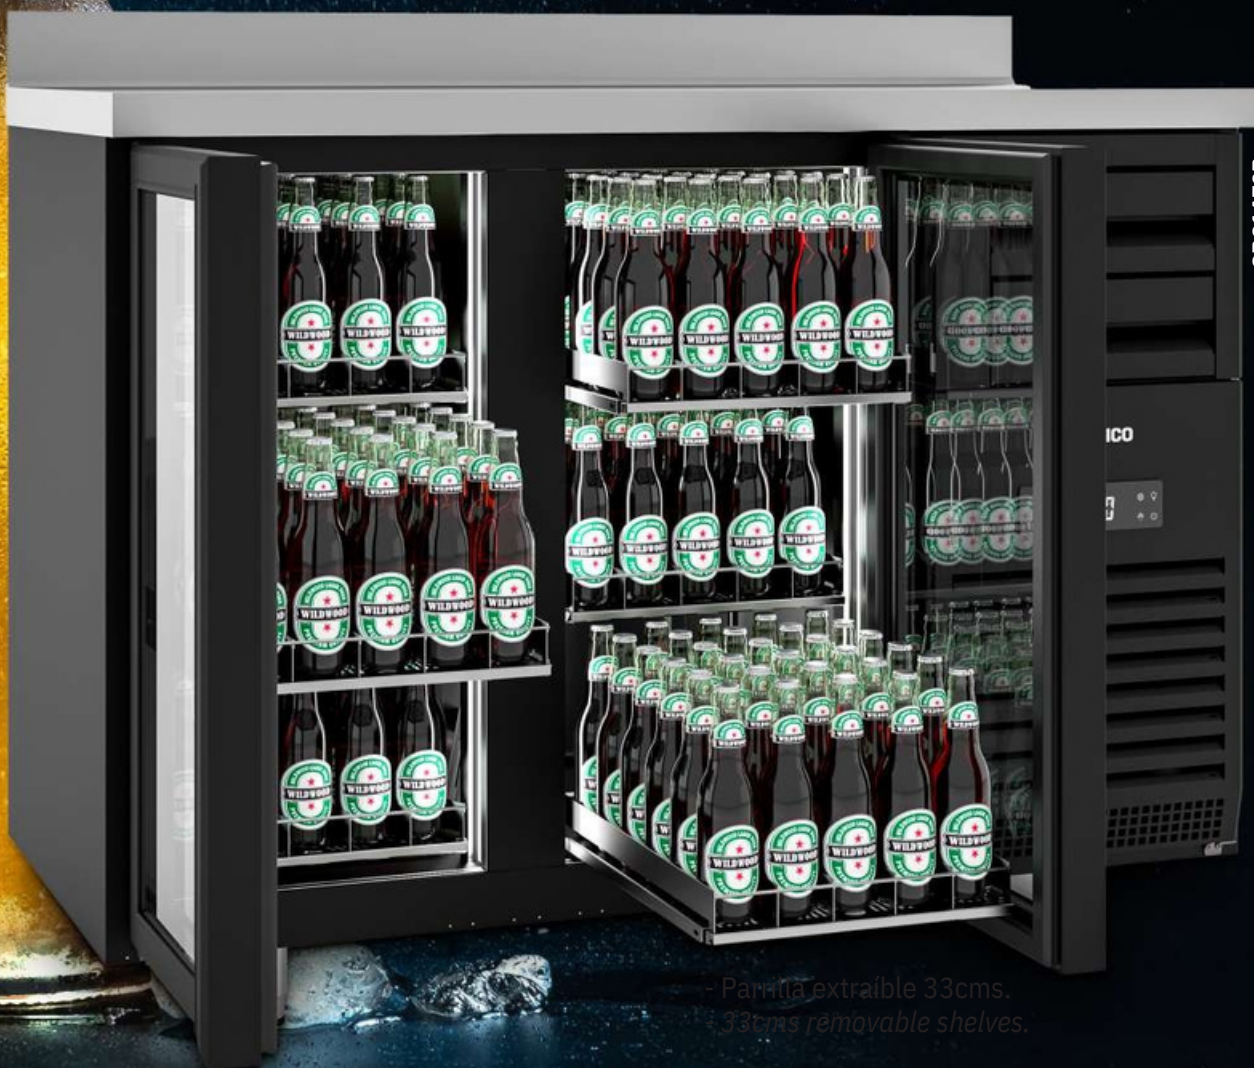

- Pared extraíble 33cms.
- 33cms removable shelves.



GRUPO 
Infrico®

Ctra. de Aguilar a A-318 por Moriles, km 15,5 - A-3132

CP 14900 LUCENA, Córdoba - España

Tel: 0034 957 51 30 68

info@infrico.com



www.Infrico.com

SPC

Enfriador de botellas Supercooler / Chest bottle cooler Supercooler / Réfrigérateur de bouteilles Supercooler



SPC501B




Grado de alcohol Alcoholic strength Teneur en alcool	Punto de corte Set point Point de coupure
5% < 5,5%	-7°
4% < 5%	-6°
3,5% < 4%	-5°
Cerveza/Beer/Bière 0,0%	-2°
Refrescos carbonatados/ Carbonated beverages Boissons gazeuses (non alcoolisées)	-2°


Triple acristalamiento templado, bajo
emisor con carga de Argón
(4-12-3-12-4)
Triple tempered glass, low emission
with Argon charge (4-12-3-12-4)
Triple vitrage trempé à faible
émissivité avec Argon (4-12-3-12-4)



SPC1470B

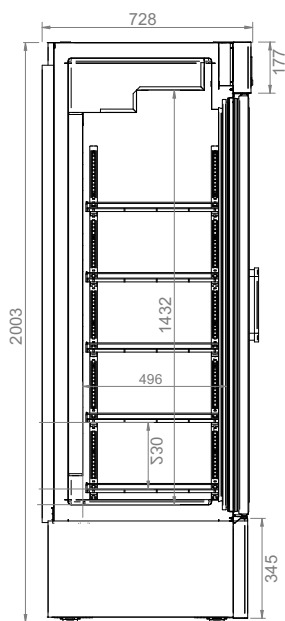

SPC501 / B

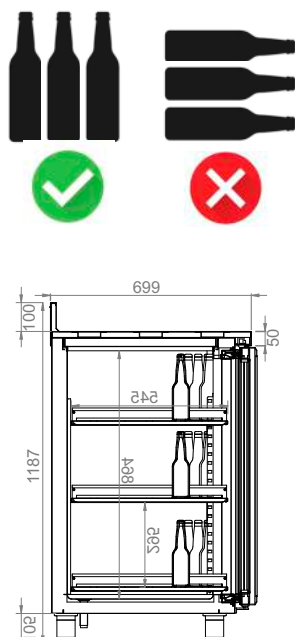

SPC1470 / B



SPC1470 / B
Parrilla extraíble 33cms.
33cms removable shelves.
Grille amovible 33cms.

Serie / Series / Série **SPC**

MODELO MODELE MODÈLE	SPC501	SPC501B	SPC1470	SPC1470B
Precio Price Prix				
Medidas Measures [mm] Mesures	687 x 728 x 2003 mm.	687 x 728 x 2003 mm.	1475 x 700 x 1187 mm.	1475 x 700 x 1187 mm.
Temperatura Temperature Température	+0°C/-8°C			
Clase Climática Climatic class Classe climatique	4 / 38°C			
Tensión/Frecuencia Electrical data Tension électrique	230V/1ph/50Hz			
Controlador Controller Régulateur	Digital / Digital / Électronique IP65			
Material Material [EXT/INT] Matériel	Int: acero Inox AISI 430 / Ext: acero Inox AISI 304 o Acero pintado epoxy (B) Int: Stainless Steel AISI 430 / Ext: Stainless Steel AISI 304 or Steel epoxy paint (B) Int: Stainless Steel AISI 430 / Ext: Acier Inox AISI 304 ou Acier peinture époxy (B)			
Espesor Thickness Épaisseur	50			
Aislamiento Isolation Isolation	40kg/m³ / Free CFC's / Zero ODP-GWP			
Capacidad Capacity Capacité	500		440	
Puertas Doors Portes	1		2	
Nº Estantes Shelving Nº d' étagères	5 [560x480]		6 [545x365]	
Sistema de frío Cooling System Système de froid	Forzado / Forced air / Ventilé			
Desescarche Defrost Dégivrage	Gas caliente / Hot gas / Gaz chaud			
Expansión Expansion Expansion	Capilar / Capillary / Capillaire		Válvula de expansión termostática / Thermostatic expansion valve / Détendeur thermostatique	
Potencia Power Puissance	629		629	
Potencia frig. Cooling capacity [W A] Puissance Frig. -10/-30°C	567		567	
Consumo Consumption [kWh/24h] Consommation	6.32		-	
Clase energética Energy class Classe Energ.	C		-	
Refrigerante Refrigerant Gaz	R-290			
Opcional Optional Options	Parrilla / Wire shelf / Grille métallique [502x119] 115V/1 ph/60 Hz 230V/1 ph/60 Hz			