


VML C/P/PNK


Vitrina expositora para pescado /
Fish display case /
Vitrine réfrigérée pour poisson




VML 12 C

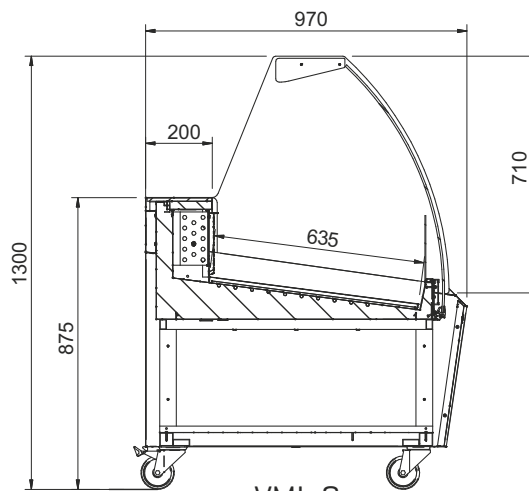

VML C

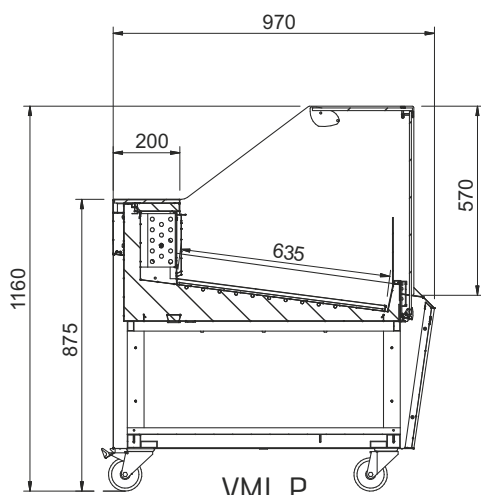


VML P

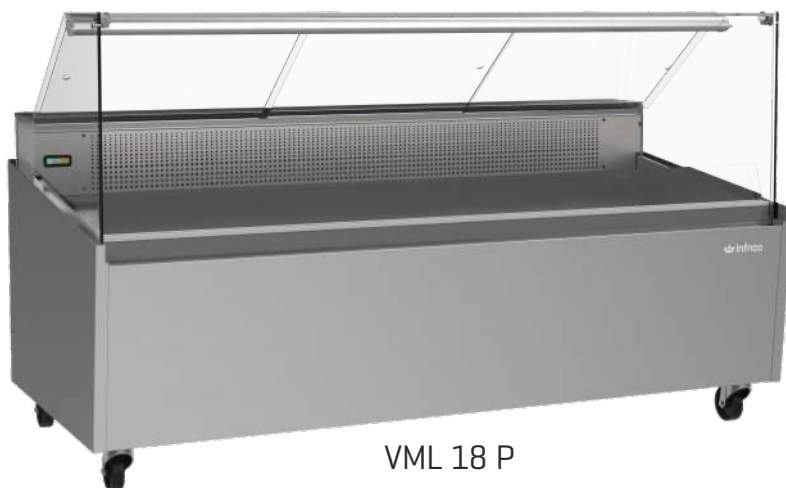

VML 18 P



VML 18 PNK

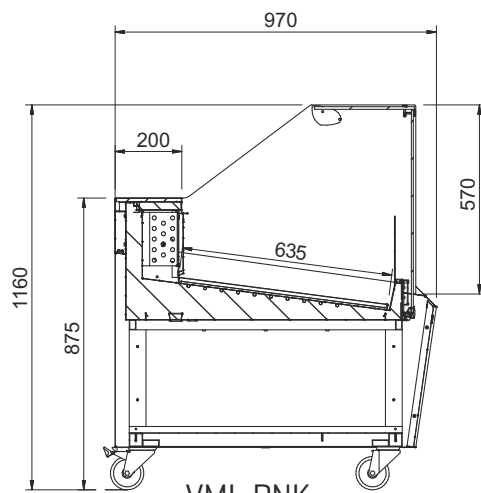

VML PNK

MÁLAGA

CATÁLOGO GENERAL / GENERAL CATALOGUE / CATALOGUE GÉNÉRAL 

Serie / Series / Série **VML C/P/NK MÁLAGA**


						
MODELO MODELE MODÈLE	NEW VML 12 C	NEW VML 15 C	NEW VML 18 C	NEW VML 12 P	NEW VML 15 P	NEW VML 18 P
Precio Price Prix						

	NEW VML 12 CNK	NEW VML 15 CNK	NEW VML 18 CNK	NEW VML 12 PNK	NEW VML 15 PNK	NEW VML 18 PNK
Precio Price Prix						
Medidas Measures Mesures (mm)	1320 x 970 x 1300 mm.	1630 x 970 x 1300 mm.	1940 x 970 x 1300 mm.	1320 x 970 x 1160 mm.	1630 x 970 x 1160 mm.	1940 x 970 x 1160 mm.
Temperatura Temperature Température (°C)	-1°C/+1°C					
Clase Climática Climatic class Classe climatique (°C)	4 / 38°C					
Tensión/Frecuencia Electrical data Tension électrique	230V/1ph/50Hz					
Controlador Controller Régulateur	Digital					
Material Material Matériel (EXT/INT)	Inox AISI 304					
Espesor Thickness Épaisseur (mm)	70					
Aislamiento Isolation Isolation	40kg/m ³ / Free CFC's / Zero ODP-GWP					
Capacidad Capacity Capacité (L)	115	237	360	115	237	360
Superficie exposición Surface exhibition Surface d'exposition (m ²)	0,79	0,99	1,19	0,79	0,99	1,19
Compresor Compressor Compresseur (HP)	1/3	1/2	7/8	1/3	1/2	7/8
Sistema de frío Cooling System Système de froid	Ventilado + placa fría / Ventilated + cold plate / Ventilé + plaque froid					
Desescarche Defrost Dégivrage	Manual / Manual / Manuel					
Expansión Expansion Expansion	Capilar / Capillary / Capillaire					
Potencia Power Puissance (W)	410	410	520	410	410	520
Potencia frig. Cooling capacity Puissance Frig. (W A -10°C)	-					
Consumo Consumption Consommation (kWh/24h)	8,7	12,5	8,9	8,7	12,5	8,9
Clase energética Energy class Classe Énerg.						
Refrigerante Refrigerant Gaz	R-290a					
Opcional Optional Options	Iluminación LED frontal Éclairage LED frontale ILUDECVMB12	Iluminación LED frontal Éclairage LED frontale ILUDECVMB15	Iluminación LED frontal Éclairage LED frontale ILUDECVMB18	Iluminación LED frontal Éclairage LED frontale ILUDECVMB12	Iluminación LED frontal Éclairage LED frontale ILUDECVMB15	Iluminación LED frontal Éclairage LED frontale ILUDECVMB18



VML B MALA


Vitrina expositora para pescado cristal bajo /
Low glass fish display case /
Vitrine réfrigérée pour poisson verre bas

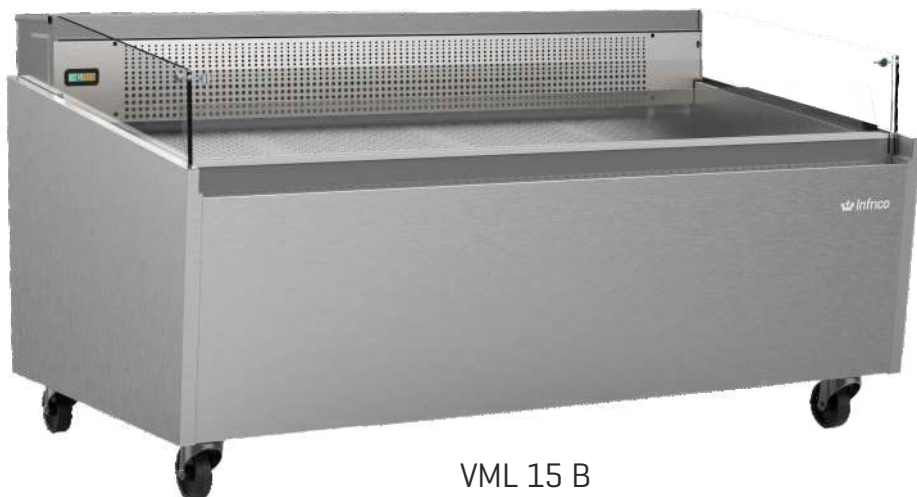

VML 15 B



VML 12 BNK

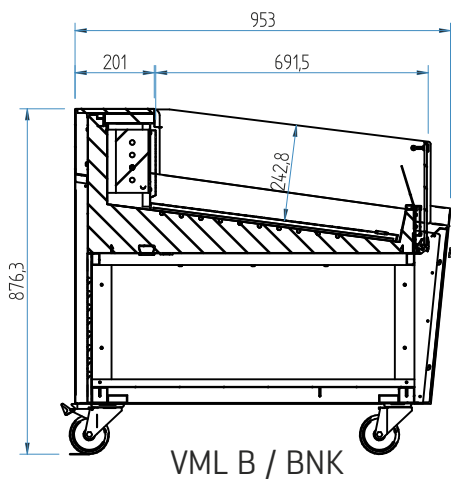

VML B / BNK

Serie / Series / Série **VML B MÁLAGA**

MODELO MODELE MODÈLE			
	NEW	NEW	NEW
	VML 12 B	VML 15 B	VML 18 B
Precio Price Prix			

	NEW	NEW	NEW
	VML 12 BNK	VML 15 BNK	VML 18 BNK
Precio Price Prix			
Medidas Measures Mesures (mm)	1320 x 970 x 876 mm.	1630 x 970 x 876 mm.	1940 x 970 x 876 mm.
Temperatura Temperature Température (°C)	-1°C/+1°C		
Clase Climática Climatic class Classe climatique (°C)	4 / 38°C		
Tensión/Frecuencia Electrical data Tension électrique	230V/1ph/50Hz		
Controlador Controller Régulateur	Digital		
Material Material Matériel (EXT/INT)	Inox AISI 304		
Espesor Thickness Épaisseur (mm)	70		
Aislamiento Isolation Isolation	40kg/m³ / Free CFC's / Zero ODP-GWP		
Capacidad Capacity Capacité (L)	115	237	360
Superficie exposición Surface exhibition Surface d'exposition (m²)	0,79	0,99	1,19
Compresor Compressor Compresseur (HP)	1/3	1/2	7/8
Sistema de frío Cooling System Système de froid	Ventilado + placa fría / Ventilated + cold plate / Ventilé + plaque froid		
Desescarche Defrost Dégivrage	Manual / Manual / Manuel		
Expansión Expansion Expansion	Capilar / Capillary / Capillaire		
Potencia Power Puissance (W)	410	410	520
Potencia frig. Cooling capacity Puissance Frig. (W A -10°C)	-		
Consumo Consumption Consommation (kWh/24h)	8,7	12,5	8,9
Clase energética Energy class Classe Energ.			
Refrigerante Refrigerant Gaz	R-290a		
Opcional Optional Options	-		

