

CHEST BOTTLE COOLER SPC501



SPC501

FORTALEZAS / STRENGTHS / FORCES

- ✓ The Supercool phenomenon consists of cooling a liquid below its freezing point, remaining in a stable liquid state without freezing.
- ✓ Designed with state-of-the-art technology, this equipment represents a qualitative leap in industrial cooling.
- ✓ Developed by our R+D+i team and designed for any type of environment.

CHEST BOTTLE COOLER

SPC501

Rev: 12/06/2026

		SPC501	
Operating temp	-10°C / 0°C 4 (30°C, 55%HR)		
Climate class	500		
Capacity (l)			
Overall dimensions LxDxH (mm)	687 x 705 x 2.010		
Cabinet Construction			
Exterior Material	Acero inoxidable AISI 304	AISI 304 Stainless Steel	Acier Inoxydable AISI 304
Back Material	Acero galvanizado negro	Black galvanized steel	Acier galvanisé noir
Interior Material	Acero inoxidable AISI 430	AISI 430 Stainless Steel	Acier Inoxydable AISI 430
Interior Construction	Uniones de amplio radio.	Rounded interior corner	Intérieur bords arrondis à large rayon
Drain	✓		
LED lighting	✓		
Insulation thickness (mm)	Poliuretano con densidad 50kg/m3, libre CFCs, cero ODP y bajo GWP	Polyurethane with high density 50kg/m3, CFCs free, zero ODP and low GWP	Polyuréthane d'une densité de 40 kg/m3, sans CFC, sans ODP et à faible GWP
Blowing Agent	HFO		
Features			
Doors	1		
Door frame heaters	✓ ✓		
Door lock	5		
Shelving			
Shelves dimensions LxD	530 x 460		
Legs, casters	Reguladores	Levellers	Niveleurs
Refrigeration			
Thermostat	Controlador digital	Digital controller	Contrôleur numérique
Defrost	Parada de compresor Gas caliente	Compressor off Hot gas defrost	Arrêt du compresseur Gaz chaud
Expansion Device	Capilar	Capillary	Capillaire
Electronic fans	✓		
Condensation	Forzada	Forced-air	Forcé
Evaporation	Evaporación ventilada	Ventilated evaporator	Système d'évaporation ventilé
Technical Features			
Refrigerant	R290		
Ref amount (gr)	130		

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis






Power Supply	230V / 1 /50 Hz		
Refrigeration Capacity (W)	583		
	757		
Power (W)			
Amps (A)	4,09		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	800 x 785 x 2.155		
Crated volume (l)	1005		
Net Weight (kg)	136		
Crated Weight (kg)	165		
Options			
		Wire shelf	
		Casters	
		115V/1ph/60Hz	
		230V/1ph/60Hz	


ELEVATION

RIGHT VIEW

PLAN VIEW

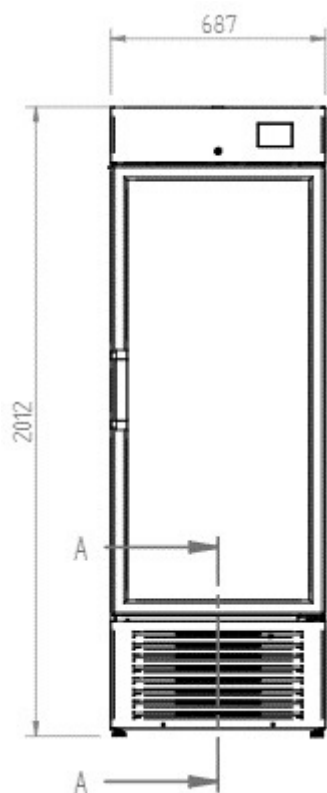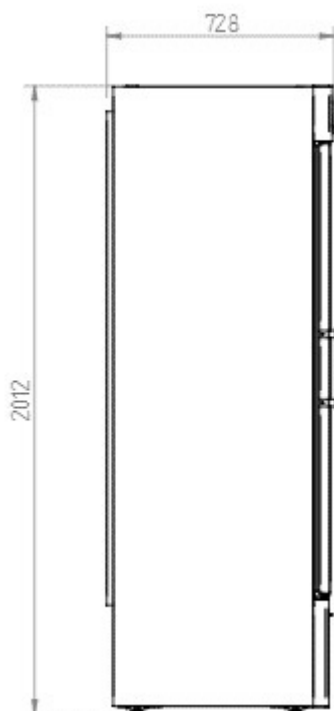

BOTTLE POSITIONING

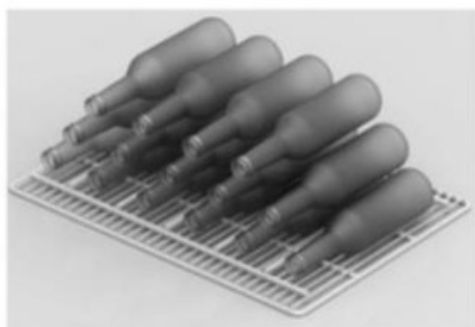

Grado alcohol / Alcoholic strength	Punto de corte / Set Point
5% < 5,5 %	-7°C
4% < 5%	-6°C
3,5% < 4%	-5°C
Cerveza / Beer 0,0%	-2°C
Refrescos carbonatados / Carbonated beverages	-2°C

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

