

## WAVE

### PVC Submersible

IP68; extremely durable, underwater, UL676 rated. Recommended for; long-term submersed in wet environments up to the depth of 16.40ft (5m) (water is skin safe for extended periods); high temperature and humidity environments (mounting surface temperature <140°F(60°C)); custom predetermined lengths and larger connector; harsh working conditions & increased handling forces during installation. Custom factory assembly.

**NOTES:**

1. Connector Tolerance  $\pm 0.02$ in (0.5mm)
2. Cable diameter: Static, Tunable & SPI PVC = 0.24in (6mm)
3. Do not apply force to the feed cable
4. Ensure Max. Cable Lengths are followed according to wire gage to avoid voltage drop



#### ORDER CODE

#### INPUT - 01



INPUT CONNECTOR TYPE	INPUT ORIENTATION + TYPE	INPUT CABLE LENGTH (LEAD WIRE)
----------------------	--------------------------	--------------------------------

#### OUTPUT - 02

OUTPUT CONNECTOR TYPE	OUTPUT ORIENTATION + TYPE	OUTPUT CABLE LENGTH (LEAD WIRE)
3 = PVC Submersible	A = End Exit B = Bottom Exit C = Side Left Exit D = Side Right Exit I = End Cap	4 = 16ft (5m) 5 = 32.8ft (10m) 8 = N/A

#### SCREW LOCK CONNECTOR ACCESSORY - IP67


#### END CAP: 3-I-8




NOTE: The tolerance is  $\pm 0.08$ in (2mm).

PVC Submersible


END EXIT: 3-A-#

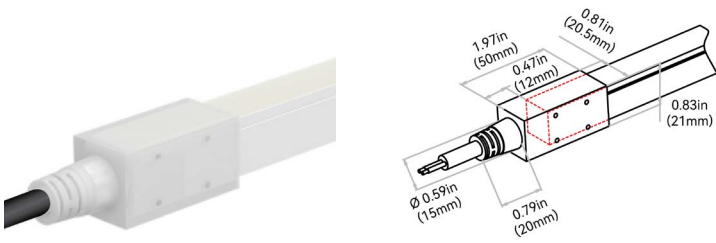

SIDE RIGHT EXIT: 3-D-#

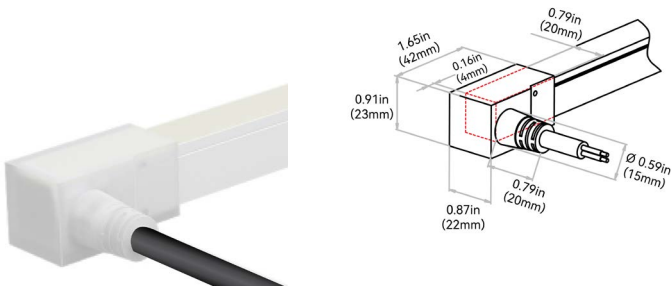

BOTTOM EXIT: 3-B-#

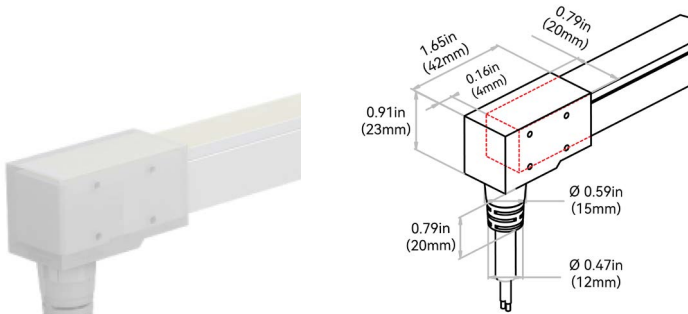

SIDE LEFT EXIT: 3-C-#

