

WAVE

Silicone Submersible

IP68; extremely durable, underwater, UL676 rated. Recommended for; long-term submersed in wet environments up to the depth of 16.40ft (5m) (water is skin safe for extended periods); high temperature and humidity environments (mounting surface temperature <185°F(85°C)); custom predetermined lengths and compact connector; harsh working conditions & increased handling forces during installation. Custom factory assembly.

NOTES:

1. Connector Tolerance ± 0.02 in (0.5mm)
2. Cable diameter: Static, Tunable, SPI Silicone = 0.26in (6.5mm)
3. Do not apply force to the feed cable
4. Ensure Max. Cable Lengths are followed according to wire gage to avoid voltage drop
5. Silicone Submersible UL676 Connectors - Top bending fixture not available for Tunable White & SPI-PIXEL



ORDER CODE


INPUT - 01

PROFILE	BEND	WIRING	INPUT CONNECTOR TYPE	INPUT ORIENTATION + TYPE	INPUT CABLE LENGTH (LEAD WIRE)
---------	------	--------	----------------------	--------------------------	--------------------------------


OUTPUT - 02

PROFILE	BEND	WIRING	OUTPUT CONNECTOR TYPE	OUTPUT ORIENTATION + TYPE	OUTPUT CABLE LENGTH (LEAD WIRE)
F = Wave	1 = Side 2 = Top 4 = N/A (End Cap)	1 = 2 Wire (Static/Dim To Warm) 2 = 3 Wire (Tunable White PWM/ SPI Pixel) 3 = 3 Wire (SPI-Pixel Power Feed) 0 = N/A (End Cap)	4 = Silicone Submersible	A = End Exit B = Bottom Exit C = Side Left Exit D = Side Right Exit I = End Cap	4 = 16ft (5m) 5 = 32.8ft (10m) 8 = N/A

SCREW LOCK CONNECTOR ACCESSORY - IP67





END CAP: F404I8

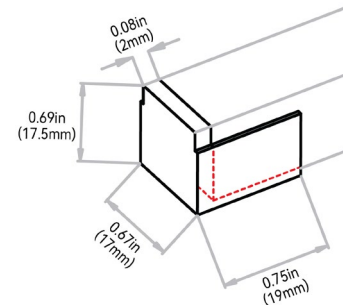



NOTE: The tolerance is ± 0.08 in (2mm).

Silicone Submersible


END EXIT: F##4A#



SIDE RIGHT EXIT: F##4D#



BOTTOM EXIT: F##4B#



SIDE LEFT EXIT: F##4C#

