

LIGHTSTRIP


Aluminum Profile - Raceway Suspended

High-quality 6063 thin-wall aluminum, light-weight design featuring hidden cables and suspended by cables from the ceiling. The raceway space is enough to conceal seamless connectors with bottom feed and the general male/female connectors. It is superb for the facade where tidiness is required and the scenarios that lack of space for wiring. Please refer to install manual for proper installation practices.

ORDER CODE

Mounting Profile Type	Standard Length	Profile	Color	Bending
A9 = Aluminum Raceway Suspended	3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm)	I = LightStrip	1 = Standard	2 = Top

DIMENSIONS

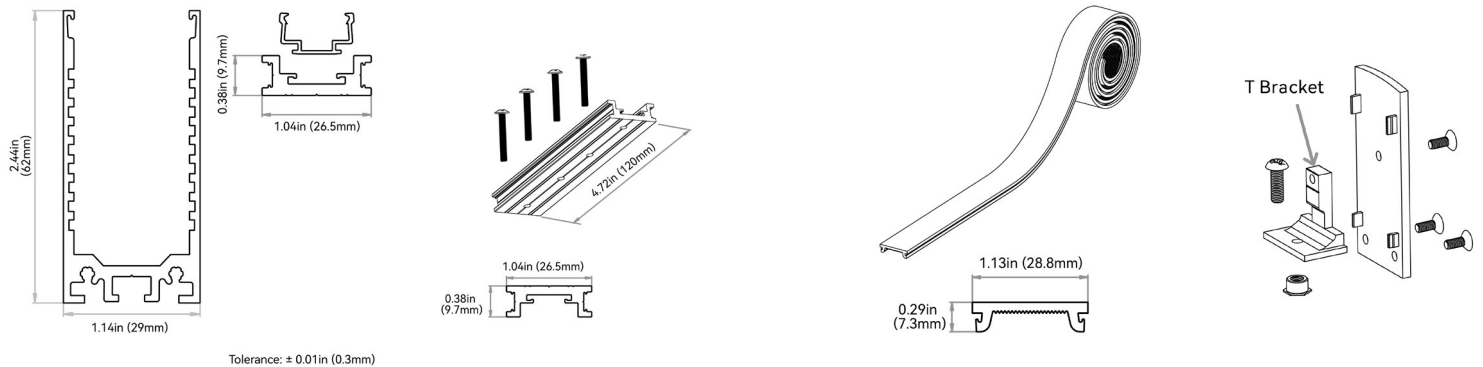

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	LEGACY ORDER CODE	STANDARD LENGTH
A93I12	CH15RALOM5SR	19.68in (500mm)
A95I12	CH15RAL01MSR	39.37in (1000mm)
A96I12	CH15RAL02MSR	78.74in (2000mm)

