



ARC PUCK - FLEX STRING 6 SPI

Outdoor Rated Profile - SPI-Pixel



TEMPERATURES

AMBIENT OPERATING TEMPERATURE:
-4°F to 122°F (-20°C to 50°C)

FIXTURE STORAGE TEMPERATURE:
-40°F to 158°F (-40°C to 70°C)

FEATURES

Material	Die-casting aluminum plus PC clear or frosted cover
Viewing Angle	120°~180° Depending on Lens Cover
Pixel Size	70~350mm (manufacture to order, dot to dot, pitch:70mm minimum)
LED Type	SMD LEDs
LED Count	6pcs
Power	1.8W/nos
Connection Type	Flexible cable
Controller	Driven by Pixel-Driver-1 (SPI to DMX)
Lumen Maintenance	50,000 Hours L70 @ 77°F (25°C)
Weight	0.11lbs (50g/nos.)

CERTIFICATIONS & FEATURES




FIXTURE TYPE				OPTICS			ELECTRICAL		LEAD CABLES	
SERIES	PROFILE	HOUSING MATERIAL	HOUSING COLOR*	LENS COVER	LED FUNCTION	LED COLOR	VOLTAGE	LED PITCH (MM)**	LEAD IN (MM)***	LEAD OUT (MM)***
A = Arc	F6 = Flex String-6SPI	A = Die Cast Aluminum	B = Black C = Custom RAL#	CF = Clear + Flat FA = Frosted + Flat-3mm FB = Frosted + Flat-5mm FC = Frosted + Flat-10mm FS = Frosted + Dome-Small FL = Frosted + Dome-Large XD = Crystal + Dome	SPI = SPI-Pixel SPW = SPI-Pixel- RGBW/A	AM = Amber 18K = 1800K 24K = 2400K 27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 60K = 6000K T27 = 2700~6000K T30 = 3000~6000K RGB = RGB	24 = 24V DC	055 = 55mm 060 = 60mm 070 = 70mm 080 = 80mm 090 = 90mm 100 = 100mm 110 = 110mm 120 = 120mm 130 = 130mm 140 = 140mm 150 = 150mm ... XXXX = Up to 3000mm	Min = 55mm Max = 3000mm	Min = 55mm Max = 3000mm
MOUNTING										
TYPE										
CPF6 = Clip Mount - Flex-6 UCF6 = U-Channel - Flex-6 SAF6 = Surface Mount - Flex-6 3M = 3M Tape										

MOUNTING

TYPE

CPF6 = Clip Mount - Flex-6
UCF6 = U-Channel - Flex-6
SAF6 = Surface Mount - Flex-6
3M = 3M Tape

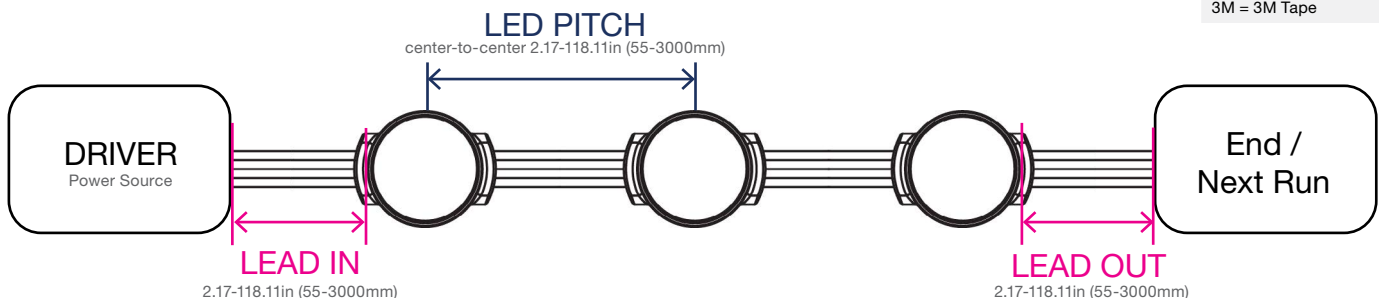

*The housing color can be standard black, or a custom RAL#. **Pixel Size: 55~3000mm(manufacture to order, puck to puck, pitch: 55mm minimum). ***Connection Type: Flexible cable

ARC - FLEX STRING 6 SPI

Outdoor Rated Profile - SPI-Pixel



OPTICS - LED COLORS

LED COLORS



ELECTRICAL

FIXTURE SPECIFICATIONS & ELECTRICAL PARAMETERS



COLOR	LUMEN COUNT (CLEAR + FLAT LENS COVER)*
1800K	70lm
2400K	74lm
2700K	77lm
3000K	80lm
3500K	83lm
4000K	85lm
6000K	88lm
2700K ~ 6000K	85lm at 2 colors at 100% drive current
3000K ~ 6000K	85lm at 2 colors at 100% drive current
RGB	56lm at RGB at 100% drive current
R,G,B,2700K	65lm at all four LEDs (R,G,B,W) at 100% drive current
R,G,B,3000K	65lm at all four LEDs (R,G,B,W) at 100% drive current
R,G,B,4000K	65lm at all four LEDs (R,G,B,W) at 100% drive current
R,G,B,6000K	65lm at all four LEDs (R,G,B,W) at 100% drive current
R,G,B,AMBER	65lm at all four LEDs (R,G,B,Amber) at 100% drive current

*Frosted lens cover lumen count to be reduced by ~20-25%





OPTICS - LENS COVERS

CLEAR FLAT LENS COVER DIMENSIONS

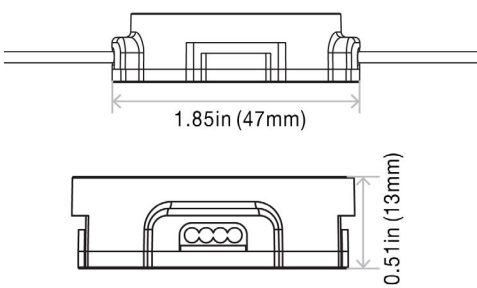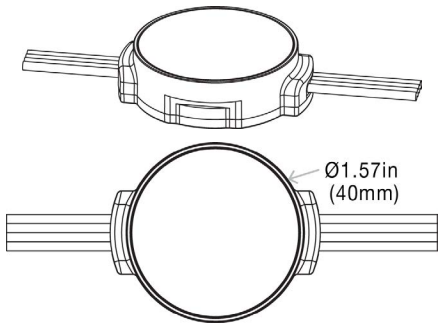

FROSTED DOME-SMALL LENS COVER DIMENSIONS

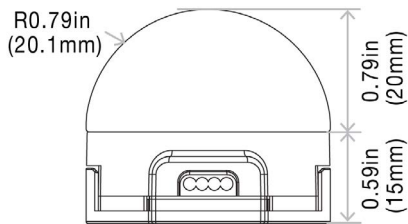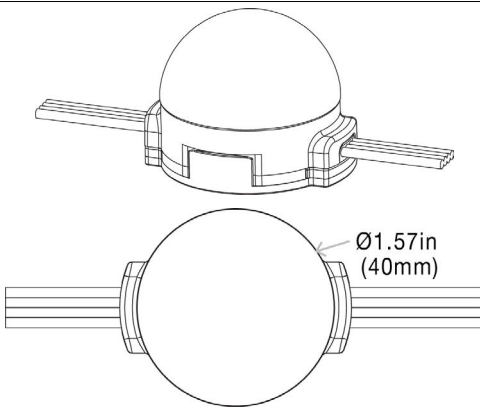

FROSTED DOME-LARGE LENS COVER DIMENSIONS



FROSTED FLAT 5MM LENS COVER DIMENSIONS



CRYSTAL DOME LENS COVER DIMENSIONS



FROSTED FLAT 3MM LENS COVER



FROSTED FLAT 10MM LENS COVER




ARC - FLEX STRING 6 SPI

Outdoor Rated Profile - SPI-Pixel




MOUNTING

CLIP MOUNT - FLEX STRING LARGE DIMENSIONS: CPF6

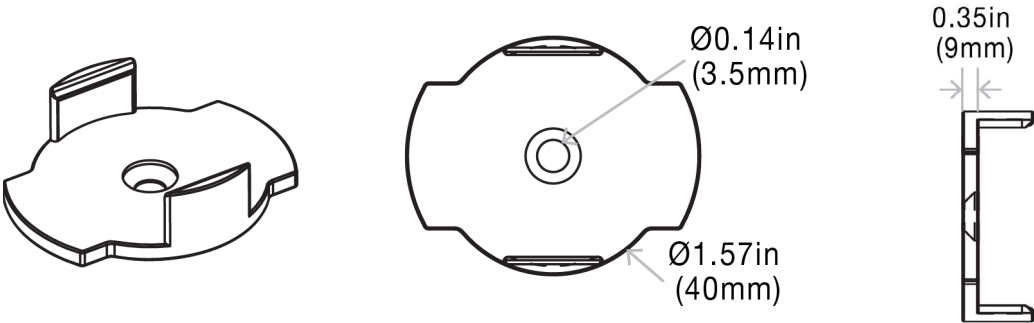

SURFACE MOUNT - FLEX STRING LARGE DIMENSIONS: SAF6

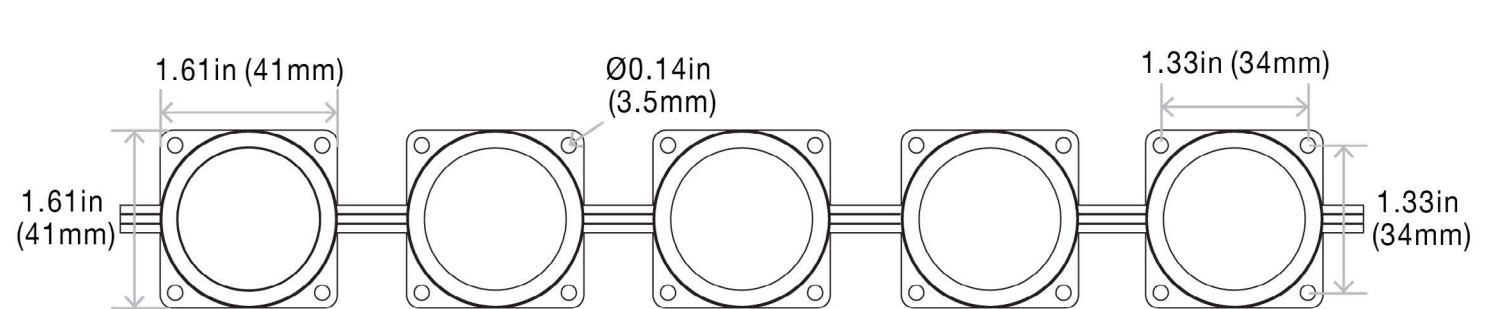

U-CHANNEL MOUNT - FLEX STRING LARGE DIMENSIONS: UCF6

