



LUMIFORM ORBIT LS FLEXIBLE

Installation Manual

Version 1.1 - September 2026



TEMPERATURE & BENDING3

FIXTURE PRECAUTIONS4

UNPACKING THE FIXTURE KIT5

UNPACKING THE REEL6

LIGHTING TEST7

CONNECTORS8

JOINTS9

MOUNTING PRECAUTIONS.....10

MOUNTING HARDWARE11

LUMIFORM FLEX INSTALLATION12

MAINTENANCE & REPLACEMENT18

STATIC WIRING DIAGRAM.....20


LIMITED WARRANTY21

INSTALLATION TEMPERATURE CHART

	SILICONE
Ambient Installation Temperature	> -40°F (> -40°C)
Maximum Mounting Surface Temperature	185°F (85°C)

MINIMUM BENDING DIAMETER

LumiForm Orbit LS Flexible Stainless Steel is a high-durability in-ground Multiflex lighting solution designed to withstand heavy loads up to 2.5 tons, making it ideal for high-traffic areas. Its 1.47-inch wide flexible mounting profile offers both side and top bending for seamless integration into curved and irregular surfaces.

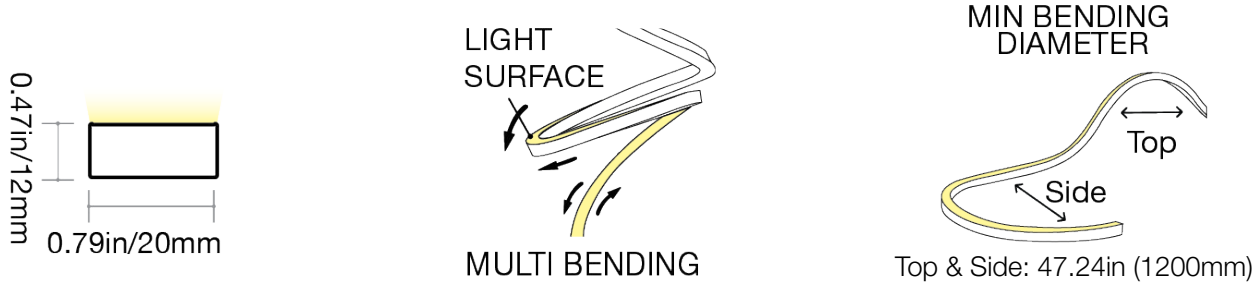


THERMAL FLUCTUATION

Defined in the fixtures OFF state

Fixtures have an Expansion and Contraction variance of up to:
Silicone - 0.05%


FIXTURE PRECAUTIONS




Turn off power during installation and avoid covering the light fixture while lit.



Only qualified personnel maintenance work.



Use appropriate power cables and converters to prevent flickering.




Use only recommended Power Unit.




Cut the Vivid Linear Flex Light only at the identification mark using special cutting tools.



Do not use the product if silicone casing material is damaged.



Test connections with a multi-meter




Avoid installing in small, confined spaces warmer than -40°F ~131°F (-40°C ~ 55°C)




Install the product out of reach of children.




Do not exceed specified voltage. Failure to do so will result in LED life degradation.




Replace the entire fixture when the light source reaches the end of life.




Assemble with proper ventilation and avoid assembly on vibrating surfaces.




Use suitable fixing materials for installation.



Allow space for expansion in aluminum channels.



Preheat Vivid Linear Flex Light before use in low temperatures and unwind from the reel before assembly.




Do not over bend & avoid bending at the first unit of light and connector. Damage to components can result.

UNPACKING THE FIXTURE KIT


STEP 1:

Place box on a sturdy, level surface.



STEP 2:

Cut the tape and open the box.




STEP 3: FOR A SINGLE FIXTURE


Remove the carton out of the box.




Lift the disc out of the frame.



Put on the gloves in the tray.




Remove the fixture from the disc.




STEP 3: FOR MULTIPLE FIXTURES


Remove the carton out of the box.



Lift the top disc to separate it from the frame below.



Put on the gloves in the tray.



Remove each fixture from its disc, lifting vertically.



CAUTION


Incorrect unpacking can fracture the PCB.
Damage to components can result.

UNPACKING THE REEL




STEP 1:

Place box on a sturdy, level surface.




STEP 3:

Assemble the support tubing with coupling.



STEP 5:

Set the spool assembly into the box with the fixture rolling off the top of the spool.




CAUTION

Do not roll the fixture off the bottom of the spool


STEP 2:

Lift the spool out of the box.




STEP 4:

Insert the support tubing into the center of the spool.



STEP 6:

Carefully guide the fixture straight outward off the spool.



CAUTION


Do not bend or twist the fixture. Two people should unroll the reel to avoid pulling on the fixture and damaging the pcb



LIGHTING TEST

STEP 1: CHECK WORKING VOLTAGE

Inspect the light when it arrives, then connect it using the correct voltage only. Using a higher voltage may damage the light.

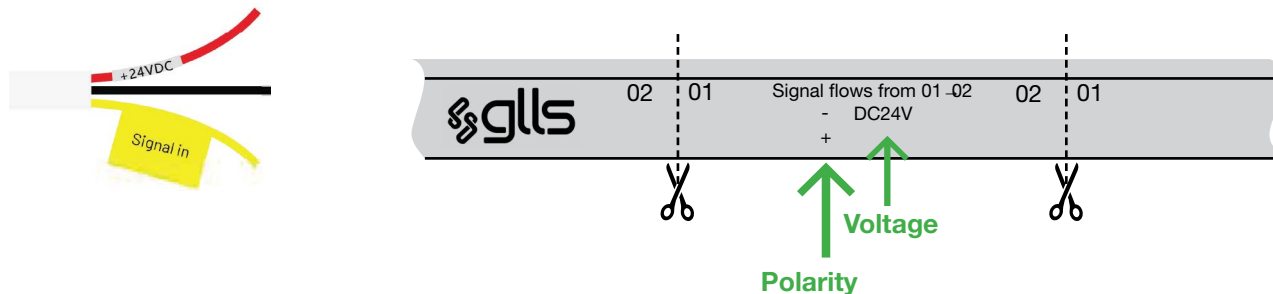

STEP 2: CONFIRM “+ / -” AND SIGNAL WIRES


For pixel products, confirm polarity and signal direction using the markings on the cable.

- Do not power the light if the yellow/green signal wires are incorrectly connected.
- If needed, separate the signal wires as shown before connecting.
- Make sure the signal direction (1 →) matches the wiring, or the signal will not transmit.

NOTE: The signal wire must be kept separated from the positive wire (red) to prevent the IC chip from shorting.


STEP 3: CONNECT SPI LIGHTS IN SERIES PROPERLY

When connecting multiple SPI pixel lights, connect them in low-to-high order (follow the numbered sequence) to ensure proper signal transmission.

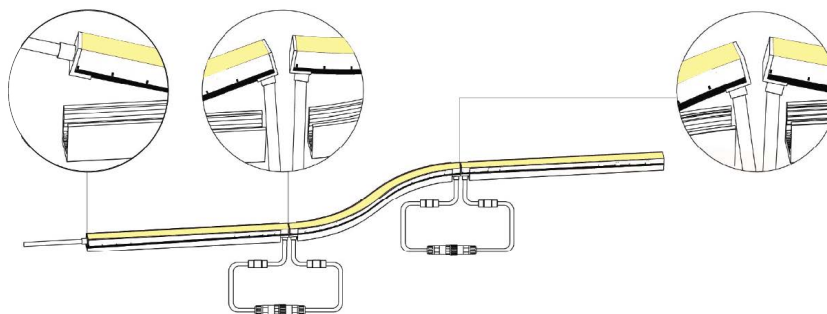

STEP 4: LIGHTING (TEST SAFELY)

Briefly test the lighting to ensure it is working properly.

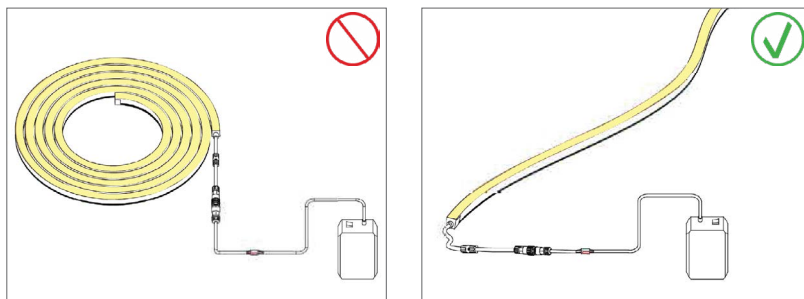


NOTES: When testing Pixel light models without the signal wire connected:
Pixel White models - the brightness will be 1/3 normal levels.
Pixel RGB or RGBW models - will illuminate blue in color.

⚠ CAUTION

Do not light up coiled product longer than 30 minutes or overheating will occur. For extended periods of light testing, uncoil the product to allow for proper heat dissipation.


PRE-INSTALLATION: CONNECTOR

The connectors may be integrated into the profile if necessary, except for connectors with bottom cable entry or side cable entry.

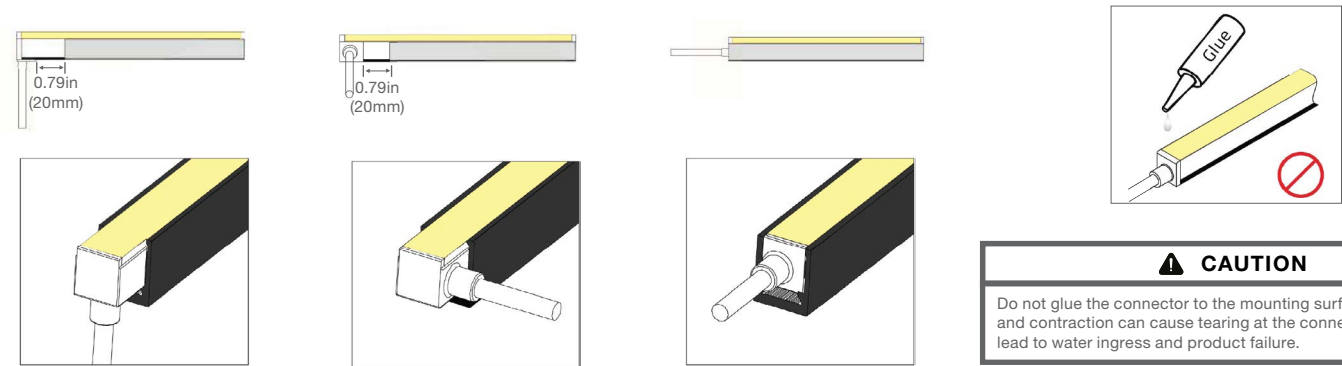


PRE-INSTALLATION: CABLE REQUIREMENT

Keep the cable in its natural (unstressed) position at the joint. Maintain a bend allowance of approximately 0.79in (20mm) for standard silicone cables.




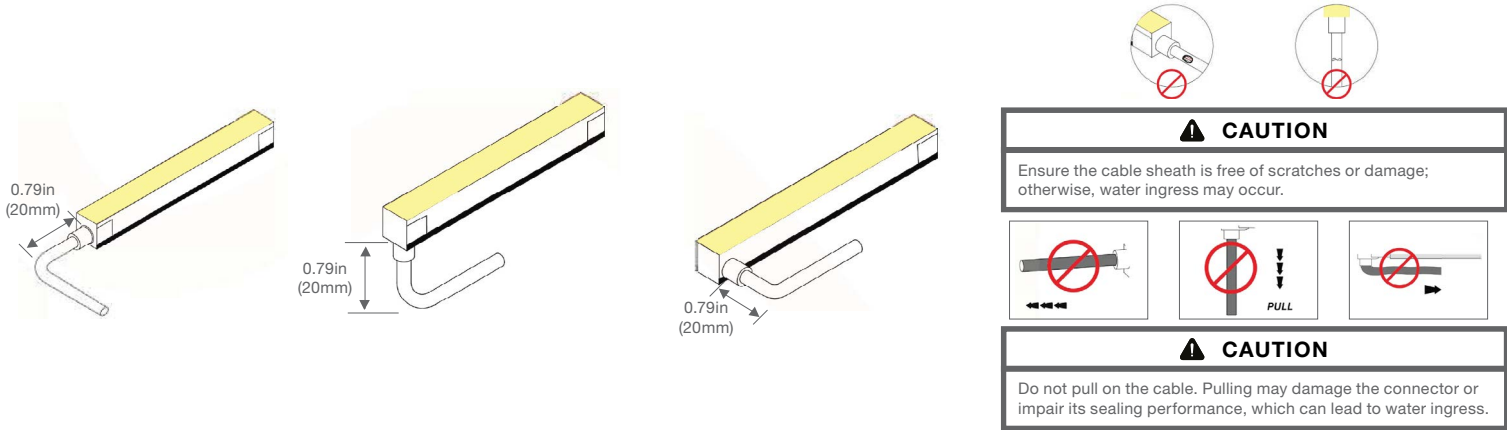


PRE-INSTALLATION: ANTI-WICKING FERRULE

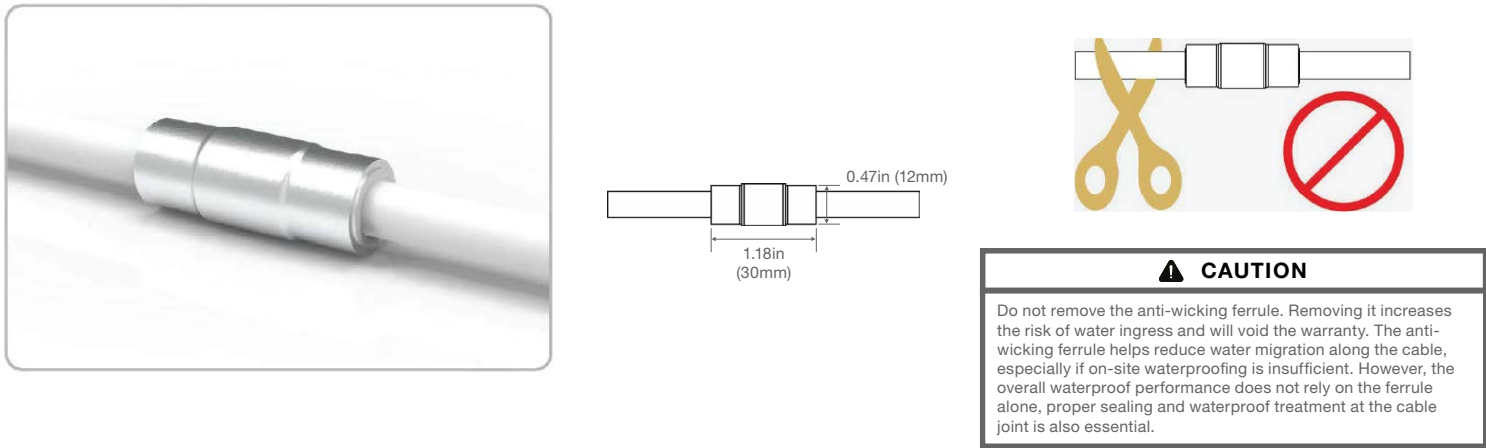

JOINTS

Use waterproof junction boxes and connectors for all cable joints. For underwater applications, use IP68-rated connectors and keep all cable joints out of the water whenever possible.

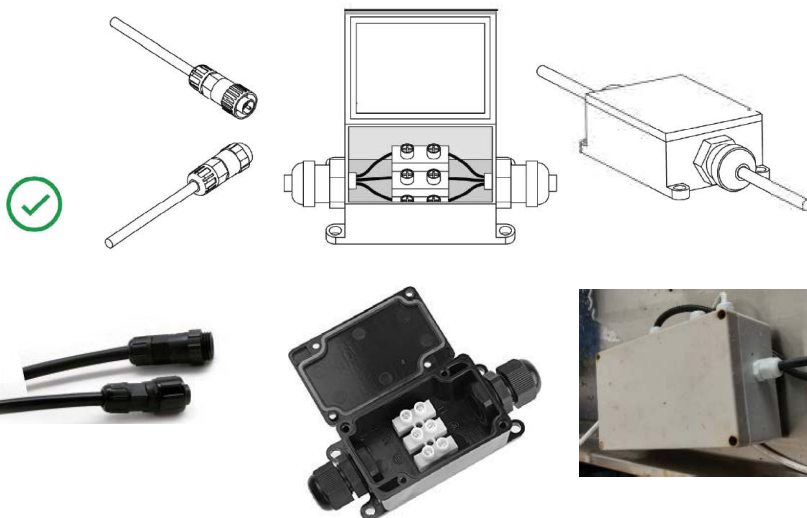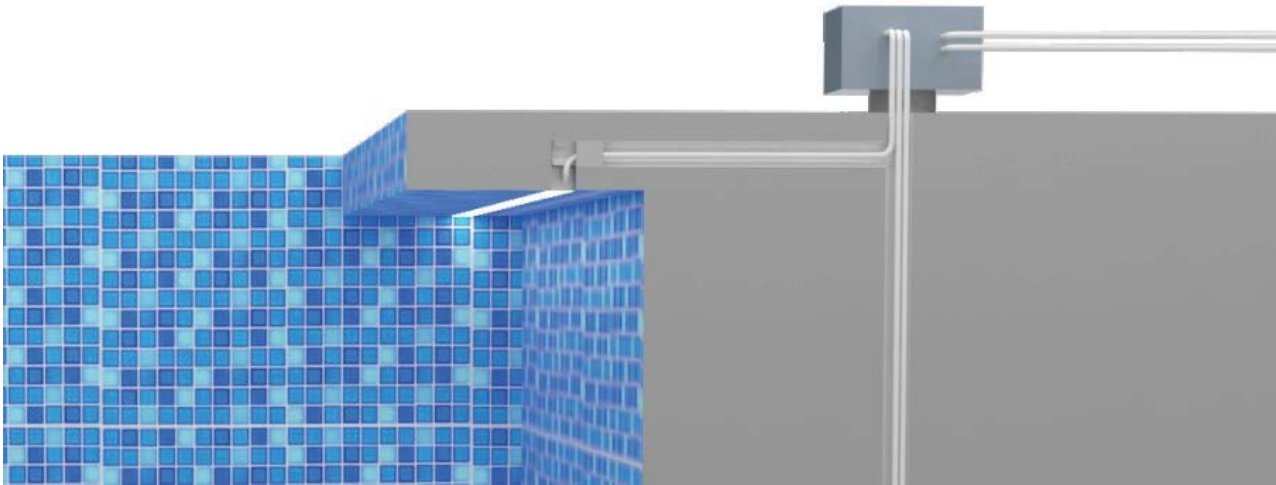

⚠ CAUTION

Electrical tape will not completely prevent water intrusion. Damage to components can result.



⚠ CAUTION

Do not install improperly cut fixtures. Water intrusion can result.

MOUNTING PRECAUTIONS



Wear Personal Protective Equipment (PPE) when handling the mounting profile. Sharp metal corners can cause serious injury.



Remove the silicone grip from mounting profile before exposing to high temperatures. Damage to components can result.




Do not submerge ferrules in water during underwater applications. Do not remove ferrules to avoid damage to light & ensure warranty remains intact.




Do not install fixtures with damaged lead wires or accessories. Water ingress can result.



Do not install bent mounting profile.



When cutting the profile keep clean of debris and burrs to avoid damage to the light fixture.



Screws must be installed straight to avoid damage to the light.




Avoid angular misalignment



Avoid parallel vertical & horizontal misalignment




When installing lights in parallel, keep at least 10 cm between them. If they are too close, overheating may occur and could damage the housing material and electronic components.




Repeated installation and removal can weaken the PCB. Two people are required for any fixture install longer than 6.5ft (2m). Damage to components can result.




Do not join mounting profile in the same location as the wall joints. The expansion and contraction of the building surface will pull the lighting connection apart. Damage to components can result.




Do not allow light fixture to hang or twist while installing into mounting profile. Improper handling could lead to damage to the internal PCB of the fixture.



Do not pull the connector wire forcefully from the fixture. Water ingress can result.



We recommend leaving 2.36in (60mm) of connector wire in its natural state. Bending too close to the fixture can result in damage.




When using a bendable aluminum profile, it is recommended to mount it in place immediately to prevent breakage caused by frequent repeated bending.

MOUNTING HARDWARE




Dimensions, Bending Diameter, Components & Accessories


Discover the innovative design of our on-site fully adaptable spec-grade Orbit LS in-ground fixtures. Engineered for easy installation, maintenance and highlighted by their multi-directional bending capabilities, along with high quality silicone composition. When the Orbit LS fixture is packaged together with our in-ground stainless steel flexible mounting system it creates our LumiForm Orbit LS - flexible In-grade system.

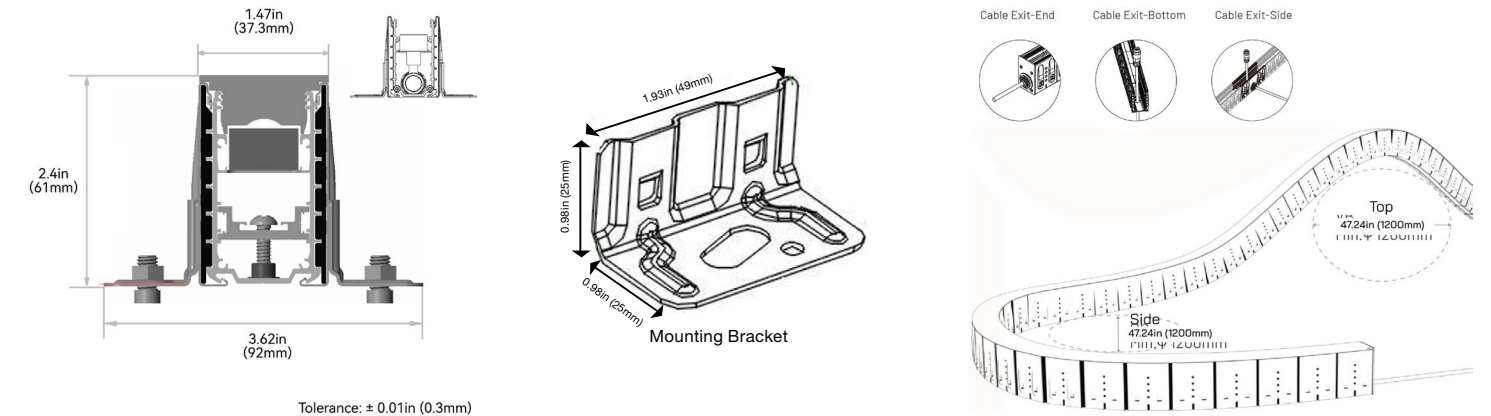

COMPONENTS

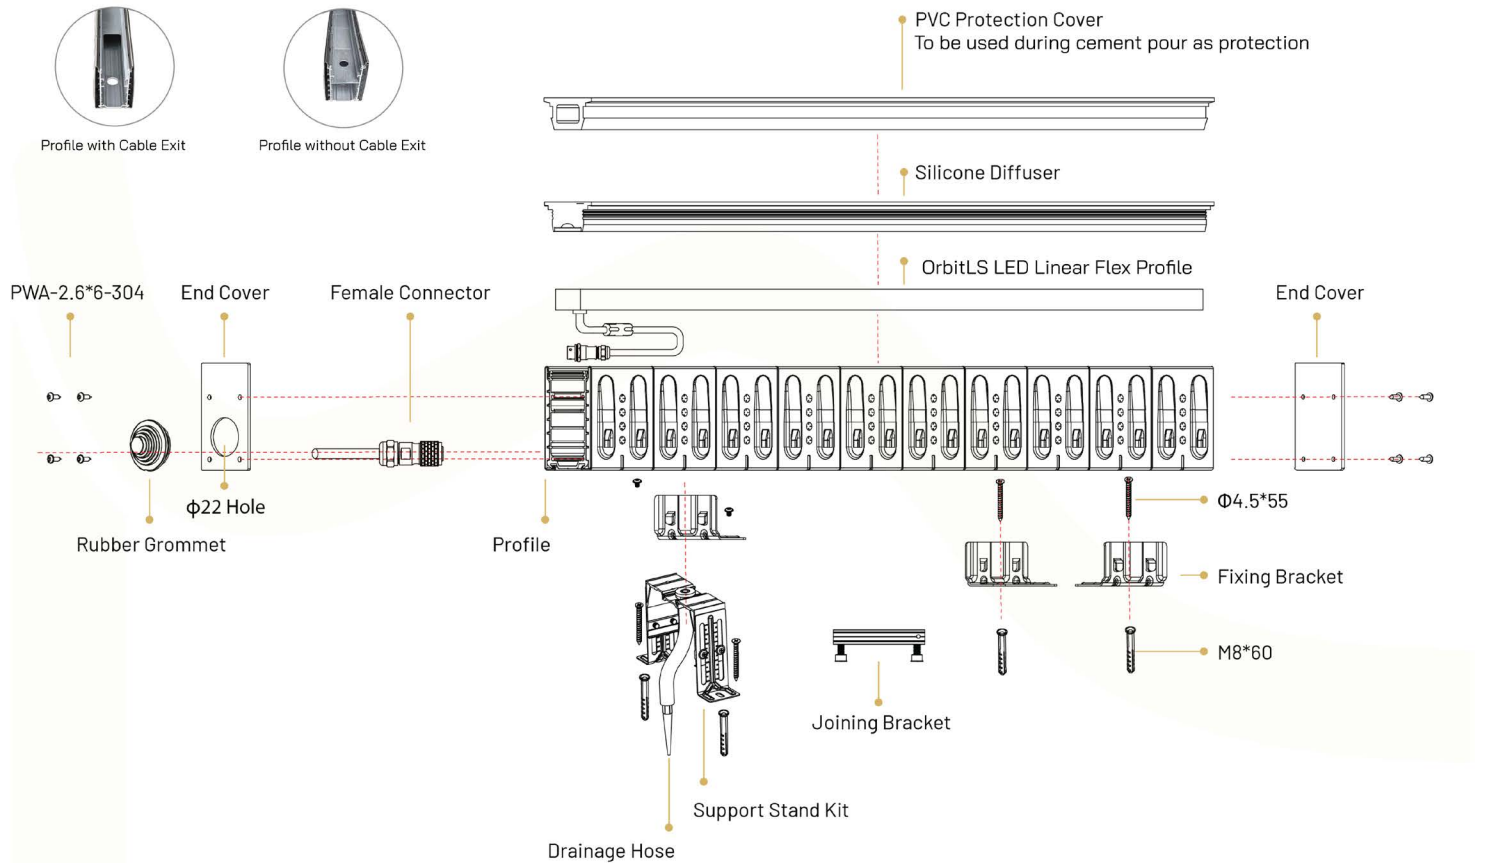

OPTIONAL ACCESSORIES & TOOLS

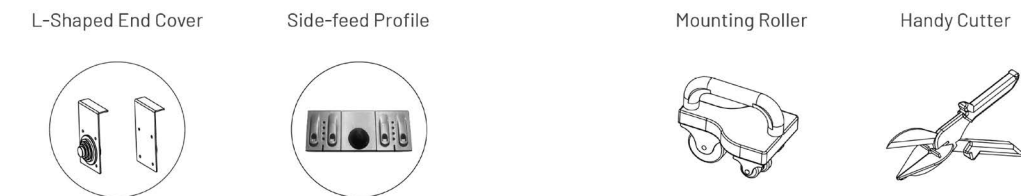


LUMIFORM FLEX INSTALLATION




Installation

INSTALLATION CROSS-SECTION

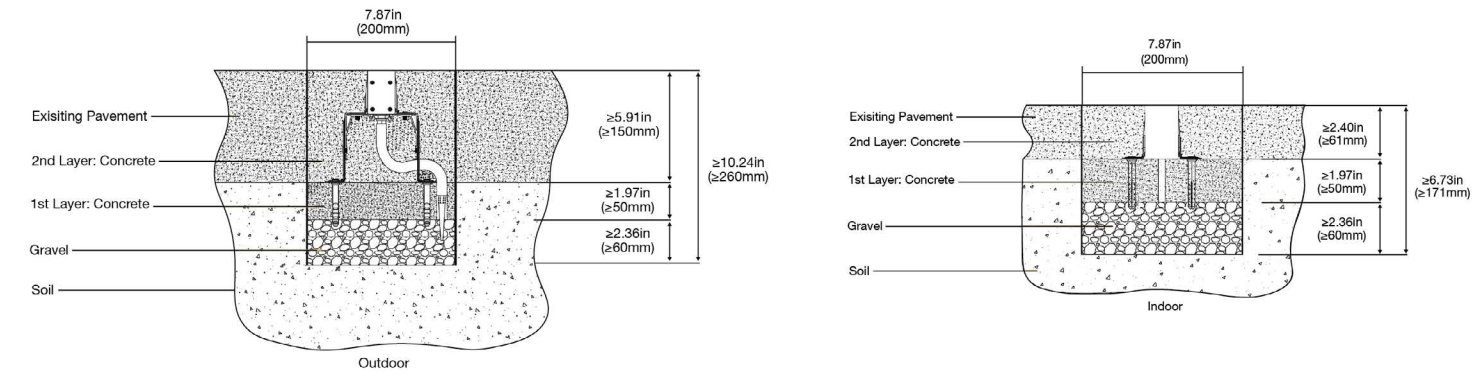


STEP 1:

Concrete Trenching.

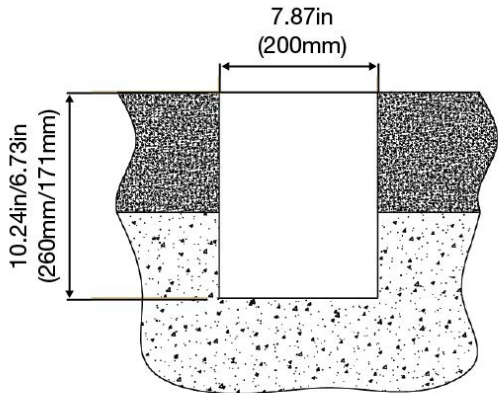


STEP 2:

Gravel Placement.

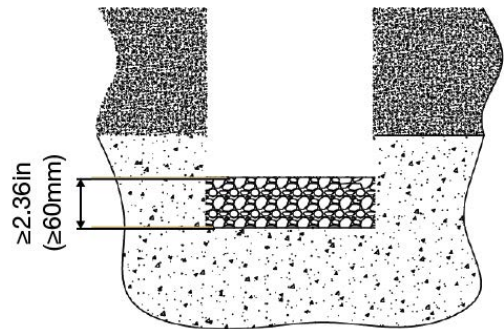

STEP 3:

First Concrete Pour.

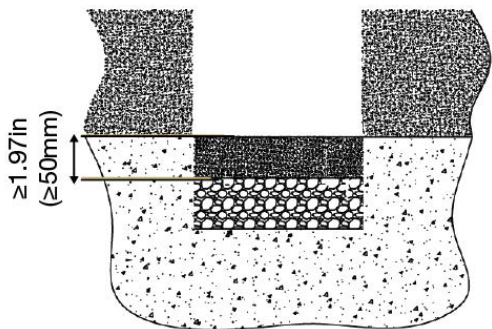



LUMIFORM FLEX INSTALLATION

Installation Continued

STEP 4:

Profile Installation.

Side View

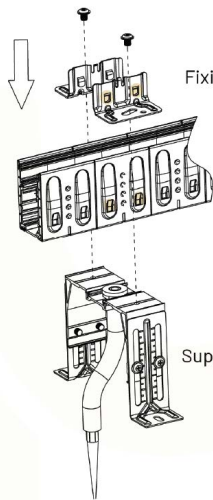


Fixing Bracket

Hook the fixing brackets onto the profile, then secure the Support Stand Kit to the fixing brackets already attached to the profile.


Support Stand Kit

Top View




Recommend 6pcs fixing brackets per 1m and they should be spaced evenly

Support Stand Kit Quantity Tips:



3 Kits per 0.5/1 m Profile



2 Kits per
Side-Feed Profile

STEP 5:

Install the End Caps.

End Cover



Power End

Non-Power End



Non-Power End


L-Shaped End Cover



Power End





Non-Power End

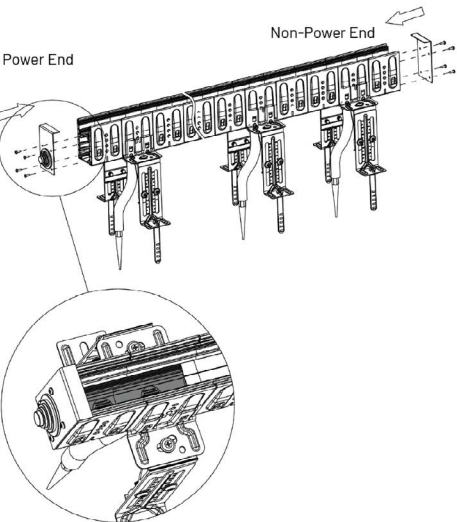

STEP 6:

Mark the Installation Route.

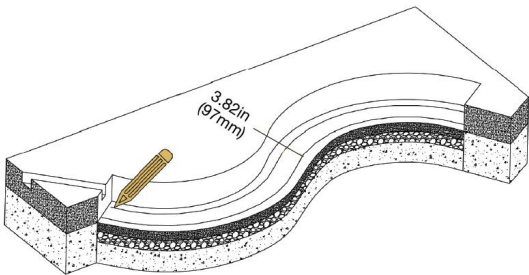


LUMIFORM FLEX INSTALLATION



Installation Continued


STEP 7:

Mark and Drill the Holes.

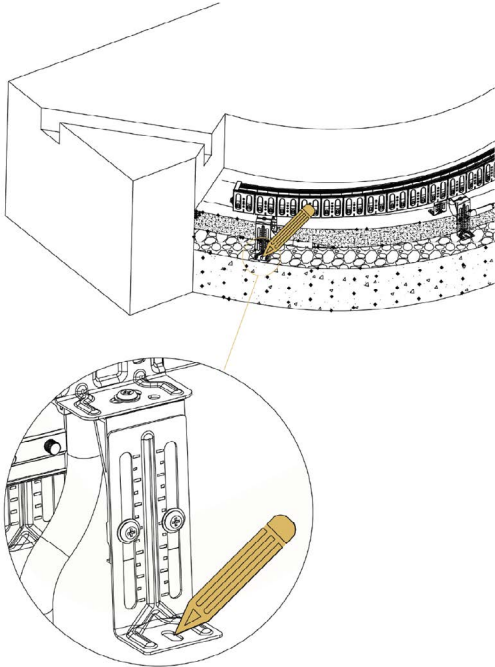


STEP 8:

Secure the Support Stands.

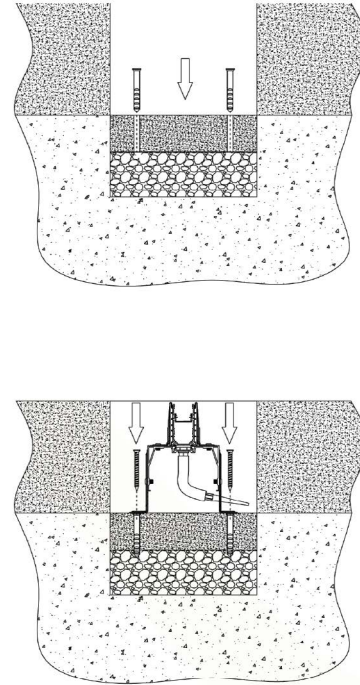

STEP 9:


Join All Profiles.

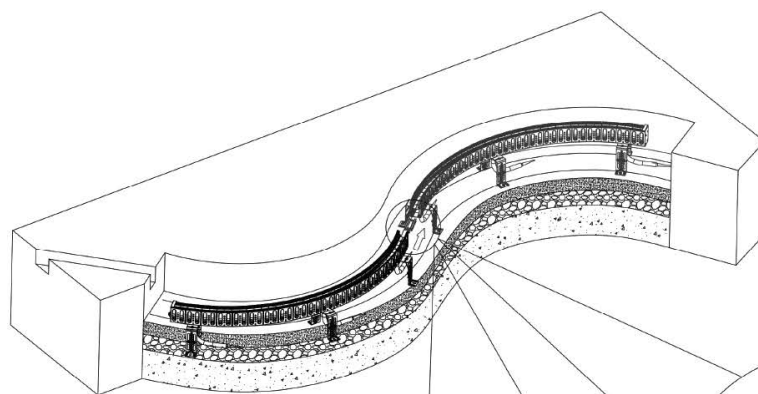


Use a screwdriver to tighten the bracket.




Joining Bracket



Top View



45° Side View



Side View

Slide the joining bracket into the bottom of the profile so it connects the two adjacent profiles. Then fasten them together with screws. Finally, secure all the profiles to the ground.




LUMIFORM FLEX INSTALLATION

Installation Continued


STEP 10:

Profile Cutting.

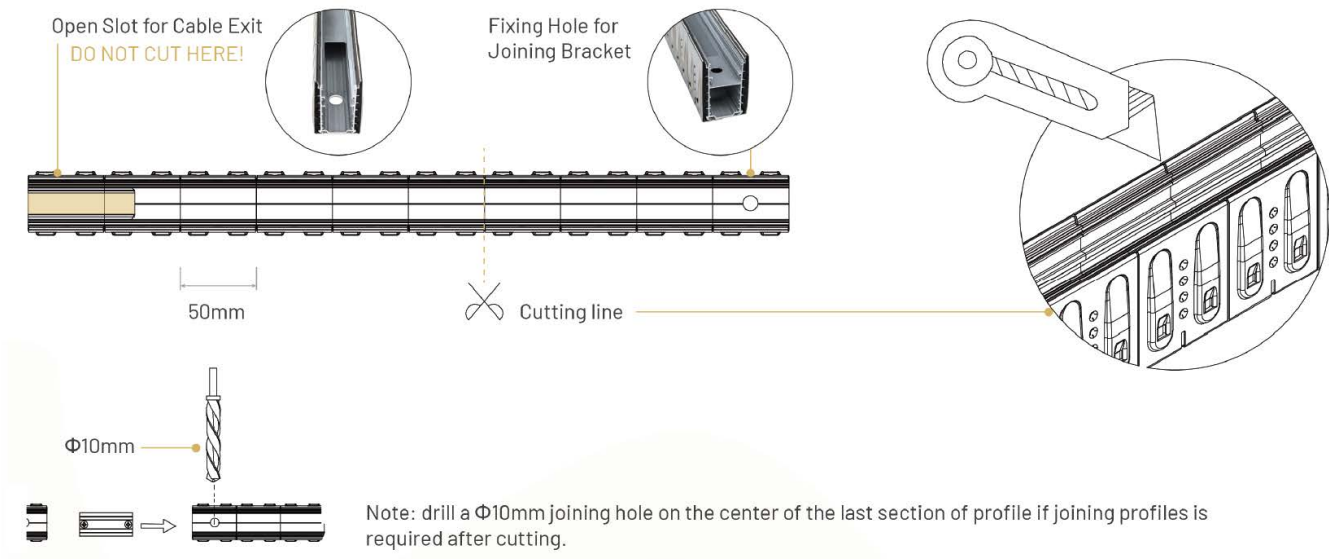


STEP 11:

Insert the Drainage Hoses into the Drainage Layer.

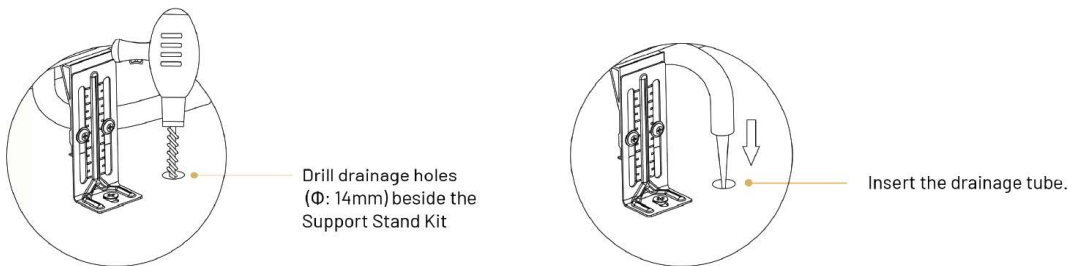

STEP 12:

Prepare the Pre-Embedded Cables for Connection.

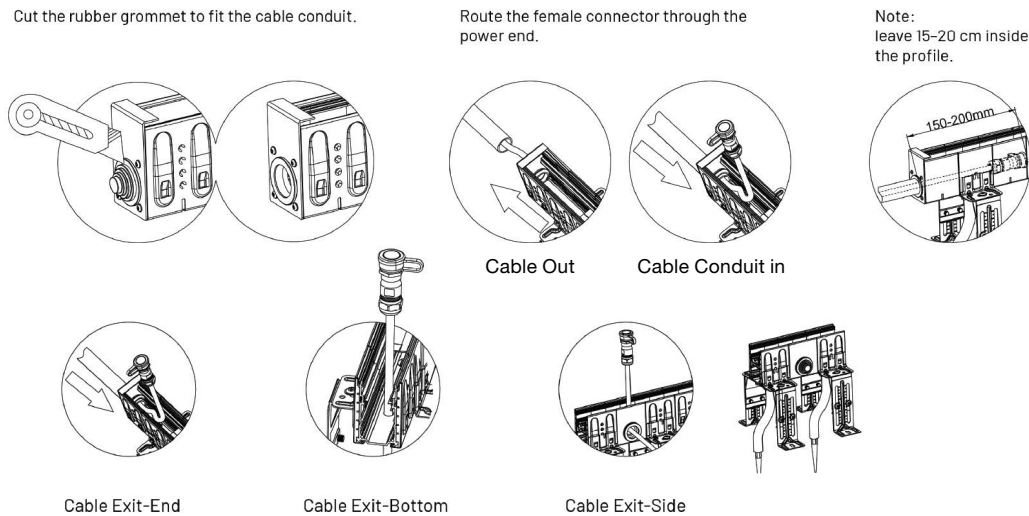



LUMIFORM FLEX INSTALLATION



Installation Continued

STEP 13:


Install the PVC Protection Cover.



L-Shaped End Cover



Note: Leave 5mm extra when cutting the PVC cover.

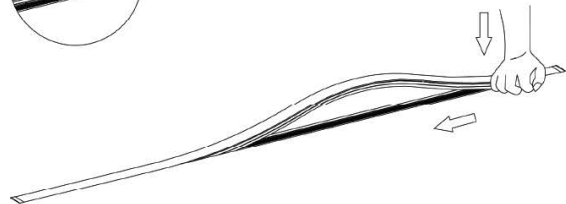



Firmly press down PVC cover and insert it under the L-shaped end cap. For standard end cap, push the COVER to ensure tight contact.

For long profiles, install from one end and then fit the cover from the opposite end when 1-2m remains

STEP 14:

Install the Support Stands and Adjust the Height.


Ensure all profiles are flush with the ground.



If any profile is not flush, adjust the stand's height until it is level with the surface.

STEP 15:

Concrete Backfilling and Securing.



Apply a small amount of concrete at the power end to secure the cable conduit, then fill the rest of the trench with concrete.





Tip: Use a concrete vibrator to remove air and ensure a solid fill.

Power Cable

Power Cable Conduit

STEP 16:

Remove the PVC Protection Cover.

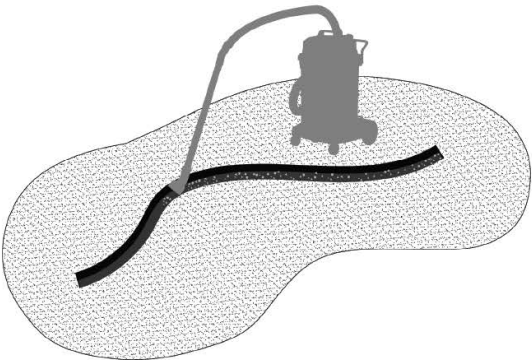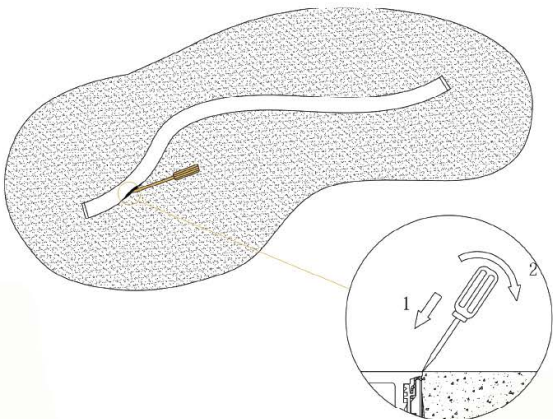

Clean the slot after removing the cover.




LUMIFORM FLEX INSTALLATION




Installation Continued

STEP 17:


Install the Light.

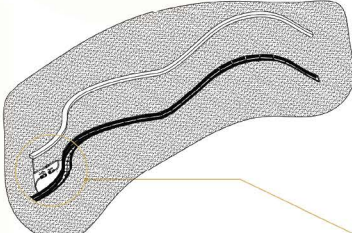

1. Remove the protective cap from the female connector.




2. Connect the light with the connector.




Note: energizing and testing the light and the connectors is needed before and after the installation.


3. Hide the cable and connector down the raceway.



4. Install the light from one end.




Tips:
Adjust the light length gently during installation if needed.
Note: This only applies to FreeBend™ Light Series.

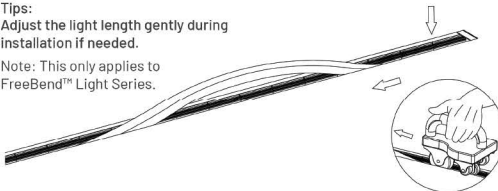


STEP 18:

Install the Silicone Diffuser.




L-Shaped End Cover






Firmly press down silicone diffuser and insert it under the L-shaped end cap. For standard end cap, push the COVER to ensure tight contact.


5mm




Note: Leave 5mm extra when cutting the silicone diffuser.



For long profiles, install from one end and then fit the cover from the opposite end when 1-2m remains.

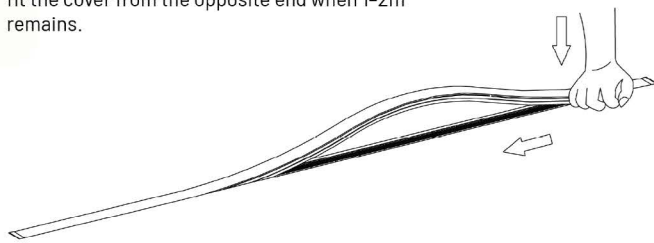

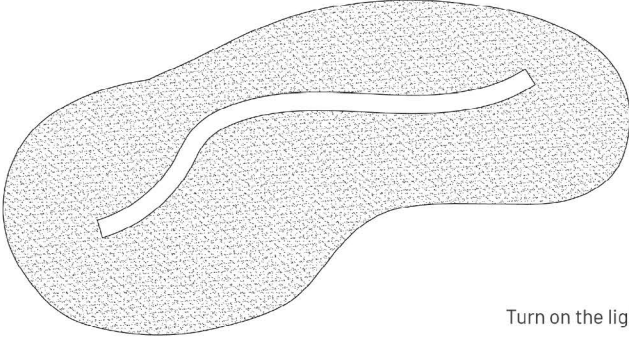

Turn on the light.



MAINTENANCE & REPLACEMENT



Maintenance & Replacement Instructions

DAILY MAINTENANCE

- **Frequency**
Every 3-6 months (or immediately after extreme weather events such as earthquakes, heavy snow, floods, typhoons, or ice storms).

INSPECTION CHECKLIST

- ☐ **Surface Debris**
Remove dirt, mud, leaves, or other obstructions blocking the light emission.
- ☐ **Light Performance**
Check for flickering, dimming, or complete failure.
- ☐ **Physical Damage**
Inspect for cracks, deep scratches, or signs of impact on the silicone cover.
- ☐ **Junction Box Integrity**
Verify waterproof connectors are intact with no aging or deterioration.

CLEANING TIPS

- **Recommended Method**
Use a soft cloth with a neutral cleaner (avoid abrasive brushes or harsh chemicals).
- **Alternative Method (High-Pressure Cleaning)**
A water jet gun is recommended for deep cleaning, while cleaning machines are suitable if the inground light can withstand the weight.
Rinsing Pressure: 20-80 bar (290-1160 psi)
Nozzle: Fan nozzles only (disperses pressure); zero-degree nozzles may cause surface damage.
Distance: 30-50cm (can be 15cm for stubborn stains for 20-30 seconds max.)
Water Temperature: $\leq 104^{\circ}\text{F}$ ($\leq 40^{\circ}\text{C}$) (room temp or lukewarm).

REPLACEMENT INSTRUCTIONS

- **Replacement Conditions**
Silicone Cover Damage: cracks, deep dents $>0.12\text{in}$ ($>3\text{mm}$), or permanent stains affecting light output.
Light Failure: flickering, dimming, extinguishing, or dead LEDs or no illumination at all.
- **Critical Reminders**
NEVER stretch the silicone before cutting it.
Avoid excessive force to prevent damage.
Clean the channel before reinstalling the cover.



MAINTENANCE & REPLACEMENT




Maintenance & Replacement Instructions

SILICONE COVER REPLACEMENT


STEP 1:

Remove the Old Cover.

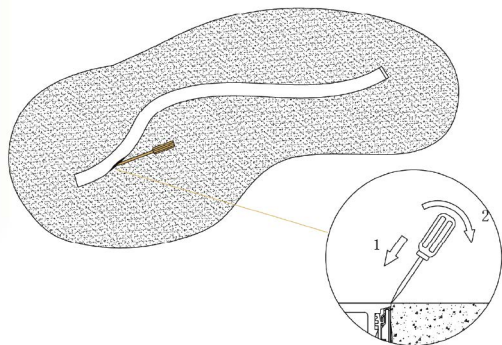

STEP 2:

Align the Length and Cut the New Cover.






Note: Leave 5mm extra when cutting the PVC cover.

STEP 3:

Install the New Cover.

Install the new silicone cover and ensure it fits **EVENLY** along the profile.

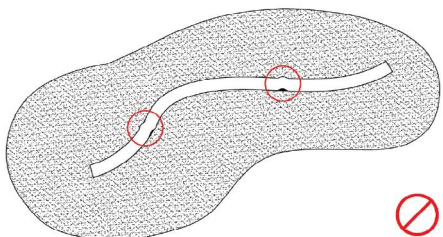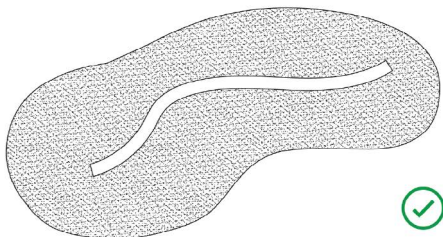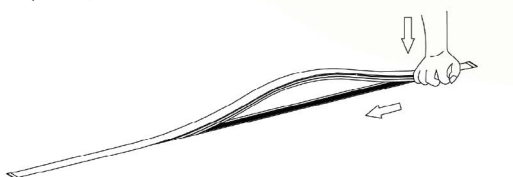


LIGHT REPLACEMENT

STEP 1:

Turn Off the Power and Disconnect the Electricity Completely.

STEP 2:

Find the Exact Position Where the Light Needs to Be Replaced.




STEP 3:

Remove the Silicone Cover.
(Follow the Steps for Silicone Cover Replacement)


STEP 4:

Remove the Failed Light.



STEP 5:

Install the New Light, Match the Polarity, and Ensure the Connectors Are Clean and Dry.




STEP 6:

Restore Power and Test the New Light Again.

STEP 7:

Reinstall the Silicone Cover by Carefully Repositioning It and Ensuring It Fits Evenly Along the Entire Profile.

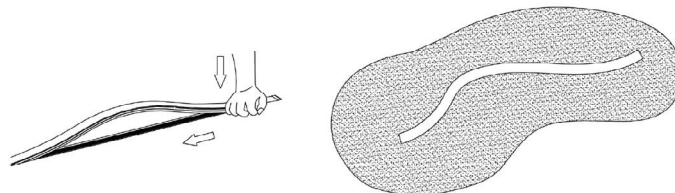


STATIC WIRING DIAGRAM




18AWG*2

SINGLE-END FEED

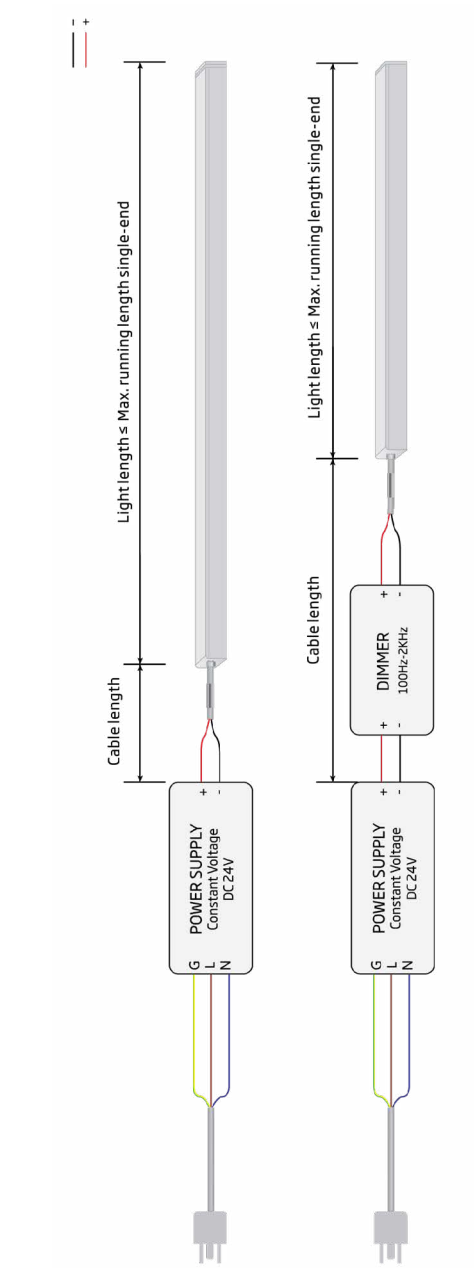

DOUBLE-END FEED

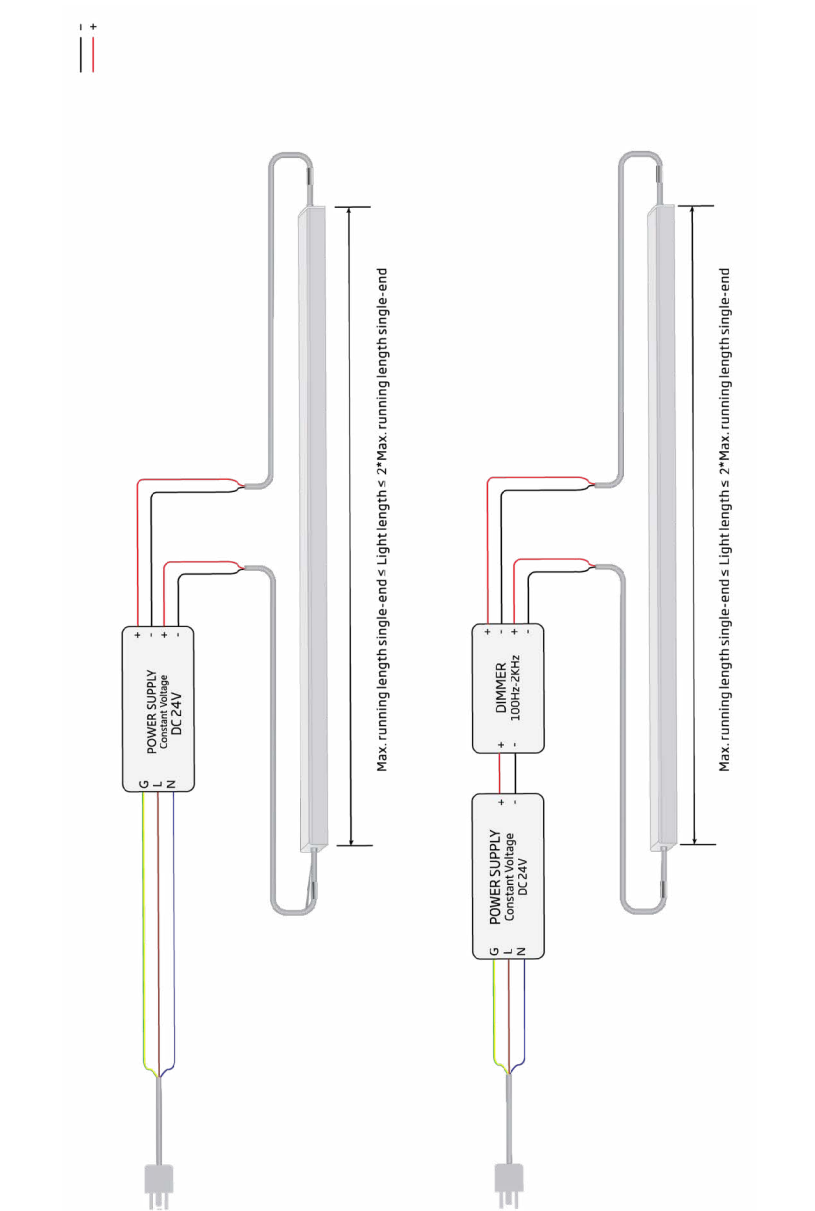

CAUTION

Ensure the polarity is correct to both ends. Reverse polarity can result in short circuits.

CAUTION

The use of two power supplies feeding both ends of the lights is not recommended. If either power supply fails, overloading and overheating can occur.

LIMITED WARRANTY



GILLS Global 10-Year Limited Warranty — Linear Flex Silicone LED Neon Flex Series

Terms & Conditions

GILLS is committed to providing defect-free products that function “as-advertised” and operate trouble-free. All GILLS manufacturing facilities are ISO 9001 registered and maintain strict quality assurance standards. The terms of this limited product warranty (“Limited Warranty”) guarantee the product(s) will be free from defect, be free of defects in material and workmanship, and function per the product’s specification, manuals, and datasheet for the stated term.

This Limited Warranty is in effect for the warranty period of 10-year (120-months) for all GILLS-branded Linear Flex Silicone products from the date of purchase to the original buyer. GILLS does not warranty any third-party products supplied by GILLS.

GILLS shall be the sole determiner of whether a product is defective under this Limited Warranty, with consideration given to the overall performance of the product. GILLS will replace or repair, at its discretion, any product that is defective or inoperable within the duration of this Limited Warranty, excluding labor. GILLS reserves the right to replace failed products with a similar, new, reconditioned, refurbished, repaired, or newer product, depending on availability or technology advancements. This shall be the customer’s sole remedy concerning any GILLS product, and the aggregate remedy for any claim shall not exceed the total purchase price of the defective product. Under no circumstances will GILLS be required to give a refund.

This Limited Warranty only applies to reasonable indoor and outdoor usage of the product in commercial applications, when properly installed and wired in accordance with all instructions, building codes, the latest UL Standards of Safety, NEC, CSA, or any other applicable domestic or international safety agencies.

Any defect arising out of the product’s unreasonable use shall not be covered by this Limited Warranty. Operating conditions must not exceed temperatures or other exposures outside the range of the product’s rated limits set by GILLS. General wear or aging is not considered a product defect if it does not result in inoperable conditions. A product shall not be regarded as defective solely because of the failure of individual LED components to emit light if the number of inoperable components is less than fifteen percent (15%) of the total number of LED components in the product.

GILLS acknowledges that its products often require professional installers, permits, equipment rental, third-party labor, and other associated costs of installation. GILLS expressly disclaims any warranty for these costs in the event of product failure; such costs shall be borne solely by the purchaser, with GILLS’ sole responsibility being the repair or replacement of the defective or failed product.

GILLS’ Limited Warranty does not include on-site visits to inspect product. GILLS reserves the right to require the return of potentially defective product for inspection, at GILLS’ expense, prior to repairing or replacing, and may deny any warranty claim if the purchaser is unable to return the product for inspection. If time is of the essence, the customer has the option to purchase a replacement product, subject to refund after return and inspection of the defective or failed product.

Limitations and Exclusions

1. GILLS shall be responsible under this Limited Warranty to repair or replace only the actual inoperable or defective light fixture—not surrounding fixtures. The customer understands that LED lights degrade over time, and it may be necessary to dim or adjust any replacement pieces to match existing surrounding fixtures.
2. GILLS does not warranty LED degradation over time. LED degradation is a part of the LED lifecycle, and it is expected that over time, the LED light fixture will lose brightness—with the amount depending on the operating environment and daily run-time.
3. GILLS is not responsible for any third-party warranty costs such as labor, equipment rental, or permits.
4. If for any reason GILLS cannot provide you with the exact fixture type for your warranty case, GILLS will provide you with the closest equivalent product at that time.
5. GILLS does not warranty for fitness for a particular purpose.
6. This Limited Warranty only applies to factory assembled and molded light fixtures and does not apply to do-it-yourself assembly. Additionally, any factory assembled product that has been modified, altered, or cut, in any way, without GILLS’ expressed written authorization will void the Limited Warranty.
7. GILLS requires the customer to follow its Case-based RMA system for all warranty claims. Any product returned without a valid Case number will not be accepted for consideration for warranty or credit.
8. No warranty claim shall exceed the original purchase price, and all warranty claims are replacement only and not subject to a cash refund.
9. This Limited Warranty only applies to product failure and does not cover damage or failure, all or in part, from the following causes: improper installation, use, operation, storage, maintenance, acts of God, extreme weather, lightning strikes, power surges, induced vibration, civil unrest, vandalism, general wear or aging, mechanical and power connections, or any circumstances that are not applicable to the reasonable use of the product. General wear or aging is not considered a product defect if it does not result in inoperable conditions. A product shall not be considered defective solely as a result of the failure of individual LED components contained in the product to emit light if the number of inoperable components is less than fifteen percent (15%) of the total number of LED components in the product.
10. This Limited Warranty is automatically voided by the use of non-approved third-party controls, power supplies, or any other manufacturer’s components, or if the product is used outside of its intended applications or for the stated purpose or conditions for which it is designed, as stated in GILLS’ written data sheets and installation instructions.
11. GILLS is not responsible for any expedited shipping costs for replacement parts under this Limited Warranty.
12. On any and all returns or exchanges other than confirmed warranty claims under this policy, GILLS does not cover, refund, or credit back shipping fees, duties, tariffs, or taxes. For confirmed warranty claims, GILLS provides a prepaid inbound shipping label and covers inbound freight to GILLS; this does not extend to duties, tariffs, or taxes, which remain the customer’s responsibility.
13. This Limited Warranty requires that a claim be submitted to GILLS within thirty (30) days of the defect first being observed. Claims submitted after this window may be declined on that basis alone.



LIMITED WARRANTY



GLLS Global 10-Year Limited Warranty — Linear Flex Silicone LED Neon Flex Series

Procedure for Warranty

The original owner at the time of the initial installation of the product must submit a warranty claim to GLLS by emailing warranty@glls.com with proof of purchase, the product SKU, and details of the failure. GLLS will issue a unique Case number at intake; this single Case number is used as the reference for the claim through troubleshooting, return, evaluation, and closure — no separate RMA number is issued.

If the claim cannot be resolved through remote troubleshooting, GLLS will issue a return authorization against the Case number, together with a prepaid inbound shipping label; GLLS covers inbound freight on confirmed warranty claims. The product must be received at the GLLS US Warehouse (1075 American Pacific Dr., Ste. A, Henderson, NV 89074, USA), or another location designated by GLLS, within fourteen (14) business days of the return authorization for it to remain valid. The Case number must be marked clearly on the outside of the package; packages received without a valid Case number cannot be received and will be held.

If a solution is required immediately, the customer may order (at their own expense) a replacement unit up front. If the product returned under the Case is confirmed as a covered warranty claim upon evaluation, GLLS will issue a credit for the replacement unit to the customer's account. GLLS will complete evaluation and issue a written coverage decision within seven (7) business days of receiving the returned product.

If coverage is approved, GLLS will provide the remedy outlined in this Limited Warranty and any replacement product will be provided with standard shipping (free of charge). If coverage is declined, GLLS will provide a written explanation identifying the specific exclusion that applies; the customer has ten (10) business days from the date of that decision to request a secondary review by emailing warranty@glls.com with the Case number and the grounds for appeal. If the customer does not request return of a declined product within ten (10) business days, GLLS may dispose of it.

Any product returned to GLLS without a valid Case number or without contacting GLLS first will be considered "lost" and not eligible for this Limited Warranty.

GLLS MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED (INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), OTHER THAN AS SET FORTH IN THIS LIMITED WARRANTY. THIS LIMITED LIABILITY DOES NOT COVER, AND UNDER NO CIRCUMSTANCE SHALL GLLS BE LIABLE FOR, ANY INCIDENTAL OR CONSEQUENTIAL LOSS OR DAMAGE WHATSOEVER ARISING OUT OF OR IN ANY WAY RELATED TO ANY DEFECT IN OR NON-PERFORMANCE OR IMPROPER PERFORMANCE OF THE PRODUCTS. IF ANY TERM OR PROVISION OF THIS LIMITED WARRANTY IS INVALID, ILLEGAL, OR UNENFORCEABLE IN ANY JURISDICTION, SUCH INVALIDITY, ILLEGALITY, OR UNENFORCEABILITY WILL NOT AFFECT ANY OTHER TERM OR PROVISION OF THIS LIMITED WARRANTY OR INVALIDATE OR RENDER UNENFORCEABLE SUCH TERM OR PROVISION IN ANY OTHER JURISDICTION.

Linear Flex Profile-Level Exceptions

The following Linear Flex profiles carry warranty terms that differ from the standard 10-Year (Silicone) and 5-Year (PVC) terms above. All other Terms & Conditions, Limitations and Exclusions, and Procedure for Warranty provisions above apply; only the duration differs.

PRODUCT LINE	MATERIAL	WARRANTY TERM	BASIS
Lumiform Orbit LS	Silicone	10 Year (Static LED Function - Colors); 7 Year (Static LED Function - Whites)	LED Functionality + LED Color fields on the order

Custom OEM Fixtures

Custom OEM Fixtures do not carry a standard Limited Warranty duration under this policy. The warranty term for a Custom OEM Fixture is established once the product has been developed with GLLS' manufacturing facility and is documented in the applicable purchase order, quote, or supply agreement governing that product. In the absence of a specific warranty term in the governing purchase order or agreement, the General Terms of Sale below (parts-only, replacement-only, no refund) apply.



LIMITED WARRANTY



Power Supplies — 7-Year Limited Warranty

Terms & Conditions

GLLS is committed to providing defect-free products that function “as-advertised” and operate trouble-free. The terms of this limited product warranty (“Limited Warranty”) guarantee the product(s) will be free from defect, be free of defects in material and workmanship, and function per the product’s specification, manuals, and datasheet for the stated term.

This Limited Warranty is in effect for a warranty period of seven (7) years (84 months) for all GLLS-branded power supplies from the date of purchase to the original buyer, except as noted below. GLLS does not warranty any third-party power supplies supplied by GLLS (e.g. Meanwell, Magnitude), which carry the original manufacturer’s warranty instead.

UL676 Power Supplies: power supplies certified to UL676 (wet-location / underwater fixtures) carry a five (5) year (60-month) Limited Warranty in place of the standard 7-year term, due to the elevated failure exposure of wet-location electronics.

GLLS shall be the sole determiner of whether a product is defective under this Limited Warranty, with consideration given to the overall performance of the product. GLLS will replace or repair, at its discretion, any product that is defective or inoperable within the duration of this Limited Warranty, excluding labor. GLLS reserves the right to replace failed products with a similar, new, reconditioned, refurbished, repaired, or newer product, depending on availability or technology advancements. This shall be the customer’s sole remedy concerning any GLLS product, and the aggregate remedy for any claim shall not exceed the total purchase price of the defective product. Under no circumstances will GLLS be required to give a refund.

This Limited Warranty only applies to reasonable indoor and outdoor usage of the product in commercial applications, when properly installed and wired in accordance with all instructions, building codes, the latest UL Standards of Safety, NEC, CSA, or any other applicable domestic or international safety agencies.

Any defect arising out of the product’s unreasonable use shall not be covered by this Limited Warranty. Operating conditions must not exceed temperatures or other exposures outside the range of the product’s rated limits set by GLLS. General wear or aging is not considered a product defect if it does not result in inoperable conditions. A product shall not be regarded as defective solely because of the failure of individual LED components to emit light if the number of inoperable components is less than fifteen percent (15%) of the total number of LED components in the product.

GLLS acknowledges that its products often require professional installers, permits, equipment rental, third-party labor, and other associated costs of installation. GLLS expressly disclaims any warranty for these costs in the event of product failure; such costs shall be borne solely by the purchaser, with GLLS’ sole responsibility being the repair or replacement of the defective or failed product.

GLLS’ Limited Warranty does not include on-site visits to inspect product. GLLS reserves the right to require the return of potentially defective product for inspection, at GLLS’ expense, prior to repairing or replacing, and may deny any warranty claim if the purchaser is unable to return the product for inspection. If time is of the essence, the customer has the option to purchase a replacement product, subject to refund after return and inspection of the defective or failed product.

Limitations and Exclusions

1. GLLS shall be responsible under this Limited Warranty to repair or replace only the actual inoperable or defective product—not surrounding fixtures. The customer understands that LED lights degrade over time, and it may be necessary to dim or adjust any replacement pieces to match existing surrounding fixtures.
2. GLLS does not warranty LED degradation over time. LED degradation is a part of the LED lifecycle, and it is expected that over time, the LED product will lose brightness—with the amount depending on the operating environment and daily run-time.
3. GLLS is not responsible for any third-party warranty costs such as labor, equipment rental, or permits.
4. If for any reason GLLS cannot provide you with the exact product type for your warranty case, GLLS will provide you with the closest equivalent product at that time.
5. GLLS does not warranty for fitness for a particular purpose.
6. This Limited Warranty only applies to factory assembled and molded products and does not apply to do-it-yourself assembly. Additionally, any factory assembled product that has been modified, altered, or cut, in any way, without GLLS’ expressed written authorization will void the Limited Warranty.
7. GLLS requires the customer to follow its Case-based RMA system for all warranty claims. Any product returned without a valid Case number will not be accepted for consideration for warranty or credit.
8. No warranty claim shall exceed the original purchase price, and all warranty claims are replacement only and not subject to a cash refund.
9. This Limited Warranty only applies to product failure and does not cover damage or failure, all or in part, from the following causes: improper installation, use, operation, storage, maintenance, acts of God, extreme weather, lightning strikes, power surges, induced vibration, civil unrest, vandalism, general wear or aging, mechanical and power connections, or any circumstances that are not applicable to the reasonable use of the product. General wear or aging is not considered a product defect if it does not result in inoperable conditions. A product shall not be considered defective solely as a result of the failure of individual LED components contained in the product to emit light if the number of inoperable components is less than fifteen percent (15%) of the total number of LED components in the product.
10. This Limited Warranty is automatically voided by the use of non-approved third-party controls, power supplies, or any other manufacturer’s components, or if the product is used outside of its intended applications or for the stated purpose or conditions for which it is designed, as stated in GLLS’ written data sheets and installation instructions.
11. GLLS is not responsible for any expedited shipping costs for replacement parts under this Limited Warranty.
12. On any and all returns or exchanges other than confirmed warranty claims under this policy, GLLS does not cover, refund, or credit back shipping fees, duties, tariffs, or taxes. For confirmed warranty claims, GLLS provides a prepaid inbound shipping label and covers inbound freight to GLLS; this does not extend to duties, tariffs, or taxes, which remain the customer’s responsibility.



LIMITED WARRANTY



Power Supplies — 7-Year Limited Warranty

13. This Limited Warranty requires that a claim be submitted to GLLS within thirty (30) days of the defect first being observed. Claims submitted after this window may be declined on that basis alone.

Procedure for Warranty

The original owner at the time of the initial installation of the product must submit a warranty claim to GLLS by emailing warranty@glls.com with proof of purchase, the product SKU, and details of the failure. GLLS will issue a unique Case number at intake; this single Case number is used as the reference for the claim through troubleshooting, return, evaluation, and closure — no separate RMA number is issued.

If the claim cannot be resolved through remote troubleshooting, GLLS will issue a return authorization against the Case number, together with a prepaid inbound shipping label; GLLS covers inbound freight on confirmed warranty claims. The product must be received at the GLLS US Warehouse (1075 American Pacific Dr., Ste. A, Henderson, NV 89074, USA), or another location designated by GLLS, within fourteen (14) business days of the return authorization for it to remain valid. The Case number must be marked clearly on the outside of the package; packages received without a valid Case number cannot be received and will be held.

If a solution is required immediately, the customer may order (at their own expense) a replacement unit up front. If the product returned under the Case is confirmed as a covered warranty claim upon evaluation, GLLS will issue a credit for the replacement unit to the customer's account. GLLS will complete evaluation and issue a written coverage decision within seven (7) business days of receiving the returned product.

If coverage is approved, GLLS will provide the remedy outlined in this Limited Warranty and any replacement product will be provided with standard shipping (free of charge). If coverage is declined, GLLS will provide a written explanation identifying the specific exclusion that applies; the customer has ten (10) business days from the date of that decision to request a secondary review by emailing warranty@glls.com with the Case number and the grounds for appeal. If the customer does not request return of a declined product within ten (10) business days, GLLS may dispose of it.

Any product returned to GLLS without a valid Case number or without contacting GLLS first will be considered “lost” and not eligible for this Limited Warranty.

GLLS MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED (INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), OTHER THAN AS SET FORTH IN THIS LIMITED WARRANTY.

THIS LIMITED LIABILITY DOES NOT COVER, AND UNDER NO CIRCUMSTANCE SHALL GLLS BE LIABLE FOR, ANY INCIDENTAL OR CONSEQUENTIAL LOSS OR DAMAGE WHATSOEVER ARISING OUT OF OR IN ANY WAY RELATED TO ANY DEFECT IN OR NON-PERFORMANCE OR IMPROPER PERFORMANCE OF THE PRODUCTS. IF ANY TERM OR PROVISION OF THIS LIMITED WARRANTY IS INVALID, ILLEGAL, OR UNENFORCEABLE IN ANY JURISDICTION, SUCH INVALIDITY, ILLEGALITY, OR UNENFORCEABILITY WILL NOT AFFECT ANY OTHER TERM OR PROVISION OF THIS LIMITED WARRANTY OR INVALIDATE OR RENDER UNENFORCEABLE SUCH TERM OR PROVISION IN ANY OTHER JURISDICTION.

Custom OEM Fixtures

Custom OEM Fixtures do not carry a standard Limited Warranty duration under this policy. The warranty term for a Custom OEM Fixture is established once the product has been developed with GLLS' manufacturing facility and is documented in the applicable purchase order, quote, or supply agreement governing that product. In the absence of a specific warranty term in the governing purchase order or agreement, the General Terms of Sale below (parts-only, replacement-only, no refund) apply.



LIMITED WARRANTY



Terms of Sale

This terms of sale exists between Green LED Lighting Solutions, LLC ("GLLS") and ("Buyer"). Purchaser acknowledges and agrees that they have reviewed all quotes and attachments prior to placing this order and ensured its accuracy. GLLS is not responsible for inaccuracies in orders. Purchaser acknowledges and agrees that the contents of this order encompass their entire order and no outside documents, including but not limited to phone calls, emails, faxes, etc., are to be incorporated into this order. Purchaser acknowledges and accepts that written purchase orders must mirror this order and acknowledges this is the responsibility of the Purchaser. Purchaser further acknowledges and accepts the order as the controlling document regardless of any outside communications that may indicate otherwise. GLLS is not responsible if purchaser later finds inaccuracies in this order, regardless of other communications.

Product Returns and Exchanges

Buyer acknowledges that upon receipt of product Buyer has (30) thirty business days to notify GLLS if the order received is not satisfactory. This includes receipt of wrong product, order not filled completely, missing parts, etc. Thirty days after receipt, GLLS assumes Buyer's order has been processed and fulfilled properly. During the thirty-day period if Buyer wishes to return any unused product for return or exchange for any reason other than incorrect product received, a re-stocking fee may apply as outlined in section 2. Only product in new condition, or custom cut product that was cut by GLLS, is eligible for return.

Re-stocking Fees

All returned product, whether returned as a complete, uncut product roll or as product custom-cut by GLLS, is subject to a 25% re-stocking fee. Restocking fees and freight charges may be waived for defective or damaged items at GLLS' discretion. Product that has been cut or altered by Buyer, or shows signs of visible use, is not eligible for return.

Custom Products and Orders

Custom made products, which are defined as those products that have been produced specifically to buyers' specifications, are not eligible for return or exchange. Custom products that contain defects will be replaced or repaired consistent with the warranty terms but are not eligible for refund. Custom orders are those orders which are put into production specifically at Buyer's request. Custom orders always require lead times. Buyer acknowledges that any payments or deposits placed on custom made products and custom orders are non-refundable once production has begun, and that any order already in production is subject to a 100% cancellation fee reflecting the full order value.

Lead Times and Product Delivery

GLLS does its best to estimate lead times, when applicable, and estimate delivery dates. However, due to factors that are often beyond our control, Buyer acknowledges that GLLS has made no guarantees as to the actual date of delivery. Buyer further acknowledges that this sale is no way contingent upon a specified date of delivery. GLLS accepts no liability for any costs incurred should Buyer have project deadlines that are not met. All shipments are DDP (Delivered Duty Paid); GLLS manages all logistics, freight, and applicable duties from point of manufacture to the delivery address shown on the applicable quote or order documentation. Tariffs are included at the rate in effect at the time of quoting but are subject to change based on the rate in effect when the order clears customs; credits will not be issued if tariff rates are lower at the time of clearance than originally quoted, and these charges remain the sole responsibility of the Buyer.

Expedited Shipping & Order Processing Times

If Buyer elects to have their order shipped via expedited shipping methods, Buyer acknowledges that expedited shipping refers to the actual shipping method and begins after the order has been processed, produced (if applicable) and packaged. Buyer acknowledges that an order may take up to 48 hours to process for shipment and any expedited shipping times do not include order processing times. Although GLLS does its best to promptly fulfill and process orders for shipment, buyer acknowledges that no guarantees have been made as to order processing times, same day shipment, etc. Buyer further acknowledges that expedited shipping only refers to the actual shipment method and expedited shipping fees will not be refunded after shipment due to order processing delays.

Product Warranty and Defect

The specific warranty terms and periods for your purchase will be outlined in the product documentation relating to the product(s) purchased. If you have any questions on this, please speak to your Account Manager.

GLLS product warranty is a parts only warranty and does not include labor, costs of installation, equipment rental, etc. GLLS assumes no liability for replacement costs and Buyer hereby acknowledges that GLLS is not responsible for any replacement costs aside from material replacement should product failure occur. Buyer also acknowledges that the warranty only covers defective product and GLLS will only replace the actual defective product, not the entire order. GLLS also reserves the right to repair failed product should that option exist.

Purchaser acknowledges and agrees that GLLS' warranty is a parts-only warranty. In the event of product failure, GLLS is only responsible for product replacement and no other ancillary costs, such as but not limited to, labor, permits, equipment rental, 3rd party civil liability, etc.

Product Return and Warranty Return Procedures

If Buyer wishes to return a product for return or exchange within the (30) thirty-day window outlined in Section 1, Buyer must promptly contact GLLS by emailing warranty@glls.com and a Case number will be issued detailing the return procedures and time frames. Should Buyer fail to return the product within the timeframe outlined for that Case, no refund or exchange will be given.

If Buyer encounters product failure during their warranty period, Buyer must notify GLLS by emailing warranty@glls.com. GLLS will issue a Case number that serves as the single reference for the claim through troubleshooting, return, evaluation, and closure. GLLS requires that Buyer return the defective product, using the prepaid inbound shipping label provided by GLLS, for inspection prior to shipping a replacement. If Buyer is unable to do this, Buyer acknowledges they will be required to purchase the replacement product and will be credited back the purchase price once the defective product is returned and confirmed as a covered warranty claim.

Governing Law

Purchaser agrees that any disputes arising out of this transaction shall be governed by the laws of the State of Nevada, USA for shipments to the United States, or by applicable Canadian law for shipments outside the United States. The venue for any legal action shall be Las Vegas, Nevada, and Purchaser waives any right to object to venue selection.

