REQUEST QUOTE NOW

Customer: Date:

Project:





MULTIFLEX ORBIT: SILICONE - 24V


Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

RoHS COMPLIANT | Class 2 | UL | CE

PROFILE CAPABILITIES







TOP & SIDE
11.81IN (300MM)

CERTIFICATIONS & FEATURES*

IP68 | IK10 | DMX | DALI | 24 DC | 7 YEAR WARRANTY | RESISTANT

FLAME
UV
SOLVENT
SALT WATER

TEMPERATURES

AMBIENT OPERATING TEMPERATURE:
-40°F to 140°F (-40°C to 60°C)

AMBIENT INSTALLATION TEMPERATURE:
-40°F to 140°F (-40°C to 60°C)

FIXTURE STORAGE TEMPERATURE:
-40°F to 140°F (-40°C to 60°C)

MAX MOUNTING SURFACE TEMPERATURE:
185°F (85°C)

HUMIDITY (NON-CONDENSING):
0–95%

THERMAL MANAGEMENT:
Free Air Convection

FIXTURE ORDER CODE

E				A						B				
L	3		2	M	1	L	3	E		6			0	
INPUT CONNECTORS				SERIES	MATERIAL	PROFILE	BENDING	JACKET/BASE + LENS COLOR		LED FUNCTION		LED COLOR	CHIP + CRI	
See Page 4 to to select input connector				M = Multiflex	1 = Silicone	L = Orbit	3 - Multi	E = White Jacket/ Black Base + Diffused		6 = SPI-Pixel-RGBW 2700K 3000K 4000K		J = 2700K L = 3000K N = 4000K	0 = Pro LED Chip + CRI80	

C		D		E				F			G	
L	3V	F	H	L	3		2		L	3		
POWER	VOLTAGE + CIRCUIT TYPE	ORDER UNIT LENGTH	PROFILE SPECIFIC	OUTPUT CONNECTOR				MOUNTING PROFILE			MOUNTING ACCESSORIES	POWER SUPPLIES & CONTROLS:
L = 6.71W/ft (22W/m)	3V = 24V DC CV	F = 3.28in (83.33mm)	H = Eco	See Page 4 to select output connector				See Page 7 to select mounting profiles			See Page 11 to select accessory	By Others By GLLS

*Maximum IP and IK ratings achievable with appropriate accessories.

GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20261027

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

A

MECHANICAL

ASSEMBLY

Fixtures are carefully assembled using high-quality components to ensure durability and performance. Each unit is built to meet strict specifications, with attention to electrical safety, thermal management, and optical alignment.

OVERALL & CUTTING LENGTHS

Fixtures feature defined overall lengths and specific cutting increments for easy customization. Cutting must be done at marked points to maintain proper function and consistent light output.

JACKET COLOR

The white jacket, black base with diffused lens cover provides a clean, uniform appearance while softening light output for reduced glare. It enhances visual comfort and delivers smooth, even illumination ideal for architectural and display applications.

BENDING RADIUS

Do not bend smaller than allowed minimum bend diameter, or may cause damage to the light & void warranty.

OPERATION

LIGHT ENGINE

Tunable White Pulse Width Modulation (PWM) light engines deliver stable, flicker-free light at a fixed brightness. They offer consistent color and reliable performance for
long-term applications.

ELECTRICAL

Designed to meet UL, CE, and RoHS standards, they feature overload, overvoltage, and short-circuit protection, along with low EMI and efficient thermal management for safe, reliable operation.

DIMMING

Dimming of 24V PWM fixtures is achieved via the driver or decoder used in the system. Depending on the selected driver/decoder, control options can include 0–10V, DMX, or DALI, enabling smooth, flicker-free dimming while maintaining consistent color and performance. Note: DMX and DALI are supported at the system level, not natively by the fixture.

GENERAL

WARRANTY

Limited 7-Year Warranty against defects in materials and manufacturing. Coverage applies to properly installed and maintained products. Damage from misuse or improper installation is not covered. GLLS may repair, replace, or issue credit for eligible claims.

LUMEN MAINTENANCE

GLLS tunable white lighting fixtures are tested to IES LM-84 and projected with IES TM-28 to ensure consistent lumen maintenance. Fixtures are designed to retain at least 70% of their initial brightness (L70) over a 10-year lifespan when properly installed and operated.

CERTIFICATION

Tested to UL2108 Class 2 by Underwriters Laboratory for use in the USA and Canada. Exceeds ANSI C78.377A, CE, and RoHS standards. Must be used under Class 2 ratings to maintain certification.

UL Certificate #: E347880

Report Referance #: E347880-20130503

TESTING

OPTICAL TESTING

TEST	RESULTS
Spectrum Analysis	IES LM 79 (Lumen, CCT, CRI, XY, SDCM, Wavelength)
Photometric Distribution	IES LM 79
Lumen Maintenance & Lifetime	IES LM 84 & IES TM28

TEMPERATURE TESTING

TEST	RESULTS
Normal Temperature Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
Abnormal Operation Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21

ENVIRONMENTAL TESTING

TEST	RESULTS
Salt Water Immersion	IEC60598-1, Sailinity 4%
Salt Spray Test	IEC60068-2-11
Outdoor Exposure	Manufacturer-defined
Flame Resistance	UL94
UV Exposure	ASTMG 154, ISO 4892-3, UVA @ 340nm & 55
IPX8	EN 60598-1: 2015+A1:2018 Clause 9.2.2 & 9.2.8
Temperature Shock(Silicone)	Manufacturer-defined, -40°C - 60°C (typical temperature range)
Constant Temperature	Manufacturer-defined
12mm Needle Flame Test (Silicone)	IEC60695-11-5
650 Glow-wire Test (Silicone)	IEC60695-2-10

DURABILITY TESTING

TEST	RESULTS
Bending Test	Manufacturer-defined, 500 cycles
Tensile Test	Manufacturer-defined, > The weight of light in max.
Twist Test	Manufacturer-defined, >200 cycles
Ball Impact	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
IK	IEC62262

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

B

LED COLORS



2700K



2700K



2700K

FIXTURE SPECIFICATIONS & OPTICAL PARAMETERS

COLOR	LED COUNT	1 CONNECTOR FULL/ DYNAMIC*	2 CONNECTORS FULL/DYNAMIC*	UL CLASS 2 MAX RUN	FIXTURE COLOR TOLERANCE**	WAVELENGTH/CCT	LED CRI	LED COLOR TOLERANCE	LUMEN COUNT	LEGACY ORDER CODE
R; G; B; 2700K	26 LEDs/ft (84 LEDs/m)	16.4ft (5m) / TBA	16.4ft (5m) / TBA	14ft (4m)	N/A	618-624nm; 522-530mn; 468-474nm; 2700±115K	N/A	N/A	>37lm/ft (120lm/m); 98lm/ft (320lm/m); 18lm/ft (60lm/m); 91lm/ft (300lm/m)	M1L3E4J0L3VFH
R; G; B; 3000K	26 LEDs/ft (84 LEDs/m)	16.4ft (5m) / TBA	16.4ft (5m) / TBA	14ft (4m)	N/A	618-624nm; 522-530mn; 468-474nm; 3000±140K	N/A	N/A	>37lm/ft (120lm/m); 98lm/ft (320lm/m); 18lm/ft (60lm/m); 91lm/ft (300lm/m)	M1L3E4L0L3VFH
R; G; B; 4000K	26 LEDs/ft (84 LEDs/m)	16.4ft (5m) / TBA	16.4ft (5m) / TBA	14ft (4m)	N/A	618-624nm; 522-530mn; 468-474nm; 4000±225K	N/A	N/A	>37lm/ft (120lm/m); 98lm/ft (320lm/m); 18lm/ft (60lm/m); 91lm/ft (300lm/m)	M1L3E4N0L3VFH

*Max run length is based on silicone seamless connectors and excludes connector length, see connector specs for details.

C

POWER & VOLTAGE

COLOR	VOLTAGE + CIRCUIT TYPE	POWER CONSUMPTION
2700K	24V DC CV	6.71W/ft (22W/m)
3000K	24V DC CV	6.71W/ft (22W/m)
4000K	24V DC CV	6.71W/ft (22W/m)

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

D

CUTTING INSTRUCTIONS

COLOR	ORDER UNIT (CUTTING UNIT)
2700K	3.28in (83.33mm)
3000K	3.28in (83.33mm)
4000K	3.28in (83.33mm)

E

COMPATIBLE CONNECTORS

INPUT - 01

L	3		2		
PROFILE	BENDING	WIRING	INPUT CONNECTOR TYPE	INPUT ORIENTATION + TYPE	INPUT CABLE LENGTH (LEAD WIRE)

OUTPUT - 02

L	3		2		
PROFILE	BENDING	WIRING	OUTPUT CONNECTOR TYPE	OUTPUT ORIENTATION + TYPE	OUTPUT CABLE LENGTH (LEAD WIRE)
L = Orbit	3 = Multi	3 = 3 Wire (SPI-Pixel Power Feed) 0 = N/A (End Cap)	2 = Silicone Seamless	A = End Exit B = Bottom Exit C = Side Left Exit D = Side Right Exit I = End Cap	1 = 0.98ft (0.3m) 2 = 3.28ft (1m) 3 = 9.84ft (3m) 4 = 16ft (5m 5 = 32.81ft (10m) 6 = 49.21ft (15m) 7 = 65.62ft (20m) 8 = N/A

LEGACY CONNECTOR ORDER CODE

FA	23K	2	2	XX	SE	X	XX	XXX	X
PRODUCT TYPE	PROFILE	BENDING	LIGHT EMITTING	FUNCTIONALITY	CONNECTOR TYPE	FIXTURE END	EXIT TYPE	LENGTH	
FA = Factory Accessories	23K = Orbit	2 = Multi	2 = 23K	3W = Tunable White 0W = For End Cap	SE = Seamless	1 = Input Side 2 = Output Side 0 = Jumpers/T-feeds/ Seamless Bottom/ Seamless End	EN = End BO = Bottom SL = Side Left SR = Side Right TF = Power Feed EC = End Cap	0M3 = 0.98ft (30cm) 01M = 3.28ft (1m) 03M = 9.84ft (3m) 05M = 16ft (5m) 10M = 32.81ft (10m) 000 = For End Cap	P = Power or For End Cap S = Signal & Power

MULTIFLEX ORBIT: SILICONE - 24V


Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

E

SILICONE SEAMLESS CONNECTOR






NOTES:
1. Connector tolerance ±0.02in (0.5mm)
2. Cable diameter: silicone Static = 0.26in (6.5mm);
3. Do not apply force to the feed cable
4. Ensure max. cable lengths are followed according to wire gage to avoid voltage drop

IP68; seamless; precise low profile dimension; high grade quality silicone & anti-wicking ferrule. Recommended for; wet environments; custom predetermined lengths; high/low temperatures; increased humidity; direct UV exposure; harsh working conditions & increased handling forces during installation. Precision milling and special glue Silicone liquid injection-moulded workmanship enables an almost consistent size between connectors and light body, and the transparent terminal of the connector allows the seamless effects spliced end by end. DryWire technology applied on the cable eliminates the capillary phenomenon through wires, which secured the long-term reliability in outdoor or any wet environments. Custom factory assembly.


END EXIT: L332A#






END CAP: L302I8





SCREW LOCK CONNECTOR ACCESSORY - IP67






NOTE: The tolerance is ±0.08in (2mm).

ANTI-WICKING FERRULE:





NOTES:
1. The anti-wicking ferrule is located at 4.53in (115mm) (±0.39in [±10mm] tolerance) from the connector on the cable. For protection against water ingress.
2. The removal of anti-wicking ferrule will void the warranty if any water ingression caused by it.

MULTIFLEX ORBIT: SILICONE - 24V


Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

E


BOTTOM EXIT: L332B#






SIDE LEFT EXIT: L332C#





SIDE RIGHT EXIT: L332D#





GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20261027

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

F


MOUNTING PROFILES


		L		3
MOUNTING PROFILE TYPE	**STANDARD LENGTH**	**PROFILE**	**COLOR**	**BEND**
A1 = Aluminum Basic	2 = 1.38in (35mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm)	L = Orbit	1 = Standard	3 = Multi
A2 = Aluminum Recessed	2 = 1.38in (35mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm)			
A4 = Aluminum Silicone Grip	1 = 0.79in (20mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm)			
A3 = Aluminum Recessed Silicone Grip	1 = 0.79in (20mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm) 6 = 78.74in (2000mm)			
A5 = Aluminum Flexible	3 = 19.68in (500mm) 5 = 39.37in (1000mm)			
C1 = Silicone Flexible	F = 2.17in (55mm) B = 4.33in (110mm) C = 7.87in (200mm) 3 = 19.68in (500mm) 5 = 39.37in (1000mm)		2 = Black 3 = White 0 = Custom	


ALUMINUM PROFILE - BASIC

High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. It is deformation and rust resistant, and cost-effective.
Please refer to install manual for proper installation practices.








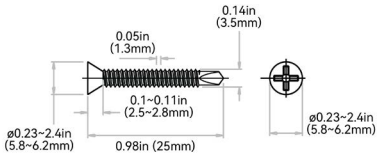

Tolerance: ± 0.01in (0.3mm)

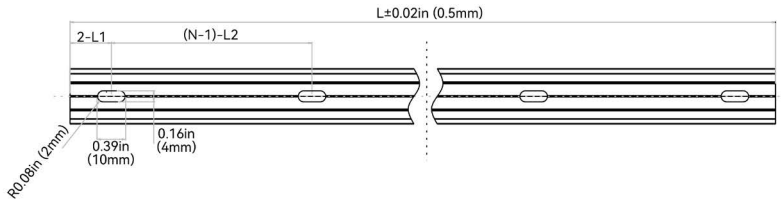

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A12L13	1.38in (35mm)	0.69in (17.5mm)	N/A	0.16*0.39in (4*10mm)	1
A13L13	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A15L13	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A16L13	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW


COMPLEXITY, SIMPLIFIED.


F


ALUMINUM PROFILE - RECESSED

High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. Recommended on projects with lighting mounted recessed in a cavity so only the lens is shown. It is deformation and rust resistant, and cost-effective. Please refer to install manual for proper installation practices.











NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

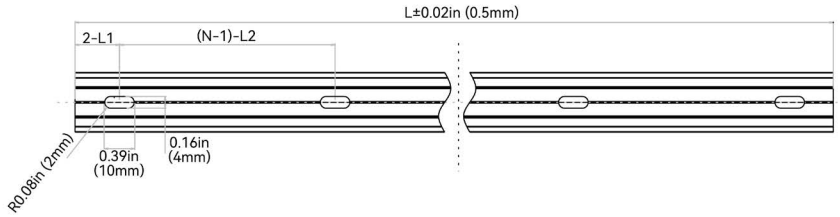



ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A22L13	1.38in (35mm)	0.69in (17.5mm)	N/A	0.16*0.39in (4*10mm)	1
A23L13	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A25L13	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A26L13	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10


ALUMINUM PROFILE - SILICONE GRIP

High-quality 6063 aluminum with thin-wall, light-weight design. Includes a serated silicone grip insert designed to hold fixture with additional force. Recommended on projects mounted upside down. It is deformation and rust resistant, and cost-effective. Please refer to install manual for proper installation practices.

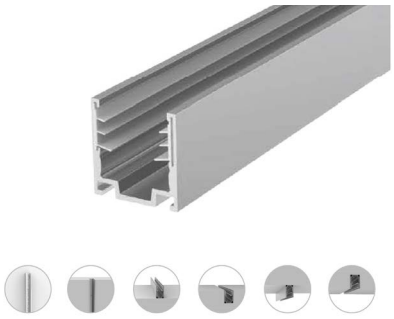








NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

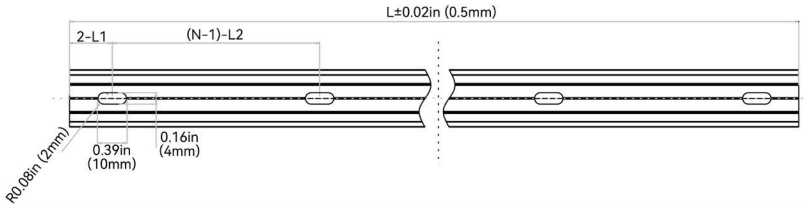

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A41L13	0.79in (20mm)	0.39in (10mm)	N/A	0.16*0.39in (4*10mm)	1
A43L13	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A45L13	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A46L13	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10

GLLS reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance. REV. 20261027

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW


COMPLEXITY, SIMPLIFIED.

F


ALUMINUM PROFILE - RECESSED - SILICONE GRIP


High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. Recommended on projects with lighting mounted recessed in a cavity so only the lens is shown. It is deformation and rust resistant, and cost-effective. Please refer to install manual for proper installation practices.






Tolerance: ± 0.01in (0.3mm)





NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
"N" hereby stands for its corresponding "Hole Number" in the below table

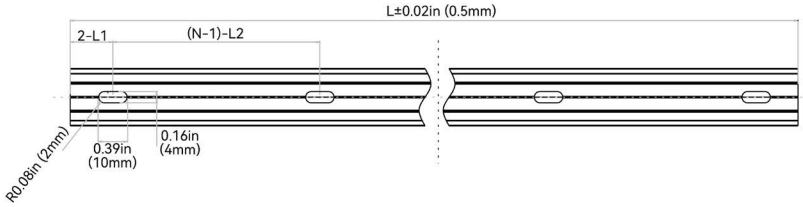


ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A31L13	0.79in (20mm)	0.39in (10mm)	N/A	0.16*0.39in (4*10mm)	1
A33L13	19.68in (500mm)	1.97in (50mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	3
A35L13	39.37in (1000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	5
A36L13	78.74in (2000mm)	3.93in (100mm)	7.87in (200mm)	0.16*0.39in (4*10mm)	10


ALUMINUM PROFILE - FLEXIBLE


High-quality 6063 aluminum with thin-wall, light-weight design to fit the fixture tightly. It is deformation and rust resistant, and cost-effective. Please refer to install manual for proper installation practices.






Tolerance: ± 0.01in (0.3mm)





NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. "N" hereby stands for its corresponding "Hole Number" in the below table

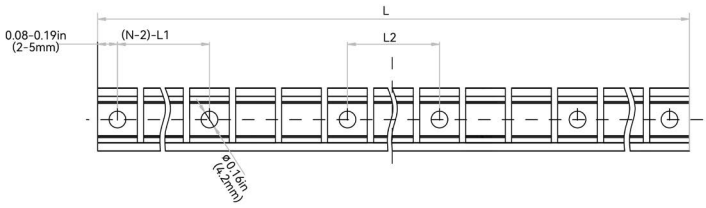

ORDER CODE	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
A53L13	19.68in (500mm)	4.34in (110.3mm)	1.92in (48.9mm)	ø 0.17in (4.2mm)	6
A55L13	39.37in (1000mm)	4.39in (114.6mm)	3.89in (98.8mm)	ø 0.17in (4.2mm)	10

MULTIFLEX ORBIT: SILICONE - 24V


Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW


COMPLEXITY, SIMPLIFIED.


F


SILICONE PROFILE - RECESSED

An all-in-one mounting profile designed to unleash your creativity. This profile not only provides flexibility in installation methods, but also overcomes bending limitations by offering both top and side bending in a single profile. Fully encapsulated in UL-certified silicone, it excels in UV, weather, and corrosion resistance, making it suitable for underwater, high and low temperature enviroments. Elegant and square in appearance, it is available in black or white standard colors, or custom bespoke colors to blend in with the background. Supported by innovative serrated silicone fins, its clamping strength is strong enough to secure any installation method. Please refer to install manual for proper installation practices. Side and top bending.

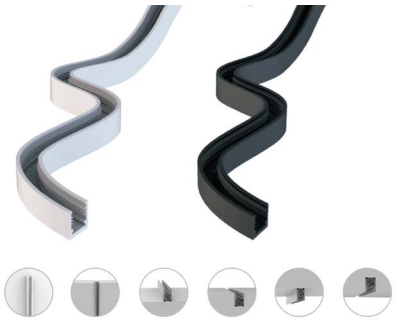






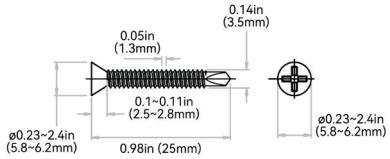

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile. “N” hereby stands for its corresponding “Hole Number” in the below table

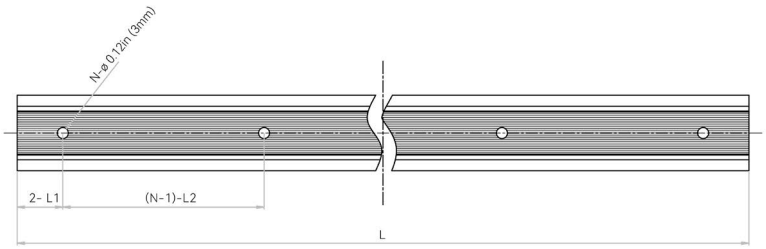

ORDER CODE	LEGACY ORDER CODE WHITE	LEGACY ORDER CODE BLACK	STANDARD LENGTH	L1	L2	SLOTTED HOLE	HOLE #
C1FL#3	CH23FAN5C5SEW	CH23FAN5C5SEB	2.17in (55mm)	0.49in (12.5mm)	1.18in (30mm)	0.12in (3mm)	2
C1BL#3	CH23FAN1C1SEW	CH23FAN1C1SEB	4.33in (110mm)	0.46in (11.6mm)	3.48in (88.4mm)	0.12in (3mm)	2
C1CL#3	CH23FAN0M2SEW	CH23FAN0M2SEB	7.87in (200mm)	0.46in (11.6mm)	3.48in (88.4mm)	0.12in (3mm)	3
C13L#3	CH23FAN0M5SEW	CH23FAN0M5SEB	19.68in (500mm)	1.14in (29mm)	3.48in (88.4mm)	0.12in (3mm)	6
C15L#3	CH23FAN01MSEW	CH23FAN01MSEB	39.37in (1000mm)	0.54in (13.8mm)	3.48in (88.4mm)	0.12in (3mm)	12

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.

G


MOUNTING ACCESSORIES


MOUNTING ACCESSORY TYPE	PROFILE
MA1 = Pivot Bracket	O = All Profiles
MA2 = Rotary Bracket	
MA3 = Side Bracket	
MA6 = Suspended Wire Kit	L = Orbit


PIVOT BRACKET: MA1O | MA00PMB00000

Applicable to all mounting profiles.







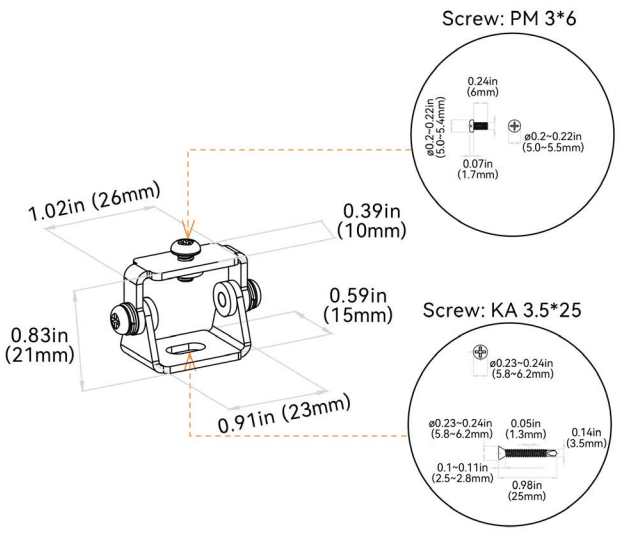

MULTIFLEX ORBIT: SILICONE - 24V

Indoor & Outdoor Rated Linear Flex Profile - SPI-RGBW

COMPLEXITY, SIMPLIFIED.


G


ROTARY BRACKET: MA2O | MA00BRL00000

Applicable to all mounting profiles.





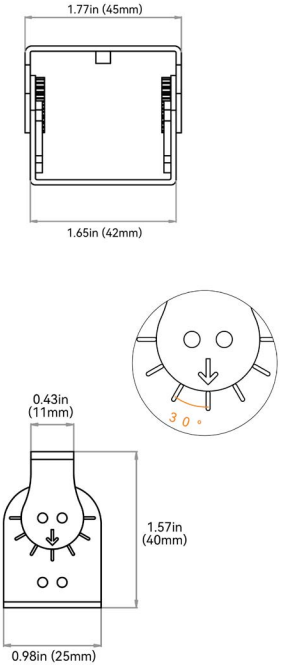


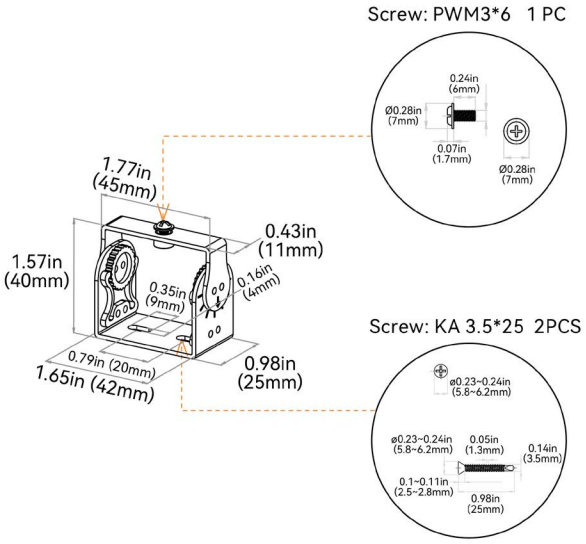


SIDE MOUNTING BRACKET: MA3O | MA00SMB00000

Applicable to all mounting profiles.





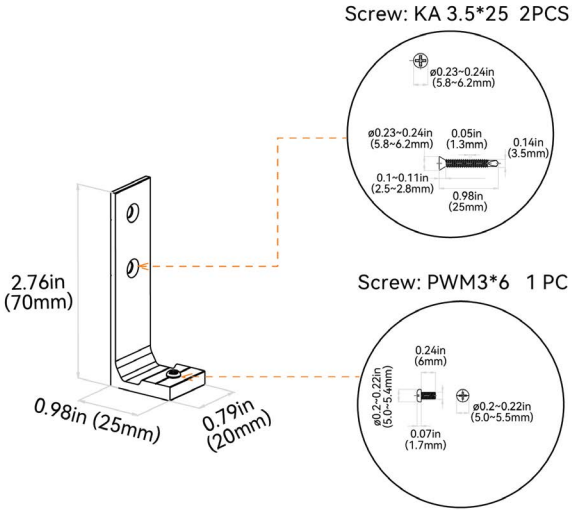

G

SUSPENDED WIRE

Applicable to Aluminum Profile - Silicone Grip. 2 kits of stainless steel wires/39.37in (1000mm) for Aluminum Profile - Silicone Grip. 3 kits of stainless steel wires/78.74in (2000mm) for Aluminum Profile - Silicone Grip





