QBLOX

QRM-RF

Qubit Readout Module RF

Release February 2026_V1.9



QBLOX B.V. - DELFTECHPARK 22 | 2628 XH DELFT | THE NETHERLANDS | CHAMBER OF COMMERCE 72525053 | ALL RIGHTS RESERVED | SALES@QBLOX.COM


DESCRIPTION

The QRM-RF combines all the multiplexed sequencing power of the qubit control module with internal downconversion stages to directly input and output signals over a wide frequency range from 2 GHz up to 18.5 GHz. Combining inputs and outputs in one module makes reflectometry/ transmission readout schemes convenient as the readout pulse and acquisition can be triggered from the same sequence processor and use the same LO for guaranteed phase stability.

The module is made for frequency-multiplexed readout of up to 6 frequencies over a wide band of 750 MHz without compromising on its state-of-the-art spurious-free dynamic range of > 50 dB (within analog bandwidth).

Measurements on up to 6 qubits can be multiplexed, however, their timing is completely independent, allowing arbitrary scheduling of measurement operations. Arbitrary pulse shapes and arbitrary complex integration functions can be uploaded to suppress crosstalk and optimize measurement efficiency under dynamic readout conditions.

Up to 131.072 IQ shots can be stored. Onboard averaging (and binning) can be used to reduce data transfer overhead for averaged experiments.

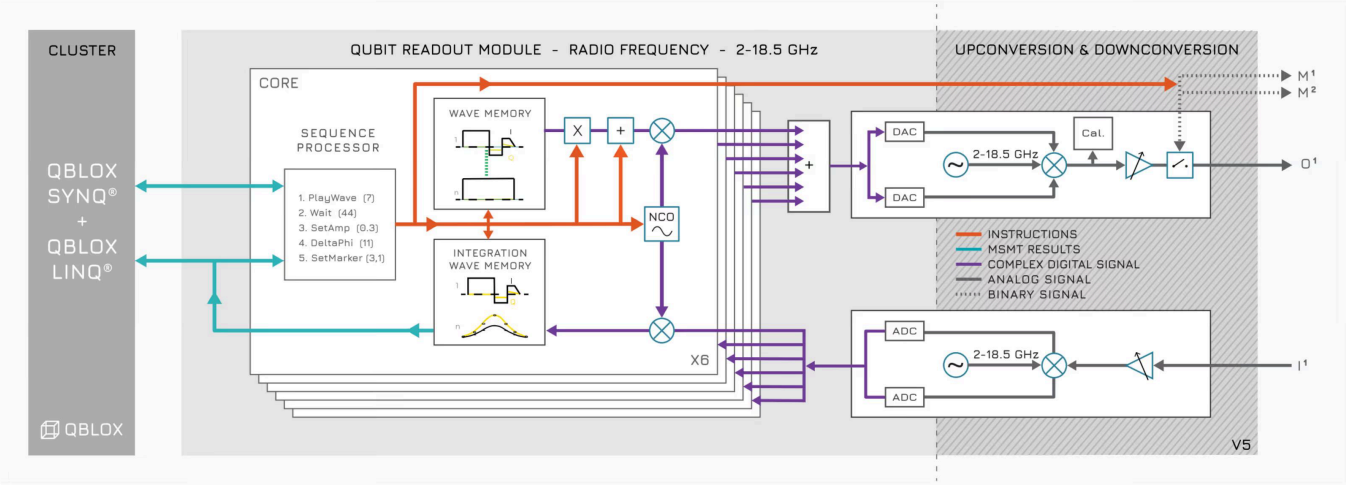

FEATURES

Real-time control of amplitude offset and modulation phase.

Multiplexed readout of up to 6 frequencies.

Synchronized to all other modules via SYNQ protocol.

On-board integration and state assignment. LINQ protocol and all-to-all connectivity of the Cluster system allow the measurement outcomes to be distributed to all other modules

On-board integration and state assignment. LINQ protocol and all-to-all connectivity of the Cluster system allow the measurement outcomes to be distributed to all other modules

On-board averaging and binning of measurement results with up to 131.072 IQ bins.

External instrument triggering via 2 marker outputs.

SPECIFICATIONS

Frequency Range (-3 dB):	**2 - 18.5 GHz**
Analog output/input channels:	**1/1**
Analog bandwidth (-3dB):	**750 MHz**
DAC/ADC sample rate:	**1 GS/S (for I and Q)**
DAC/ADC resolution (vertical):	**12 BIT (for I and Q)**
Binary output markers:	**2 (3.3V LVTTL)**
Max. Output power (into 50 Ω):	**-40 to +5 dBm (settable)**
Spurious-free dynamic range:	**> 50 dB (within analog bandwidth)**

Phase noise (@3 GHz, 10 kHz offset):	**-115 dBc/Hz**
Max. input power (into 50 Ω):	**-26 to 0 dBm (settable)**
Frequency resolution (Input and Output):	**0.25 Hz (IF), 1 Hz (LO)**
Measurement result memory (IQ shots):	**3,000,000 (48 bit wide)**
Ethernet data rate:	**1 Gbit/s**
Driver/API:	**SCPI / Python / QCoDeS**
Max. power consumption (via Cluster):	**35 W**
Input/Output connector type:	**SMA**
Marker connector type:	**SMP**
Dimensions single module:	**269 X 130 X 20 mm³**
Weight:	**0.322 kg**