
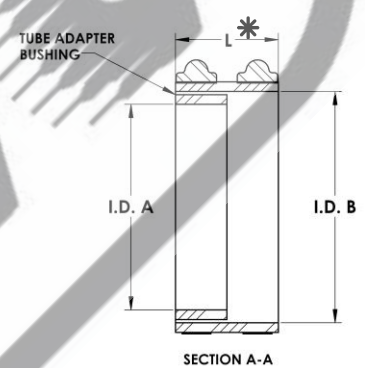


Product Specification Sheet

RUBBER SLEEVE & CLAMPS

**STRAIGHT SLEEVE-
TUBE O.D. TO TUBE O.D.**

**ADAPTER SLEEVE -
TUBE O.D. TO PIPE O.D.**


Dimensions in Inches, [] are in millimeters

STRAIGHT SLEEVES

Sonic P/N	Description	A	B	Length (L)	Material	Temp. Range
10038	2" Sleeve & Clamps	2.00 in [51 mm]	-	2.00 in [51 mm]	EPDM 304 SS Clamp	-40°F to 257°F (-40°C to 125°C)
10039	3" Sleeve & Clamps	3.00 in [76 mm]	-	2.00 in [51 mm]	SBR 304 SS Clamp	-25°F to 185°F (-32°C to 85°C)
18826	3" Sleeve & Clamps	3.00 in [76 mm]	-	2.00 in [51 mm]	SILICONE 304 SS Clamp	-58°F to 392°F (-50°C to 200°C)
10040	4" Sleeve & Clamps	4.00 in [102 mm]	-	2.00 in [51 mm]	SBR 304 SS Clamp	-25°F to 185°F (-32°C to 85°C)
18900	4" Sleeve & Clamps	4.00 in [102 mm]	-	2.00 in [51 mm]	SILICONE 304 SS Clamp	-58°F to 392°F (-50°C to 200°C)
12679	6" Sleeve & Clamps	6.00 in [153 mm]	-	4.00 in [102 mm]	EPDM 304 SS Clamp	-40°F to 257°F (-40°C to 125°C)
14717	6 ⁵ / ₈ " Sleeve & Clamps	6.63 in [169 mm]	-	4.00 in [102 mm]	EPDM 304 SS Clamp	-40°F to 257°F (-40°C to 125°C)

ADAPTER SLEEVES

Sonic P/N	Description	A	B	Length (L)	Material	Temp. Range
12837	2 ³ / ₈ " Sleeve & Clamps To 2"	2.00 in [51 mm]	2.38 in [61 mm]	2.00 in [51 mm]	EPDM 304 SS Clamp	-40°F to 257°F (-40°C to 125°C)
12831	3 ¹ / ₂ " Sleeve & Clamps To 3"	3.00 in [76 mm]	3.50 in [89 mm]	2.00 in [51 mm]	SBR/SILICONE 304 SS Clamp	-25°F to 185°F (-32°C to 85°C)
12841	4 ¹ / ₂ " Sleeve & Clamps To 4"	4.00 in [102 mm]	4.50 in [115 mm]	2.00 in [51 mm]	SILICONE 304 SS Clamp	-58°F to 392°F (-50°C to 200°C)
12849	6 ⁵ / ₈ " Sleeve & Clamps To 6"	6.00 in [153 mm]	6.63 in [169 mm]	4.00 in [102 mm]	EPDM 304 SS Clamp	-40°F to 257°F (-40°C to 125°C)

*ALTERNATIVE SLEEVE LENGTHS AVAILABLE