


Pangea[®]

Utility Plating System


Design rationale

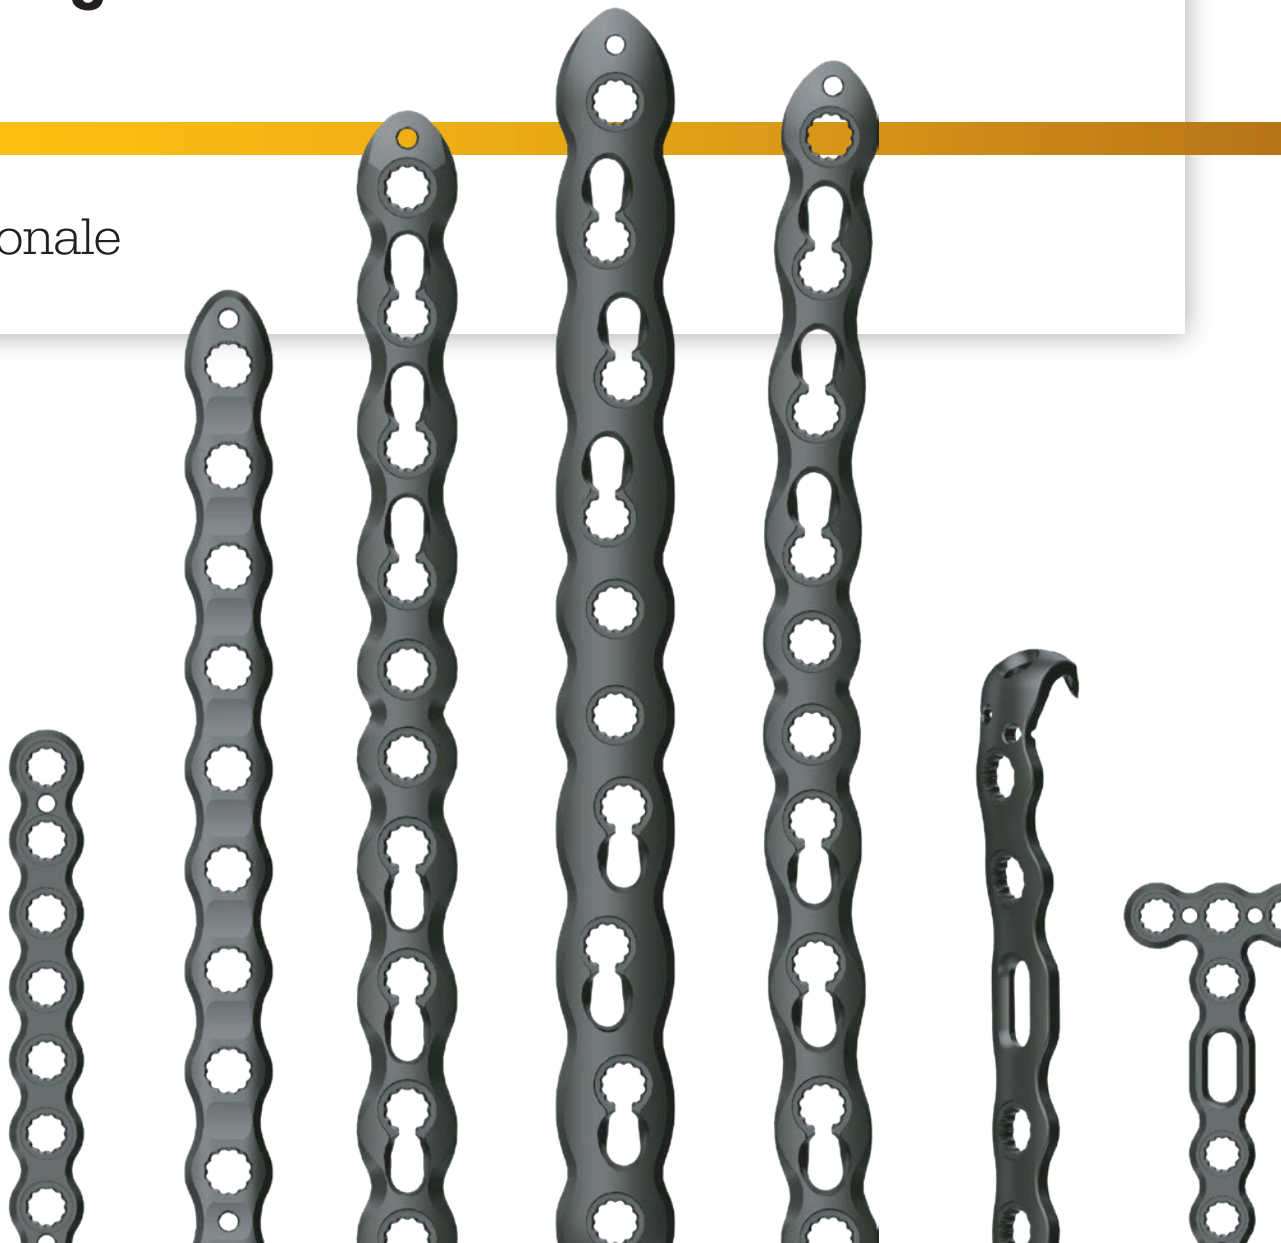

Pangea Utility Plating System

Design rationale

stryker

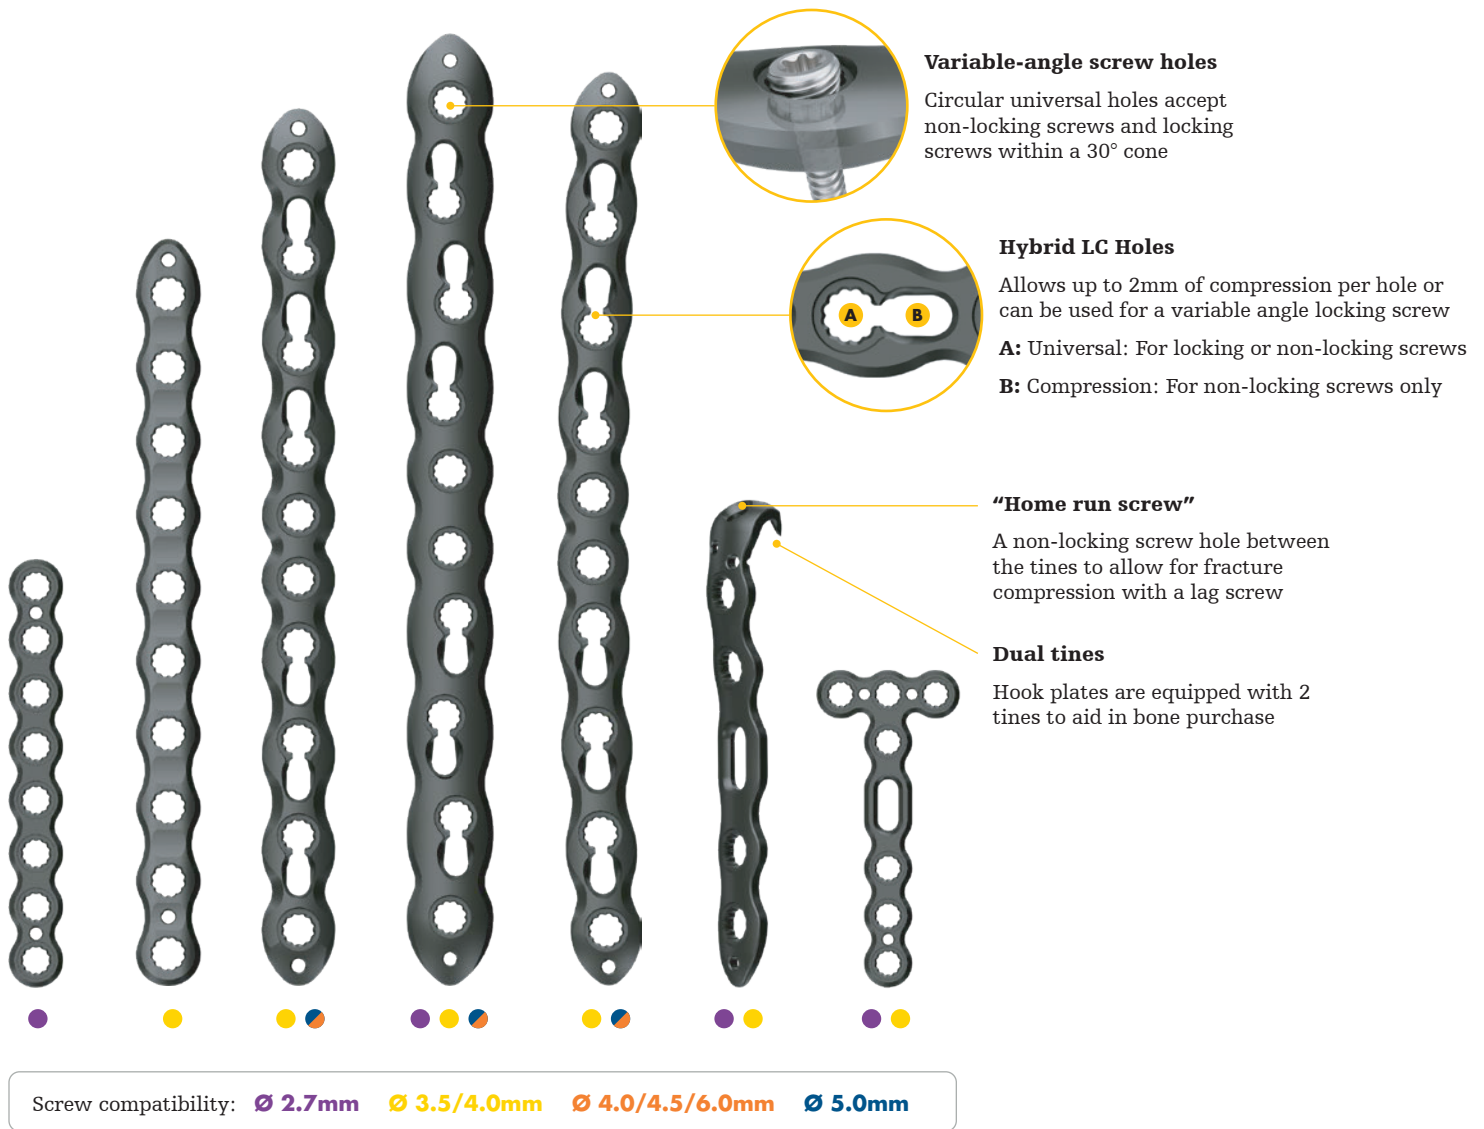

System highlights

- Versatile plate offering with 13 utility plate types utilizing the small and large fragment platforms
- Pangea's utility plates may be used to compress, neutralize, buttress or bridge a particular fracture pattern and act as a complement to the Pangea anatomic plate offerings available throughout the large and small fragment indications
- Plate size and shape span 3 different screw interfaces to meet the needs of your patients
- Additional auxiliary and optional tray configurations can be customized to your small and large fragment core trays to potentially reduce back table clutter and make desired implants available in a more convenient way
- Pangea's hybrid locking-compression ("LC") holes can achieve 2mm of compression by placing a non-locking screw eccentrically in the oblong portion of the hole before tightening, while the circular aspect of the hole accommodates variable-angled locking and non-locking screws

Pangea Utility Plating System

Design rationale

stryker

● 2.7mm utility plates

Drill bit: 2.0mm



Straight narrow plates

Holes: 4, 6, 8, 10, 20
Thickness: 1.7mm
Lengths: 31mm to 152mm



Straight broad plates

Holes: 4, 6, 8, 10, 12, 14, 16, 18, 20
Thickness: 2.75mm
Lengths: 38mm to 206mm



T-plates

Holes: 3Tx5, 3Tx10, 5Tx10
Thickness: 1.7mm
Lengths: 51mm and 89mm



Hook plates

Holes: 3, 5, 7
Thickness: 1.7mm
Lengths: 37mm to 72mm

● 3.5mm utility plates

Drill bit: 2.5mm



Straight narrow plates

Holes: 4, 6, 7, 8, 10, 12, 14, 16, 18, 20, 22
Thickness: 3.3mm
Lengths: 51mm to 289mm



Straight broad plates

Holes: 4, 6, 7, 8, 10, 12, 14, 16, 18, 20, 22
Thickness: 3.3mm
Lengths: 62mm to 316mm



Curved narrow plates

Holes: 8, 10, 12, 14, 16, 18, 20
Thickness: 3.3mm
Lengths: 115mm to 270mm



T-plates

Holes: 3Tx5, 3Tx10, 5Tx10
Thickness: 2.0mm
Lengths: 77mm and 137mm



Hook plates

Holes: 3, 5, 7
Thickness: 2.0mm
Lengths: 49mm to 103mm



Locking 1/3 tubular plates

Holes: 2-8, 10, 12, 14
Thickness: 1.7mm
Lengths: 26mm to 170mm



SPS Non-locking 1/3 tubular plates

Holes: 2-8, 10, 12, 14
Thickness: 1.2mm
Lengths: 25mm to 181mm

● 5.0mm utility plates

Drill bit: 3.2mm and 4.3mm



Straight narrow plates

Holes: 4, 6-12, 14, 16, 18, 20
Thickness: 4.3mm
Lengths: 75mm to 384mm



Straight broad plates

Holes: 6-12, 14, 16, 18, 20
Thickness: 5.2mm
Lengths: 116mm to 384mm



Curved broad plates

Holes: 8-12, 14, 16, 18, 20, 22, 24
Thickness: 5.2mm
Lengths: 160mm to 456mm

Screw platform

Multiaxial locking	5.0		14-120mm	3.5		10-120mm	2.7		8-80mm
	4.0		14-95mm						
	5.0		10-20mm						
Cortex	4.5		14-150mm	3.5		10-120mm	2.7		8-80mm
Cancellous	6.0		20-150mm	4.0		10-100mm			
	6.0		30-150mm	4.0		10-100mm			
	6.0		45-150mm						
Cable plug Washers									

This document is intended solely for the use of healthcare professionals. A surgeon must always rely on his or her own professional clinical judgment when deciding whether to use a particular product when treating a particular patient. Stryker does not dispense medical advice and recommends that surgeons be trained in the use of any particular product before using it in surgery. The information presented is intended to demonstrate the breadth of Stryker's product offerings. A surgeon must always refer to the package insert, product label and/or instructions for use before using any of Stryker's products. Products may not be available in all markets because product availability is subject to the regulatory and/or medical practices in individual markets. Please contact your sales representative if you have questions about the availability of products in your area.

Stryker Corporation or its affiliates own, use, or have applied for the following trademarks or service marks: Pangea, Stryker. All other trademarks are trademarks of their respective owners or holders.

Content ID: TR-PANG-DESR-3054336
Copyright © 2026 Stryker



Manufacturer:

Stryker GmbH
Bohnackerweg 1
2545 Selzach, Switzerland
stryker.com