




# Moose Jaw

## Portable fastening power

The Moose Jaw uses Press Lock's hydro-pneumatic tech in a compact, lightweight design for easy, modular metal joining. With zero setup, operators can dive into projects worry-free.

PLT Moose Jaw with Booster Unit & Optional Spring Balancer

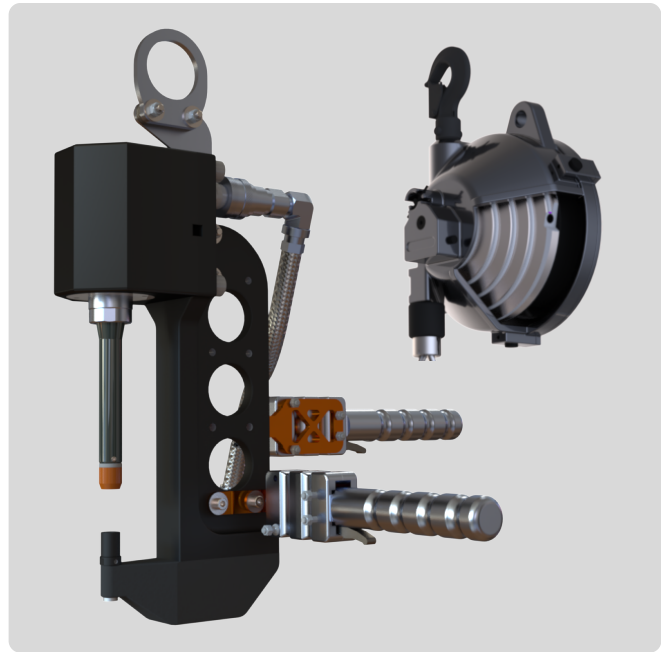

### No additional compressor capacity needed

Our systems use 30% less air than most clinchers. This allows you to add a machine without upgrading your compressor capacity.

### No-leak hydraulic swivel

The 90° hydraulic connector swivels and prevents breakdowns and leaks.

### Robot-ready

Add the MooseJaw to any robotic arm for fully automated clinching operations.

### Clinch wide or hard-to-reach parts

The wide opening allows you to clinch challenging parts that other machines may not be able to reach.

## Get a quote


+1 (289) 204 3279  
[presslocktech.com](https://presslocktech.com)

Joining metal since 1999 | Made in Canada | Next-day parts and service



**Press the Pedal,  
Lock the Metal**

Press Lock Technologies | 520 Burlington St. East  
Hamilton, ON | Canada L8L 4J2

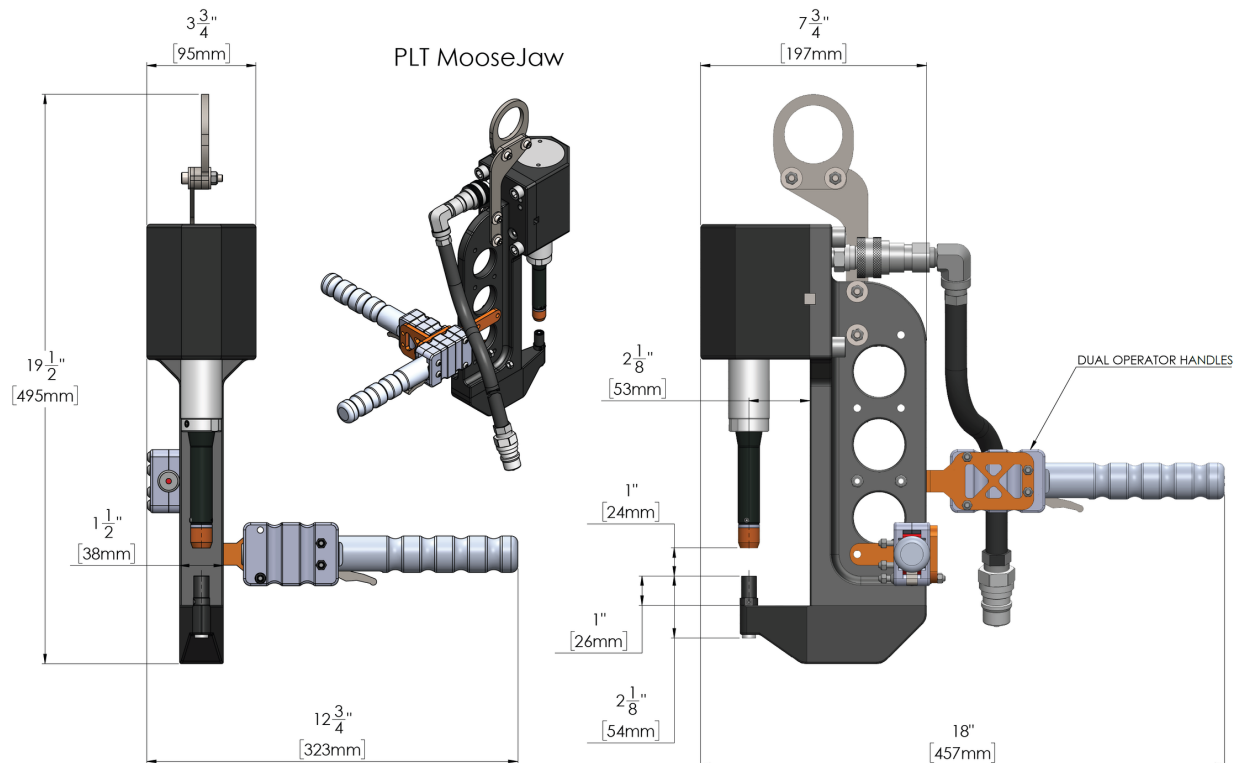

## Product specs

|                    |                                                                                                               |
|--------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Dimensions</b>  | L18" (457 mm) x W12.75" (323 mm)                                                                              |
| <b>Speed</b>       | 30+ cycles per minute                                                                                         |
| <b>Jaw opening</b> | 6mm (0.25") of opening for single trigger operation<br>25mm (1.00") or more opening with dual safety triggers |
| <b>Bite</b>        | 53mm (2") or more                                                                                             |
| <b>Capacity</b>    | Join steel, aluminium, copper, stainless steel and more                                                       |
| <b>Shop air</b>    | 90 psi                                                                                                        |
| <b>Power</b>       | 2 Amp, 115 VAC                                                                                                |