



FirePro.

GTN-25 Magnets

Data sheet

Issue September 2022

Version 2.0





Reinventing
Fire Suppression

Product Overview

The GTN-25 Magnets are ideal for applications where it is not possible to use screws to fix the FirePro condensed aerosol generator bracket(s). They are suitable to be installed with any cylindrical type generator bracket.

Product Code: 10640

Technical Characteristics

GTN-25 Pot magnet with threaded stem Ø 25 mm, Thread M5, Vertical strength approx. 25 kg		 
Material	NdFeB	
Pot diameter D	25 mm	
Pot height H1	8 mm	
Total height H2	16,5 mm	
Thread M	M5	
Tolerance	+/- 0,1 mm	
Coating	Nickel-plated (Ni)	
Steel	Q235	
Magnetisation	N42	
Vertical strength	approx. 25 kg	
Max. working temperature	80°C	
Curie Temperature*	310°C	
Weight	27 g	
Compliance	European RoHS directive	
	European REACH regulation	

*The temperature at which materials undergo a sharp change in their magnetic properties



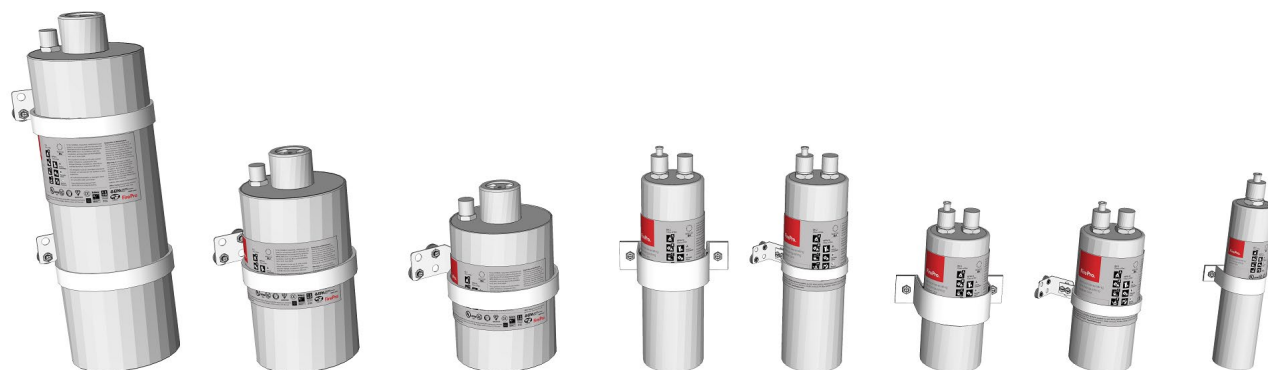



Figure 1, Aerosol Generators brackets

Magnets Installation on Aerosol Generator Brackets


10492 - Bracket Set for FP-100, FP-200, FP-500

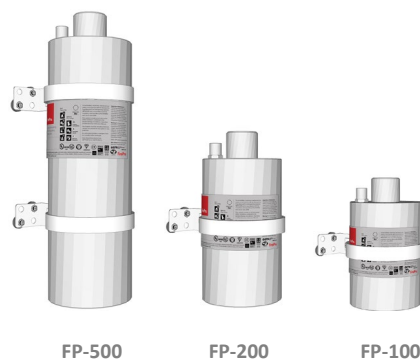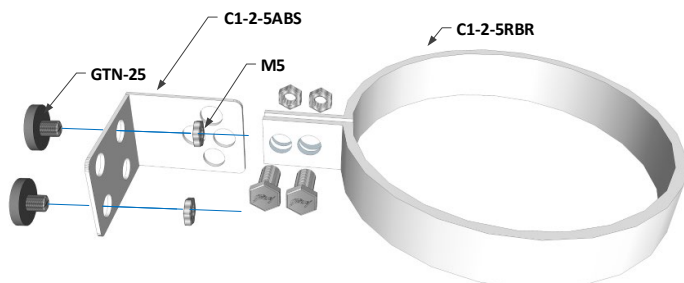

10988 – Bracket Set for FP-40, FP-80

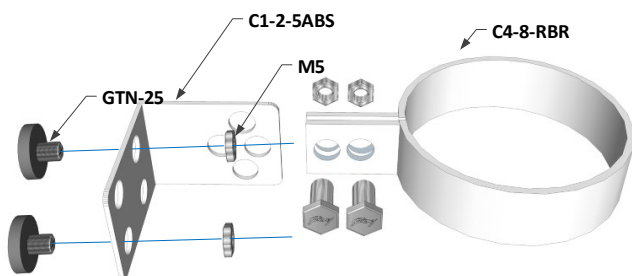


10282 – Bracket Set for FP-40, FP-80

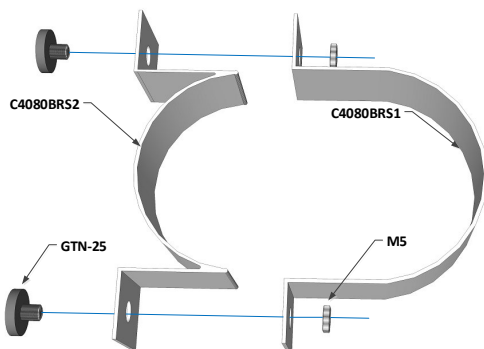

10158 - Bracket for FP-20

10780 – Magnet mounting plate for FP20

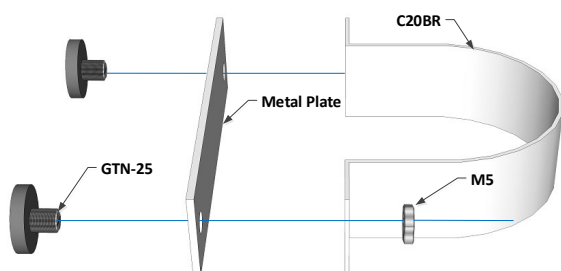

PRODUCT DISCLAIMERS

FirePro Systems Ltd makes no representations or warranties of any kind, either express or implied, statutory or otherwise, including but not limited to warranties of merchantability, fitness for a particular purpose, of title, or of non-infringement of third party rights, including the intellectual property rights of others.

For Materials or Equipment manufactured by Third Parties and not by FirePro Systems Ltd, the Buyer shall only be entitled to the benefit of any such warranty or guarantee as is given by the Third Party manufacturer to FirePro Systems Ltd.

LIMITATION OF LIABILITY

In no event, regardless of cause, shall FirePro Systems Ltd be liable for any indirect, special, incidental, punitive or consequential damages of any kind, whether arising under breach of contract, tort (including negligence), strict liability or otherwise, even if advised of the possibility of such damages.

NOTE

FirePro is constantly updating its products and systems to the state of the art and therefore reserves the right to make changes in design, equipment and technology. You cannot therefore base any claims on the data, illustrations or descriptions contained in this literature.



FirePro Systems

8 Faleas Street, Agios Athanasios, CY-4101 Limassol, Cyprus - EU
Tel.: +357 25 379999 | Fax: +357 25 354432 | Email: mail@firepro.com
www.firepro.com