January 20th 2025 1 (4)

EIFys QPD-385-Y(H)

# **Quadrant photodetector datasheet**



# 1. Product Description and Key Features

The 4-quadrant photodetector from ElFys consists of black silicon photosensitive surface in circular geometry with four individual pixels. The product is suitable for highly demanding Vis and NIR applications, where accurate laser spot positioning is needed. The 4-quadrant photodetector is optimized for 1064 nm wavelength. Series contains two models, one with (denoted by H in the product name) and one without heater.

| Absolute maximum ratings |     |     |      |  |  |  |  |
|--------------------------|-----|-----|------|--|--|--|--|
| Parameter                | Min | Max | Unit |  |  |  |  |
| Storage temperature      | -55 | 125 | °C   |  |  |  |  |
| Operation temperature    | -40 | 85  | °C   |  |  |  |  |
| Operation voltage        |     | 250 | ٧    |  |  |  |  |
| Peak DC current          |     | 10  | mA   |  |  |  |  |

#### 2. Electrical and Optical Performance

| •  |  |      |          |     |                 |  |  |  |
|--|--|------|----------|-----|-----------------|--|--|--|
| Electro optical characteristics at 25 °C |  |      |          |     |                 |  |  |  |
| Parameter                                | Condition  | Min  | Тур      | Max | Unit            |  |  |  |
| Active area (per element)                |  | 38.5 |          |     | mm <sup>2</sup> |  |  |  |
| Overall active area diameter             |  | 14   |          |     | mm <sup>2</sup> |  |  |  |
| Case bottom to active surface distance   |  |      | 5.0      |     | mm              |  |  |  |
| Active surface to glass window distance  |  |      | 200      |     | μm              |  |  |  |
| Gap                                      | between elements   |      | 70       |     | μm              |  |  |  |
| Dark current                             | bias 140 V, per element                                  |      | 5        | 30  | nA              |  |  |  |
| Dark current temperature coefficient     | bias 140 V, per element                                  |      | 1.11     |     | times/°C        |  |  |  |
| Responsivity                             | bias 140 V, wavelength 1064 nm                           | 0.5  | 0.64     |     | A/W             |  |  |  |
| Breakdown voltage                        | reverse current 2 μA                                     | 250  |          |     | V               |  |  |  |
| Capacitance                              | bias 140 V, per element                                  |      | 16       | 22  | pF              |  |  |  |
| Rise time                                | bias 140 V   |      | 15       |     | ns              |  |  |  |
| Crosstalk                                | bias 140 V, load resistance 1000 Ohm, wavelength 1064 nm |      | 2        |     | %               |  |  |  |
| Heating resistor*                        |  |      | 40       |     | Ω               |  |  |  |
| Temperature sensor resistance*           | PTC  |      | 1 000    |     | Ω               |  |  |  |
| NEP                                      | bias 140 V, wavelength 1064 nm                           |      | 6.30E-14 |     | W/√Hz           |  |  |  |
| FOV                                      |  |      | ±75      |     | 0               |  |  |  |


<sup>\*11-</sup>pin TO-can with heater, model QPD-385-YH




January 20th 2025 2 (4)

#### 3. Spectral Response


Responsivity as a function of temperature at 1064 nm

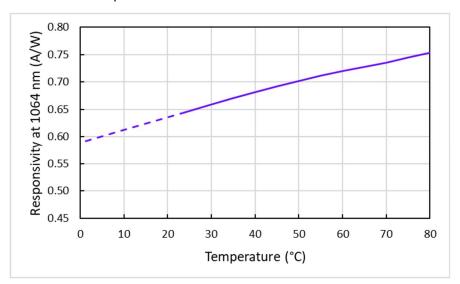

Responsivity (at 25 °C)

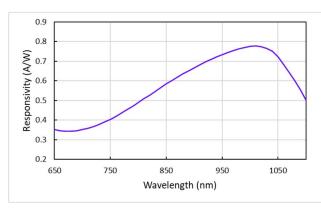


External quantum efficiency (at 25 °C)

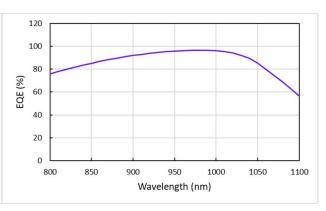


# 4. Dark current and capacitance vs reverse bias

Dark current (at 25 °C)

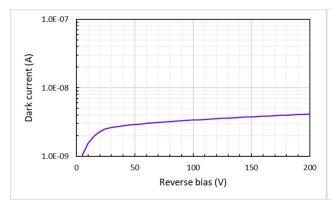

Capacitance (at 25 °C)

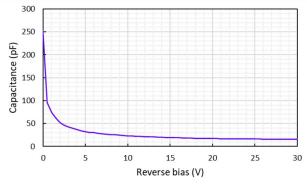




January 20th 2025 3 (4)

### 5. Packaging


TO-can with 11-pins, model QPD-385-YH, with heater

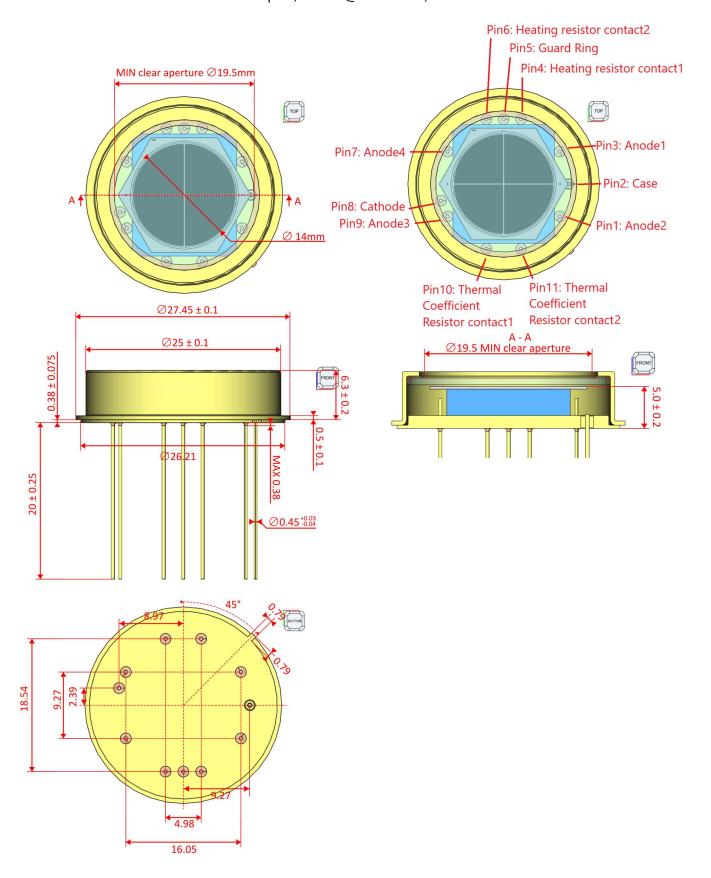



January 20th 2025 4 (4)

#### TO-can with 7-pins, model QPD-385-Y, without heater

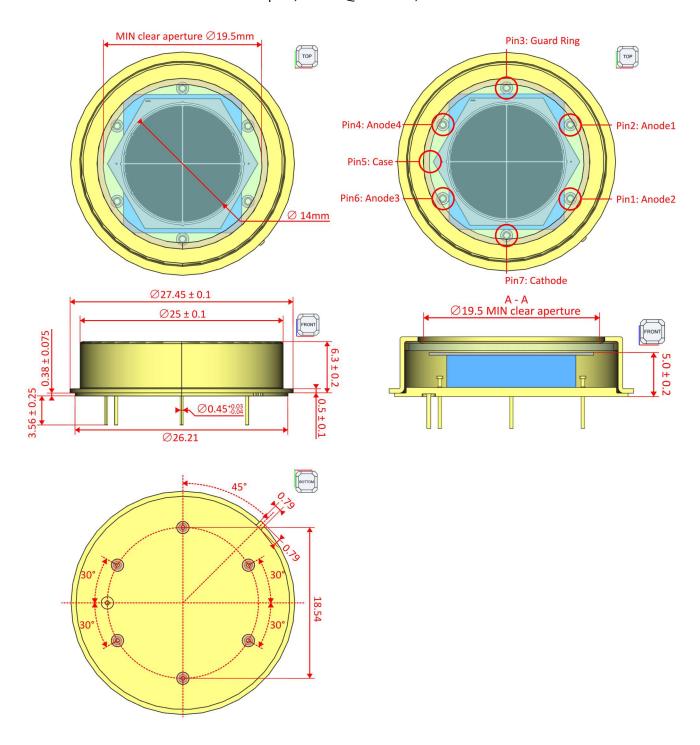

ElFys, Inc. reserves the right to change product specification without prior notice.

