

Wand PIR-S (sichtbare Befestigung)


Performance Line PR

Spezifikation:


Dicke (in mm)	40	50	60	80	100	120	140	160	180	200	220
Baubreite Standard (in mm)	1150 (1100/1000 möglich)										
Dämmkern	Hartschaum PIR										
Gewicht bei 0,5/0,4 mm Standard (in kg/m ²)	9,2	9,6	10,0	10,8	11,6	12,4	13,4	14,0	14,8	15,6	16,4
Raumgewicht (in kg/m ³)	~ 37					~ 40					
U-Wert W/m ² K [EN 14509]	0,59	0,45	0,38	0,28	0,23	0,18	0,15	0,13	0,12	0,10	0,09
Brandverhalten [EN 14509]	B- s2,d0					B- s1,d0					
Schalldämmmaß [Rw/C,Ctr)dB]	~27 (-2;-4)					~ 25 (-3;-5)					
Bezeichnung Hersteller	← PWS-PIR-ST					PWS-PIR-CH →					

Profilierung:


	Bezeichnung	A	I
	liniert	✓	✓
	glatt	✓	✓
	gesickt	✓	X
	micro 16	✓	X

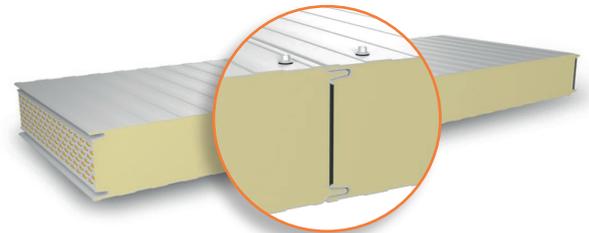


bis 120 mm Kerndicke

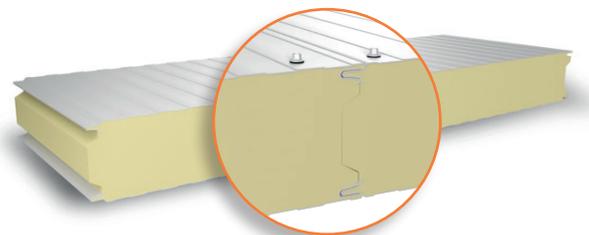

ab 120 mm Kerndicke

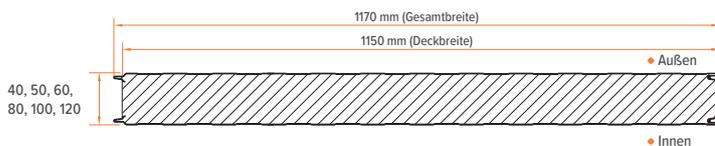

bis 120 mm Kerndicke

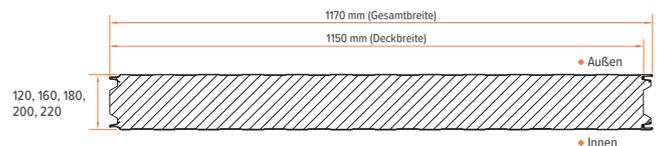

ab 120 mm Kerndicke



Bauaufsichtliche Zulassung:
Z-10.49-861



Umwelt-Deklaration
des Produkts