

Technical data Corode Filterunit

CF07..M



6.600 l/h – Filter Housing PP or PVDF


Corode Filterunit with magnetic drive pump **CPMD-07**
Max. flow : 6.6m³/h
Max. head : 9mtr.
Pump head : PP or PVDF
Motor : 0.25kW, 230/400V, 1.15/0.66Amp, 3Ph, 50Hz, IP55
: 0.25kW, 230V, 2.2Amp, 1Ph, 50Hz, IP55

Filter Housing in PP maximum temp 80°C
Filter Housing in PVDF maximum temp 90°C
Outside metal SS316
Filter Housing: 10", 20", 30" or B-800

Standard units include:
Thermal overload switch
Air release and drain valve
Pressure gauge
Suction strainer

Filter media:
Cartridge, Disc, Bag

Optional:
Dry run protector
Hand priming pump
Transport wheels
Precoat tank in PP PCT-1, 10"xØ250 (10 liter)
PCT-2, 20"xØ250 (20 liter)

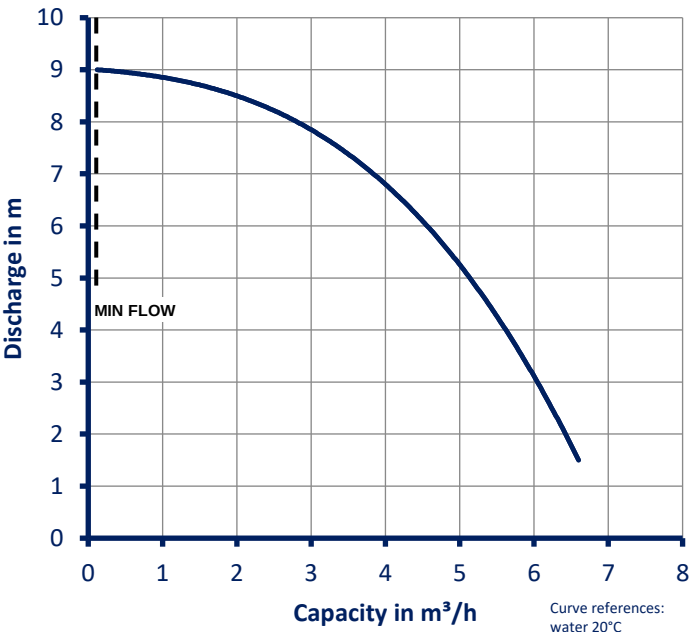

	L in cm	W in cm	H in cm	Connection suction pump	Connection outlet Filterunit	Filter media
CF07C5M PVDF	45	35	85	Ø32mm	Ø32mm	Cartridge 5x10"
CF07CM PP	45	35	85	Ø32mm	Ø32mm	Cartridge 7x10"
CF07C20M PP	45	35	115	Ø32mm	Ø32mm	Cartridge 7x20"
CF07C30M PP	45	35	145	Ø32mm	Ø32mm	Cartridge 7x30"
CF07PM PP	45	35	85	Ø32mm	Ø32mm	Disc 42xØ215
CF07P20M PP	45	35	115	Ø32mm	Ø32mm	Disc 78xØ215
CF07B20M PP	45	35	115	Ø32mm	Ø32mm	Bag 400xØ180
CF07B30M PP	45	35	148	Ø32mm	Ø32mm	Bag 800xØ180