LED AREA LIGHT

Model No.EAL-150W1033cws-7PS

LED **EAL-150W1033cws-7PS** is LED Area Light featuring Lumileds 2835 LED chips with high efficiency (150-170 lumens per watt). It offers 3 color temperatures (3000K, 4000K, 5000K) and 3 wattage selections (150W, 120W, 100W). With an IP65 rating for outdoor use and over 110-degree light distribution angle, it provides bright, clear illumination. This light is UL/cUL and DLC 5.1 Premium certified, ensuring safety and eligibility for utility rebates, making it ideal for various outdoor lighting applications.

±400W REPLACEMENT

- 100–150 WATTS — 3 Wattage Selectable
- 3000K–5000K CCT — 3 CCT Selectable
- IP65 PROOF — IP65 Protection
- Photocell
- 0-10V Dimmable
- Wet Rated

* Shorting Cap and 7-pin Receptacle included

Electrical Specifications

Input Power	Equivalency	Lumen Output(3000K)	Lumen Output(4000K)	Lumen Output(5000K)	CCT	Estimated Yearly Cost
100 W	250W	14500LM	16000LM	15700LM	3000/4000/5000K	$12.04
120 W	250W	17400LM	19200LM	18840LM	3000/4000/5000K	$14.45
150 W	400W	21667LM	23968LM	23553LM	3000/4000/5000K	$18.06

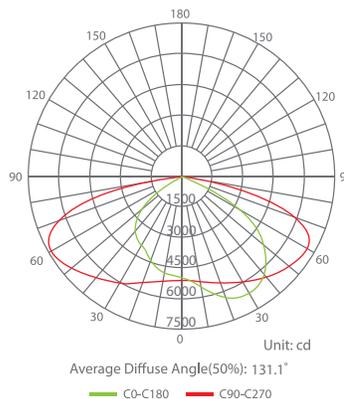| Input Voltage	Luminous Efficacy	Beam Angle	CRI	Input Current	Power Factor	Lamp Lifespan
120-277 V	150-160 lm/W	Type III	70	0.58 A	0.9	50,000 Hrs.

Mechanical Specifications

Rating	Operational Temperature	Inner Box QTY.	Master Box QTY.	Dimensions(in.)	UPC Code
Wet Rated	-40°F - 113°F	N/A	1 qty.	8.66"(W) x 2.07"(D) x 16.63"(H)	811174037941

Product Dimensions

16.63"
8.66"
16.63"
2.07"
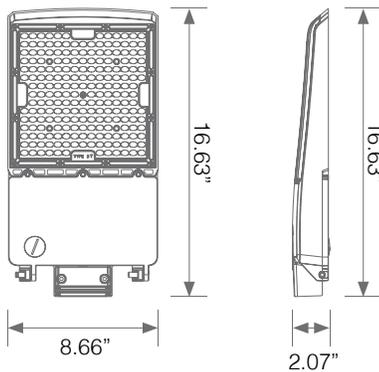
Product Photometric Data

Unit: cd
Average Diffuse Angle(50%): 131.1°
C0-C180 C90-C270

Control Compatibility

Shorting Cap & 7-pin Receptacle

Optional Accessories

Mounting Bracket

EAL-Directmount

EAL-Slipfitter

EAL-Universal

EAL-Trunnionmount

Photocell Mount

EAL-Photocell