

INSTALLATION GUIDE

MODEL No. EIN-FM5WH-1000e, EIN-FM7WH-1000e,
EIN-FM7WH-1000er, EIN-FM9WH-1000e, EIN-FM9WH-1000er

LED Ceiling Light
5CCT Die-cast Flush Mount



Questions?

For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
www.euricompany.com



**5CCT SELECTABLE
LED CEILING
LIGHT**

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

WARNING


Please read carefully and save these instructions, as you may need them at a later date.
When using electrical equipment, basic safety precautions should always be followed as below:

READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

General: All electrical connections must be in accordance with local and National Electrical Codes (N.E.C) standards. If you are unfamiliar with connections obtain the services of a qualified electrician.

- Risk of fire or electric shock.
- Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- This device is not intended for use with emergency exit.
- This fixture is 5%-100% dimmable. Please refer to a compatible dimmer list.
- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

PACKAGE CONTENTS

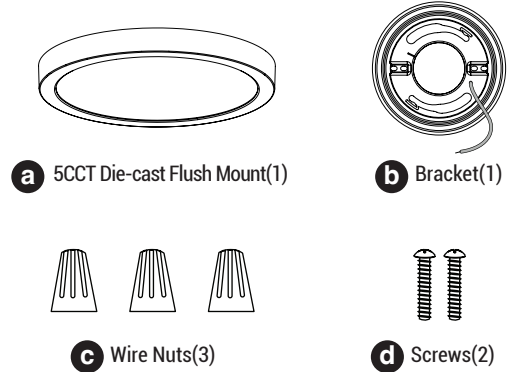


DIMMER RECOMMENDATION


This unit may operate on other dimmers we haven't tested with. (Input 120V 60Hz)

LEVITON	6672, RNL06, IPL06, DSL06, 6674
LUTRON	TG-600PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153PH-WH, DVCL-153P, MSCL-OP153M, PD-6WCL, MACL-153M//MA-R


INSTALLATION INSTRUCTIONS



- 1** Make sure power is OFF and the J-Box is securely mounted before installing the fixture. (This flush mount panel is compatible with 2.75" and 3.5" Junction Box.)

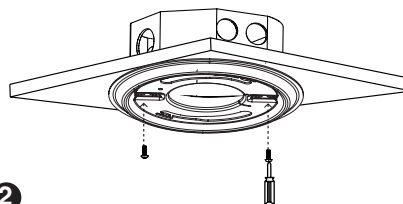


- 2** Refer to the hole position on the bracket and do the matching to J-Box. Attach them with screws.




- 3** Select lamp color desired with the CCT switch.

5 IN 1
☒ 2700K
☒ 3000K
☒ 3500K
☒ 4000K
☒ 5000K

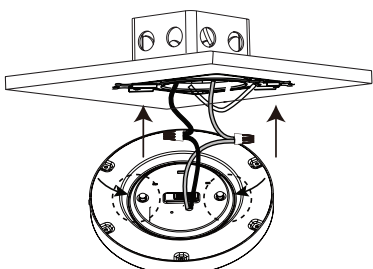

- 4** Connect supply wires to wires on fixture/bracket with wire nuts. Attach white to white, black to black, and copper wire to green wire as ground-ing connection.

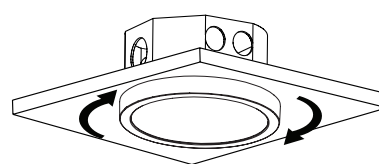

- 5** Arrange the wires into the J-Box. Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. Turn on the power after installation, check the fixture can work well.