

PRODUCT IMAGE



OPTIONS

Construction

- Lens: PC Diffuser
- Housing: Die-cast Aluminum
- Wall Mount

Material Color



Black

DESCRIPTION

Designed with a durable die-cast aluminum housing and a high-transmission polycarbonate diffuser, this LED outdoor wall pack delivers reliable performance for residential and commercial applications. Featuring field-selectable color temperatures (2700K/3000K/3500K/4000K/5000K), it allows you to customize the lighting ambiance to suit any exterior space. Producing up to 1200 lumens while consuming only 16W, this fixture combines energy efficiency with dependable illumination. ETL listed for wet locations and available with an optional photocell.

APPLICATIONS

Ideal for building perimeters, walkways, parking lots, entrances, loading areas, warehouses, commercial buildings, multi-family properties, schools, hospitality spaces, and other outdoor applications requiring enhanced visibility, safety, and security.

FEATURES

CONSTRUCTION

- ETL certificate
- Output constant current lever can be adjusted through output cable with 0-10V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Eco-friendly without mercury

ELECTRICAL


- Projected Life: L90 > 50,000 hrs
- PF (Tolerance : -3%): ≥0.95
- THD (Tolerance : +5%): ≤20%
- Flicker Percent: <5%
- Surge Protection: Differential-mode Surge 1200V Ring Wave 2500V
- Dimming: Non-Dimmable
- Operating Temp.: -40°F to 140°F
- IP Rating: IP54
- Range of application: Wet locations

OPTICAL

- Optional Integrated Photocell
- High Efficacy up to 75 lm/W
- Automated Dusk to Dawn functionality
- Wattage: 16 W
- Lumen Output: 1200 lm
- 5 CCT Adjustable: 2700/3000/3500/4000/5000K
- Input Voltage: 120V
- CRI: >80


MATERIAL

- Die-cast Aluminum Housing
- Lens: PC Diffuser
- Material Color: Black
- Lens Color White




SPECIFICATIONS					MODEL NO. EOL-WL01BK-3100e		
SKU	Series	Photocell	Wattage	Lumen Output	CCT	Voltage	Finish
EOL-WL01BK-3100e EOL-WL02BK-3100e	Mini Wall Pack	Non-Photocell Photocell	16W	1200 lm	5CCT Adjustable 2700K/3000K/3500K/4000K/5000K	120 V	Black

DIMENSIONS

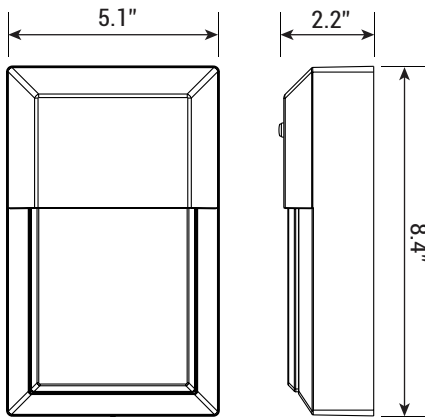

EOL-WL01BK-3100e

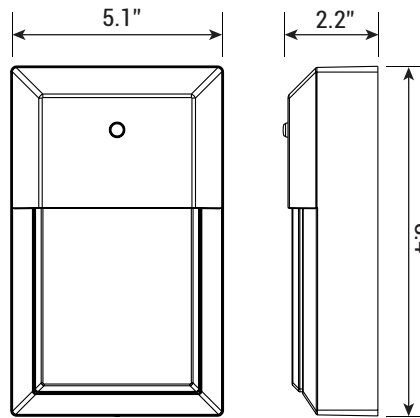

EOL-WL02BK-3100e

LIGHT DISTRIBUTION TESTING PARAMETER

