


INSPINIA INS-K4A24

Intercom - Datasheet




Product Side Views

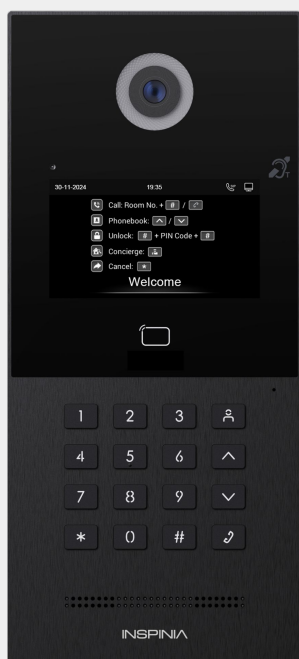

Product Dimensions

Front and side view (mm)

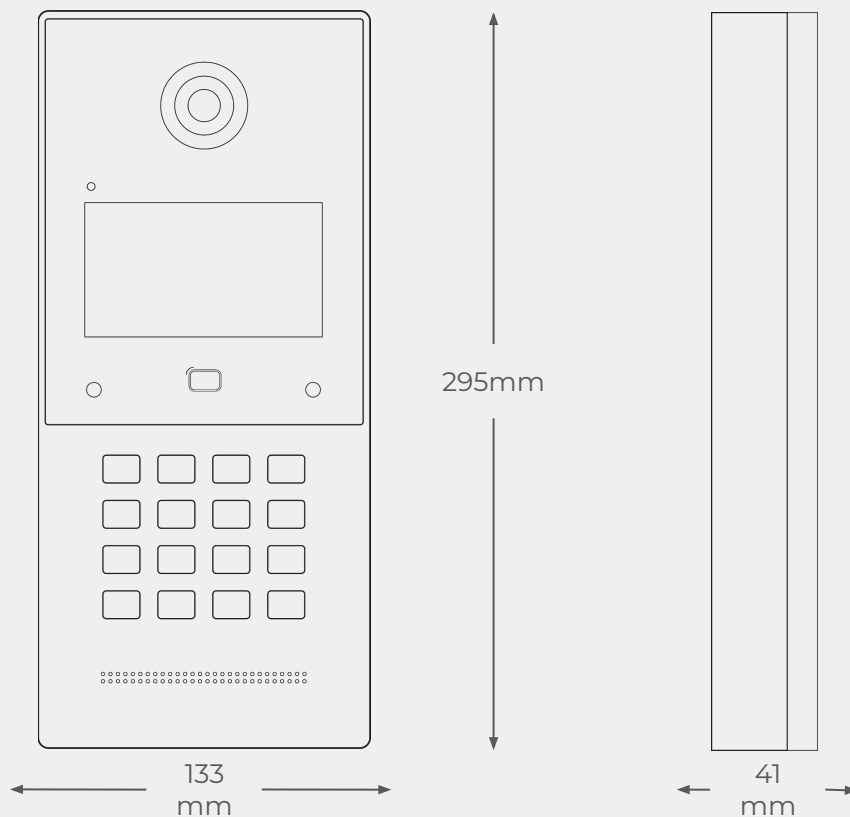

INSPINIA INS-K4A24

Intercom - Datasheet



Product Specifications

Hardware / Software:	Linux-based system Material: Aluminum front panel Button: Mechanical
Camera & Display:	Video Resolution: 2MP, CMOS camera, 1280 x 720 (720p) Video Codec: H.264 Viewing Angle: 115° (H) / 75° (V) / 125° (D) Display: 4.3-inch TFT LCD
Power Supply:	PoE (802.3af) or DC 12V/2A
Audio:	Audio Codec: G.711 with Echo Cancellation Microphone: Built-in Speaker: 8Ω / 1W
Connectivity:	Ethernet Port : 1x RJ45 10/100Mbps adaptive Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP RS485 Port: 1
Access Control:	Support IC (13.56MHz) & ID (125kHz) card, PIN code, Bluetooth (Optional) Relays: 3 output relays for door locks Tamper Alarm: Included for enhanced security
Working Temperature:	Temperature: -40°C to +55°C Humidity: 10% to 90% (non-condensing) Protection Ratings: IP65 (Weatherproof), IK06 (Impact resistant)
Installation:	Mounting Options: Surface mounting Product Dimensions: 295 x 133 x 41 mm
Certificates:	

Order Code(s)

INS-K4A24

INSPINIA INS-K4A24

Intercom - Datasheet



PORTS & CONNECTIONS



- 1 Camera
- 2 Display Screen
- 3 Card Reader Area
- 4 Microphone
- 5 Numeric Keyboard
- 6 Speaker



Inspiration for your **living space**
www.inspinia.eu


INSPINIA INS-K4A24

Intercom - Datasheet




HOW TO MOUNT YOUR INSPINIA

Surface Mounting & Rain Hood (Optional)

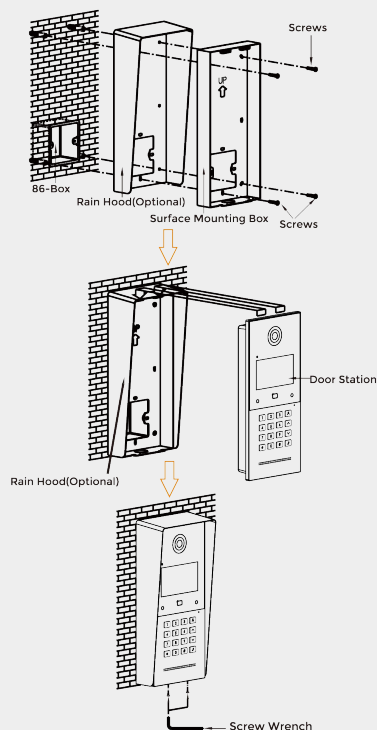

Flush Mounting & Rain Hood (Optional)

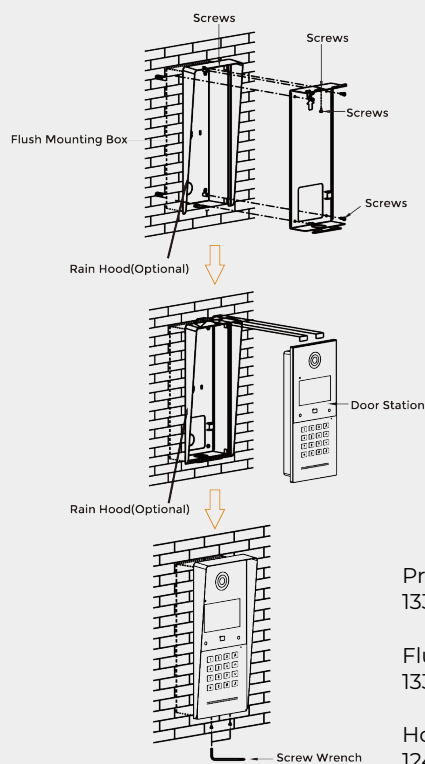


Product size:
133 × 295 × 41 mm


Flush Mounting size:
133 × 295 × 63.5 mm

Hole-cutting size:
124 × 289 × 56 mm

Surface Mounting -86 Mounting Box

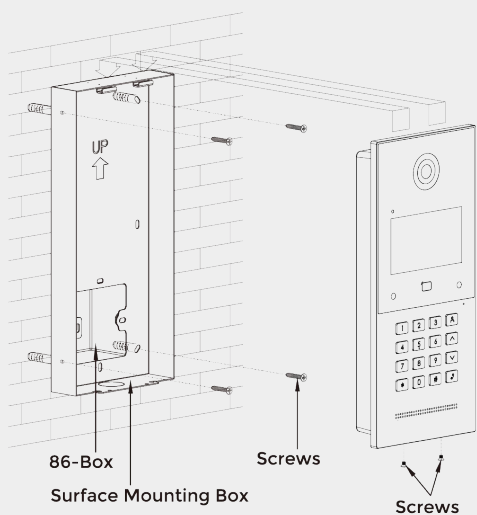

Flush Mounting

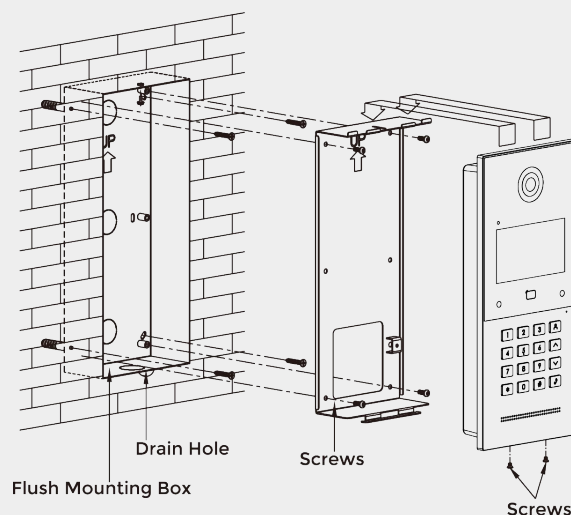

Inspiration for your **living space**

www.inspinia.eu