

INSPINIA 1-Button

Intercom - Datasheet




Product Side Views



Product Dimensions

Front and side view (mm)

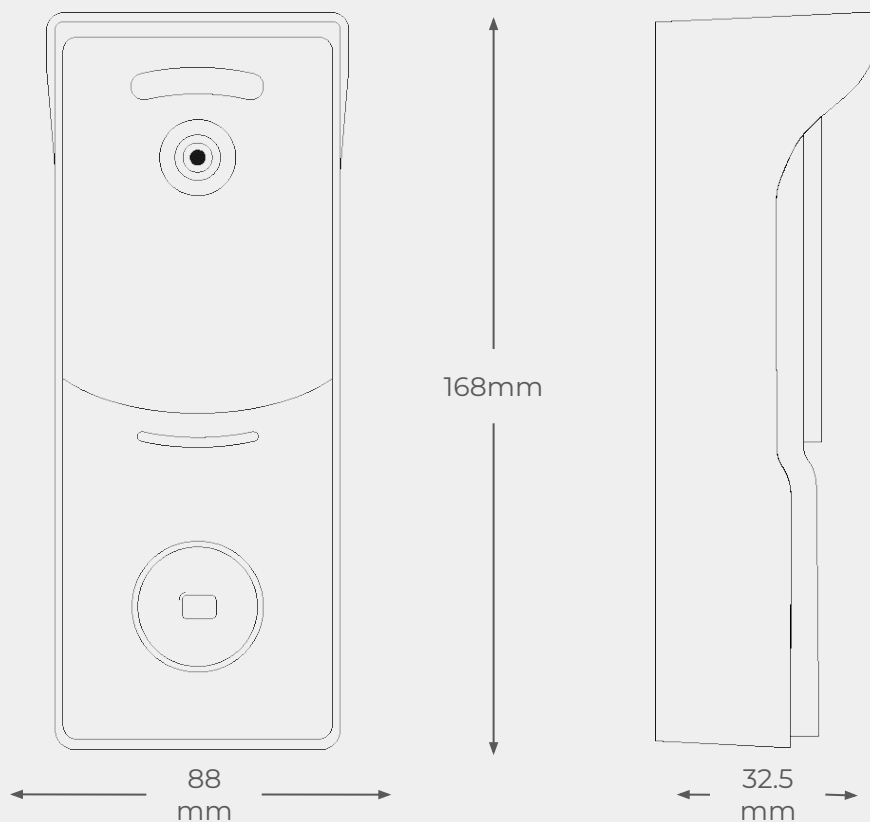

INSPINIA 1-Button

Intercom - Datasheet



Product Specifications

Hardware / Software:	Operating System: Linux-based system Front Panel: Plastic
Camera and Video:	2MP, 1080P HD Camera, digital WDR Video Codec: H.264, H.265 Viewing Angle: 110°(H) / 60°(V) / 125°(D) Light Compensation: LED white light
Power Supply:	PoE (802.3af) or DC 12V/2A
Audio Features:	Audio Codec: G.711 Microphone: Built-in microphone Speaker: Built-in with echo cancellation
Connectivity:	Ethernet port: 1 x RJ45, 10/100 Mbps adaptive Protocols: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP Wi-Fi: IEEE 802.11 b/g/n, 2.4GHz (optional)
Access Control:	Door Entry: IC (13.56MHz) card (Optional), Bluetooth (Optional) Relay Output: 1 Tamper Alarm: Supported Wiegand: Supported
Working Temperature	Temperature: -40°C to +55°C Humidity: 10% to 90% (non-condensing) Protection Ratings: IP65 (Weatherproof), IK06 (Impact resistant)
Installation :	Mounting Options: Surface mounting Dimensions: 130 x 50 x 28 mm
Certificates:	

Order Code(s)

INS - 1 button

INSPINIA 1-Button

Intercom - Datasheet



PORTS & CONNECTIONS



- 1 LED Light
- 2 Microphone
- 3 Camera
- 4 Calling Indicator Light
- 5 Talking Indicator Light
- 6 Unlocking Indicator Light
- 7 One Backlit Button
- 8 Card Reader Area (Optional) Call Button



Local Web Interface

Default IP : 192.168.2.100
Username : admin
Password : 123456



Inspiration for your **living space**

www.inspinia.eu