


# OUTDOOR LIGHTING - Street Lighting - Bright



Dimensions

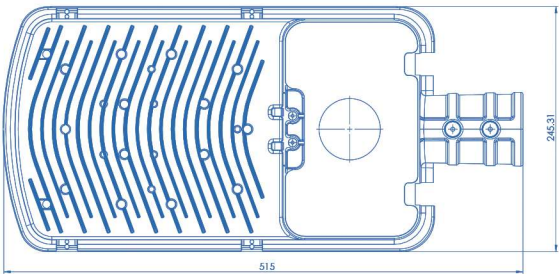

Unistar model, produced by Unistar Energy Solution

Features & Benefits	
Category	Outdoor Lighting
Sub-Category	Street Lighting
Type	SL Bright
Variants	Narrow Beam Angle, Wide Beam Angle
Warranty	3 Years
Certificates	Proudly Made In Egypt Egyptian Electricity Holding Company Approved
Complies with	IEC60529 IEC62722 IEC 60589

SL Bright Technical Data

Cover Material	Glass
Housing Material	Aluminum Die-cast
Coating Type	Electrostatic powder
Operating Temp.	°C 70 - 20-
Color Tempertaure	3000K / 4000K / 5000K 6000K / 6500K
Design	Heat Sink
Frequency	50Hz
Current	1000 mA
Luminous Efficacy	120 Lm/W
CRI	≥80
Lifetime	50,000h
Beam Angle	°120 x °60
Life Code	L80 F50



Models									
Models	Power	Voltage Range	Flux	Power Factor (PF)	(IP Rating)	(IK Rating)	Failure rate	Insulation class	Outer Color
Street Lighting Fixture Pro - 100W	100W	85 - 265V	12000 Lm	≥0.9	66	8	10%	Class 1	Grey
Street Lighting Fixture Pro - 150W	150W	85 - 265V	18000 Lm	≥0.9	66	8	10%	Class 1	Grey