

Multi channel Polarization Controller

1U Rack-type polarization controller

Patent pending

Features

- Multi channel (4 or 8 channels)
- No squeezing fiber
- Negligible loss and back reflection
- Wavelength insensitive
- High extinction ($> 30\text{dB}$)
- Multiple PCs stackable in a 1U size rack

Applications

- Optical communication
- Fiber optic sensors
- Component testing
- Fiber laser
- PDL measurement



43(H) X 482(W) X 400(D) mm


Specifications

Polarization Extinction Ratio (dB)	> 30
Insertion loss (dB)	< 0.4
Polarization dependent loss (dB)	< 0.03 (typical)
Operation range (nm)	1260 - 1625

Any design or specification can be changed without prior notice.

KS photonics Inc.
E-mail: info@ksphotonics.com

Multi channel Polarization Controller

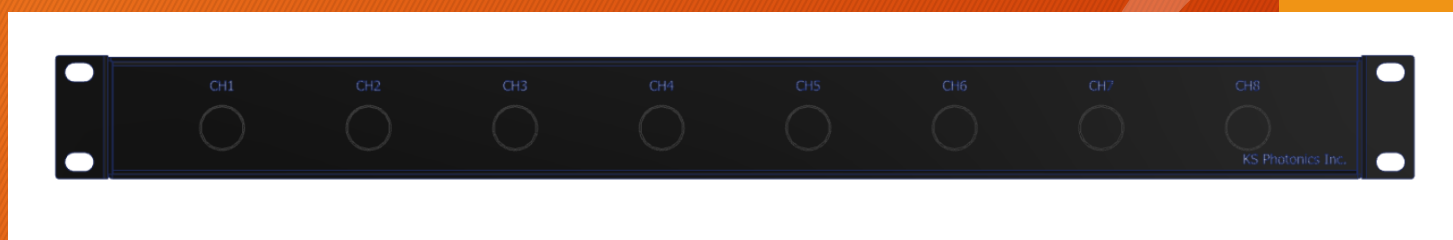

Ordering Code

