

CF SERIES

Cartridge Filter

Uv resistant tank

Max Operating Pressure
250Kpa/36psi(2.5bar)

Max temperature
40°C(104°F)

Pool & Spa Equipment



Designed and engineered
in the USA

WWW.FIBROPOOL.COM
WWW.FIBROPOOL.AE

CF SERIES CARTRIDGE FILTER

comes with a uv resistant tank and a heavy duty ring-lock lid which allows easycleaning and replacement of the cartridge element. A screw type airbleed valve releases trapped air inside the filter tank.The high qualityoil-filled pressure gauge provides an easy overview of the operatingpressure.


PRODUCT INFORMATION

Code	Model	Filter Area (m²)	Valve Connections	Max Flow Rate		A mm	B mm	C mm
88060101	CF25	2.25	1.5"/50mm	92lpm	5.5m³/h	445	387	225
88060102	CF50	4.63	1.5"/50mm	190lpm	11.4m³/h	625	567	225
88060103	CF75	7.00	1.5"/50mm	283lpm	17.0m³/h	805	747	225
88060104	CF100	9.40	2.0"/63mm	382lpm	22.9m³/h	985	927	225
88060105	CF150	13.72	2.0"/63mm	555lpm	33.4m³/h	1165	1107	225
88060106	CF200	16.82	2.0"/63mm	680lpm	40.9m³/h	1345	1287	225

- CF Series Filter is equipped with:
- 1.universal standard of union connection
 - 2.pressure gauge
 - 3.cartridge filter element

ARTRIDGE FILTER ELEMENT

Code	Model	D mm	E mm	Micron µm	Fold Number
88270101	CF25-CE	Ø183	184.5	≥15	150
88270102	CF50-CE	Ø183	364.5	≥15	150
88270103	CF75-CE	Ø183	544.5	≥15	150
88270104	CF100-CE	Ø183	724.5	≥15	150
88270105	CF150-CE	Ø183	904.5	≥15	175
88270106	CF200-CE	Ø183	544.5x2	≥15	180

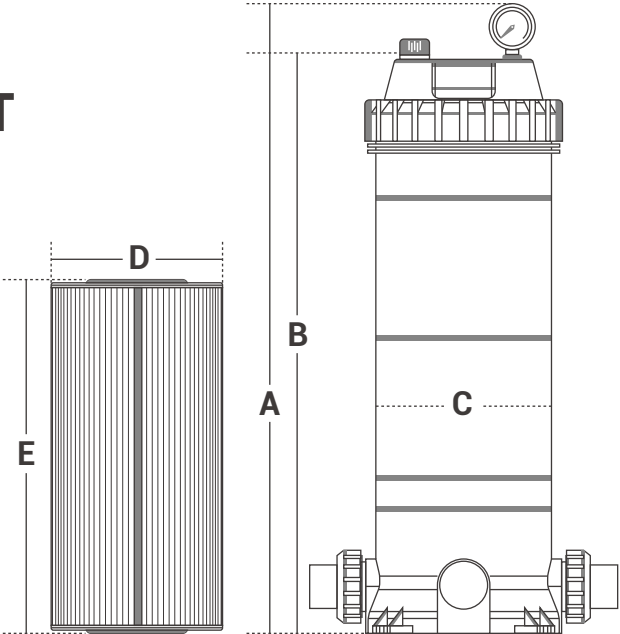

FibroPool® MEA

WWW.FIBROPOOL.COM



WWW.FIBROPOOL.AE



Designed and engineered in the USA

We reserve the right to change all or part of the features of the articles or contents of this document, with out prior notice.