


DATA SHEET

FibroPool® MEA

AQUAFALCON

COMMERCIAL POOL PUMP

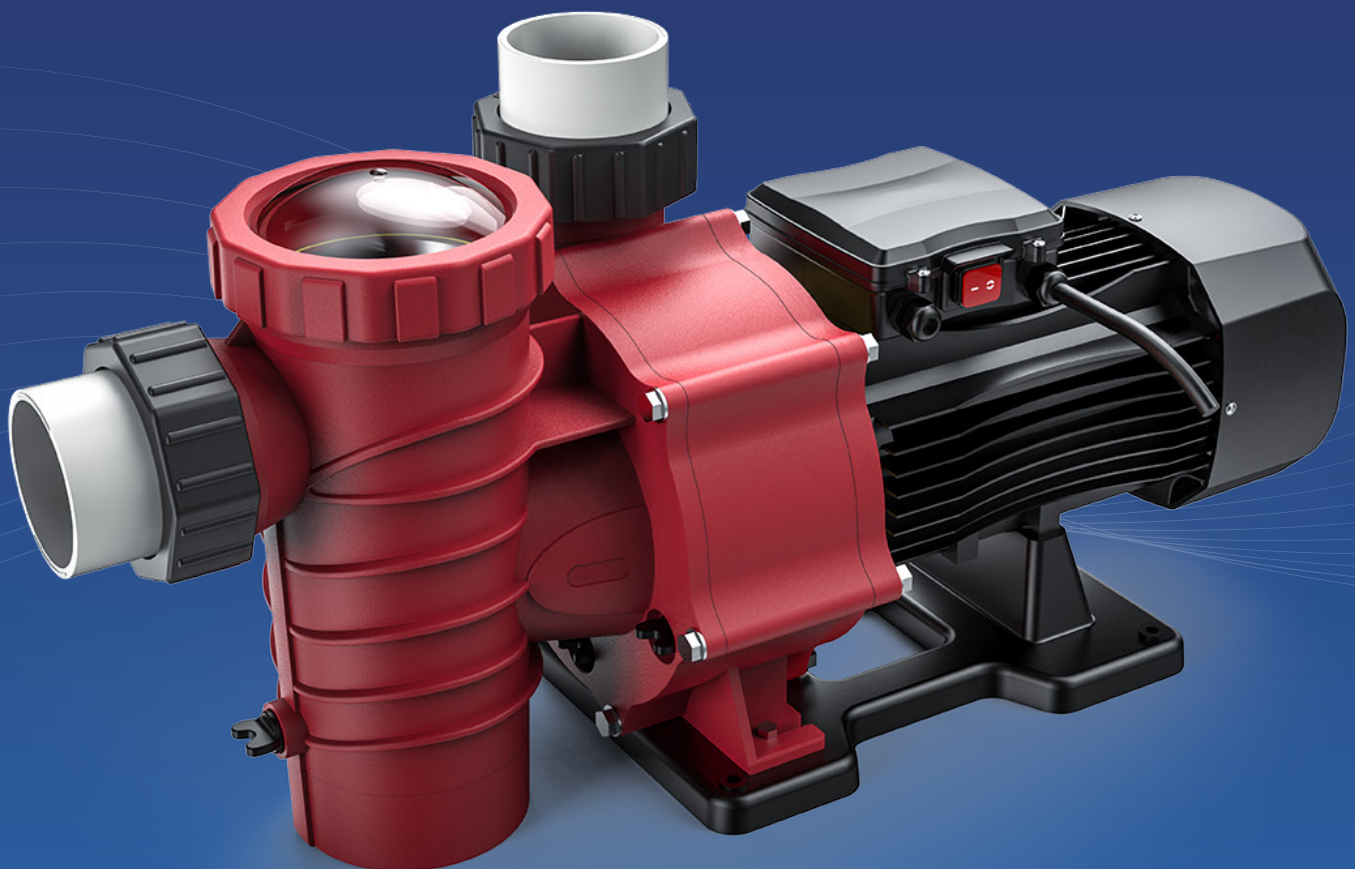

Designed and engineered
in the USA

WWW.FIBROPOOL.COM
WWW.FIBROPOOL.AE


AQUAFALCON COMMERCIAL POOL PUMP

1	Mechanical seal: S silicon carbide +316SS +fluorine rubber (superwear-resistant)
2	Water Temperature: 1-75°C
3	Bearing: (BUT)2RS1 Made in UK
4	Insulation class: Class F
5	Motor Material: 50wW600 High efficiencyeat dissipation
6	Motor protection: Front and reardouble skeleton sealing structure
7	Protection class: Ip66
8	Junction box: Aluminum alloy flameretardant structure
9	Shaft: 316SS Food grade stainless steel-40Crtempered steel
10	Pump body material: PA material(high temperature resistant)

Scope of Application

Suitable for various household and commercial swimming pools, hot springs, landscapebaths, aquariums and other environments that require filtration


Technical Parameters

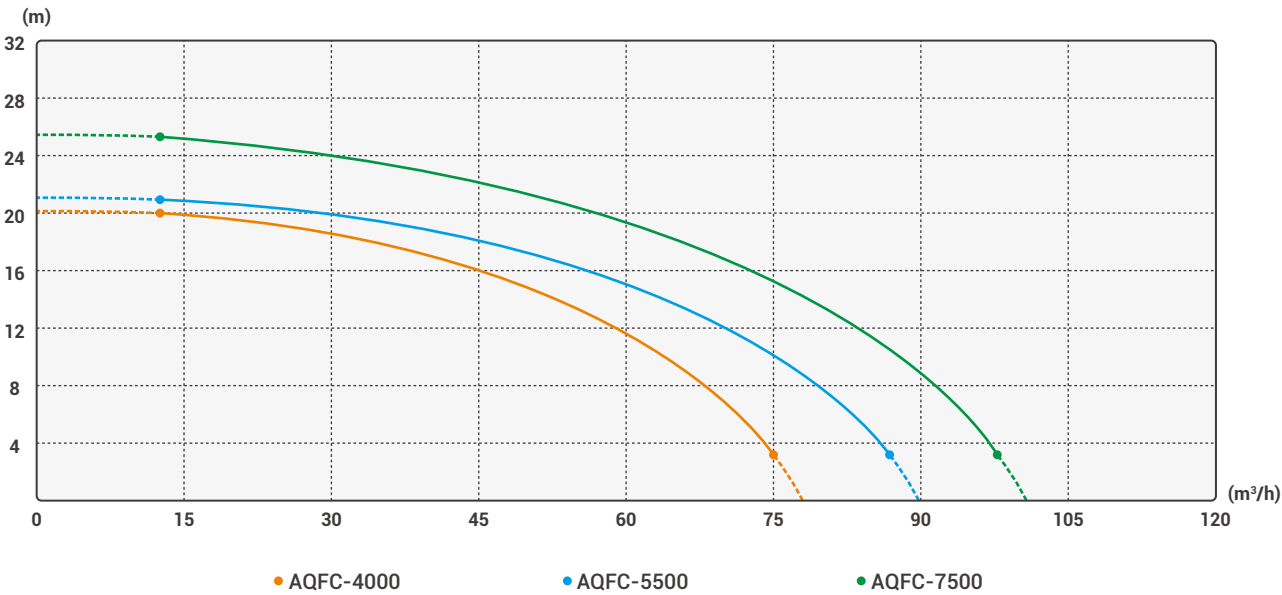

Product Parameters

Model	Input power (HP)	Input power (KW)	IMAX Flow rate (m3/h)	MAX Head (m)	Outlet (mm)	Voltage (v)
AQFC-4000	4	3	75	20	90-110	380
AQFC-5500	5.5	4	87	21	90-110	380
AQFC-7500	7.5	5.5	98	25	90-110	380

Anatomical Drawing(mm)

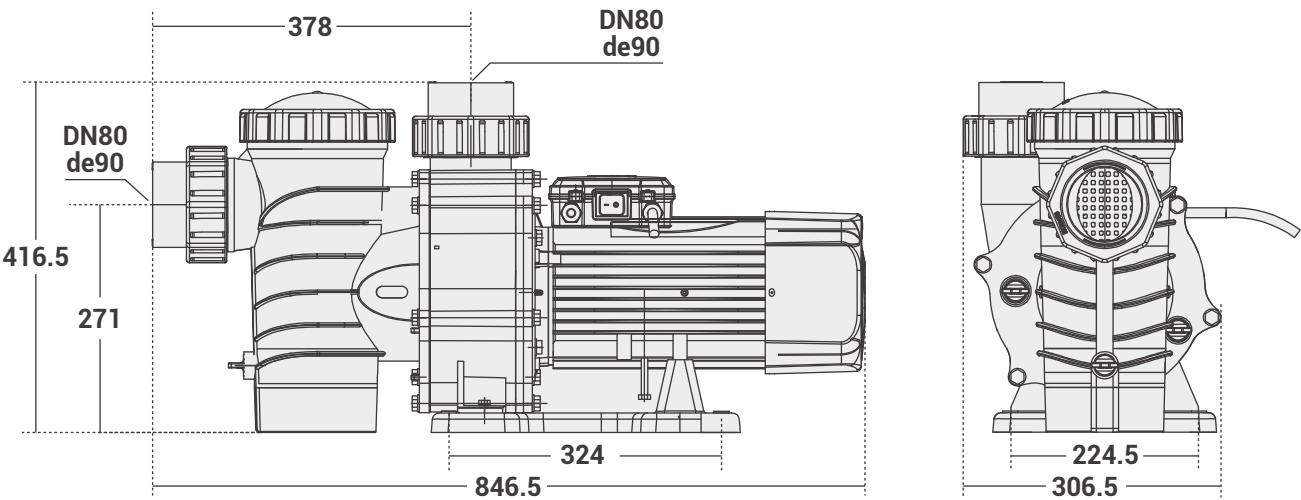

FibroPool® MEA

WWW.FIBROPOOL.COM



WWW.FIBROPOOL.AE



Designed and engineered in the USA

We reserve the right to change all or part of the features of the articles or contents of this document, with out prior notice.