





PWR LIGHTING

PWRBLOX PIXELBAR

DATASHEET

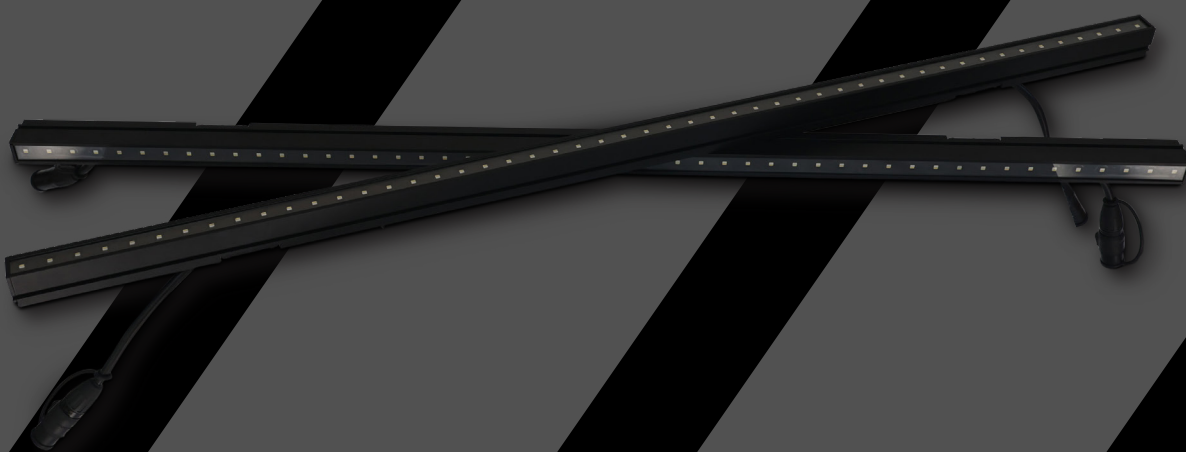

www.pwr-lighting.com

GENERAL

Product name	The PWR Pixelblox bar 50 / 100
Order PN	PWR-PB-BAR-50 PWR-PB-BAR-100
Description	RGBW pixel controllable lineair LED bar


ELECTRICAL

Light Source	RGBW (white: 6500k) + 8bit grayscale/color
Expected average LED lifetime	50.000 hours*
Power	PIXELBLOX50 24V - 11W PIXELBLOX100: 24V -22W
Certification	CE, ROHS

FUNCTIONAL

Description	Pixel controlled Slim Design, Modular, Compatible with other fixtures in PixelBlox Series
--------------------	---

*Figure provided by manufacture and
obtained under manufacture's test conditions





PWRPIXELBLOX BAR DATASHEET

CONNECTIVITY


Input/output	Traditional IP65 XLR4P in Male/Female connection
---------------------	--

MECHANICAL

Housing	Aluminum, black powder coating
Dimensions (L x W x H)	+/- 500 x 24 x 32 mm +/- 1000 x 24 x 32 mm
Weight	650g 1200g
Construction	Outdoor, IP66
Operating temperature	-20 to +40 Degrees Celsius
Mounting	PixelBlox supports a wide spread of different 2D and 3D mounting accessories. Multiple bars can be interconnected by using I, L, T, X, Y, 3D,... coupler systems using an elegant M5 thumbbolt See list of accessories for more details

Cables

Replaceable covers	Standard delivered with bars: Stealth black (dark grey) cover
Cover Types	Different covers available in different colors. See list of covers for more details









PWRPIXELBLOX BAR DATASHEET

DIMENSIONS

Flat cover

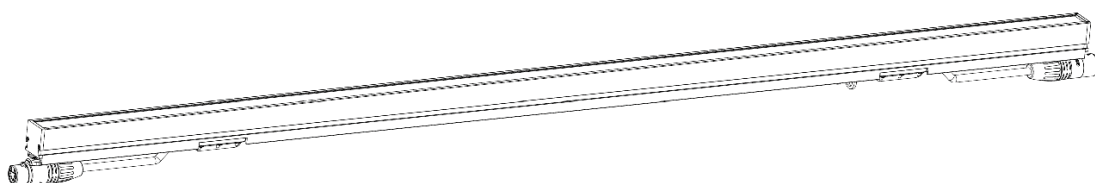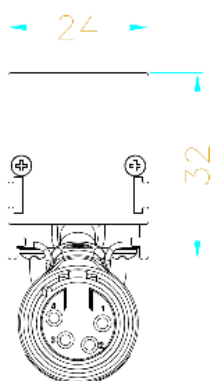

Round cover

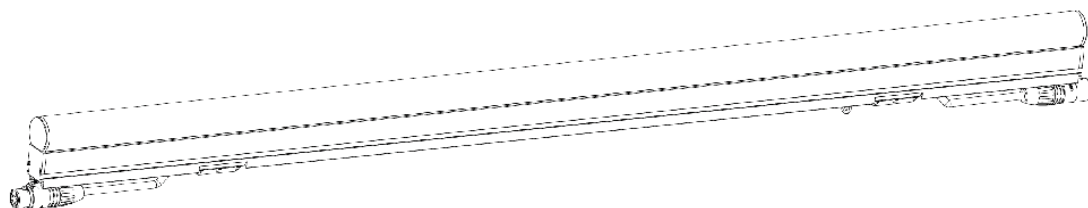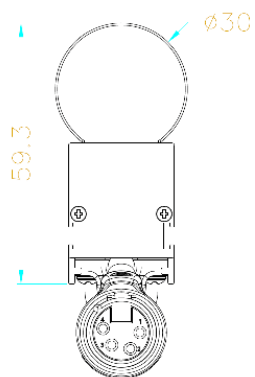

Square cover

