


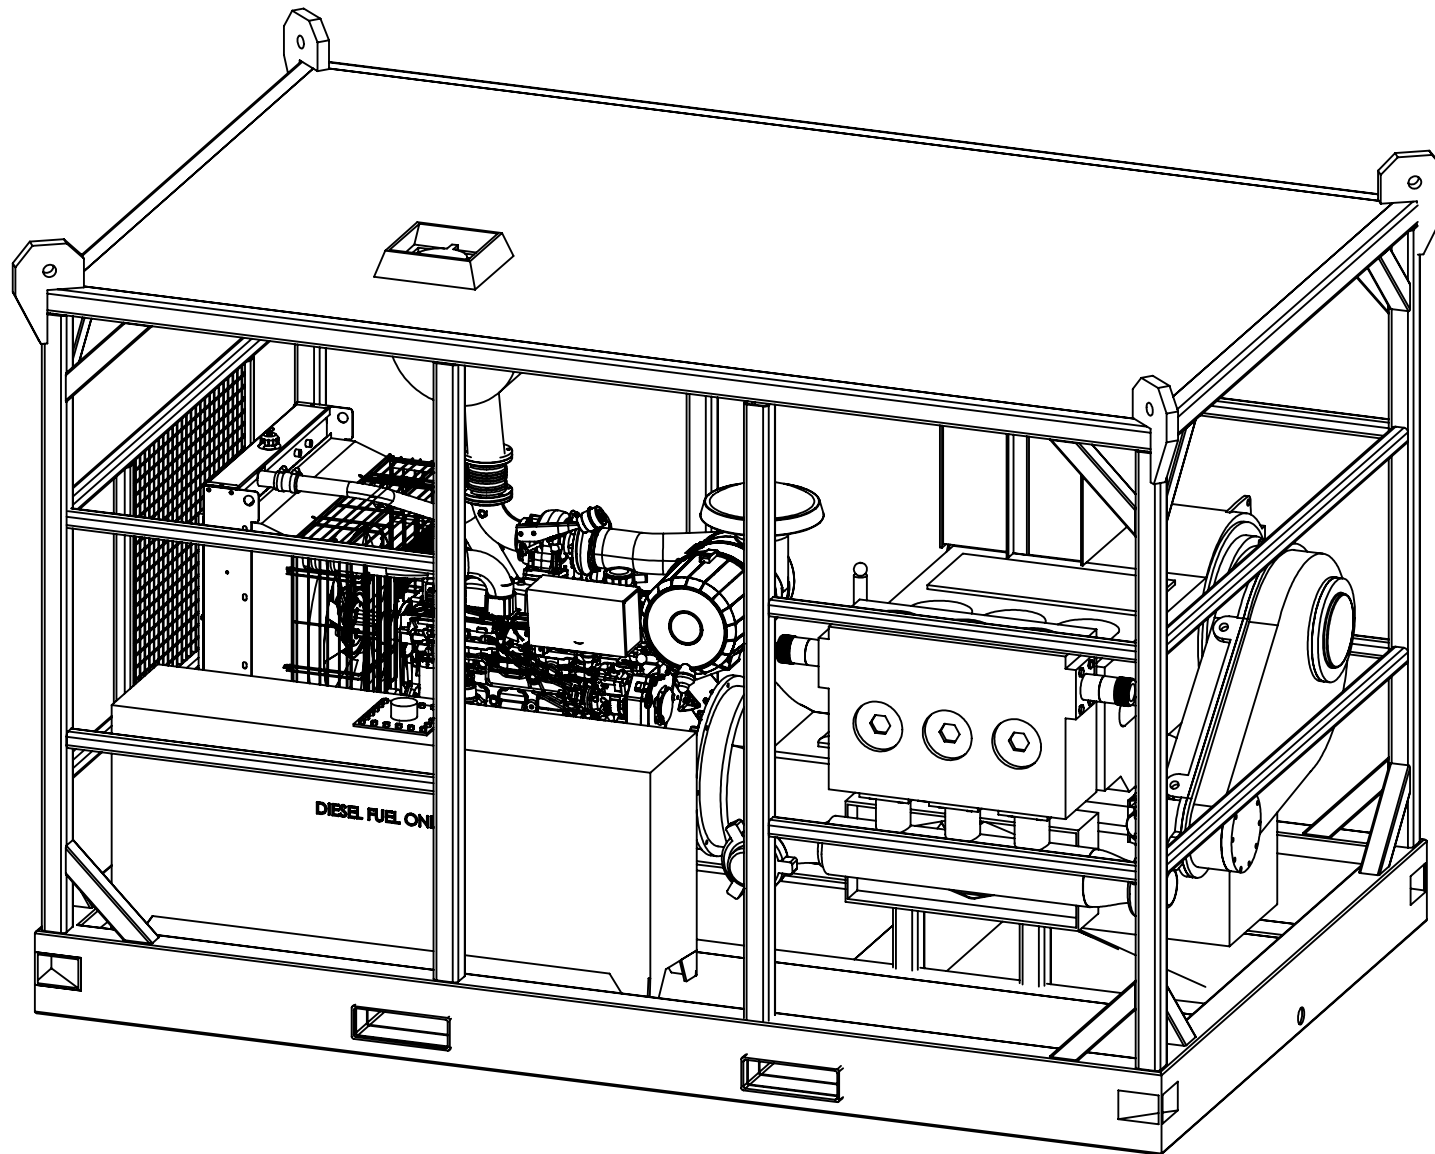

GARDNER DENVER 250 PUMP SPECIFICATIONS:

MAX INPUT: 250 BHP
MAX RPM: 300 RPM
STROKE LENGTH: 5"
ROD LOAD: 50000 LB
PUMP WEIGHT: 4490 LB
GEAR RATIO: 4.64:1

UNIT SPECIFICATIONS:

GD-250 Triplex Pump
300 Horsepower Diesel Engine
5 Speed Standard Transmission
Auxiliary Hydraulics:
18GPM / 2500PSI
105 Gallon Diesel Fuel Tank
Stainless Steel Weatherproof
Control Panel
MC II Flometer

PUMP PACKAGE: GD-250 SINGLE PIECE

DIMENSIONS: 11'5" x 7'1" x 7'5"
WEIGHT: 17500 LB
MAX PRESSURE: 10000 PSI
MAX FLOW RATE: 245 GPM


THE ENCLOSED DOCUMENT, DATA, AND
ASSOCIATED MATERIALS ARE THE PROPERTY OF
RIVER RENTAL TOOLS, INC.
REPRODUCTION OR DISTRIBUTION
OF THE PROPRIETARY MATERIALS HEREIN
STRICTLY PROHIBITED
WITHOUT WRITTEN CONSENT.



DOCUMENT HISTORY		DO NOT SCALE	SIZE A	SHEET 1 OF 1	REV 0
CREATED BY	SMN				
APPROVED BY	AA	NOT TO SCALE			
REVISED BY					

GARDNER DENVER 250
PUMP SPECIFICATIONS:

MAX INPUT: 250 BHP
MAX RPM: 300 RPM
STROKE LENGTH: 5"
ROD LOAD: 50000 LB
PUMP WEIGHT: 4490 LB
GEAR RATIO: 4.64:1

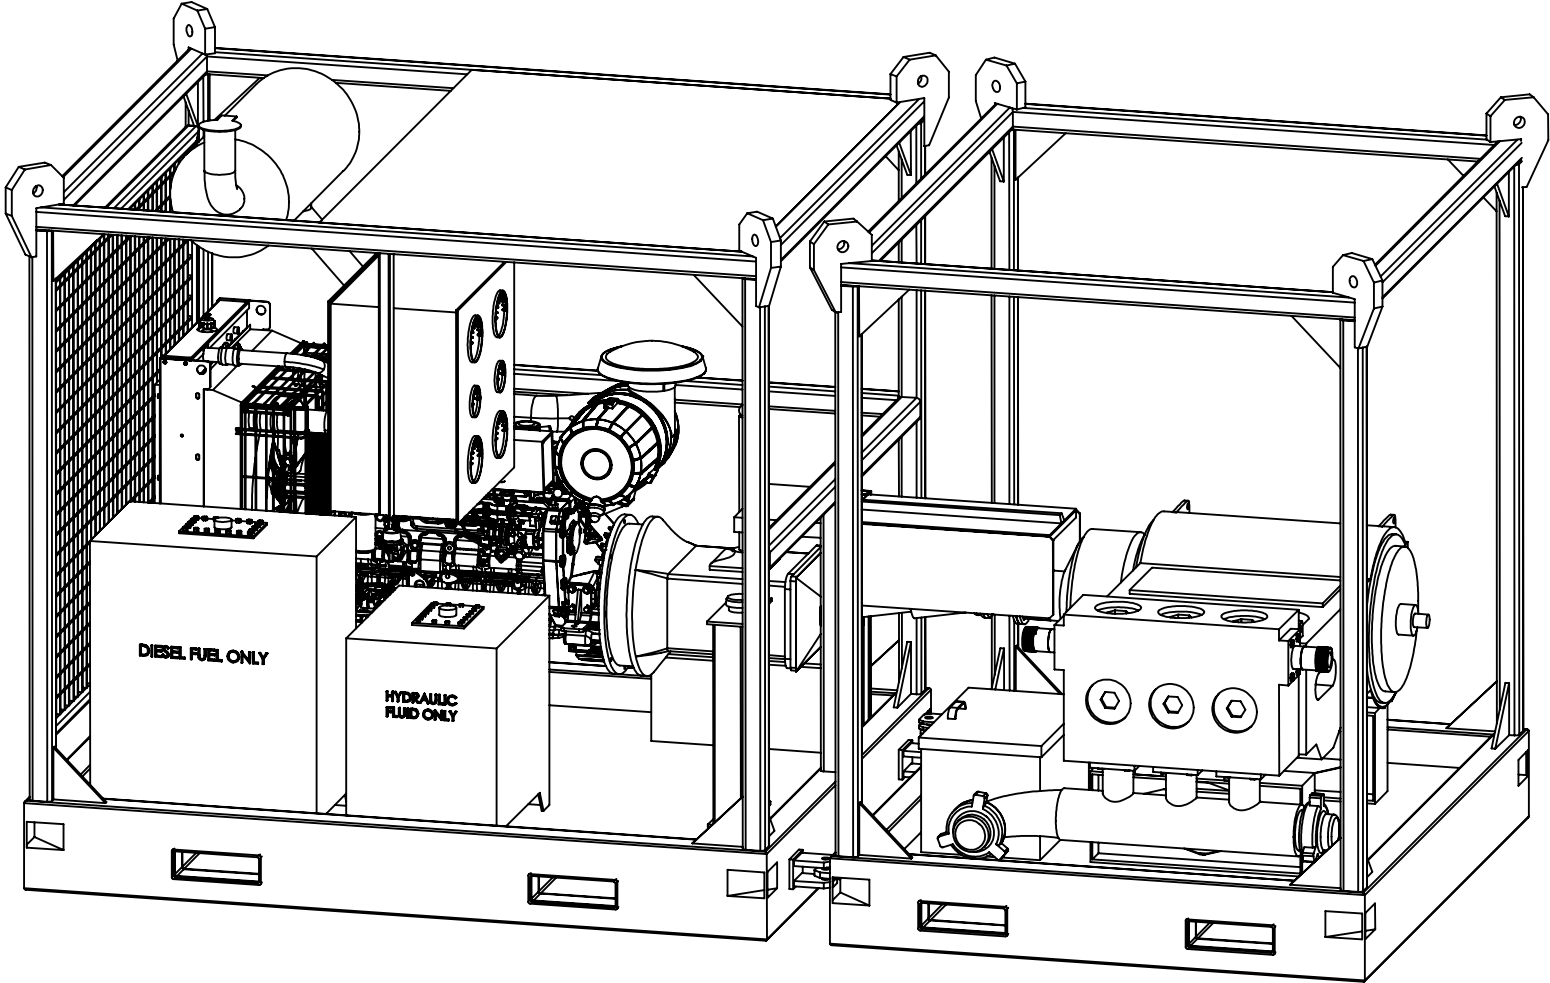

UNIT SPECIFICATIONS:

GD-250 Triplex Pump
300 Horsepower Diesel Engine
5 Speed Standard Transmission
Auxillary Hydraulics:
18GPM / 2500PSI

105 Gallon Diesel Fuel Tank
Stainless Steel
Weatherproof Control Panel
MC II Flometer

PUMP PACKAGE: GD-250 TWO PIECE



	DIMENSIONS	WEIGHT
POWER	9' x 7' x 7'6"	9000 LB
FLUID	6' x 7' x 7'6"	6000 LB

MAX FLOW RATE: 245 GPM MAX PRESSURE: 10000 PSI

DOCUMENT HISTORY		DO NOT SCALE	SIZE A	SHEET 1 OF 1	REV 0
CREATED BY	SMN				
APPROVED BY	AA				
REVISED BY					

THE ENCLOSED DOCUMENT, DATA, AND
ASSOCIATED MATERIALS ARE THE PROPERTY OF
RIVER RENTAL TOOLS, INC.
REPRODUCTION OR DISTRIBUTION
OF THE PROPRIETARY MATERIALS HEREIN
STRICTLY PROHIBITED
WITHOUT WRITTEN CONSENT.



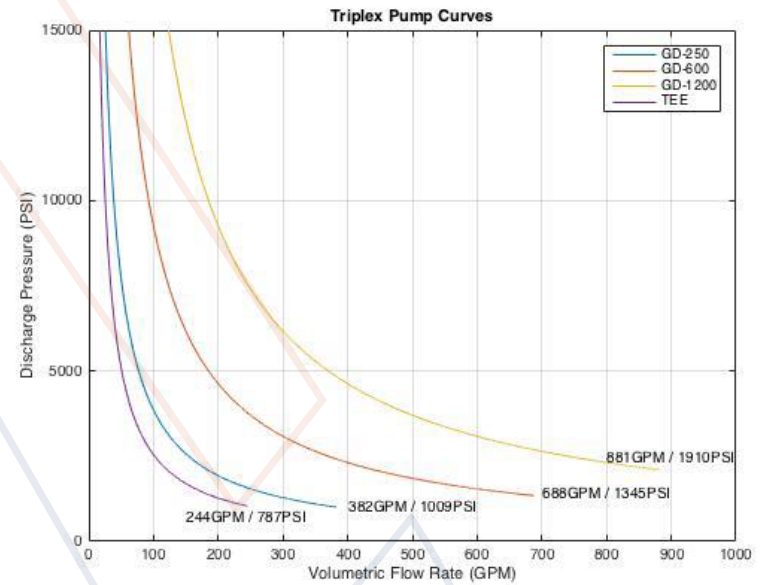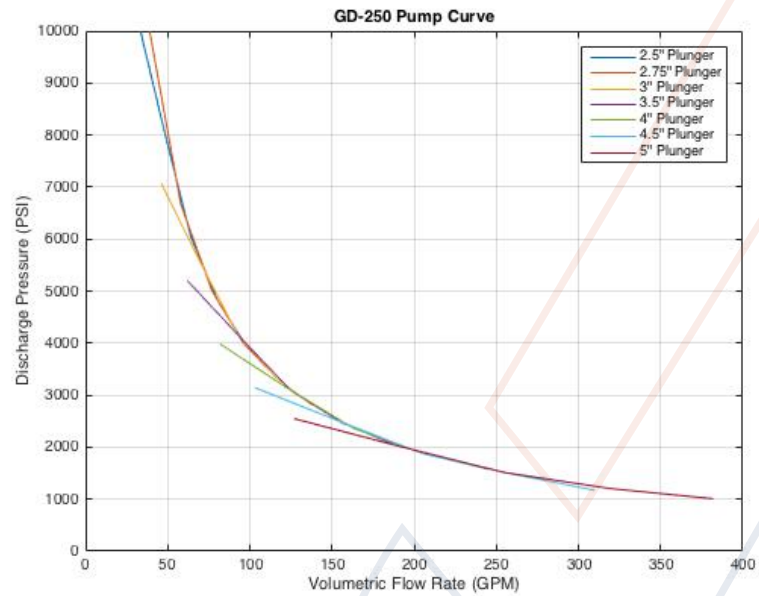

		Displacement at Pump Revolution							
Plunger	Gal./	50		100		200		330	
Size	Rev.	GPM	PSI	GPM	PSI	GPM	PSI	GPM	PSI
2.5"	0.032	16	10186	32	10186	64	6049	96	4033
2.75"	0.39	19	8418	39	8418	77	5000	116	3333
3"	0.46	23	7074	46	7074	92	4201	138	2801
3.5"	0.62	31	5197	62	5197	125	3086	187	2058
4"	0.82	41	3979	82	3979	163	2363	245	1575
4.5"	1.03	52	3144	103	3144	207	1867	310	1245
5"	1.27	64	2546	127	2546	255	1512	382	1008