


GARDNER DENVER TEE
PUMP SPECIFICATIONS:

MAX INPUT: 165 BHP
MAX RPM: 350 RPM
STROKE LENGTH: 5"
ROD LOAD: 44000 LB
PUMP WEIGHT: 3230 LB

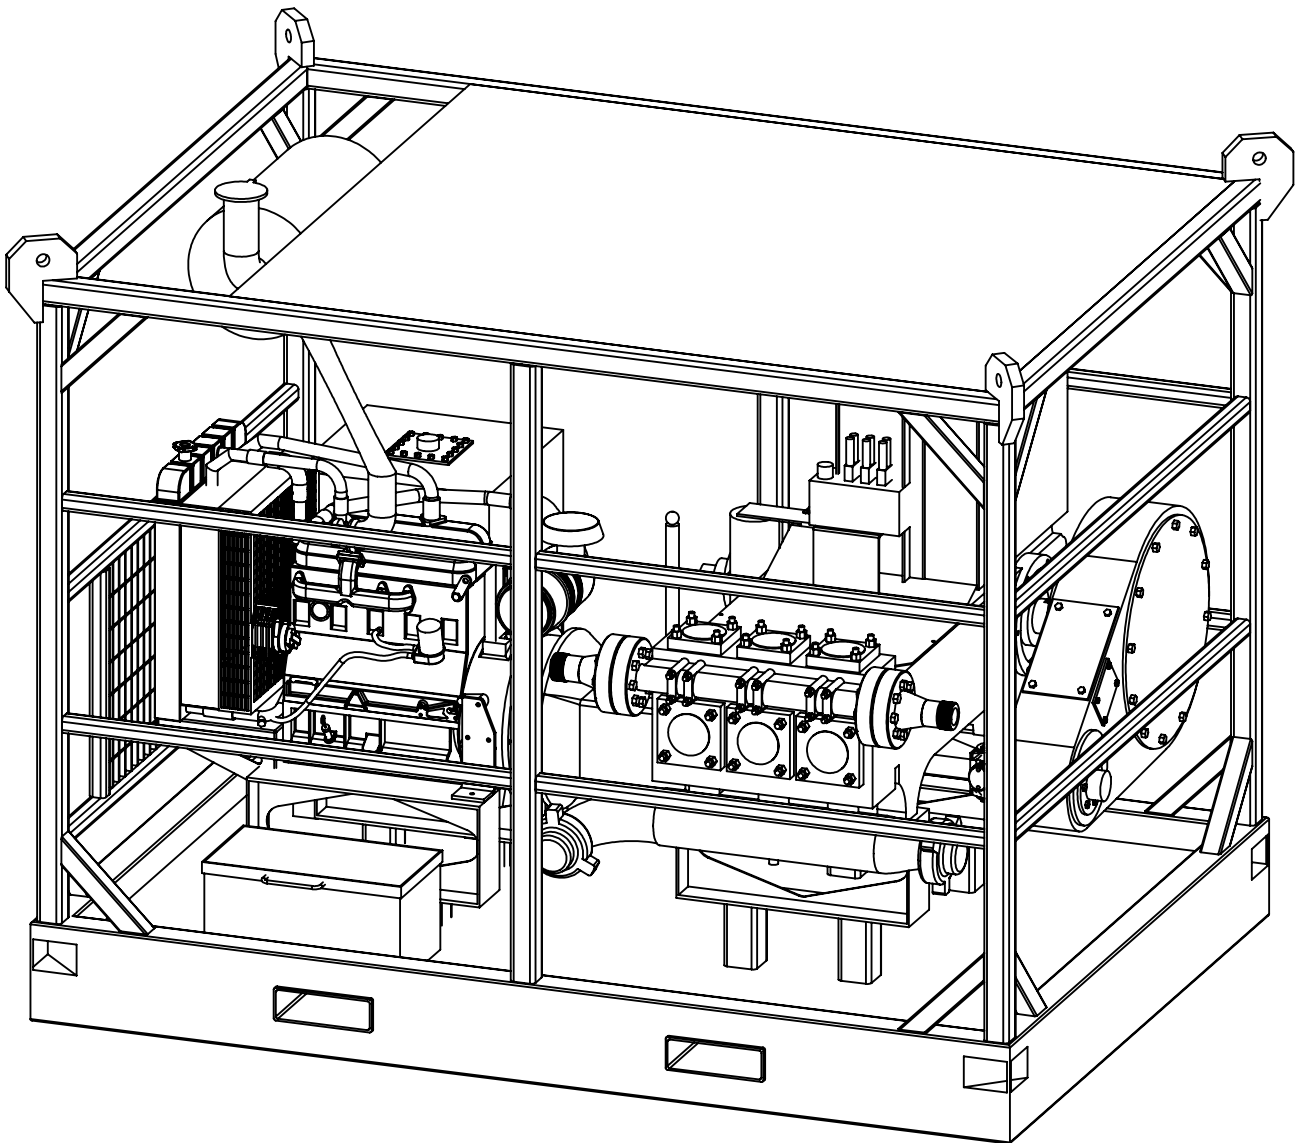

UNIT SPECIFICATIONS:

GD TEE Triplex Pump
185 Horsepower Diesel Engine
5 Speed Standard Transmission
Auxillary Hydraulics:
18GPM / 2500PSI
90 Gallon Diesel Fuel Tank
Stainless Steel Weatherproof
Control Panel
MC II Flometer

PUMP PACKAGE: GD-TEE SINGLE PIECE

DIMENSIONS: 10' x 7' x 7'6"
WEIGHT 13000 LB
MAX PRESSURE: 5000 PSI
MAX FLOW RATE: 245 GPM


THE ENCLOSED DOCUMENT, DATA, AND
ASSOCIATED MATERIALS ARE THE PROPERTY OF
RIVER RENTAL TOOLS, INC.
REPRODUCTION OR DISTRIBUTION
OF THE PROPRIETARY MATERIALS HEREIN
STRICTLY PROHIBITED
WITHOUT WRITTEN CONSENT.



DOCUMENT HISTORY		DO NOT SCALE	SIZE A	SHEET 1 OF 1	REV 0
CREATED BY	SMN				
APPROVED BY	AA				
REVISED BY		NOT TO SCALE			

GARDNER DENVER TEE
PUMP SPECIFICATIONS:

MAX INPUT: 165 BHP
MAX RPM: 350 RPM
STROKE LENGTH: 5"
ROD LOAD: 44000 LB
PUMP WEIGHT: 3230 LB

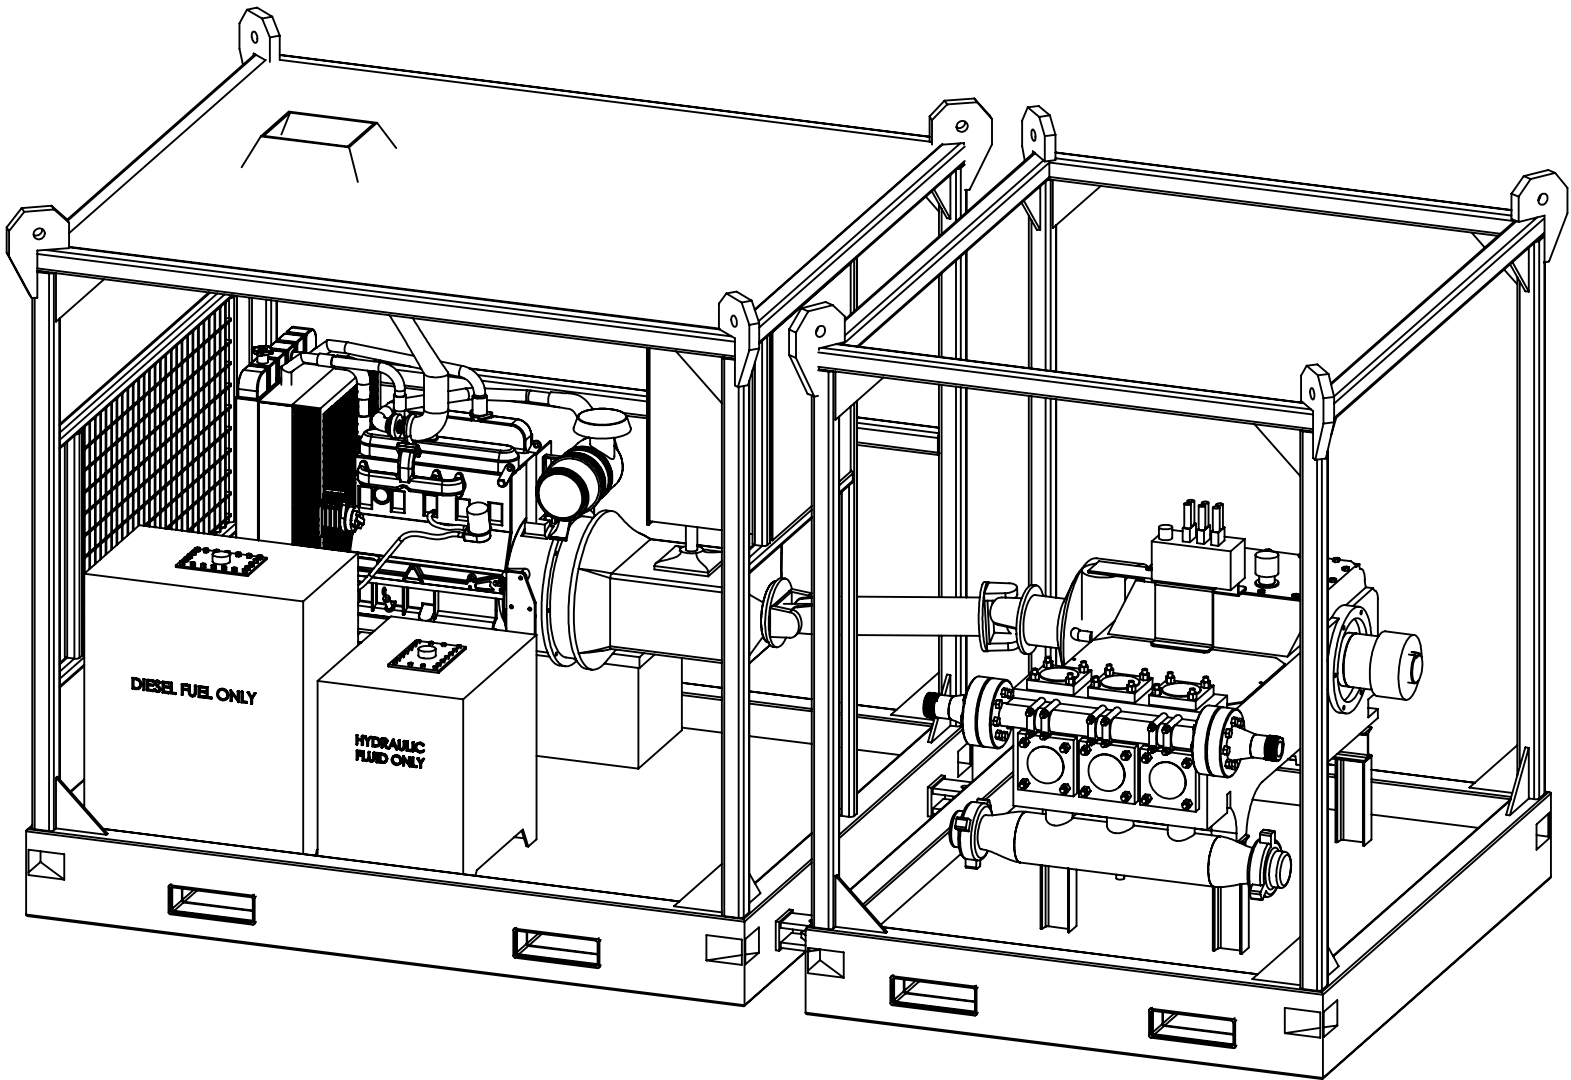

UNIT SPECIFICATIONS:

GD TEE Triplex Pump
190 Horsepower Diesel Engine
5 Speed Standard Transmission
Auxillary Hydraulics:
18GPM / 2500PSI
90 Gallon Diesel Fuel Tank
Stainless Steel Weatherproof
Control Panel
MC II Flometer

PUMP PACKAGE: GD-TEE TWO PIECE



	DIMENSIONS	WEIGHT
POWER	7'10" x 6'10" x 7"	8000 LB
FLUID	4'5" x 6'10" x 7"	8000 LB

MAX FLOW RATE: 245 GPM MAX PRESSURE: 5000 PSI

THE ENCLOSED DOCUMENT, DATA, AND
ASSOCIATED MATERIALS ARE THE PROPERTY OF
RIVER RENTAL TOOLS, INC.
REPRODUCTION OR DISTRIBUTION
OF THE PROPRIETARY MATERIALS HEREIN
STRICTLY PROHIBITED
WITHOUT WRITTEN CONSENT.



DOCUMENT HISTORY		DO NOT SCALE	SIZE A	SHEET 1 OF 1	REV 0
CREATED BY	SMN				
APPROVED BY	AA	NOT TO SCALE			
REVISED BY					

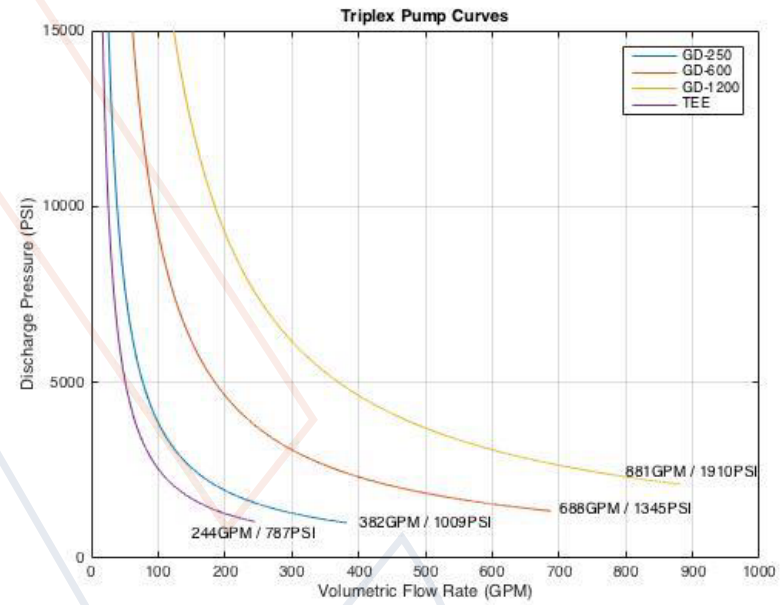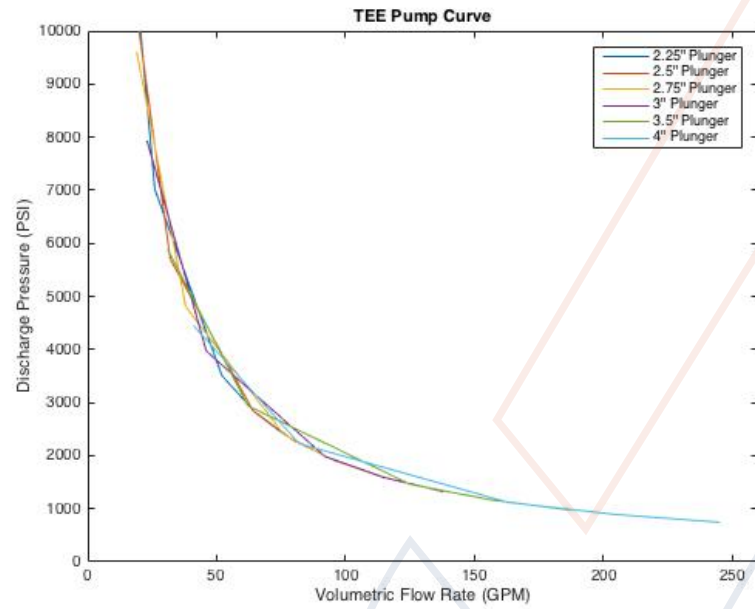

Plunger	Gal./ Rev.	Displacement at Pump Revolution									
		50		100		200		250		300	
		GPM	PSI	GPM	PSI	GPM	PSI	GPM	PSI	GPM	PSI
2.25"	0.258	13	10000	26	9318	52	4659	65	3727	77	3102
2.5"	0.319	16	8960	32	7560	64	3774	80	3016	96	2515
2.75"	0.38	19	7405	38	6164	76	3122	95	2504	114	2070
3"	0.45	23	6222	46	5226	92	2613	115	2090	138	1742
3.5"	0.623	31	4571	62	3816	125	1923	156	1541	187	1286
4"	0.817	41	3500	82	2932	163	1475	204	1178	245	981