
Quick Start Guide

LINXC Bridge™


pureLiFi | Power Beyond Solace

STEP 1

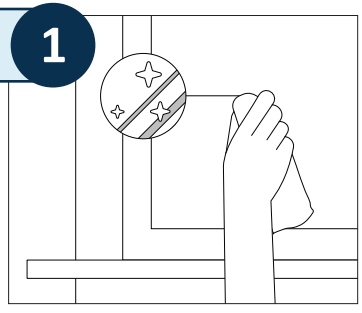


Use provided Alcohol Wipe to clean inner and outer window pane.

STEP 2

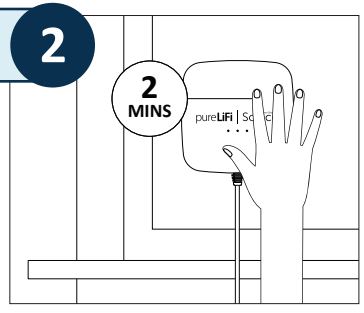


Remove tape backing from Outdoor Unit. Stick the unit onto the window and **apply pressure for 2 minutes.** Plug the hardwired ethernet cable into your 5G Receiver.

STEP 3

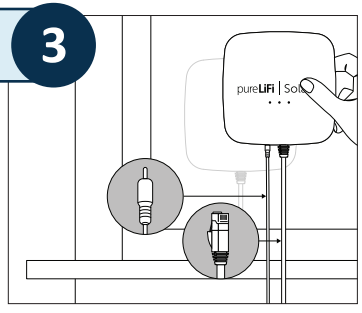


Moving indoors, plug the DC power and ethernet cables into the bottom of the Indoor Unit. **Remove the tape backing** from the Indoor Unit.

STEP 4

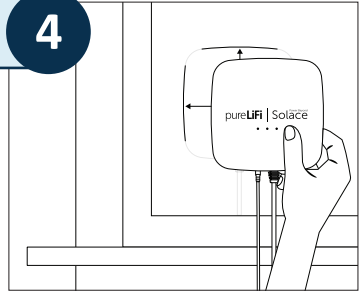


Align the Indoor Unit with the back of the Outdoor Unit and stick it onto the window. **Apply pressure for 2 minutes.**

STEP 5

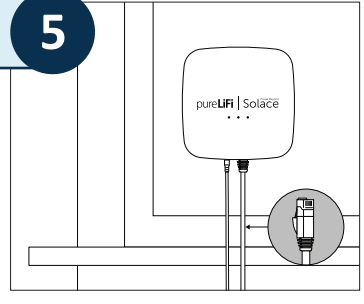

Plug the ethernet cable into your router and plug the other end of the power cable into the wall. **Observe the LED indicators**. To find out what the LEDs mean, refer to the LED Translator on page 8 of the user guide.

STEP 6

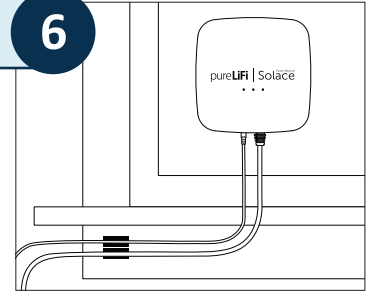


Finally, make everything tidy using the **Cable Management Clips.**

Quick Start Guide


LINXC Bridge™

pureLiFi | Power Beyond Solace


Below are a list of best practices and considerations for installation:

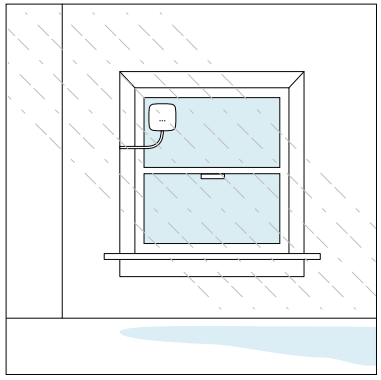


Keep the Outdoor Unit away from direct streams of water.

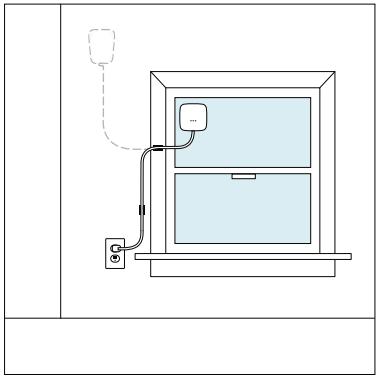

Choose a window close to where your 5G Receiver is installed that has an available power outlet nearby.

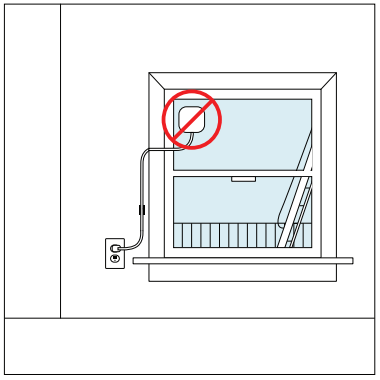

Do not place the unit on a window designated as a fire escape.

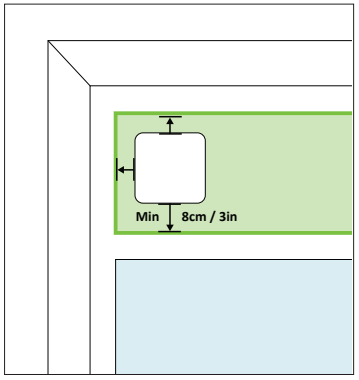


The Indoor/Outdoor Units should be installed a minimum of 8cm (3in) away from the frame of the window.


Ideally, the LINXC Bridge™ should be placed on a fixed window.

If you're installing the units on a window that has a moving component, take a look at these illustrations for the best placement options:


Horizontal Sliding Windows

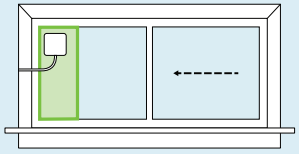

Vertical Sliding Windows



Rotating Windows



Casement Windows

