

U.S. Department of
Homeland Security

United States
Coast Guard



Commanding Officer
United States Coast Guard
Marine Safety Center

2100 2nd Street, S.W. Stop 7102
Washington, DC 20593-7102
Staff Symbol: MSC-3
Phone: (202) 475-3403
Fax: (202) 475-3920
Email: msc@uscg.mil

16710/P018437
Serial: C1-1303087
September 12, 2013

Conrad Industries, Inc
Attn: Mr. Richard Soudelier
P.O. Box 790
Morgan City, LA 70381
Email: RLSoudelier@conradindustries.com

Subj: CBR 2021, O.N. 1248194, Conrad Shipyard Hull No. C-1032
CBR 2022, O.N. 1248783, Conrad Shipyard Hull No. C-1033
HSM 1001, O.N. 1249240, Conrad Shipyard Hull No. C-1035
HSM 1002, O.N. 1249241, Conrad Shipyard Hull No. C-1036
CBC 388, O.N. 1248751, Conrad Shipyard Hull No. C-1040
CBC 389, O.N. 1248047, Conrad Shipyard Hull No. C-1041
NEW CONSTRUCTION, CG1249506, Conrad Shipyard Hull No. C-1042
NEW CONSTRUCTION, CG1249510, Conrad Shipyard Hull No. C-1044
297'-6" x 54' x 12' Unmanned Double Hull Type II/III Tank Barges (D/O)
Grade A (max. 25 psia Reid) and Lower Grades Flammable or Combustible Liquids
Identified in 46 CFR Table 30.25-1 or 46 CFR 153 Table 2, and Specified Hazardous
Cargoes
Rivers; Lakes, Bays, and Sounds; Limited Coastwise on unmanned fair weather voyages
only, not more than 12 miles offshore between St. Marks and Carrabelle, Florida
Plan Approval Extension: Vapor Collection System and List of Authorized Cargoes

Dear Mr. Soudelier:

We have reviewed the information submitted with your e-mail dated August 22, 2013 (MSC Document No. 1315809), wherein you have requested that plans previously approved under project P014938 Conrad Shipyard Hulls C-994 through C-997, be used for the construction of the subject vessels. While we have no objection to you using the plans that were previously approved plans, please be advised that the cognizant Officer in Charge, Marine Inspection (OCMI) has the final authority for these issues.

Enclosure (1) includes details regarding MSC approval letters for previously approved plans you wish to use for the construction of the subject vessels. By copy of this letter, we recommend the OCMI extend approval of all drawings and calculations addressed in enclosure (1) to the subject vessels. This extension of plan approval is based on our understanding that:

- a. The subject vessel will be built to the same plans as those specified in enclosure (1),
- b. The regulations used for the original plan approval have not changed since the original plan approval,

16710/P018437
Serial: C1-1303087
September 12, 2013

Subj: Conrad Shipyard Hulls C-1032, C-1033, C-1035, C-1036, C-1040, C-1041, C-1042, and C-1044

Plan Approval Extension: Vapor Collection System and List of Authorized Cargoes

- c. The owner of the original plans specifically authorizes the use of the plans for new construction,
- d. There are no modifications to subject vessel or any of the installed systems which would require additional review, and
- e. All comments provided in the original approval letters, accompanying the approved plans, still apply.

You must provide the OCMI a copy of each item listed in enclosure (1) with its corresponding MSC approval letter. Plans that do not conform to any part of (a) through (e) above shall be submitted to our office for approval. The installation, workmanship, and testing shall be to the satisfaction of the OCMI. Any vessel system, arrangement, structure, or other item that requires plan approval but is not covered by an extension must be either submitted to the MSC for review or reviewed by the OCMI.

The Vapor Control System (VCS) PRIS for the subject vessels is included as enclosure (2). In addition, we have updated each vessel's cargo and vapor control authority. The 46 CFR 151 Cargo List and VCS List of Cargoes are included as enclosures (3) and (4).

At the time of this review, some of the vessels' official numbers were not available. Once you provide the vessel names and official numbers to this office, the updated Cargo Authority Attachments (CAAs), containing the cargoes found in enclosure (3) and vapor control authority for the cargoes found in enclosure (4), will be made available for issuance by the OCMI.

Please note that only the local OCMI can issue a vessel's CAA as part of the Certificate of Inspection (COI). The OCMI will verify the carriage authority and vapor control tank group characteristics we used as a basis for creating enclosures (3) and (4) are consistent with the vessel's actual design. For the OCMI's convenience, we have included the following recommended COI endorsement:

Only those hazardous cargoes named in the vessel's Cargo Authority Attachment, Serial No. C1-1303087 dated September 12, 2013, may be carried and then only in the tanks indicated.

When the vessel is carrying cargoes containing greater than 0.5% benzene, the person in charge is responsible for ensuring the provisions of 46 US Code of Federal Regulations Part 197, Subpart C are applied.

In accordance with 46 CFR Part 39, excluding part 39.40, this vessel's vapor control system has been inspected to the plans approved by Marine Safety Center letters Serial No. C1-1204161 dated September 25, 2013 and extended by C1-

16710/P018437
Serial: C1-1303087
September 12, 2013

Subj: Conrad Shipyard Hulls C-1032, C-1033, C-1035, C-1036, C-1040, C-1041, C-1042, and C-1044

Plan Approval Extension: Vapor Collection System and List of Authorized Cargoes

1303087 dated September 12, 2013 and found acceptable for collection of bulk liquid cargo vapors annotated with "Yes" in the CAA's VCS column.

Our Project Number for these vessels is **P018437**. Please ensure that future correspondence includes the Project Number, and either the Coast Guard (CG) number that appears in the subject line or the Official Number of each barge once assigned. To avoid confusion, the owners are encouraged to provide the National Vessel Documentation Center with the vessel CG numbers when applying for documentation.

If you have any questions concerning our review, please contact Lieutenant Rachel Beckmann at the number listed above.

Sincerely,



M. J. SEXTON
Lieutenant, U. S. Coast Guard
Assistant Chief, Tank Vessel and Offshore Division
By direction

- Encl: (1) Plan Approval Extension Form, dated August 21, 2013
(2) VCS PRIS, Conrad Shipyard Hulls C-1032, C-1033, C-1035, C-1036, C-1040, C-1041, C-1042, and C-1044, dated September 12, 2013
(3) 46 CFR Part 151 Cargo List, Conrad Shipyard Hulls C-1032, C-1033, C-1035, C-1036, C-1040, C-1041, C-1042, and C-1044, dated September 12, 2013
(4) VCS List of Cargoes, Conrad Shipyard Hulls C-1032, C-1033, C-1035, C-1036, C-1040, C-1041, C-1042, and C-1044, dated September 12, 2013

Copy: Commander, Coast Guard Sector Marine Safety Unit, Morgan City

U.S. Department of
Homeland Security

United States
Coast Guard



Commanding Officer
United States Coast Guard
Marine Safety Center

2100 2nd Street, S.W. Stop 7102
Washington, DC 20593-7102
Staff Symbol: MSC-3
Phone: (202) 475-3403
Fax: (202) 475-3920
Email: msc@uscg.mil

16710/P014938
Serial: C1-1204161
September 25, 2012

Conrad Industries, Inc.
Attn: Mr. Richard L. Soudelier
PO Box 790
Morgan City, LA 70381
Email: rlsoudelier@conradindustries.com

Subj: JARED JOSEPH, O.N. 1242310, Conrad Shipyard Hull No. C-994
NICHOLAS RAY, O.N. 1213431, Conrad Shipyard Hull No. C-995
ALLISON JANE, O.N. 1213432, Conrad Shipyard Hull No. C-996
MACI BRYAN, O.N. 1242740, Conrad Shipyard Hull No. C-997
297'-6" x 54' x 12' Unmanned Double Hull Type II/III Tank Barges (D/O)
Grade A (max. 25 psia Reid) and Lower Grades Flammable or Combustible Liquids
Identified in 46 CFR Table 30.25-1 or 46 CFR 153 Table 2 as Pollution Category I or
III and Specified Hazardous Cargoes
Design Density 8.7 lbs/gal; Maximum Density (slack load) 15 lbs/gal
Rivers; Lakes, Bays, and Sounds; Limited Coastwise on unmanned fair weather voyages
only, not more than 12 miles offshore between St. Marks and Carrabelle, Florida
Vapor Collection System and List of Authorized Cargoes

Ref: (a) Document No. 1216407, Conrad Shipyard, "Vapor Control Piping," Dwg. No. P-03,
Sheets 1 and 2, Rev. 2, dated May 3, 2012
(b) Document No. 1216410, Guarino & Cox, LLC, "Vapor Control System
Calculations," Dwg. No. C-32, Rev. 1, dated September 25, 2012
(c) Coast Guard Marine Safety Center's "Industry Guidelines for Determining the
Maximum Liquid Transfer Rate for a Tank Vessel Transferring a Flammable or
Combustible Cargo Using a Vapor Control System" dated July 15, 2001

Dear Mr. Richard L. Soudelier:

In response to your electronic submissions dated September 14, 2012, September 24 2012, and September 25, 2012 we have reviewed the vapor collection system (VCS) piping plan and the vapor control pressure drop calculations for compliance with 46 CFR Part 39, excluding Subpart 39.40. The VCS piping plan, reference (a), is marked "**Approved.**" The installation, workmanship and testing shall be to the satisfaction of the cognizant Officer in Charge, Marine Inspection (OCMI). The pressure drop calculations, reference (b) are "**Examined.**" Calculations and plans such as these are not normally marked approved, but are used to verify that the system meets the applicable regulations. The following comments apply:

Subj: Conrad Shipyard Hull C-994 through C-997;
Vapor Collection System and List of Authorized Cargoes

1. Based on your calculations, this VCS is capable of recovering vapors of the cargoes listed in enclosure (1) at a maximum vapor-air mixture density of **0.35 lbm/ft³**, at a maximum liquid load rate of **5,500 bbl/hr**, and at a maximum liquid discharge rate of **4,300 bbl/hr**.

2. In accordance with reference (b), the set-point of the overfill shutdown system shall be no higher than **7 inches** below the tank top of cargo tank 1 P/S and 2 P/S, and set no higher than **9.5 inches** below the tank top of cargo tank 3 P/S.

3. The oil transfer procedures shall include a table or graph showing the liquid transfer rate versus the pressure drop, as required by 46 CFR 39.30-1(b)(3), to the satisfaction of the cognizant OCMI. This information must be taken from the calculations, tables, and graphs contained within reference (b). However, the table or graph added to the oil transfer procedures should exclude unauthorized cargoes, and shall not reflect transfer rates exceeding the maximum liquid load rate approved in paragraph 1.

4. The tanks share a common vent header, which would allow mixing of various vapors and liquid cargoes. Note this configuration restricts the types of cargoes that can be carried simultaneously.

5. Enclosure (3) contains VCS Category 2 and 4. Polymerization and residue build-up of these cargoes can adversely affect the operation of the vapor collection system. The barge's owner must develop a method for internal visual inspection to verify that fouling of VCS components is not occurring, to the satisfaction of the cognizant OCMI.

6. In conjunction with this review, we have generated the subject vessel's cargo authority based on the Tank Group Characteristics Loading Form submitted with your email dated September 14, 2012. The 46 CFR 151 Cargo List is attached as enclosure (2).

7. The Cargo Authority Attachment (CAA) for each vessel is now available in the Coast Guard's Marine Information for Safety and Law Enforcement (MISLE). The CAA will contain the cargoes found in enclosures (1) and (2). Please note that only the cognizant OCMI can issue a vessel's CAA, which is valid only when referenced by and attached to a valid Certificate of Inspection (COI). The OCMI will verify the carriage authority and vapor control tank group characteristics we used to create enclosures (1) and (2) are consistent with the vessel's actual construction. Enclosure (3) contains the VCS tank group characteristics and our recommended COI endorsement.

As a condition of your participation in MSC's electronic commerce program, you must provide a copy of the approved drawings to the OCMI, along with a copy of the corresponding MSC approval letter.

Our Project Number for this vessel is **P014938**. Please ensure that future correspondence includes the Project Number and Official Number that appears in the subject line for each barge.

16710/P014938
Serial: C1-1204161
September 25, 2012

Subj: Conrad Shipyard Hull C-994 through C-997;
Vapor Collection System and List of Authorized Cargoes

If you have any questions concerning our review, please contact Lieutenant Rachel Beckmann at the number listed above.

Sincerely,



J.B. Wheeler
Lieutenant, U. S. Coast Guard
Assistant Chief, Tank Vessel and Offshore Division
By direction

Encl: (1) Vapor Collection System List of Cargoes; Conrad Shipyard Hull Nos. C-994 through C-997; dated September 25, 2012
(2) 46 CFR Part 151 Cargo List, Conrad Shipyard Hull Nos. C-994 through C-997; dated September 25, 2012
(3) VCS PRIS; Conrad Shipyard Hull Nos. C-994 through C-997; dated September 25, 2012

Copy: Commander, Coast Guard Sector Morgan City, w/ enclosures

REVISIONS			
REV	DESCRIPTION	DATE	BY
1	A. Changed HVPV valve from ERL to Tanktech per owner request. B. Modified calculations to suit. C. Added hull C.- 994 THRU C- 997	9 -25-12	RA
GUARINO & COX, LLC 19399 Helenbirg Rd. Suite 203 Covington, La. 70433 (985) 871-9997			
THE USE OF THIS PLAN AND / OR DISCLOSURE OF ITS CONTENTS, IN ANY FASHION, IN WHOLE OR IN PART AND / OR ITS REPRODUCTION WITHOUT THE PREVIOUS WRITTEN PERMISSION OF "GUARINO & COX, LLC" IS STRICTLY PROHIBITED.			
Conrad Industries, Inc			
297'-6" x 54' x 12' INLAND TANK BARGE			
VAPOR CONTROL SYSTEM CALCULATIONS			
SCALE:	NONE	DATE:	9- 25 -12
DRAWN BY:	R. ALLUMS	CK'D BY:	R. ALLUMS
HULL NO.	C- 994 THRU C- 997	JOB NO.	10-002
		DWG. NO.	C-32
		REV.	1

© Guarino & Cox, LLC 2010

I. VAPOR CONTROL SYSTEM CALCULATIONS - SUMMARY

A. General Description of Vessel:

Builder:	CONRAD INDUSTRIES, INC	
Builder's hull numbers:	Conrad C-994 THRU C-997	
Year Built:	2012 / 2013	
Official Numbers:		
Owner:		
Vessel Names:		
Vessel Dimensions:	297'-6" x 54'-0" x 12'-0"	
Service:	Inland Tank Barge (D/O)	
Classification:	None	
Max Design Working Pressure of Tanks:	3.00	(psig)
Max Cargo Loading Rate	5,500	(bbl/hr)
Maximum Discharge Rate	4,300	(bbl/hr)
VCS Cargoes:	See Table 1	
Maximum Vapor-Air Mixture Density:	0.35 (Pentane, all isomers)	(lbm/ft ³)
Maximum Vapor Growth Rate:	1.54 (Pentane, all isomers)	(lbm/ft ³)

B. General Description of Vapor Control System:

[Note: Also see Reference 6 for details of vapor control system.]

1. Pipe:

One (1) 8" diam longitudinal vapor header fitted with a 6" high-velocity PV Valve.
 One (1) 8" diam tranverse vapor header with 8" shore connection valves.
 One (1) 8" diam branch line off longitudinal header to each cargo tank.
 (See Reference 6 for system layout)

2. High Velocity PV Valve:

Model:	Tanktech/Bergan KLPH-6	
Pressure Setting:	1.50	(psig)
Vacuum Setting:	0.5	(psig)
PV Valve Flow Capacity:	See Att. 1	(bbl/hr)

3. Spill Valve:

Model:	None installed
Pressure Setting:	N/A

4. Vapor Recovery Hose:

Diameter:	8" (assumed)
Length:	50' (assumed)

5. Cargo Tank P-V Valves:

	(One central P/V valve only, no individual tank P-V valves)	
Model:	See #2 above.	
Pressure Setting:	1.50	(psig)
Vacuum Setting:	0.5	(psig)

C. VCS Calculations:

1. Cargo Authority:

The vapor collection system installed on this barge is designed for Grade A and lower petroleum products and chemicals. Typical cargoes to be carried by this barge are listed in Table 1. These cargoes are to be listed in the Cargo Authority Attachment (CAA) of the barge's Certificate of Inspection. Note that Table 1 is not intended to be an all-inclusive list and the CAA should therefore not be limited to these cargoes. Other cargoes with less restrictive or equal characteristics shall also be included on the CAA.

2. Determining Vapor-Air Mixture Density and Vapor Growth Rate:

Of the cargoes carried, Pentane has the highest vapor-air mixture density. Pentane also has the greatest vapor growth rate. (See Table 1)

3. The Maximum Liquid Transfer Rate as Imposed by the Capacity of the Cargo Tank Venting System: (Ref: 46 CFR 39.20-11)

Tanks #1 P/S are the farthest tanks from the High-Velocity P-V Valve in terms of total equivalent pipe length. Using factors from Reference 4 and 9, the total equivalent length of pipe is calculated for this path. This calculation is shown in Table 2.

Using Darcy's equation, and friction factors selected as appropriate for the pipe size, and the maximum liquid transfer rate, the pressure drop along the VCS piping from tank #1P to the P-V Valve is calculated using the total equivalent length of pipe from Table 2. The pressure drop calculations were done for the maximum loading rate (5,500 BBL/hr) for this barge. This maximum loading rate is based on loading one tank at a time. This calculation is shown in Table 3.

Conclusions:

Using a 5,500 bbl/hr maximum liquid transfer rate (for Pentane and lower cargoes), the vapor-air mixture and air-equivalent volumetric flow rates for each cargo are shown in Table 3. The greatest pressure drop in the cargo tank venting system is 0.24 psig for Pentane cargo. At a pressure relief setting of 1.5 psig, the high-velocity P-V valve has an adequate flow capacity (see attachment 1). The greatest total back pressure imposed on the tanks by the cargo tank venting system (1.03 psig) does not exceed the design working pressure of the cargo tanks (3.00 psig). Also, the vacuum relieving capacity of the P-V Valve has been checked against the maximum discharge rate and has been found to have adequate vacuum relieving capacity (see Table 3).

4. The Maximum Liquid Transfer Rate as Imposed by the Relieving Capacity of the Cargo Tank Spill Valves:

No spill valves are installed on this barge.

5. The Maximum Liquid Transfer Rate as Imposed by the Set Point of the Overfill Alarm:

At the maximum cargo loading rate of 5,500 bbl/hr, required overfill alarm set points have been calculated such that the person in charge of the transfer operations has more than 60 seconds from the overfill alarm to stop the transfer operations before the tank overflows. (See attached overfill alarm set point calculation sheets.) The overfill alarms will need to be set at or below these calculated levels to ensure that the VCS complies with 46 CFR 39.20-9. In addition, the overfill alarms must also be set at or below a capacity of 98.5% to comply with 33CFR155.775.

6. The Maximum Liquid Transfer Rate as imposed by the pressure drop between the most remote tank and the facility vapor connection (Ref: 46 CFR 39.30-1(d)(3):

This requires the sum of the pressure drop along the longest path from the cargo tank to the vessel vapor connection and the back pressure at the facility vapor connection not to exceed 80 percent of the pressure setting of any pressure relief valve in the system. Tanks #1 P/S are the farthest from the facility vapor connection (in terms of total equivalent length of pipe). The total equivalent length from cargo tank #1P to the facility vapor connection is given in Table 4.

Using Darcy's equation, and friction factors selected as appropriate for the pipe size, and the maximum liquid transfer rate, the pressure drop along the VCS piping from tank #1P to the facility vapor connection is calculated using the total equivalent length of pipe from Table 4. These calculations are shown in Table 5.

Conclusions:

Pressure drop at the maximum liquid transfer rate of 5,500 bbl/hr (for Pentane and lower cargoes) along this path for each cargo is given in Table 5. The highest pressure drop (for Pentane) does not exceed 80 percent of the P-V valve pressure setting. If the pressure drop between the facility vapor connection and the shore facility's pressure sensor is known, it should be added to the pressure drop along this path to ensure that the total pressure drop does not exceed 80 percent of the P-V valve pressure setting.

7. Graph as Required by 46 CFR 39.30-1(b)(3):

See attached.

Table 1 Determination of Vapor-Air Mixture Density & Vapor Growth Rate

	CHRIS Code	Name	VCS Category	Liquid S.G.	*Vapor Press. @ 115 F (psia)	Vapor S.G.	Vapor-air Mixture Weight Density (lb/ft ³)	Vapor Growth Rate	Max. Loading Rate	Vapor Volumetric Flow Rate (bbl/hr)	Air Equivalent Volumetric Flow Rate (bbl/hr)	Pressure Drop to PV Valve in VCS (See Table 3) (psig)	Pressure Drop to Facility Connection in VCS (See Table 5) (psig)
1	ACN	Acrylonitrile	4	0.81	5.00	1.80	0.095	1.10	5,500	6050	6756	0.033	0.068
2	ACT	Acetone	1	0.79	10.00	2.00	0.123	1.20	5,500	6600	8393	0.062	0.102
3	ACP	Acetophenone	1	1.03	0.80	4.14	0.085	1.01	5,500	5588	5881	0.025	0.050
4	AND	Adiponitrile	1	0.95	0.01	3.73	0.078	1.00	5,500	5601	5606	0.022	0.044
5	AEC	Amyl acetate (all isomers)	1	0.88	0.33	0.10	0.075	1.01	5,500	5636	5485	0.022	0.044
6	AAI	Amyl Alcohol (iso-, n-, sec-, primary)	1	0.82	0.30	3.04	0.079	1.01	5,500	5533	5637	0.023	0.046
7	ATN	Acetonitrile	3	0.78	0.03	1.41	0.078	1.00	5,500	5503	5605	0.022	0.044
8	BAL	Benzyl Alcohol	1	1.05	0.10	3.73	0.077	1.00	5,500	5511	5557	0.023	0.045
9	BNZ	Benzene	1	0.88	4.50	2.80	0.114	1.25	5,500	6875	8420	0.052	0.103
10	BTX	Benzene, Toluene, Xylene mixtures (10% Benzene or more)	1	0.84	7.30	2.80	0.138	1.25	5,500	6875	9252	0.083	0.124
11	BAR	Butyl Acrylate (iso-, n-)	2	0.90	0.60	4.42	0.086	1.01	5,500	5566	5908	0.028	0.051
12	BAX	Butyl Acetate (all isomers)	1	0.87	0.80	4.00	0.085	1.01	5,500	5566	5867	0.025	0.050
13	IAL	Butyl Alcohol (iso-)	1	0.81	0.90	2.60	0.083	1.02	5,500	5599	5843	0.026	0.050
14	BAN	Butyl Alcohol (n-)	1	0.81	0.50	0.10	0.074	1.01	5,500	5555	5477	0.022	0.044
15	BAS	Butyl Alcohol (sec-)	1	0.81	1.30	2.60	0.086	1.03	5,500	5843	5994	0.028	0.052
16	BAT	Butyl Alcohol (tert-)	1	0.78	2.80	2.60	0.097	1.06	5,500	5808	6582	0.032	0.063
17	BPH	Butyl Benzyl Phthalate	1	1.12	0.01	10.80	0.077	1.00	5,500	5501	5518	0.022	0.044
18	BAD	iso-Butyraldehyde	1	0.80	7.80	2.50	0.131	1.18	5,500	6358	8344	0.081	0.101
19	BTR	n-Butyraldehyde	1	0.80	7.80	2.50	0.131	1.18	5,500	6358	8344	0.081	0.101
20	BUE	Butyl Toluene	1	0.85	0.10	5.11	0.078	1.00	5,500	5511	5680	0.023	0.045
21	CLS	Caprolactam Solutions	1	1.02	0.05	3.90	0.077	1.00	5,500	5506	5530	0.022	0.044
22	CCH	Cyclohexanone	1	0.96	0.20	3.40	0.078	1.00	5,500	5522	5603	0.023	0.046
23	CHA	Cyclohexylamine	1	0.87	0.62	3.42	0.083	1.01	5,500	5568	5820	0.025	0.049
24	CHX	Cyclohexane	1	0.78	4.50	2.90	0.116	1.09	5,500	5995	7410	0.040	0.080
25	CHN	Cyclohexanol	1	0.96	0.15	3.45	0.078	1.00	5,500	5517	5679	0.023	0.045
26	CPD	1,3-Cyclopentadiene dimer (mottlen)	2	0.89	0.25	4.55	0.080	1.01	5,500	5528	5677	0.024	0.047
27	CMP	p-Cymene	1	0.86	0.11	4.62	0.078	1.00	5,500	5512	5578	0.023	0.045
28	CRB	Chlorobenzene	1	1.11	0.80	3.88	0.087	1.02	5,500	5588	5972	0.028	0.052
29	CRS	Cresols	1	1.05	0.08	3.72	0.077	1.00	5,500	5509	5646	0.022	0.045
30	CUM	Cumene	1	0.86	0.60	4.20	0.085	1.01	5,500	5566	5887	0.025	0.050
31	IDA	Decaldehyde (iso-)	1	0.83	0.01	5.00	0.076	1.00	5,500	5501	5508	0.022	0.044
32	DAL	Decaldehyde (n-)	1	0.83	0.00	5.01	0.076	1.00	5,500	5500	5500	0.022	0.044
33	DCE	Decane	1	0.74	0.12	4.80	0.078	1.00	5,500	5513	5590	0.023	0.045
34	DAX	Decyl Alcohol (all isomers) (Decanol)	1	0.83	0.01	5.30	0.076	1.00	5,500	5501	5508	0.022	0.044
35	DBZ	Decylbenzene (n-)	1	0.86	0.01	7.52	0.078	1.00	5,500	5501	5512	0.022	0.044
36	DAA	Diacetone Alcohol	1	0.97	0.10	4.00	0.078	1.00	5,500	5511	5562	0.023	0.045
37	DCH	1,1-Dichloroethane	1	1.18	9.90	3.41	0.188	1.20	5,500	6589	10361	0.079	0.156
38	DPA	Diisobutyl Phthalate (ortho-)	1	1.05	0.00	9.59	0.076	1.00	5,500	5500	5500	0.022	0.044
39	DEB	Diethylbenzene	1	0.87	0.08	4.62	0.078	1.00	5,500	5509	5558	0.023	0.045
40	DEG	Diethylene Glycol	1	1.12	0.01	3.68	0.078	1.00	5,500	5501	5508	0.022	0.044
41	DEN	Diethylamine	3	0.71	1.00	2.50	0.083	1.02	5,500	5610	5884	0.025	0.050
42	DBL	Diisobutylene	1	0.72	2.00	3.88	0.103	1.04	5,500	5720	6654	0.032	0.064
43	DIK	Diisobutyl Ketone	1	0.81	0.16	4.90	0.079	1.00	5,500	5518	5623	0.023	0.046
44	DIP	Diisopropanolamine	1	0.98	0.01	4.59	0.076	1.00	5,500	5501	5507	0.022	0.044
45	DIX	Diisopropylbenzene (all isomers)	1	0.86	0.03	5.60	0.077	1.00	5,500	5503	5627	0.022	0.044
46	DTL	Dimethyl Phthalate	1	1.19	0.00	6.89	0.076	1.00	5,500	5500	5500	0.022	0.044
47	DOP	Dioctyl Phthalate	1	0.98	0.00	13.47	0.076	1.00	5,500	5500	5500	0.022	0.044
48	DPN	Dipentene	1	0.84	0.10	4.90	0.078	1.00	5,500	5511	5577	0.023	0.045
49	DIL	Diphenyl	1	0.99	0.01	5.31	0.076	1.00	5,500	5501	5508	0.022	0.044
50	DDO	Diphenyl, Diphenyl Ether Mixtures	1	1.07	0.01	5.86	0.076	1.00	5,500	5501	5509	0.022	0.044
51	DMF	Dimethylformamide	1	0.95	0.30	2.51	0.078	1.01	5,500	5533	5610	0.023	0.046
52	DPE	Diphenyl Ether	1	1.07	0.01	5.87	0.076	1.00	5,500	5501	5509	0.022	0.044
53	DPG	Dipropylene Glycol	1	1.03	0.07	4.83	0.077	1.00	5,500	5508	5551	0.023	0.045
54	DPX	1,1-, 1,2-, 1,3-Dichloropropane	3	1.16	6.30	3.90	0.162	1.13	5,500	6193	9034	0.060	0.119
55	DFF	Distillates Flashed Feed Stocks	1	0.75	2.30	3.40	0.102	1.05	5,500	5753	6861	0.032	0.064
56	DSR	Distillates Straight Run	1	0.73	2.30	3.40	0.102	1.05	5,500	5753	6861	0.032	0.064
57	DOZ	Dodecene (all isomers)	1	0.76	0.02	5.81	0.077	1.00	5,500	5502	5519	0.022	0.044
58	DDB	Dodecylbenzene	1	0.86	4.70	8.40	0.240	1.25	5,500	8875	12196	0.109	0.218
59	EAC	Ethyl Acrylate	2	0.93	2.00	3.50	0.100	1.04	5,500	5720	6543	0.031	0.062
60	EAI	2-Ethylhexyl acrylate	2	0.89	0.02	6.35	0.077	1.00	5,500	5502	5520	0.022	0.044
61	EEA	2-Ethoxyethyl acetate	1	0.97	0.02	4.70	0.077	1.00	5,500	5503	5517	0.022	0.044
62	ETG	Ethoxy Triglycol (crude)	1	1.02	0.00	6.14	0.076	1.00	5,500	5500	5500	0.022	0.044
63	ETA	Ethyl Acetate	1	0.90	4.50	3.04	0.119	1.09	5,500	5995	7504	0.041	0.082
64	EAA	Ethyl Acetoacetate	1	1.03	0.20	4.48	0.079	1.00	5,500	5522	5639	0.023	0.046
65	EAL	Ethyl Alcohol (Ethanol)	1	0.79	3.50	1.60	0.088	1.07	5,500	5885	8255	0.029	0.057
66	ETB	Ethyl Benzene	1	0.87	0.60	3.56	0.083	1.01	5,500	5568	5824	0.025	0.049
67	EBT	Ethyl Butanol	1	0.83	0.12	3.52	0.078	1.00	5,500	5513	5564	0.023	0.045
68	EBE	Ethyl tert-butyl ether	1	0.74	0.19	3.50	0.078	1.00	5,500	5521	5602	0.023	0.046

Vapor Recovery Calculations

	CHRIS Code	Name	VCS Category	Liquid S.G.	*Vapor Press. @ 115 F (psia)	Vapor S.G.	Vapor-air Mixture Weight Density (lb/ft ³)	Vapor Growth Rate	Max. Loading Rate	Vapor Volumetric Flow Rate (bbl/hr)	Air Equivalent Volumetric Flow Rate (bbl/hr)	Pressure Drop to PV Valve in VCS (See Table 3) (psig)	Pressure Drop to Facility Connection in VCS (See Table 5) (psig)
69	EBR	Ethyl butyrate	1	0.88	1.00	4.00	0.090	1.02	5,500	5610	6107	0.027	0.054
70	ECY	Ethyl Cyclohexane	1	0.79	0.50	3.87	0.083	1.01	5,500	5555	5798	0.025	0.049
71	EDC	Ethylene dichloride	1	1.26	4.00	3.42	0.122	1.08	5,500	5940	7508	0.041	0.082
72	EGL	Ethylene Glycol	1	1.19	0.01	2.21	0.078	1.00	5,500	5501	5503	0.022	0.044
73	EMA	Ethylene Glycol Butyl Ether Acetate	1	0.94	0.05	5.52	0.077	1.00	5,500	5506	5644	0.022	0.045
74	EGY	Ethylene Glycol Diacetate	1	1.10	0.01	5.03	0.078	1.00	5,500	5501	5508	0.022	0.044
75	EPE	Ethylene Glycol Phenyl Ether	1	1.10	0.01	4.80	0.078	1.00	5,500	5501	5608	0.022	0.044
76	EHP	Ethyl-3-ethoxypropionate	1	0.95	0.01	5.00	0.078	1.00	5,500	5501	5610	0.022	0.044
77	EHX	2-Ethylhexanol	1	0.84	0.02	4.50	0.078	1.00	5,500	5502	5514	0.022	0.044
78	EPR	Ethyl Propionate	1	0.89	3.50	1.60	0.088	1.07	5,500	5885	6255	0.029	0.057
79	ETE	Ethyl Toluene	1	0.88	0.28	4.15	0.080	1.01	5,500	5531	5679	0.024	0.047
80	FAM	Formamide	1	1.13	0.10	1.55	0.076	1.00	5,500	5511	5520	0.022	0.044
81	FMS	Formaldehyde Solution	1	1.13	0.15	1.03	0.076	1.00	5,500	5517	5517	0.022	0.044
82	FAL	Furfuryl Alcohol	1	1.13	0.05	3.40	0.077	1.00	5,500	5506	5526	0.022	0.044
83	FFA	Furfural	1	1.20	0.15	3.31	0.078	1.00	5,500	5517	5575	0.023	0.045
84	GAK	Gasoline Blending Stocks: Alkylates	1	0.75	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
85	GRF	Gasoline Blending Stocks: Reformates	1	0.80	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
86	GAT	Gasolines: Automotive	1	0.74	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
87	GAV	Gasolines: Aviation	1	0.71	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
88	GCS	Gasolines: Casinghead	1	0.87	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
89	GPL	Gasolines: Polymer	1	0.75	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
90	GSR	Gasolines: StraightRun	1	0.75	12.50	3.40	0.217	1.25	5,500	6875	11610	0.099	0.196
91	GCR	Glycerine	1	1.26	0.00	3.17	0.076	1.00	5,500	5500	5500	0.022	0.044
92	HMX	Heptane (all isomers)	1	0.68	2.50	3.45	0.105	1.05	5,500	5775	6779	0.034	0.067
93	HEP	Heptonic Acid	1	0.92	0.01	4.49	0.076	1.00	5,500	5501	5507	0.022	0.044
94	HTX	Heptanol (all isomers)	1	0.82	0.04	4.00	0.077	1.00	5,500	5504	5525	0.022	0.044
95	HPX	Heptene (all isomers)	2	0.70	2.90	3.40	0.109	1.06	5,500	5819	6958	0.036	0.070
96	HXS	Hexane (all isomers)	1	0.66	7.00	3.00	0.142	1.14	5,500	6270	8561	0.054	0.106
97	HXO	Hexanoic Acid	1	0.93	0.01	4.00	0.076	1.00	5,500	5501	5508	0.022	0.044
98	HXN	Hexanol	1	0.82	1.00	3.52	0.088	1.02	5,500	5610	6031	0.027	0.053
99	HEX	Hexene (all isomers)	2	0.67	8.00	2.90	0.148	1.16	5,500	6380	8882	0.058	0.115
100	HXG	Hexylene Glycol	1	0.92	0.01	1.10	0.076	1.00	5,500	5501	5501	0.022	0.044
101	IPH	Isophorone	1	0.93	0.01	4.75	0.076	1.00	5,500	5501	5507	0.022	0.044
102	JPJ	Jet Fuels: JP-4	1	0.81	3.40	4.00	0.124	1.07	5,500	5874	7499	0.041	0.082
103	JPV	Jet Fuels JP-5 (Kerosene, heavy)	1	0.82	0.10	4.00	0.078	1.00	5,500	5511	5582	0.023	0.045
104	KRS	Kerosene	1	0.81	0.15	4.50	0.079	1.00	5,500	5517	5605	0.023	0.046
105	MTT	Methyl Acetate	1	0.92	6.10	2.60	0.122	1.12	5,500	6171	7812	0.045	0.089
106	MAL	Methyl Alcohol (Methanol)	1	0.79	6.63	1.10	0.079	1.13	5,500	6229	8355	0.030	0.059
107	MAC	Methylamyl Acetate	1	0.86	0.33	4.97	0.082	1.01	5,500	5536	5758	0.024	0.048
108	MAA	Methylamyl Alcohol	1	0.81	0.43	3.52	0.081	1.01	5,500	5547	5730	0.024	0.048
109	MAK	Methylamyl Ketone	1	0.82	0.05	1.00	0.076	1.00	5,500	5506	5506	0.022	0.044
110	MAM	Methyl Acrylate	2	0.95	4.10	3.00	0.115	1.08	5,500	5951	7303	0.039	0.078
111	MBE	Methyl Tert-Butyl Ether (MTBE)	1	0.74	0.04	3.10	0.077	1.00	5,500	5504	5519	0.022	0.044
112	MBK	Methyl Butyl Ketone	1	0.81	0.97	3.50	0.088	1.02	5,500	5607	6012	0.028	0.053
113	MBU	Methyl Butyrate	1	0.90	1.26	3.53	0.091	1.03	5,500	5639	6168	0.028	0.055
114	MEK	Methyl Ethyl Ketone	1	0.80	4.50	2.50	0.108	1.09	5,500	5995	7135	0.037	0.074
115	MHK	Methyl Heptyl Ketone	1	0.83	0.06	4.90	0.077	1.00	5,500	5507	5546	0.023	0.045
116	MIK	Methyl Isobutyl Ketone	1	0.80	1.15	3.45	0.089	1.02	5,500	5627	6096	0.027	0.054
117	MMM	Methyl methacrylate	2	0.94	2.02	3.45	0.099	1.04	5,500	5722	6538	0.031	0.062
118	MNA	Methyl Naphthalene	1	1.02	0.01	4.91	0.076	1.00	5,500	5501	5508	0.022	0.044
119	MNS	Mineral Spirits	1	0.75	0.20	4.30	0.079	1.00	5,500	5522	5633	0.023	0.046
120	MPL	Morpholine	1	1.00	0.80	3.00	0.084	1.02	5,500	5588	5857	0.025	0.050
121	MRE	Myrcene	1	0.80	0.17	4.70	0.079	1.00	5,500	5519	5625	0.023	0.046
122	PTN	Naphtha: Petroleum	1	0.74	0.19	3.50	0.078	1.00	5,500	5521	5600	0.023	0.046
123	NSV	Naphtha: Solvent	1	0.87	0.20	3.50	0.078	1.00	5,500	5522	5607	0.023	0.046
124	NSS	Naphtha: Stoddard Solvent	1	0.76	0.20	4.30	0.079	1.00	5,500	5522	5633	0.023	0.046
125	NVM	Naphtha: VM&P	1	0.77	0.19	4.30	0.079	1.00	5,500	5521	5627	0.023	0.046
126	NAX	Nonane (all isomers)	1	0.72	0.27	4.40	0.080	1.01	5,500	5530	5684	0.024	0.047
127	NON	Nonene (all isomers)	2	0.73	0.35	4.30	0.082	1.01	5,500	5539	5733	0.024	0.048
128	NNS	Nonyl Alcohol (all isomers)	1	0.94	0.10	5.00	0.078	1.00	5,500	5511	5579	0.023	0.045
129	NNP	Nonyl Phenol	1	0.95	0.01	7.80	0.078	1.00	5,500	5501	5512	0.022	0.044
130	NPM	1-, 2-Nitropropane	1	0.99	1.05	3.06	0.086	1.02	5,500	5616	5979	0.026	0.052
131	OAX	Octane (all isomers)	1	0.70	0.79	3.90	0.087	1.02	5,500	5587	5969	0.026	0.052
132	OCX	Octanol (all isomers)	1	0.83	0.01	4.48	0.078	1.00	5,500	5501	5507	0.022	0.044
133	OTX	Octene (all isomers)	2	0.72	0.90	3.90	0.088	1.02	5,500	5589	6033	0.027	0.053
134	OTW	Oil, fuel: No. 2	1	0.88	0.56	8.00	0.095	1.01	5,500	5582	6198	0.028	0.056
135	OTD	Oil, fuel: No. 2-D	1	0.90	0.69	3.40	0.084	1.01	5,500	5578	5853	0.025	0.050
136	OFR	Oil, fuel: No. 4	1	0.90	0.15	3.40	0.078	1.00	5,500	5517	5577	0.023	0.045
137	OFV	Oil, fuel: No. 5	1	0.94	0.15	3.40	0.078	1.00	5,500	5517	5577	0.023	0.045
138	OSX	Oil, fuel: No. 6	1	0.95	0.15	3.40	0.078	1.00	5,500	5517	5577	0.023	0.045
139	OIL	Oil, misc: Crude	1	0.95	0.15	3.40	0.078	1.25	5,500	6875	8951	0.035	0.070
140	ODS	Oil, Misc: Diesel	1	0.90	0.69	3.40	0.084	1.01	5,500	5578	5854	0.025	0.050
141	OLB	Oil, Misc: Lubricating	1	0.90	0.16	1.00	0.076	1.00	5,500	5517	5517	0.022	0.044

Vapor Recovery Calculations

	CHRIS Code	Name	VCS Category	Liquid S.G.	*Vapor Press. @ 115 F (psia)	Vapor S.G.	Vapor-air Mixture Weight Density (lb/ft ³)	Vapor Growth Rate	Max. Loading Rate	Vapor Volumetric Flow Rate (bbl/hr)	Air Equivalent Volumetric Flow Rate (bbl/hr)	Pressure Drop to PV Valve in VCS (See Table 3) (psig)	Pressure Drop to Facility Connection in VCS (See Table 5) (psig)
142	ORL	Oil, Misc: Residual	1	1.02	0.15	1.00	0.076	1.00	5,500	5517	5517	0.022	0.044
143	OTB	Oil, Misc: Turbine	1	0.87	0.30	6.40	0.082	1.01	5,500	5533	5754	0.024	0.048
144	PTY	Pentane (all isomers)	5	0.63	27.00	2.50	0.350	1.54	5,500	8470	18150	0.241	0.479
145	PTE	Pentene (all isomers)	6	0.64	24.95	2.40	0.310	1.50	5,500	8245	16840	0.203	0.402
146	PIN	Pinene	1	0.88	0.38	4.70	0.083	1.01	5,500	5542	5777	0.024	0.048
147	PLB	Polybutene	1	0.91	0.01	1.00	0.076	1.00	5,500	5501	5501	0.022	0.044
148	PGC	Polypropylene Glycol	1	1.01	0.10	1.00	0.076	1.00	5,500	5511	5511	0.022	0.044
149	IAC	Propyl Acetate (iso-)	1	0.89	1.80	3.52	0.097	1.04	5,500	5898	6447	0.030	0.060
150	PAT	Propyl Acetate (n-)	1	0.00	1.85	3.52	0.098	1.04	5,500	5704	6472	0.031	0.061
151	IPA	Propyl Alcohol (iso-)	1	0.79	3.00	2.07	0.091	1.06	5,500	5830	6382	0.030	0.059
152	PAL	Propyl Alcohol (n-)	1	0.80	1.20	2.07	0.082	1.02	5,500	5832	5851	0.026	0.050
153	PBY	Propylbenzene (all isomers)	1	0.88	0.20	4.14	0.079	1.00	5,500	5522	5628	0.023	0.046
154	IPX	Iso-Propylcyclohexane	1	0.80	0.01	4.35	0.076	1.00	5,500	5501	5507	0.022	0.044
155	PPG	Propylene Glycol	1	1.04	0.01	2.82	0.076	1.00	5,500	5501	5504	0.022	0.044
156	PGN	Propylene Glycol Methyl Ether Acetate	1	0.92	0.70	3.11	0.083	1.01	5,500	5577	5826	0.025	0.049
157	PTT	Propylene Tetramer	1	0.29	0.02	1.00	0.076	1.00	5,500	5502	5502	0.022	0.044
158	SFL	Sulfolane	1	1.28	0.01	4.14	0.076	1.00	5,500	5501	5506	0.022	0.044
159	STY	Styrene	2	0.92	0.40	3.60	0.081	1.01	5,500	5544	5719	0.024	0.048
160	TTG	Tetraethylene Glycol	1	1.20	0.01	6.70	0.076	1.00	5,500	5501	5511	0.022	0.044
161	THN	Tetrahydronaphthalene	1	0.97	0.04	4.56	0.077	1.00	5,500	5504	5529	0.022	0.044
162	TOL	Toluene	1	0.87	1.50	3.14	0.091	1.03	5,500	5665	6201	0.028	0.056
163	TCN	1,2,3-Trichloropropane	3	1.39	0.15	5.60	0.079	1.00	5,500	5517	5633	0.023	0.046
164	TCP	Tricresyl Phosphate (less than 1% of ortho)	1	1.16	0.01	12.69	0.077	1.00	5,500	5501	5521	0.022	0.044
165	TEB	Triethylbenzene	1	0.88	0.02	5.60	0.077	1.00	5,500	5502	5518	0.022	0.044
166	TEN	Triethylamine	3	0.73	2.50	3.49	0.105	1.05	5,500	5775	6795	0.034	0.067
167	TEG	Triethylene Glycol	1	1.12	0.01	5.17	0.076	1.00	5,500	5501	5508	0.022	0.044
168	TPS	Triethyl Phosphate	1	1.07	0.03	6.28	0.077	1.00	5,500	5503	5530	0.022	0.044
169	TRE	Trimethylbenzene (all isomers)	1	0.89	0.14	4.20	0.078	1.00	5,500	5515	5588	0.023	0.045
170	TRP	Trixylenyl Phosphate	1	1.16	0.00	14.20	0.076	1.00	5,500	5500	5500	0.022	0.044
171	THF	Tetrahydrofuran	1	0.89	8.50	1.35	0.090	1.17	5,500	6435	7001	0.036	0.071
172	UDC	Undecene	1	0.75	0.05	5.32	0.077	1.00	5,500	5508	5542	0.022	0.045
173	UND	Undecyl Alcohol	1	0.84	0.01	5.94	0.076	1.00	5,500	5501	5509	0.022	0.044
174	VAM	Vinyl Acetate	2	0.94	5.80	2.97	0.130	1.12	5,500	6138	8015	0.047	0.093
175	XLX	Xylenes (ortho-, meta-, para-)	1	0.89	0.51	3.68	0.083	1.01	5,500	5558	5786	0.024	0.049

max = 0.350 1.54 max = 0.241 0.479

Notes: 1. The above data is sourced from the USCG CHRIS Manual (Ref. 7) & from various manufacturer's MSDS's.

Calculation of Maximum Liquid Transfer Rate as Imposed by the Capacity of the Cargo Tank Venting System

Table 2

Note: Darcy's equation will be used to estimate the pressure drop of the vapor-air mixture through the vent piping from the farthest tank in terms of equivalent pipe length (#1P) to the P-V valve. Equivalent length for this path is calculated using Crane's Technical Paper 410 (Ref 4) and Cameron Hydraulic Data handbook (Ref 9).

Calculate equivalent lengths of pipe:

a. Pipe run #1

Description:

8" Branch (Exp trunk to vapor stack)

Pipe size, nominal:

8" sch. 40 pipe

Pipe ID (inches):

7.98

Item	Description	Size (in)	Qty	Unit Equivalent Length (ft)	Total Equivalent Length (ft)
1	Entrance	8	1	23.3	23.3
2	Straight Pipe	8	1	54.0	54.0
3	Tee, branch	8	2	39.9	79.8
4	Tee, flow	8	1	13.3	13.3
5					
6					
	Sum (pipe run #1)				170.4

b. Pipe run #2

Description:

6" branch at P-V valve

Pipe size, nominal:

6" sch. 40 pipe

Pipe ID (inches):

6.07

Item	Description	Size (in)	Qty	Unit Equivalent Length (ft)	Total Equivalent Length (ft)
1	Straight Pipe	6	1	3.0	3.0
2	Reducer (8x6)	6	1	6.4	6.4
	Sum (pipe run #2)				9.4

Table 3 Calculation of Maximum Liquid Transfer Rate as Imposed by the Capacity of the Cargo Tank Venting System (Continued)

A. Calculate pressure drop using Darcy's equation:

Calculate pressure drop using Darcy's equation:												
		Pipe run #1					Pipe run #2					
		Description: 6" Branch (Exp trunk to vapor stack)					Description: 6" branch at P-V valve					
		Pipe ID: 7.68 (in)					Pipe ID: 6.07 (in)					
		Equiv. Pipe Length (table 2a): 170.4 (feet)					Equiv. Pipe Length (table 2b): 9.4 (feet)					
		Darcy friction factor: 0.014					Darcy friction factor: 0.015					
CHRIS Code	Name	Vapor-air Mixture Weight Density (from Table 1) (lb/ft ³)	Liquid Transfer Rate (bbl/hr)	Vapor Growth Rate	Vapor Volumetric Flow Rate (bbl/hr)	Mean Velocity (ft/s)	Pressure Drop (pipe run #1) (psig)	Vapor Volumetric Flow Rate (bbl/hr)	Mean Velocity (ft/s)	Pressure Drop (pipe run #2) (psig)	Pressure Drop (Total) (psig)	Air Equiv. Volumetric Flow Rate (bbl/hr)
1ACN	Acrylonitrile	0.095	5,500	1,100	6050	27.16	0.027	6050	46.95	0.006	0.033	5758
2ACT	Acetone	0.123	5,500	1,200	6500	29.53	0.042	6500	51.22	0.010	0.062	5393
3ACP	Acetophenone	0.085	5,500	1,012	5568	24.99	0.021	5568	43.19	0.005	0.025	5681
4AND	Adiponitrile	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
5AEC	Amyl acetate (all isomers)	0.075	5,500	1,007	5538	24.85	0.018	5538	42.96	0.004	0.022	5485
6AAI	Amyl Alcohol (iso-, n-, sec-, primary)	0.079	5,500	1,006	5533	24.84	0.019	5533	42.94	0.004	0.023	5537
7ATN	Acetonitrile	0.076	5,500	1,001	5503	24.71	0.018	5503	42.71	0.004	0.022	5505
8BAL	Benzyl Alcohol	0.077	5,500	1,002	5511	24.74	0.018	5511	42.77	0.004	0.023	5557
9BNZ	Benzene	0.114	5,500	1,250	6575	30.87	0.042	6575	53.35	0.010	0.062	5420
10BTX	Benzene, Toluene, Xylene mixtures (10% Benzene)	0.138	5,500	1,250	6575	30.87	0.051	6575	53.35	0.012	0.063	5252
11BAR	Butyl Acrylate (iso-, n-)	0.065	5,500	1,012	5568	24.99	0.021	5568	43.19	0.005	0.026	5608
12BAX	Butyl Acetate (all isomers)	0.085	5,500	1,012	5568	24.99	0.020	5568	43.19	0.006	0.025	5587
13BAL	Butyl Alcohol (iso-)	0.083	5,500	1,018	5569	25.14	0.020	5569	43.45	0.006	0.025	5543
14BAN	Butyl Alcohol (n-)	0.074	5,500	1,010	5565	24.94	0.018	5565	43.11	0.004	0.022	5477
15BAS	Butyl Alcohol (sec-)	0.086	5,500	1,026	5643	25.34	0.021	5643	43.79	0.006	0.028	5594
16BAT	Butyl Alcohol (tert-)	0.097	5,500	1,056	5808	26.98	0.028	5808	45.07	0.008	0.032	5582
17BPH	Butyl Benzyl Phthalate	0.077	5,500	1,000	5501	24.70	0.019	5501	42.68	0.004	0.022	5518
18BAD	iso-Butyraldehyde	0.131	5,500	1,156	6358	28.55	0.041	6358	49.34	0.010	0.051	5344
19BTR	n-Butyraldehyde	0.131	5,500	1,156	6358	28.55	0.041	6358	49.34	0.010	0.051	5344
20BUE	Butyl Toluene	0.076	5,500	1,002	5511	24.74	0.018	5511	42.77	0.004	0.023	5580
21OLS	Caprolactam Solutions	0.077	5,500	1,001	5506	24.72	0.018	5506	42.72	0.004	0.022	5530
22OCH	Cyclohexanone	0.078	5,500	1,004	5522	24.78	0.019	5522	42.85	0.004	0.023	5603
23CHA	Cyclohexylamine	0.083	5,500	1,012	5568	25.00	0.020	5568	43.21	0.005	0.025	5620
24CHX	Cyclohexane	0.116	5,500	1,090	5995	26.92	0.033	5995	45.82	0.008	0.040	7410
25CHN	Cyclohexanol	0.078	5,500	1,003	5517	24.77	0.018	5517	42.81	0.004	0.023	5579
26CPD	1,3-Cyclopentadiene dimer (molten)	0.080	5,500	1,005	5528	24.82	0.019	5528	42.90	0.004	0.024	5677
27CMP	p-Cymene	0.079	5,500	1,002	5512	24.75	0.018	5512	42.78	0.004	0.023	5579
28CRB	Chlorobenzene	0.087	5,500	1,016	5588	25.09	0.021	5588	43.36	0.005	0.028	5672
29CRS	Cresols	0.077	5,500	1,002	5509	24.73	0.018	5509	42.75	0.004	0.022	5546
30CUM	Cumene	0.085	5,500	1,012	5566	24.99	0.021	5566	43.18	0.005	0.025	5687
31IDA	Decaldehyde (iso-)	0.076	5,500	1,000	5501	24.70	0.018	5501	42.68	0.004	0.022	5508
32DAL	Decaldehyde (n-)	0.076	5,500	1,000	5500	24.70	0.018	5500	42.68	0.004	0.022	5500
33DCE	Decane	0.079	5,500	1,002	5513	24.75	0.019	5513	42.78	0.004	0.023	5559
34DAX	Decyl Alcohol (all isomers) (Decanol)	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
35DBZ	Decylbenzene (n-)	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5512
36DAA	Dioxetane Alcohol	0.079	5,500	1,002	5511	24.74	0.018	5511	42.77	0.004	0.023	5582
37DOH	1,1-Dichloroethane	0.188	5,500	1,158	6589	29.89	0.064	6589	51.13	0.015	0.079	10381
38DPA	Diethyl Phthalate (ortho-)	0.076	5,500	1,000	5500	24.70	0.018	5500	42.68	0.004	0.022	5506
39DEB	Diethylbenzene	0.078	5,500	1,002	5509	24.73	0.019	5509	42.75	0.004	0.023	5558
40DEG	Diethylene Glycol	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
41DEN	Diethylamine	0.083	5,500	1,020	5610	25.19	0.020	5610	43.64	0.005	0.025	5684
42DBL	Diisobutylene	0.103	5,500	1,040	5720	25.88	0.026	5720	44.39	0.006	0.032	6654
43DIK	Diisobutyl Ketone	0.079	5,500	1,003	5518	24.77	0.019	5518	42.82	0.004	0.023	5623
44DIP	Diisopropylamine	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5507
45DIX	Diisopropylbenzene (all isomers)	0.077	5,500	1,001	5503	24.71	0.018	5503	42.71	0.004	0.022	5627
46DTL	Dimethyl Phthalate	0.076	5,500	1,000	5500	24.70	0.018	5500	42.68	0.004	0.022	5500
47DOP	Diethyl Phthalate	0.076	5,500	1,000	5500	24.70	0.018	5500	42.68	0.004	0.022	5500
48DPN	Dipentene	0.078	5,500	1,002	5511	24.74	0.018	5511	42.77	0.004	0.023	5577
49DOL	Diphenyl	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
50DDO	Diphenyl, Diphenyl Ether Mixtures	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
51DMF	Dimethylformamide	0.078	5,500	1,006	5533	24.84	0.019	5533	42.94	0.004	0.023	5510
62DPE	Diphenyl Ether	0.078	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5509
53DPG	Dipropylene Glycol	0.077	5,500	1,001	5508	24.73	0.018	5508	42.74	0.004	0.023	5551
64DPX	1,1-, 1,2-, 1,3-Dichloropropane	0.162	5,500	1,128	6193	27.81	0.048	6193	48.06	0.011	0.060	9234
55DFF	Diisobutyl Flash Feed Stocks	0.102	5,500	1,048	5753	25.83	0.026	5753	44.65	0.006	0.032	6681
56DSR	Diisobutyl Straight Run	0.102	5,500	1,048	5753	25.83	0.026	5753	44.65	0.006	0.032	6681
57DOZ	Dodecane (all isomers)	0.077	5,500	1,000	5502	24.71	0.018	5502	42.70	0.004	0.022	5519
58DOB	Dodecylbenzene	0.240	5,500	1,250	6575	30.87	0.088	6575	53.35	0.021	0.109	12196
59EAC	Ethyl Acrylate	0.100	5,500	1,040	5720	25.88	0.026	5720	44.39	0.006	0.031	6543
60EAI	2-Ethylhexyl acrylate	0.077	5,500	1,000	5502	24.71	0.018	5502	42.70	0.004	0.022	5520
61EBA	2-Ethoxyethyl acetate	0.077	5,500	1,000	5503	24.71	0.018	5503	42.70	0.004	0.022	5517
62ETG	Ethoxy Triethyl (crude)	0.078	5,500	1,000	5500	24.70	0.018	5500	42.68	0.004	0.022	5500
63ETA	Ethyl Acetate	0.119	5,500	1,080	5895	28.92	0.033	5895	46.82	0.008	0.041	7504
64EAA	Ethyl Acetoacetate	0.079	5,500	1,004	5522	24.79	0.019	5522	42.85	0.004	0.023	5539
65EAL	Ethyl Alcohol (Ethanol)	0.086	5,500	1,070	5885	26.42	0.023	5885	45.87	0.005	0.029	6255
66ETB	Ethyl Benzene	0.083	5,500	1,012	5568	24.99	0.020	5568	43.19	0.005	0.025	5624
67EBT	Ethyl Butanol	0.078	5,500	1,002	5513	24.78	0.018	5513	42.78	0.004	0.023	5564
68EBE	Ethyl tert-butyl ether	0.078	5,500	1,004	5521	24.78	0.019	5521	42.85	0.004	0.023	5602
69EBR	Ethyl butanol	0.090	5,500	1,020	5610	25.19	0.022	5610	43.54	0.005	0.027	5767
70ECY	Ethyl Cyclohexane	0.083	5,500	1,010	5565	24.94	0.020	5565	43.11	0.005	0.025	5796
71EDC	Ethylene dichloride	0.122	5,500	1,080	5840	26.67	0.033	5840	46.10	0.008	0.041	7508
72EGL	Ethylene Glycol	0.078	5,500	1,000	5501	24.70	0.018	5501	42.68	0.004	0.022	5503
73EMA	Ethylene Glycol Butyl Ether Acetate	0.077	5,500	1,001	5508	24.72	0.019	5508	42.72	0.004	0.022	5544
74EGY	Ethylene Glycol Diacetate	0.076	5,500	1,000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508
75EPE	Ethylene Glycol Phenyl Ether	0.076	5,500	1,000	5501	24.70	0.018	5501	4			

Vapor Recovery Calculations

		Pipe run #1						Pipe run #2					
		Description: 8" Branch (Exp trunk to vapor stack)						Description: 8" branch at P-V valve					
		Pipe ID: 7.88 (in)						Pipe ID: 6.07 (in)					
		Equip. Pipe Length (table 2a): 170.4 (feet)						Equip. Pipe Length (table 2b): 9.4 (feet)					
		Darcy friction factor: 0.014						Darcy friction factor: 0.015					
CHRIS Code	Name	Vapor-air Mixture Weight Density (lbm/ft ³)	Liquid Transfer Rate (bbl/hr)	Vapor Growth Rate	Vapor Volumetric Flow Rate (bbl/hr)	Mean Velocity (ft/s)	Pressure Drop (pipe run #1) (psig)	Vapor Volumetric Flow Rate (bbl/hr)	Mean Velocity (ft/s)	Pressure Drop (pipe run #2) (psig)	Pressure Drop (Total) (psig)	Air Equiv. Volumetric Flow Rate (bbl/hr)	
100	BKG Hexylene Glycol	0.076	5,600	1.000	5501	24.70	0.018	5501	42.89	0.004	0.022	5501	
101	IPH Isophorene	0.076	5,600	1.000	5501	24.70	0.018	5501	42.89	0.004	0.022	5501	
102	JPF Jet Fuel; JP-4	0.124	5,600	1.068	5874	26.37	0.033	5874	45.58	0.008	0.041	7499	
103	JFV Jet Fuel JP-5 (Kerosene, heavy)	0.078	5,600	1.002	5511	24.74	0.018	5511	42.77	0.004	0.023	5562	
104	KRS Kerosene	0.079	5,600	1.003	5517	24.77	0.019	5517	42.81	0.004	0.023	5605	
106	MTT Methyl Acetate	0.122	5,600	1.122	6171	27.71	0.036	6171	47.89	0.008	0.045	7812	
106	MAL Methyl Alcohol (Methanol)	0.079	5,600	1.133	6229	27.97	0.024	6229	48.34	0.006	0.030	8365	
107	MAC Methylamyl Acetate	0.082	5,600	1.007	5536	24.86	0.020	5536	42.86	0.005	0.024	5766	
108	MAA Methylamyl Alcohol	0.081	5,600	1.009	5547	24.81	0.019	5547	43.06	0.005	0.024	5730	
109	MAK Methylamyl Ketone	0.078	5,600	1.001	5508	24.72	0.018	5508	42.72	0.004	0.022	5505	
110	MAM Methyl Amylate	0.115	5,600	1.082	5961	28.72	0.032	5961	46.18	0.007	0.039	7303	
111	MDE Methyl Tert-Butyl Ether (MTBE)	0.077	5,600	1.001	5504	24.72	0.018	5504	42.72	0.004	0.022	5519	
112	MBK Methyl Butyl Ketone	0.068	5,600	1.019	5807	25.17	0.021	5807	43.51	0.006	0.026	6012	
113	MBU Methyl Butyrate	0.091	5,600	1.025	5838	25.32	0.023	5838	43.76	0.006	0.028	6168	
114	MEK Methyl Ethyl Ketone	0.108	5,600	1.060	5995	26.92	0.030	5995	46.52	0.007	0.037	7136	
116	MRK Methyl Isobutyl Ketone	0.077	5,600	1.001	5507	24.73	0.018	5507	42.73	0.004	0.023	5546	
116	MRK Methyl Isobutyl Ketone	0.089	5,600	1.023	5827	25.28	0.022	5827	43.66	0.006	0.027	6086	
117	MMM Methyl methacrylate	0.069	5,600	1.040	5722	25.89	0.025	5722	44.41	0.006	0.031	6536	
118	MMA Methyl Methacrylate	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508	
119	MMS Mineral Spirits	0.079	5,600	1.004	5522	24.79	0.019	5522	42.86	0.004	0.023	5633	
120	MPL Morpholine	0.084	5,600	1.018	5588	25.09	0.020	5588	43.36	0.005	0.026	5857	
121	MRE Myrcene	0.079	5,600	1.003	5519	24.78	0.019	5519	42.83	0.004	0.023	5625	
122	PTN Naphtha: Petroleum	0.078	5,600	1.004	5521	24.79	0.019	5521	42.84	0.004	0.023	5600	
123	NBV Naphtha: Solvent	0.078	5,600	1.004	5522	24.79	0.019	5522	42.85	0.004	0.023	5607	
124	NBS Naphtha: Standard Solvent	0.078	5,600	1.004	5522	24.79	0.019	5522	42.85	0.004	0.023	5633	
126	NVM Naphtha: VMAP	0.078	5,600	1.004	5521	24.79	0.019	5521	42.84	0.004	0.023	5627	
126	NAX Nonane (all isomers)	0.080	5,600	1.006	5630	24.83	0.019	5630	42.91	0.004	0.024	5684	
127	NON Nonane (all isomers)	0.082	5,600	1.007	5639	24.87	0.020	5639	42.98	0.005	0.024	5733	
128	NON Nonane (all isomers)	0.078	5,600	1.002	5511	24.74	0.018	5511	42.77	0.004	0.023	5679	
128	NNP Nonyl Phenol	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.023	5612	
130	NPM 1, 2-Nitropropane	0.086	5,600	1.021	5816	25.21	0.021	5816	43.58	0.005	0.026	5979	
131	OAX Octane (all isomers)	0.087	5,600	1.016	5687	25.09	0.021	5687	43.36	0.005	0.026	5969	
132	OCX Octanol (all isomers)	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5507	
133	OTX Octene (all isomers)	0.088	5,600	1.018	5699	25.14	0.022	5699	43.45	0.005	0.027	6033	
134	OTW Oil, fuel, No. 2	0.095	5,600	1.011	5662	24.97	0.023	5662	43.16	0.005	0.028	6188	
136	OTD Oil, fuel, No. 2-D	0.084	5,600	1.014	5676	25.04	0.020	5676	43.27	0.006	0.026	5953	
136	OFR Oil, fuel, No. 4	0.078	5,600	1.003	5517	24.77	0.018	5517	42.81	0.004	0.023	5677	
137	ORV Oil, fuel, No. 5	0.078	5,600	1.003	5517	24.77	0.018	5517	42.81	0.004	0.023	5677	
138	OSX Oil, fuel, No. 6	0.078	5,600	1.003	5517	24.77	0.018	5517	42.81	0.004	0.023	5577	
139	OIL Oil, misc: Crude	0.078	5,600	1.250	6875	30.87	0.029	6875	53.35	0.007	0.035	8961	
140	ODS Oil, Misc: Diesel	0.084	5,600	1.014	5676	25.04	0.020	5676	43.27	0.006	0.026	5954	
141	OLB Oil, Misc: Lubricating	0.076	5,600	1.003	5517	24.77	0.018	5517	42.81	0.004	0.022	5517	
142	ORL Oil, Misc: Residual	0.078	5,600	1.003	5517	24.77	0.018	5517	42.81	0.004	0.022	5517	
143	OTB Oil, Misc: Turbine	0.082	5,600	1.006	5633	24.84	0.020	5633	42.94	0.006	0.024	5764	
144	PTY Pentane (all isomers)	0.350	5,600	1.640	8470	38.03	0.196	8470	65.73	0.045	0.241	18160	
145	PTE Pentane (all isomers)	0.310	5,600	1.489	8245	37.02	0.184	8245	63.98	0.038	0.203	16849	
146	PNH Phenane	0.083	5,600	1.008	5642	24.88	0.020	5642	43.01	0.005	0.024	5777	
147	PLB Polybutene	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5501	
148	PGC Polypropylene Glycol	0.076	5,600	1.002	5511	24.74	0.018	5511	42.77	0.004	0.022	5511	
149	IAC Propyl Acetate (iso-)	0.097	5,600	1.036	5699	25.56	0.025	5699	44.22	0.008	0.030	6447	
150	PAT Propyl Acetate (n-)	0.098	5,600	1.037	5704	25.61	0.025	5704	44.26	0.008	0.031	6472	
151	IPA Propyl Alcohol (iso-)	0.091	5,600	1.060	5830	26.18	0.024	5830	45.24	0.008	0.030	6382	
152	PAL Propyl Alcohol (n-)	0.062	5,600	1.024	5632	25.29	0.020	5632	43.71	0.005	0.025	5951	
153	PBY Propylbenzene (all isomers)	0.079	5,600	1.004	5522	24.78	0.019	5522	42.85	0.004	0.023	5628	
154	IPX Iso-Propylaldehyde	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.023	5507	
155	PPG Propylene Glycol	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.023	5504	
156	PGN Propylene Glycol Methyl Ether Acetate	0.083	5,600	1.014	5577	25.04	0.020	5577	43.28	0.005	0.025	5826	
157	PTT Propylene Tetramer	0.076	5,600	1.000	5502	24.71	0.018	5502	42.70	0.004	0.022	5502	
158	SFL Sulfolane	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5506	
158	STY Styrene	0.081	5,600	1.006	5644	24.89	0.019	5644	43.02	0.005	0.024	5719	
160	TTG Tetraethyleneglycol	0.076	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5511	
161	THN Tetrahydronaphthalene	0.077	5,600	1.001	5504	24.72	0.018	5504	42.72	0.004	0.022	5529	
162	TOL Toluene	0.091	5,600	1.030	5686	25.44	0.023	5686	43.96	0.005	0.026	6201	
163	TGN 1,2,3-Trichloropropene	0.079	5,600	1.003	5517	24.77	0.019	5517	42.81	0.004	0.023	5633	
164	TCP Tricresyl Phosphate (less than 1% of ortho isomer)	0.077	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5501	
165	TEB Triethylbenzene	0.077	5,600	1.000	5502	24.71	0.018	5502	42.70	0.004	0.022	5518	
166	TEN Triethylamine	0.106	5,600	1.050	5775	26.93	0.027	5775	44.82	0.008	0.034	8795	
167	TED Triethylene Glycol	0.078	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5508	
168	TPE Triethyl Phosphate	0.077	5,600	1.001	5503	24.71	0.018	5503	42.71	0.004	0.022	5530	
169	TRE Triethylbenzene (all isomers)	0.078	5,600	1.003	5515	24.78	0.019	5515	42.89	0.004	0.023	5556	
170	TRP Triphenyl Phosphate	0.076	5,600	1.000	5500	24.70	0.018	5500	42.68	0.004	0.022	5500	
171	THF Tetrahydrofuran	0.080	5,600	1.170	6435	28.89	0.029	6435	49.94	0.007	0.038	7001	
172	UDC Undecene	0.077	5,600	1.001	5506	24.72	0.018	5506	42.72	0.004	0.022	5542	
173	UND Undecyl Alcohol	0.078	5,600	1.000	5501	24.70	0.018	5501	42.69	0.004	0.022	5509	
174	VAM Vinyl Acetate	0.130	5,600	1.115	6138	27.58	0.038	6138	47.63	0.009	0.047	8015	
176	XLX Xylenes (ortho-, meta-, para-)	0.083	5,600	1.010	5556	24.85	0.020	5556	43.12	0.005	0.024	5786	
max = 0.241												18160	

Greatest pressure drop to P-V valve:

0.24 (psig)

Pentane (all isomers)

max = 0.241 18160

High velocity P-V valve pressure setting:

1.50 (psig)

Back pressure imposed by P-V valve @ highest flow rate

0.79 (psig)

Total back pressure imposed on cargo tank by venting

1.03 (psig)

Max design working pressure of tanks:

3.00 (psig)

Conclusion: At the maximum cargo loading rate, the total back pressure imposed by the tank venting system does not exceed the maximum design working pressure of the tanks.

B. Check vacuum relief valve capacity at maximum discharge rate.

Opening vacuum setting for PV Valve:

0.5 (psig)

Maximum discharge rate (total):

4300 (bbl/hr)

Corresponding vacuum at max discharge rate: (see

attached PV valve flow capacity curve)

0.51 (psig)

Table 4 **Calculation of the Maximum Liquid Transfer Rate as Imposed by the pressure drop between the most remote tank and the facility vapor connection (Ref: 46 CFR 39.30-1(d)(3):**

Note: Darcy's equation will be used to estimate the pressure drop of the vapor-air mixture through the vent piping from the farthest tank in terms of equivalent pipe length (#1P) to the facility connection. Equivalent length for this path is calculated using Crane's Technical Paper 410 (Ref. 4) and Cameron Hydraulic Data handbook (Ref. 9)

Calculate equivalent lengths of pipe:

a. Pipe run #1

Description: 8" Piping
 Pipe size, nominal: 8" sch. 40 pipe
 Pipe ID (inches): 7.98

Item	Description	Size (in)	Qty	Unit Equivalent Length (ft)	Total Equivalent Length (ft)
1	Entrance	8	1	23.3	23.3
2	Straight Pipe	8	1	195.0	195.0
3	Tee, branch	8	2	39.9	79.8
4	Tee, run	8	3	13.3	39.9
5	Elbow, 45 deg.	8	2	10.2	20.4
6	Valve, Gate	8	1	8.6	8.6
7	Hose	8	1	50.0	50.0
	Sum (pipe run #1)				417.0

Table 6

Calculation of the Maximum Liquid Transfer Rate as Imposed by the pressure drop between the most remote tank and the facility vapor connection (Ref: 48 CFR 39.38-1(d)(3) (continued):

1. Calculate pressure drop using Darcy's equation:

Pipe run #1
Description: 8" Piping
Pipe ID: 7.98 (in)
Equivalent Length of Pipe (from Table 4a): 417.0 (feet)
Darcy friction factor: 0.014

	CHRS Code	Name	Vapor-air Mixture Weight Density (from Table 1) (lb/ft ³)	Liquid Transfer Rate (lb/hr)	Vapor Growth Rate	Vapor Volumetric Flow Rate (bbl/hr)	Mean Velocity (ft/s)	Pressure Drop (pipe run #1) (psig)	Pressure Drop (Total) (psig)	Air Equivalent Volumetric Flow Rate (bbl/hr)
1	ACN	Acrylonitrile	0.095	5,500	1.100	6050	27.16	0.068	0.068	8756
2	ACT	Acetone	0.123	5,500	1.200	6600	29.83	0.102	0.102	8363
3	ACP	Acetophenone	0.085	5,500	1.012	5586	24.90	0.050	0.050	5881
4	AND	Adiponitrile	0.078	5,500	1.008	5501	24.70	0.044	0.044	5606
5	AEG	Amyl acetate (all isomers)	0.078	5,500	1.007	5536	24.88	0.044	0.044	5488
6	AAL	Amyl Alcohol (iso-, n-, sec-, primary)	0.078	5,500	1.008	5533	24.84	0.048	0.048	5637
7	ATN	Acetonitrile	0.078	5,500	1.001	5503	24.71	0.044	0.044	5605
8	BAL	Benzyl Alcohol	0.077	5,500	1.002	5511	24.74	0.045	0.048	5557
9	BNZ	Benzene	0.114	5,500	1.250	6875	30.87	0.103	0.103	8420
10	BTX	Benzene, Toluene, Xylene mixtures (10% Benzene)	0.138	5,500	1.250	6875	30.87	0.124	0.124	8252
11	BAR	Butyl Acrylate (iso-, n-)	0.086	5,500	1.012	5588	24.99	0.051	0.051	6008
12	BAX	Butyl Acetate (all isomers)	0.085	5,500	1.012	5586	24.99	0.050	0.050	5867
13	IAL	Butyl Alcohol (iso-)	0.083	5,500	1.018	5598	25.14	0.050	0.050	6843
14	BAN	Butyl Alcohol (n-)	0.074	5,500	1.010	5555	24.94	0.044	0.044	5477
15	BAS	Butyl Alcohol (sec-)	0.086	5,500	1.026	5843	26.34	0.052	0.052	5994
16	BAT	Butyl Alcohol (tert-)	0.097	5,500	1.056	6008	26.08	0.063	0.063	6562
17	BPH	Butyl Benzyl Phthalate	0.077	5,500	1.009	5601	24.70	0.044	0.044	5518
18	BAD	iso-Butyraldehyde	0.131	5,500	1.198	6358	28.55	0.101	0.101	8344
19	BTR	n-Butyraldehyde	0.131	5,500	1.166	6358	28.55	0.101	0.101	8344
20	BUE	Butyl Toluene	0.078	5,500	1.002	5511	24.74	0.045	0.046	5590
21	CLS	Caprolactam Solutions	0.077	5,500	1.001	5506	24.72	0.044	0.044	5530
22	COH	Cyclohexanone	0.078	5,500	1.004	5522	24.79	0.046	0.046	5603
23	CHA	Cyclohexanamine	0.083	5,500	1.012	5588	25.00	0.049	0.049	5820
24	CHX	Cyclohexane	0.118	5,500	1.260	6995	26.92	0.080	0.080	7410
25	CHN	Cyclohexanone	0.078	5,500	1.003	5517	24.77	0.045	0.046	5578
26	CPD	1,3-Cyclopentadiene dimer (molten)	0.080	5,500	1.005	5528	24.82	0.047	0.047	5677
27	CMP	n-Cymene	0.078	5,500	1.002	5512	24.75	0.045	0.045	5579
28	CRB	Chlorobenzene	0.087	5,500	1.018	5688	25.99	0.052	0.052	5972
29	CRS	Cresole	0.077	5,500	1.002	5509	24.73	0.045	0.046	5546
48	DTL	Dimethyl Phthalate	0.078	5,500	1.000	5500	24.70	0.044	0.044	5500
47	DOP	Diethyl Phthalate	0.076	5,500	1.000	5500	24.70	0.044	0.044	5500
46	DPN	Dipentene	0.078	5,500	1.002	5511	24.74	0.046	0.046	5677
49	DIL	Diphenyl	0.076	5,500	1.000	5501	24.70	0.044	0.044	5598
60	DDO	Diphenyl, Diphenyl Ether Mixtures	0.076	5,500	1.000	5501	24.70	0.044	0.044	5599
51	DMF	Dimethylformamide	0.078	5,500	1.008	5533	24.84	0.048	0.048	5610
62	DPE	Diphenyl Ether	0.076	5,500	1.000	5501	24.70	0.044	0.044	5509
53	DPG	Dipropylene Glycol	0.077	5,500	1.001	5509	24.73	0.045	0.045	5551
54	DPX	1,1-, 1,2-, 1,3-Dichloropropane	0.162	5,500	1.126	6193	27.81	0.119	0.119	9034
55	DFP	Distillates Flashed Feed Stocks	0.102	5,500	1.046	5753	25.83	0.064	0.064	6661
56	DSR	Distillates Straight Run	0.102	5,500	1.046	5753	25.83	0.064	0.064	6661
57	DOZ	Dodecane (all isomers)	0.077	5,500	1.000	5502	24.71	0.044	0.044	5519
68	DOB	Dodecylbenzene	0.240	5,500	1.250	6875	30.87	0.216	0.216	12198
58	EAC	Ethyl Acrylate	0.100	5,500	1.040	5720	25.68	0.062	0.062	6843
60	EAL	2-Ethylhexyl acetate	0.077	5,500	1.000	5502	24.71	0.044	0.044	5520
61	EFA	2-Ethylhexyl acetate	0.077	5,500	1.000	5503	24.71	0.044	0.044	5517
62	ETO	Ethoxy Triglycol (oxide)	0.078	5,500	1.000	5500	24.70	0.044	0.044	5500
63	ETA	Ethyl Acetate	0.119	5,500	1.090	5985	26.92	0.082	0.082	7504
64	EAA	Ethyl Acetoacetate	0.079	5,500	1.004	5522	24.79	0.046	0.046	5639
65	EAL	Ethyl Alcohol (Ethanol)	0.086	5,500	1.070	5885	26.42	0.057	0.057	6256
66	ETB	Ethyl Benzene	0.083	5,500	1.012	5566	24.99	0.049	0.049	5824
67	EBT	Ethyl Butanol	0.078	5,500	1.002	5513	24.75	0.045	0.045	5684
68	EBE	Ethyl tert-butyl ether	0.078	5,500	1.004	5521	24.79	0.048	0.048	5602
69	EBR	Ethyl butyrate	0.090	5,500	1.020	5610	25.19	0.054	0.054	6107
70	ECY	Ethyl Cyclohexane	0.083	5,500	1.010	5555	24.94	0.049	0.049	5796
71	EDC	Ethylene dichloride	0.122	5,500	1.080	5940	26.87	0.082	0.082	7508
72	EGL	Ethylene Glycol	0.076	5,500	1.000	5501	24.70	0.044	0.044	5503
73	EMA	Ethylene Glycol Butyl Ether Acetate	0.077	5,500	1.001	5506	24.72	0.045	0.045	5544
74	EGL	Ethylene Glycol Octoate	0.076	5,500	1.000	5501	24.70	0.044	0.044	5508
75	EPE	Ethylene Glycol Phenyl Ether	0.076	5,500	1.000	5501	24.70	0.044	0.044	5508
76	EBP	Ethyl 3-ethoxypropionate	0.076	5,500	1.000	5501	24.70	0.044	0.044	5510
77	EHX	2-Ethylhexanol	0.076	5,500	1.000	5502	24.71	0.044	0.044	5514
78	EPR	Ethyl Propionate	0.086	5,500	1.070	5885	26.42	0.057	0.057	6255
79	ETE	Ethyl Toluene	0.080	5,500	1.005	5531	24.83	0.047	0.047	5679
80	FAM	Formamide	0.076	5,500	1.002	5511	24.74	0.044	0.044	5520
81	FMS	Formaldehyde Solution	0.076	5,500	1.003	5517	24.77	0.044	0.044	5517
82	FAL	Formyl Alcohol	0.077	5,500	1.001	5506	24.72	0.044	0.044	5528
83	FFA	Formic Acid	0.079	5,500	1.003	5517	24.77	0.045	0.045	5675
84	GAH	Gasoline Blending Stocks: Alkylates	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
85	GRF	Gasoline Blending Stocks: Reformates	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
86	GAT	Gasolines: Automotive	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
87	GAV	Gasolines: Aviation	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
88	GCS	Gasolines: Casinghead	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
89	GPL	Gasolines: Polymer	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
90	GSR	Gasolines: Straight Run	0.217	5,500	1.250	6875	30.87	0.196	0.196	11610
91	GCR	Glycoline	0.078	5,500	1.000	5500	24.70	0.044	0.044	5500
92	HMX	Heptane (all isomers)	0.105	5,500	1.050	5775	25.93	0.067	0.067	6779
93	HEP	Heptanoic Acid	0.078	5,500	1.000	5501	24.70	0.044	0.044	5507
94	HIX	Heptanol (all isomers)	0.077	5,500	1.001	5504	24.72	0.044	0.044	5525
95	HPT	Heptane (all isomers)	0.100	5,500	1.058	5819	25.13	0.070	0.070	6968
96	HXS	Hexane (all isomers)	0.142	5,500	1.140	6270	25.15	0.106	0.106	8661
97	HKO	Hexanoic Acid	0.076	5,500	1.000	5501	24.70	0.044	0.044	5506
98	HXN	Hexanol	0.083	5,500	1.020	5610	25.19	0.053	0.053	6031
99	HEX	Hexene (all isomers)	0.148	5,500	1.160	6380	28.65	0.115	0.115	8852
100	HXG	Hexylene Glycol	0.078	5,500	1.000	5501	24.70	0.044	0.044	5501
101	JPH	Isophorene	0.076	5,500	1.000	5501	24.70	0.044	0.044	5507
102	JPF	Jet Fuels: JP-4	0.124	5,500	1.068	5874	26.37	0.082	0.082	7498
103	JPV	Jet Fuels: JP-5 (Kerosene, heavy)	0.078	5,500	1.002	5511	24.74	0.045	0.045	5562
104	KRS	Kerosene	0.079	5,500	1.003	5517	24.77	0.048	0.048	5605
105	MIT	Methyl Acetate	0.122	5,500	1.122	6171	27.71	0.089	0.089	7812
106	MAL	Methyl Alcohol (Methanol)	0.079	5,500	1.133	6229	27.97	0.059	0.059	8355
107	MAG	Methylamyl Acetate	0.082	5,500	1.007	5536	24.88	0.048	0.048	5758
108	MAA	Methylamyl Alcohol	0.081	5,500	1.009	5547	24.91	0.048	0.048	5730
109	MAK	Methylamyl Ketone	0.076	5,500	1.001	5506	24.72	0.044	0.044	5506
110	MAM	Methyl Acrylate	0.115	5,500	1.082	5951	28.72	0.078	0.078	7303

Pipe run #1			
Description:	8" Piping		
Pipe ID:	7.98 (in)		
Equivalent Length of Pipe (from Table 4a):	417.0 (feet)		
Darcy friction factor:	0.014		

111	MBE	Methyl Tert-Butyl Ether (MTBE)	0.0771	5,500	1.001	5504	24.72	0.044	0.044	5519
112	MBK	Methyl Butyl Ketone	0.088	5,500	1.019	5607	25.17	0.053	0.053	5612
113	MBU	Methyl Butyrate	0.091	5,500	1.025	5639	25.32	0.055	0.055	5668
114	MEK	Methyl Ethyl Ketone	0.108	5,500	1.090	5695	26.52	0.074	0.074	5735
115	MEK	Methyl Propyl Ketone	0.077	5,500	1.001	5507	24.73	0.045	0.045	5548
116	MEK	Methyl Isobutyl Ketone	0.069	5,500	1.023	5627	25.26	0.054	0.054	5696
117	MMM	Methyl methacrylate	0.099	5,500	1.040	5722	26.69	0.062	0.062	5838
118	MNA	Methyl Naphthalene	0.076	5,500	1.000	5501	24.70	0.044	0.044	5508
119	MNS	Mineral Spirits	0.079	5,500	1.004	5522	24.79	0.046	0.046	5533
120	MPL	Morpholine	0.064	5,500	1.018	5588	25.09	0.050	0.050	5667
121	MRE	Myrcene	0.079	5,500	1.003	5519	24.78	0.046	0.046	5526
122	PTN	Naphtha: Petroleum	0.078	5,500	1.004	5521	24.79	0.046	0.046	5500
123	NSV	Naphtha: Solvent	0.078	5,500	1.004	5522	24.79	0.046	0.046	5507
124	NBS	Naphtha: Standard Solvent	0.079	5,500	1.004	5522	24.79	0.046	0.046	5533
125	NVM	Naphtha: VM&P	0.079	5,500	1.004	5521	24.78	0.046	0.046	5527
126	NAX	Nonane (all isomers)	0.060	5,500	1.005	5530	24.83	0.047	0.047	5584
127	NON	Nonane (all isomers)	0.062	5,500	1.007	5539	24.87	0.048	0.048	5733
128	NNS	Nonyl Alcohol (all isomers)	0.078	5,500	1.002	5511	24.74	0.045	0.045	5579
129	NBP	Nonyl Phenol	0.078	5,500	1.000	5501	24.70	0.044	0.044	5512
130	NPM	n-Propylamine	0.086	5,500	1.021	5616	25.21	0.052	0.052	5979
131	OAX	Octane (all isomers)	0.067	5,500	1.016	5587	25.09	0.052	0.052	5969
132	OCX	Octanol (all isomers)	0.078	5,500	1.000	5501	24.70	0.044	0.044	5507
133	OTX	Octene (all isomers)	0.088	5,500	1.018	5599	25.14	0.053	0.053	6003
134	OTW	Oil, Fuel, No. 2	0.095	5,500	1.011	5582	24.97	0.056	0.056	6198
135	OTD	Oil, Fuel, No. 2-D	0.084	5,500	1.014	5576	25.04	0.050	0.050	5853
136	OFR	Oil, Fuel, No. 4	0.078	5,500	1.003	5517	24.77	0.045	0.045	5577
137	OFV	Oil, Fuel, No. 5	0.078	5,500	1.003	5517	24.77	0.045	0.045	5577
138	OSX	Oil, Fuel, No. 6	0.078	5,500	1.003	5517	24.77	0.045	0.045	5577
139	OIL	Oil, Misc: Crude	0.078	5,500	1.250	5875	30.87	0.070	0.070	6861
140	ODB	Oil, Misc: Diesel	0.084	5,500	1.014	5578	25.04	0.050	0.050	6864
141	OLB	Oil, Misc: Lubricating	0.078	5,500	1.003	5517	24.77	0.044	0.044	5517
142	ORL	Oil, Misc: Residual	0.078	5,500	1.003	5517	24.77	0.044	0.044	5517
143	OTB	Oil, Misc: Turbine	0.062	5,500	1.008	5533	24.84	0.048	0.048	5754
144	PTY	Pentane (all isomers)	0.350	5,500	1.540	6470	38.03	0.479	0.479	18150
145	PTE	Pentene (all isomers)	0.310	5,500	1.499	6245	37.02	0.462	0.462	16640
146	PN	Pinene	0.093	5,500	1.008	5542	24.86	0.048	0.048	5777
147	PAB	Polylutene	0.076	5,500	1.000	5501	24.70	0.044	0.044	5501
148	PBG	Propylene Glycol	0.076	5,500	1.002	5511	24.74	0.044	0.044	5511
149	IAG	Propyl Acetate (iso-)	0.087	5,500	1.038	5688	25.58	0.060	0.060	6447
150	PAT	Propyl Acetate (n-)	0.098	5,500	1.037	5704	25.61	0.061	0.061	6473
151	IPA	Propyl Alcohol (iso-)	0.091	5,500	1.060	5630	26.18	0.059	0.059	6382
152	PAL	Propyl Alcohol (n-)	0.082	5,500	1.024	5632	25.29	0.050	0.050	6351
153	PEY	Propylbenzene (all isomers)	0.076	5,500	1.004	5522	24.79	0.046	0.046	5528
154	PX	iso-Propylcyclohexane	0.076	5,500	1.000	5501	24.70	0.044	0.044	5507
155	PPG	Propylene Glycol	0.076	5,500	1.000	5501	24.70	0.044	0.044	5504
156	PGN	Propylene Glycol Methyl Ether Acetate	0.063	5,500	1.014	5577	25.04	0.049	0.049	5628
157	PTT	Propylene Tetramer	0.076	5,500	1.000	5502	24.71	0.044	0.044	5502
158	SFL	Sulfolane	0.076	5,500	1.000	5501	24.70	0.044	0.044	5506
159	STY	Styrene	0.061	5,500	1.006	5544	24.86	0.045	0.045	5719
160	TTG	Tetramethylene Glycol	0.078	5,500	1.000	5501	24.70	0.044	0.044	5511
161	THN	Tetrahydronaphthalene	0.077	5,500	1.001	5504	24.72	0.044	0.044	5528
162	TOL	Toluene	0.091	5,500	1.030	5685	25.44	0.056	0.056	6201
163	TON	1,2,3-Trichloropropane	0.079	5,500	1.003	5517	24.77	0.046	0.046	5633
164	TOP	Tricresyl Phosphate (less than 1% of ortho isomer)	0.077	5,500	1.000	5501	24.70	0.044	0.044	5521
165	TEB	Triethylbenzene	0.077	5,500	1.000	5502	24.71	0.044	0.044	5518
166	TEN	Triethylamine	0.106	5,500	1.066	5775	25.93	0.067	0.067	6795
167	TEG	Triethylene Glycol	0.076	5,500	1.000	5501	24.70	0.044	0.044	5508
168	TPS	Triethyl Phosphate	0.077	5,500	1.001	5503	24.71	0.044	0.044	5535
169	TRE	Trimethylbenzene (all isomers)	0.076	5,500	1.003	5515	24.76	0.045	0.045	5568
170	TRP	Triethyl Phosphate	0.078	5,500	1.000	5500	24.70	0.044	0.044	5500
171	THF	Tetrahydrofuran	0.090	5,500	1.170	5435	28.89	0.071	0.071	7001
172	UDC	Undecane	0.077	5,500	1.001	5506	24.72	0.045	0.045	5542
173	UND	Undecyl Alcohol	0.078	5,500	1.000	5501	24.70	0.044	0.044	5509
174	VAM	Vinyl Acetate	0.130	5,500	1.116	5136	27.56	0.093	0.093	8015
175	XLX	Xylenes (ortho-, meta-, para-)	0.083	5,500	1.010	5556	24.95	0.049	0.049	5786

2. Compare pressure drop to P-V valve pressure settings:

a. High-velocity P-V Valve pressure setting:

1.50 (psig)

b. Cargo tank P-V Valve pressure setting:

1.50 (psig)

c. 80% of lowest P-V Valve Pressure Setting:

1.20 (psig)

d. Highest Pressure Drop from Tank to Facility Connection:

0.48 (psig)

e. Max Allowable Back Pressure at Facility Connection:

0.72 (psig)

for

Pentane (all isomers)


Conclusion:

For the cargo with the highest pressure drop (Pentane), the pressure drop is 0.48 psig. This, when added to the back pressure at the facility vapor connection must not exceed 80% of the pressure setting of any P-V valve in the cargo tank venting system. Therefore, the maximum allowable back pressure at the shore facility must not exceed 0.72 psig when loading with Pentane at the maximum liquid transfer rate (5,500 bbl/hr).

Graphs as required by 46 CFR 39.30-1(b)(3)


Curve of Loading Rate vs. Pressure Drop

Conrad Hull C-994 THRU C-997

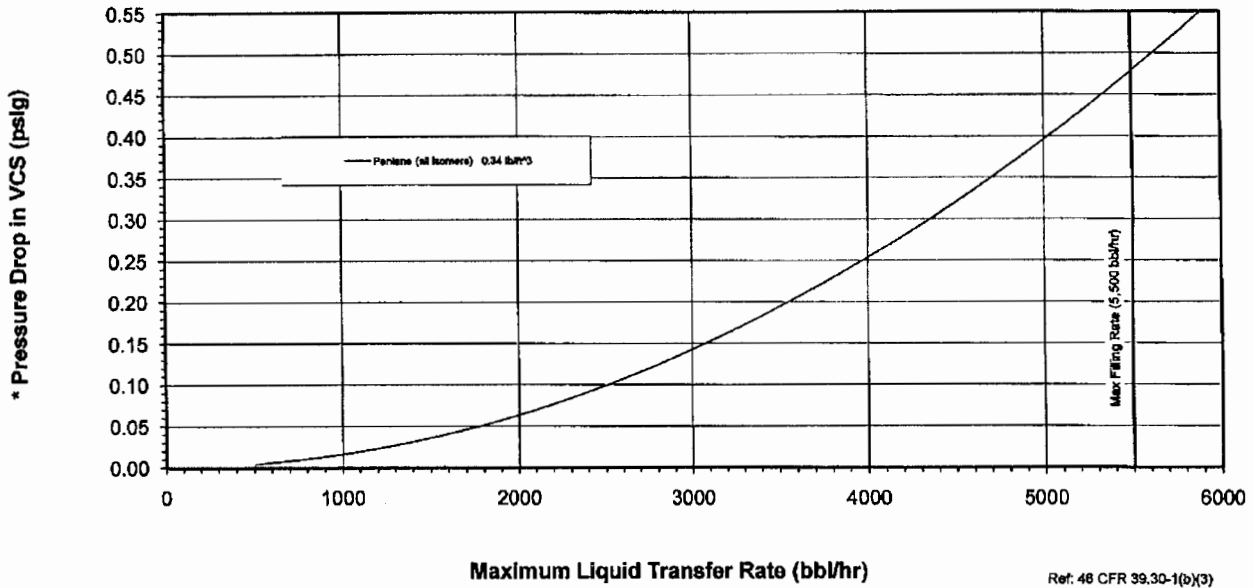


Curve of Allowable Back Pressure at Facility Connection

Conrad Hull C-994 THRU C-997

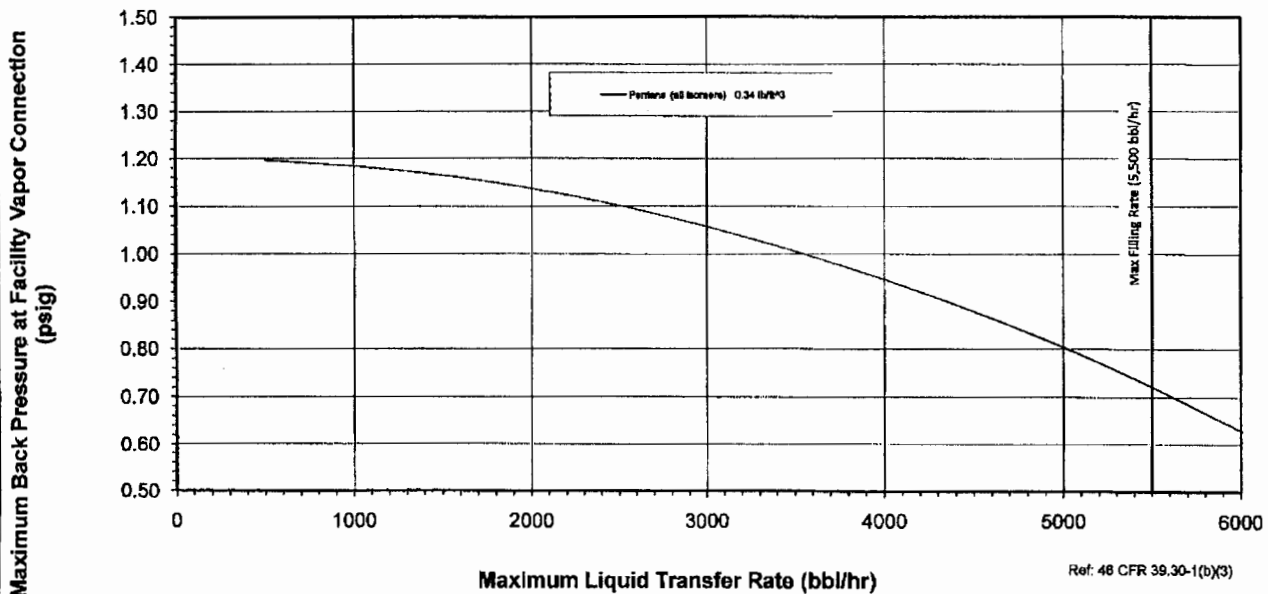


Conrad C-994 THRU C-997
Calculation of Overfill Alarm Set Point
(Cargo Tank No. 1 P/S)

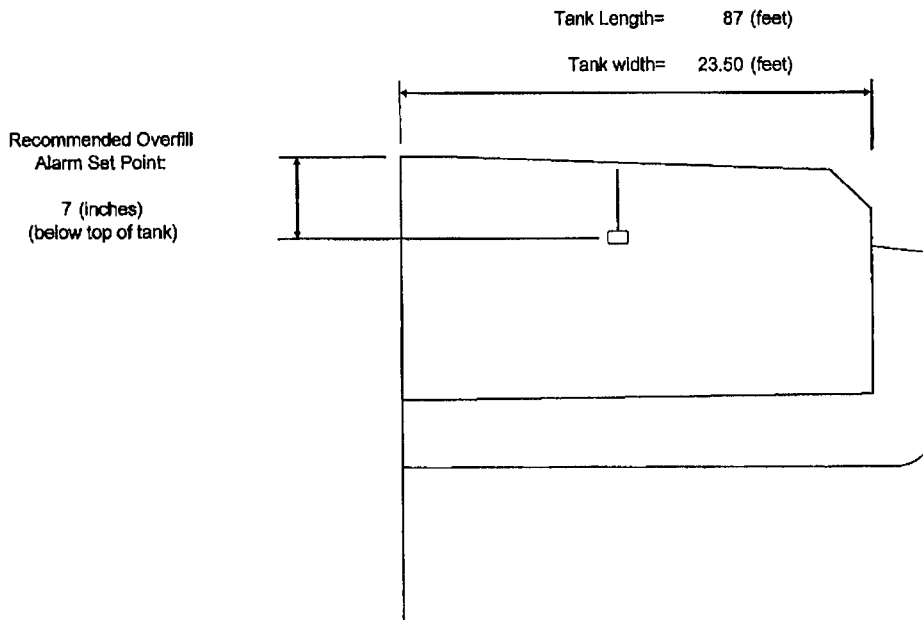

Maximum (per tank) Cargo Loading Rate	=	5,500 (bbl/hr)	
	=	91.67 (bbl/min)	
Minimum allowable time from alarm to overflow	=	60 (sec)	
Required volume above overfill alarm set point	=	91.7 (bbl)	
Capacity to deck at CL (17'-8" ABL) =		5278 BBL	
Capacity to 7" below dk at CL (17'-1" ABL) =		5168 BBL	
Volume above alarm =		110.1 BBL	RESULT OK
**Recommended set point of	=	7 (inches)	[Based on 98% full tank]

**Note: Or 98.5%, whichever is lower (to comply with 33CFR155.775)	
Capacity at 98.5% =	5199 BBL
Dist from TT at CL =	0.49 ft


Conrad C-994 THRU C-997
Calculation of Overfill Alarm Set Point
(Cargo Tank No. 2 P/S)

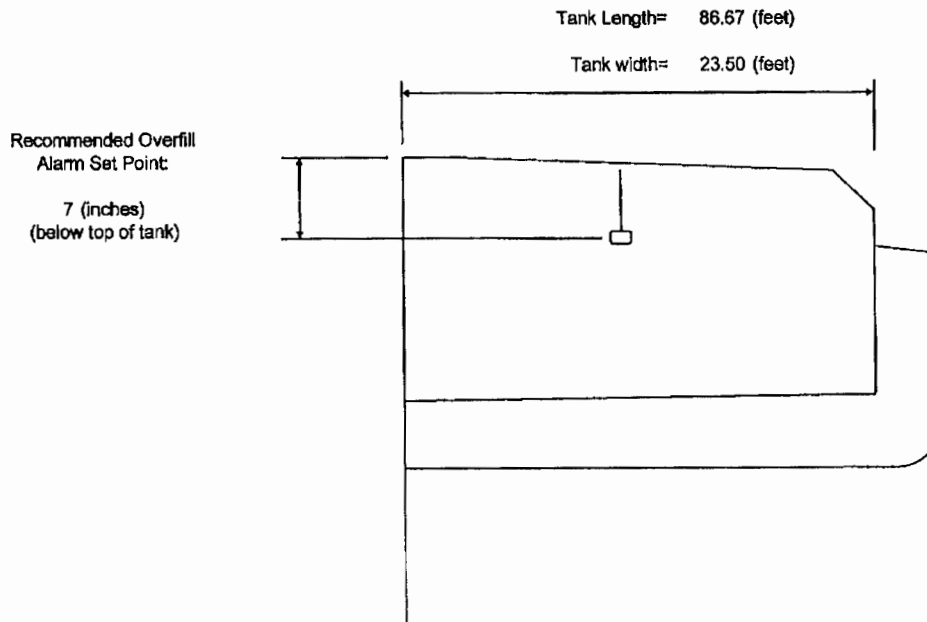

Maximum (per tank) Cargo Loading Rate	=	5,500 (bbl/hr)	
	=	91.67 (bbl/min)	
Minimum allowable time from alarm to overflow	=	60 (sec)	
Required volume above overfill alarm set point	=	91.7 (bbl)	
Capacity to deck at CL (17'-8" ABL) =		5258 BBL	
Capacity to 7" below dk at CL (17'-1" ABL) =		5149 BBL	
Volume above alarm =		109.6 BBL	RESULT OK
**Recommended set point of	=	7 (inches)	[Based on 98% full tank]

**Note: Or 98.5%, whichever is lower (to comply with 33CFR155.775)	
Capacity at 98.5% =	5179 BBL
Dist from TT at CL =	0.49 ft.

Conrad C-994 THRU C-997
Calculation of Overfill Alarm Set Point
(Cargo Tank No. 3 P/S)

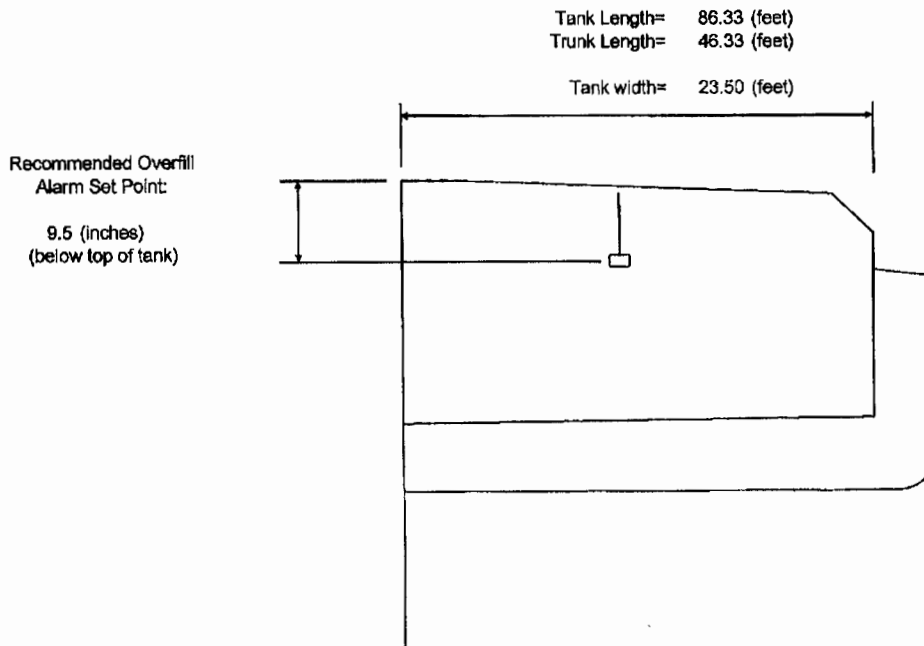

Maximum (per tank) Cargo Loading Rate	=	5,500 (bbl/hr)	
	=	91.67 (bbl/min)	
Minimum allowable time from alarm to overflow	=	60 (sec)	
Required volume above overfill alarm set point	=	91.7 (bbl)	
Capacity to deck at CL (17'-8" ABL) =		4409 BBL	
Capacity to 9.5" below dk at CL (16'-10.5" ABL) =		4314 BBL	
Volume above alarm =		95.1 BBL	RESULT OK
**Recommended set point of	=	9.5 (inches)	

**Note: Or 98.5%, whichever is lower (to comply with 33CFR155.775)	
Capacity at 98.5% =	4343 BBL
Dist from TT at CL =	0.63 ft.

Vapor Recovery Calculations

REFERENCES

1. 46 CFR 32.55-25, Venting of cargo tanks of tank barges constructed on or after July 1, 1951 - B/ALL
2. 46 CFR 39.20-11, Vapor overpressure and vacuum protection - TB/ALL
3. 46 CFR 39.30-1, Operational Requirements - TB/ALL
4. Flow of Fluids Through Valves, Fittings, and Pipe; Crane Technical Paper No. 410
5. USCG Guidelines for Determining the Maximum Liquid Transfer Rate for a Tank Vessel Transferring a Flammable or Combustible Cargo Using a Vapor Control System
6. Conrad Dwg. ~~994~~P3 Vapor Control Piping
7. USCG CHRIS (Chemical Hazards Response Information System) Manual.
8. 46 CFR 39.20-9, Tank Barge Liquid Overfill Protection - B/ALL
9. Cameron Hydraulic Data, 15th edition

Vapor Recovery Calculations

LIST OF ATTACHMENTS


1. Flow Capacity Curves for High-Velocity P-V Valve
2. Vacuum flow diagram for High-Velocity P-V Valve
3. USCG Approval Certificate for High-Velocity P-V Valve

CONRAD C-994 THRU C-997

HIGH VELOCITY VENT VALVE FLOW CAPACITY CURVE

MODEL : KSPA-6
 SIZE : 6"(150A)
 SETTING PRESSURE : 1050mmAq

VALVE INLET PRESSURE, mmAq
 (1mmAq = 0.0014289PSI)

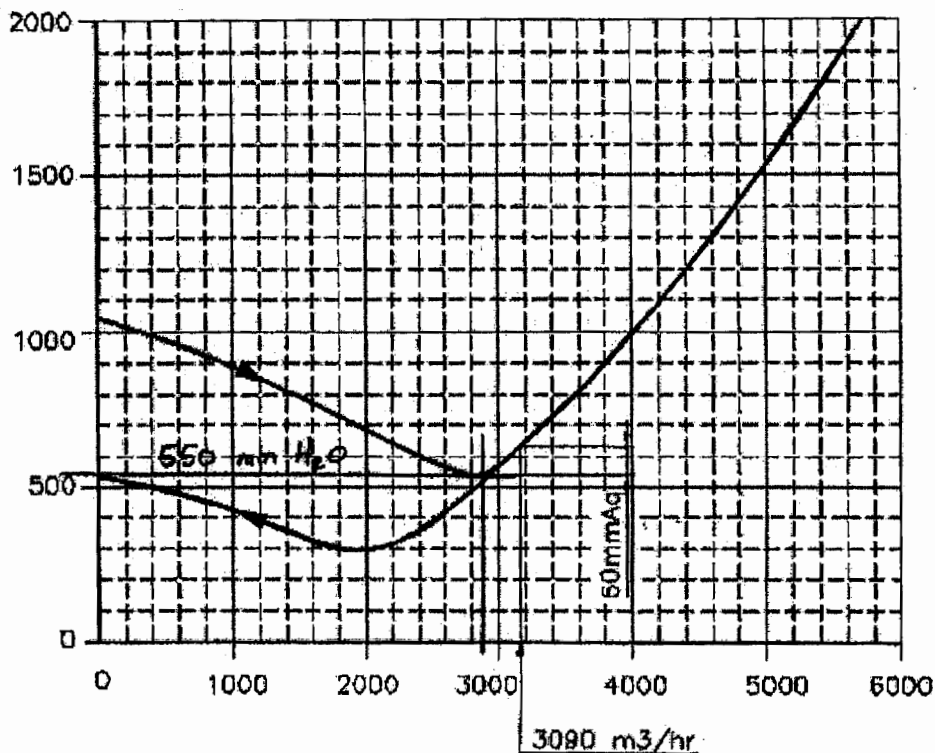

FLOW CAPACITY CURVE, SCMH(Standard cubic meter per hour)
 (1SCMH = 6.289BBL/hr)

$$18,150 \text{ bbl/hr} \times \frac{1 \text{ m}^3/\text{hr}}{6.289 \text{ bbl/hr}} = 2,886 \text{ m}^3/\text{hr}$$

$$550 \text{ mm H}_2\text{O} \times \frac{0.00143 \text{ PSI}}{\text{mm H}_2\text{O}} = 0.79 \text{ PSI}$$

APPLICABLE STANDARD	TEST CONDITION	SHEET NO. 1/1
IMO MSC/Circ.677 API Standard 2000	FLOW TEST PERFORMED ON EQUIPMENT USING AIR, AT TEMP.T=15.6°C AND AMBIENT PRESSURE P=1.0332Kg/cm ²	

NEW JSD-JIV-series flow capacity curve


FILE POSITION : PC02/02/01/flow.doc

TANKTECH
 TANKS, TANKS, TANKS

CONRAD C-994 THRU C-997

FLOW CAPACITY CURVE GRAPH

FLOW TEST PERFORMED ON EQUIPMENT
USING AIR, AT TEMP. T=15.6°C AND
AMBIENT PRESSURE P=1.0332 KG/CM².

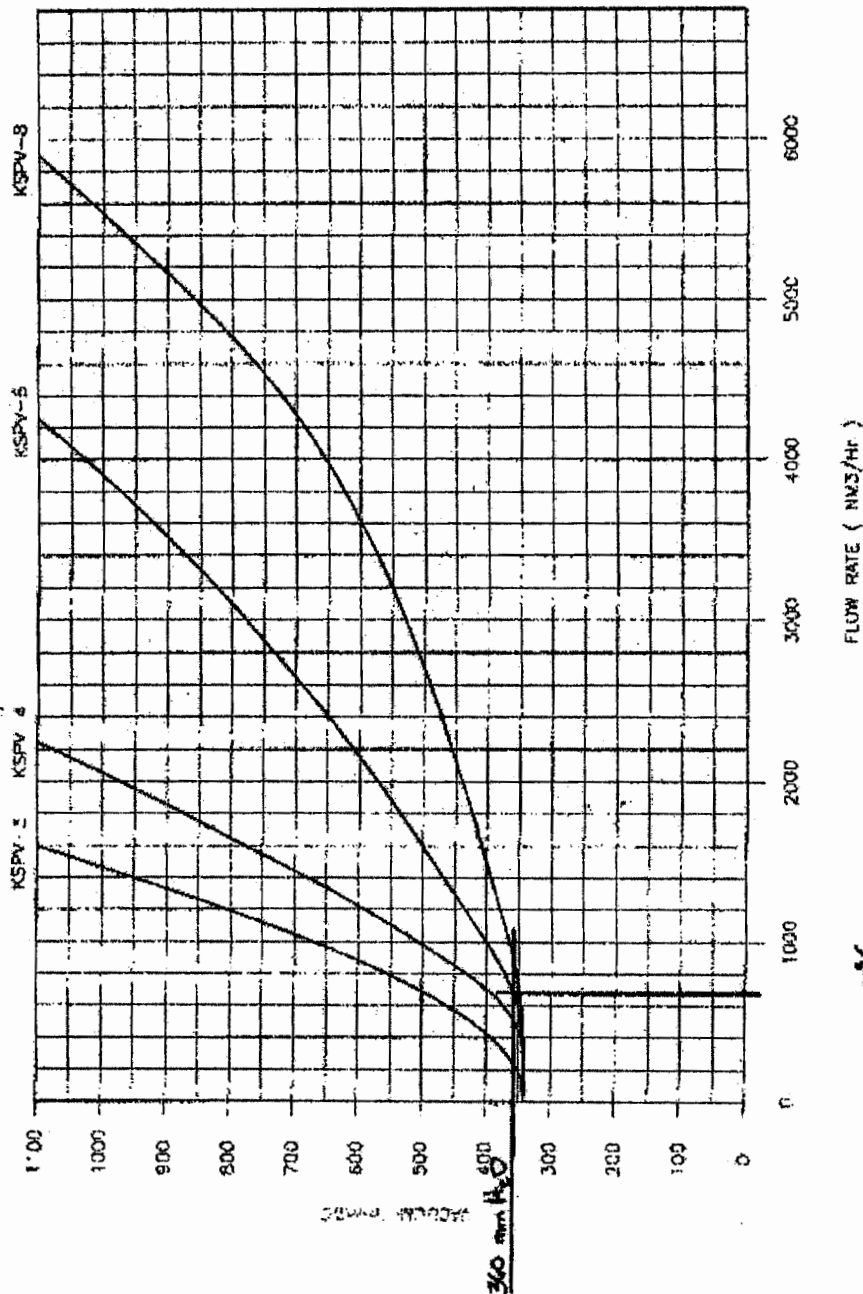

$$4800 \text{ lb/hr} \times \frac{1 \text{ m}^3/\text{hr}}{6.289} = 684 \text{ m}^3/\text{hr}$$

$$360 \text{ mm H}_2\text{O} \times \frac{0.0143 \text{ psi}}{\text{mm H}_2\text{O}} = 0.51 \text{ psi}$$

TANKTECH

TYPE HIGH VELOCITY VACUUM RELIEF VALVE
KSPV TYPE



U. S. Department of Homeland Security
United States Coast Guard
Certificate of Approval

Coast Guard Approval Number: 162.017/144/3

Expires: 17 March 2016

PRESSURE-VACUUM RELIEF VALVES FOR TANK VESSELS

TANKTECH CO., LTD.
#1506-2 SONGJEONG-DONG
GANGSEO-GU
BUSAN 618-270
KORBA, REPUBLIC OF

Model KLPH-6 ND 150 high velocity pressure/vacuum relief valves. AISI 304 Stainless steel, wt.-loaded construction.

Identifying Data: Drwg: KSP #PHZZ3000 dtd. Nov 04, 1995, Korea Inst. of Mach. & Metals Test report #s 95139250, 95139250-1, 95139250-2, & 95139250- 3, dtd. August 7, 1995 and report dated December 19, 2000.

Pressure setting: 700-2100 mm H2O (1-3 psig), Vacuum setting: 344 mm H2O (0.5 psig).

This certificate supersedes approval number 162.017/144/2, dated January 28, 2006.

*** END ***

THIS IS TO CERTIFY THAT the above named manufacturer has submitted to the undersigned satisfactory evidence that the item specified herein complies with the applicable laws and regulations as outlined on the reverse side of this Certificate, and approval is hereby given. This approval shall be in effect until the expiration date hereon unless sooner canceled or suspended by proper authority.



GIVEN UNDER MY HAND THIS 17th DAY OF
MARCH 2011, AT WASHINGTON D.C.

C. R. O'NEIL
Assistant Chief, Tank Vessel and Offshore Division
U.S. Coast Guard Marine Safety Center