

VAPOR CONTROL SYSTEM INSTALLATION

FOR BARGES: "7027" AND "7028"

CONOCO, INC.

I. INTENT AND TECHNICAL APPROACH

The enclosed information is being submitted to obtain approval for the installation and use of a vapor control system. The information is structured to address (1) the regulations of 33 CFR Parts 154, 155, 156, and 46 CFR Parts 30, 32, 35, and 39 as revised and amended June 21, 1990 (re: gasoline, crude oil, and benzene) and (2) the guidelines of the enclosure to USCG letter of 24 August 1993 and as revised 20 September 1993 (i.e., GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM). It is desired that U.S.C.G. authorize use of the vapor control system with all 46 CFR Subchapter "O" and "D" cargoes for which the system meets applicable regulations (e.g., benzene, gasoline, and crude oil) as well as other U.S.C.G. "inhouse" guidelines.

The technical approach used herein to determine maximum liquid transfer rate imposed by (a) the capacity of the cargo tank venting system [see 46 CFR 39.20-11], and (b) the pressure drop between the most remote tank and the shore connection [see 46 CFR 39.30-1(D)(3)] is summarized as follows:

1. Pertinent vessel and piping system parameters are obtained for (a) maximum design working pressure, (b) pressure vacuum valve setting and flow characteristics, and (c) piping system parameters (see APPENDIX E-1).
2. Cargoes for which the vapor control system is to be used are identified (see APPENDIX E-2).
3. Cargo data is obtained for (a) USCG vapor control system category, (b) specific gravity of cargo vapor, and (c) saturated vapor pressure at 115 degrees F (see APPENDIX E-2).
4. The vapor-air mix density, specific gravity, and growth rate (VGR) are determined for each cargo for which adequate data is available (see APPENDIX E-2).

II. BARGE TYPE AND DESCRIPTION:

The vessels of concern are a 297'-6" X 54'-0" X 12'-0", double side, double bottom, tank barges intended for service on rivers, lakes, bays and sounds. They are equipped with a raked end and a box end. Each barge has six (6) cargo tanks, and is served by a cargo pump, and a transverse load and unload header.

III. INDIVIDUAL BARGE DATA:

<u>NAME</u>	<u>BUILDER</u>	<u>HULL</u>
7027	TRINITY/ASHLAND CITY	4317
7028	TRINITY/ASHLAND CITY	4318

IV. CARGO PRODUCT(S):

The vapor control system is to be used with cargo product(s) listed in APPENDIX E and as otherwise authorized by U.S.C.G.

V. CARGO HOSES:

The vessels will not carry cargo vapor hoses. Accordingly, and with reference to 46 CFR 39.30-1(c), hoses are not included in the pressure drop calculations presented by this analysis.

VI. MAXIMUM DESIGN WORKING PRESSURE:

Per previous documentation the barge structure is reported to be suitable for a 3.0 PSIG MAXIMUM DESIGN WORKING PRESSURE.

(Note: This MAXIMUM DESIGN WORKING PRESSURE is considered appropriate for both pressure and vacuum conditions.)

VII. MAXIMUM LIQUID TRANSFER RATE:

The maximum liquid transfer rate (MLTR) is to be 5,000 BBL/HR unless otherwise limited by (1) the max capacity of the cargo tank venting system (see APPENDIX E-3), or (2) by the sum of the "shore connection pressure" plus the "pressure drop" from the most remote tank to the shore connection being in excess of 80% of the P/V setting as determined from the graphs of APPENDIX G for specific loading conditions.

5. The pressure drop across the PV valve, piping system losses, pressure at the tank most remote from the PV valve, and MAXIMUM LIQUID TRANSFER RATE as limited by the vapor control system are determined (see APPENDIX E-3).

These parameters are based on a vapor-air mix flow rate of "VGR" times a "liquid transfer rate" equal to the lesser of 5,000 BBL/HR (i.e., an owner/operator criteria) or the maximum flow rate which results in a pressure at the most remote tank not exceeding the cargo tank MAXIMUM DESIGN WORKING PRESSURE (see SECTION VI below).

6. A set of graphs is developed for various values of vapor growth rate (VGR) (see APPENDIX G). The values of VGR bracket the values determined in the above described analysis. Each set consists of five graphs - i.e., one graph for each of five conditions of pressure at the shore connection loading header ranging from -1.0 PSIG to 1.0 PSIG. Each graph shows the relationship between the "pressure drop" from the most remote tank to the shore connection and the "liquid flow rate" for a range of cargo vapor-air specific gravity. The pressure drop is based on a vapor-air mix flow rate of "VGR" times the noted liquid transfer rate.

Each graph page contains a description of the intended procedure for its use.

APPENDIX F provides a detailed illustration of the pressure drop calculation process.

APPENDIX H provides a detailed listing by cargo of the pressure drop from the most remote tank to the shore connection for a 1.0 PSIG pressure at the shore connection.

VIII. VAPOR CONTROL SYSTEM (46 CFR 39.20-1):

FIGURE 1 and TABLE LM-1 provide a diagram and list of material, respectively, of the vapor control system and related equipment.

When the vapor control system is to be used:

A. Pressure/vacuum valves (if any) other than the vapor control system pressure/vacuum valve(s) will be removed and the connections sealed with standard threaded pipe caps or equal.

B. Above-deck vapor piping will be lettered and painted in accordance with 46 CFR 39.20-1(d).

C. The shore connection flange will be in accordance with 46 CFR 39.20-1(f).

IX. CARGO GAUGING SYSTEM:

A. One (1) visual tank level indicator (i.e., sight glass) will be installed at the access hatch to each cargo tank to provide liquid level determination in accordance with 46 CFR 39.20-3(a). Descriptive literature is provided in TABLE LM-1 and in APPENDIX A.

B. One (1) high level indicating device (i.e., dipstick) will be installed in each cargo tank to indicate when the liquid level in the cargo tank is within about 3.28 feet of the tank top in accordance with 46 CFR 39.20-3 (b). Descriptive literature is provided in TABLE LM-1 and in APPENDIX B.

X. LIQUID OVERFILL PROTECTION (46 CFR 39.20-9):

Primary tank barge liquid overfill protection will be provided by installation of a high level alarm/shutdown system which complies with the requirements of 46 CFR 39.20-9 (b). Additional tank barge liquid overfill protection will be provided by installation of spill valves which comply with the requirements of 46 CFR 39.20-9(d). Each spill valve will serve two (2) cargo tanks (P/S) by use of an adapter. Descriptive literature on both protection measures is provided in TABLE LM-1 and in APPENDIX C.

Calculations for the allowable flow of the spill valve (without exceeding the MAX DESIGN WORKING PRESSURE) are provided as APPENDIX I; however, these flow rates do not govern the MAX LIQUID TRANSFER RATE since primary liquid overfill protection is provided by the high level alarm and shutdown system.

APPENDIX J provides a summary comparison of the spill valve and the P/V transfer rates.

XI. VAPOR OVERPRESSURE AND VACUUM PROTECTION (46 CFR 39.20-11):

To satisfy the requirements of 46 CFR 39.20-11, the cargo tank venting system is to be fitted with one (1) pressure vacuum relief valve. Descriptive literature is provided in TABLE LM-1 and in APPENDIX D. It will be installed in the above deck vapor control piping.

A. VAPOR OVERPRESSURE (LOADING) PROTECTION

APPENDIX E develops the maximum liquid (cargo loading) transfer rate for which the pressure in the cargo tank most remote from the P/V valve does not exceed the MAXIMUM DESIGN WORKING PRESSURE. The calculations therein are in general accordance with the USCG-provided GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM.

B. VAPOR VACUUM PROTECTION

It is possible that cargo loading may suddenly be stopped while the shore facility compressor continues to draw a vacuum. In that instance, the P/V valve is required to have sufficient vacuum capability to intake air in quantity equal to the MAXIMUM LIQUID TRANSFER RATE at a pressure (vacuum) which does not exceed the MAXIMUM DESIGN WORKING VACUUM.

With reference to the vacuum curve information in APPENDIX D, the P/V valve has the following vacuum capacity at a vacuum of -1.0 PSIG, a pressure which is less than the -3.0 PSIG MAXIMUM DESIGN WORKING VACUUM:

CARGO PRODUCT WITH HIGHEST REQ'D AIR FLOW RATE	HIGHEST REQUIRED AIR FLOW RATE (MATR)		PV VALVE VACUUM CAPACITY AIR	
	(BBL/HR)	(FT ³ /HR)	(BBL/HR)	(FT ³ /HR)
VARIOUS	5,000	28,074	5,877	33,000

Since the capacity at higher vacuum exceeds the highest required air flow rate, the cargo tank venting system will:

a. Prevent a vacuum in the cargo tank vapor space, whether generated by withdrawal of cargo or vapor at maximum rates, that exceeds the MAXIMUM DESIGN WORKING VACUUM for any tank connected to the vapor collection system; and

b. Not relieve at a vacuum corresponding to a vacuum in the cargo tank vapor space of less than 0.5 PSIG below atmospheric pressure.

XII. OPERATIONAL REQUIREMENTS (46 CFR 39.30-1):

To satisfy the requirements of 46 CFR 39.30-1(b) and (d), data is developed showing the relationship between "pressure drop" through the vapor control system from the most remote cargo tank to the vessel shore connection and "liquid transfer rate" for various values of vapor-air mix growth rate, vapor-air mix specific gravity, and pressure at the shore connection.

Detailed support calculations for the data are voluminous, and repetitive. Accordingly, an illustrative sample calculation and graph (vice complete calculations and graphs for all individual products) are provided as APPENDIX F. The calculation procedure is in general accordance with the USCG-provided GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM. Output results from the complete calculations are presented in the graphs of APPENDIX G. Further, a listing is provided, by cargo, of the pressure drop from the most remote cargo tank to the shore connection for a 1.0 PSIG pressure at the shore connection. Descriptive literature similar to those graphs and table is to be included in the vessel "TRANSFER PROCEDURES" by the owner-operator.

VAPOR CONTROL SYSTEM INSTALLATION

FOR BARGES: "7027" AND "7028"


CONOCO, INC.

TABLE LM-1
LIST OF MATERIAL
FOR VAPOR CONTROL SYSTEM


PIECE MARK	ITEM	QTY	SIZE	SPECIFICATION
12	PIPING FITTINGS FLANGES		8"	SCHED 40, STEEL, ASTM A-53 OR A-106 GRADE B 2" & SMALLER: 3000# FORGED STEEL SCR'D ASTM 105; AND 2 1/2" & LARGER: BUTT WELD SCHED 40 ASTM A234 GR B, ANSI B-16.9 150# SLIP-ON OR WELD NECK FLANGES, STEEL ASTM A-105, ANSI B-16.5; AND/OR 150# FF WELD NECK FLANGES, ASTM A 181
15	VALVE	3	8"	BUTTERFLY VALVE, STEEL W/S.S. TRIM, KEYSTONE OR EQUAL, 150#
16	P.V. VALVE	1	8"	MIDLAND, MODEL A-883, S.S., SET AT 1.5 PSIG PRESSURE, & -0.5 PSIG VACUUM
18	HIGH LEVEL INDICATING DEVICE	6	N/A	MIDLAND MODEL B-610, MAGNETIC DIPSTICK, 300 SERIES STAINLESS STEEL WETTED PARTS
19	HIGH LEVEL SENSOR ALARM & SHUTDOWN SYSTEM	1	N/A	MIDLAND MODEL B-595 TANK HIGH LEVEL AND OVERFILL SENSOR (ONE SENSOR IN EACH TANK)
20	SPIILL VALVE	3	10"	MIDLAND MODEL A-7103, SET @ 1.75 PSIG
22	VISUAL TANK LEVEL INDICATOR	6	N/A	ERL MODEL SGM-1 MARINE SIGHT GLASS

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 100%


1.0 PSIG SHORE CONNECTION PRESSURE

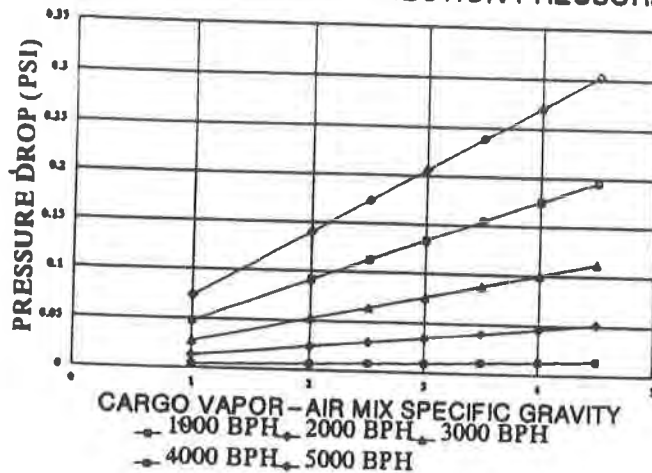


0.5 PSIG SHORE CONNECTION PRESSURE

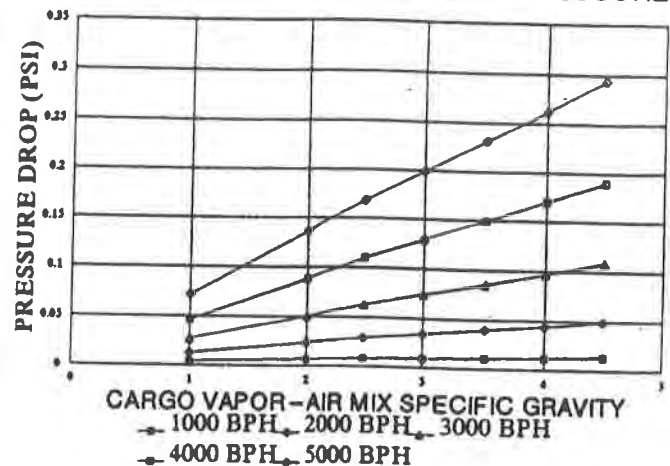


0.0 PSIG SHORE CONNECTION PRESSURE

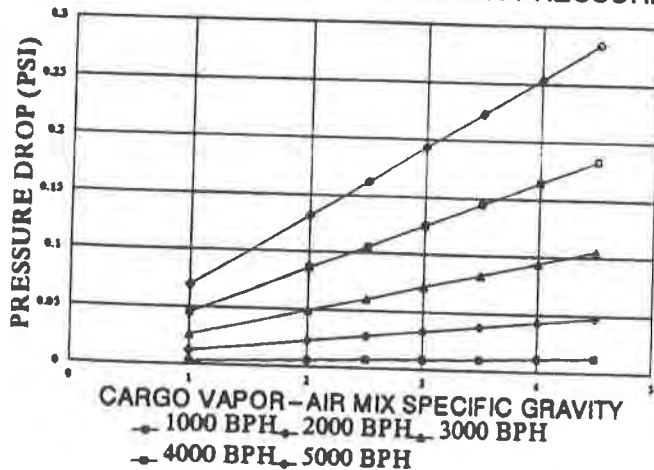

-0.5 PSIG SHORE CONNECTION PRESSURE

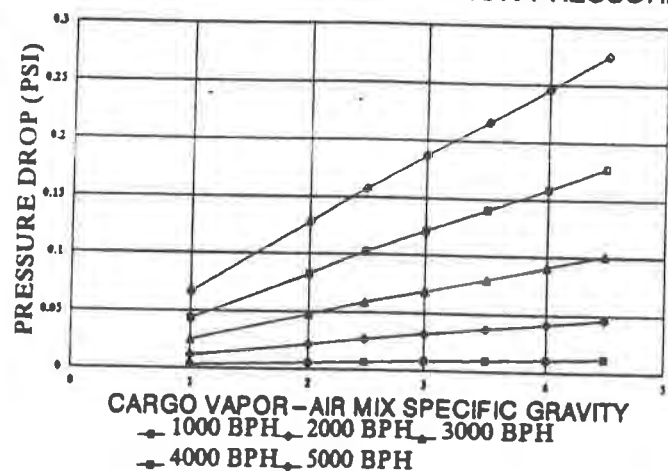

-1.0 PSIG SHORE CONNECTION PRESSURE

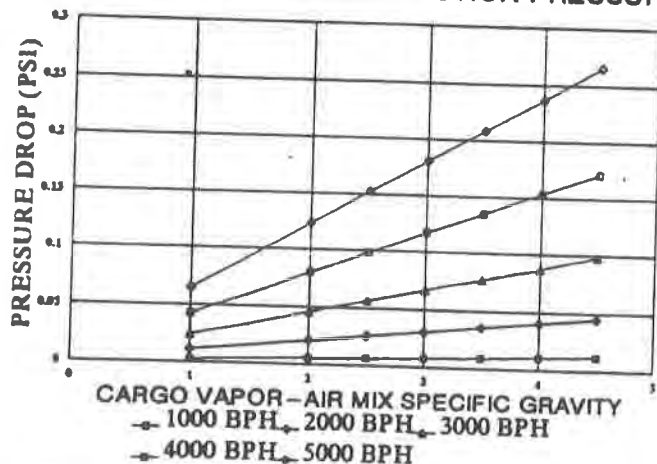
**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.


A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 105%


1.0 PSIG SHORE CONNECTION PRESSURE

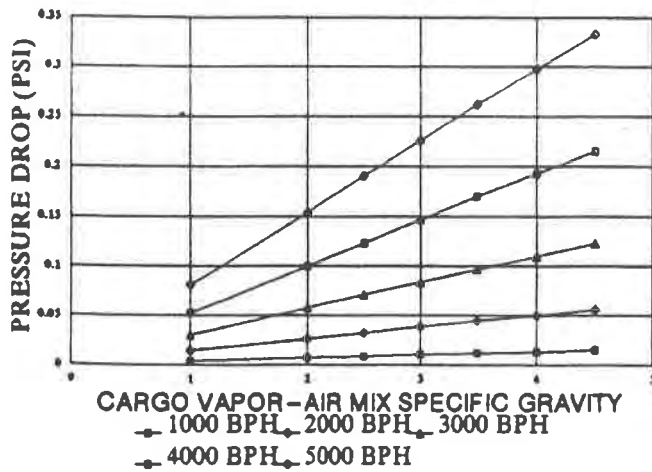


0.5 PSIG SHORE CONNECTION PRESSURE

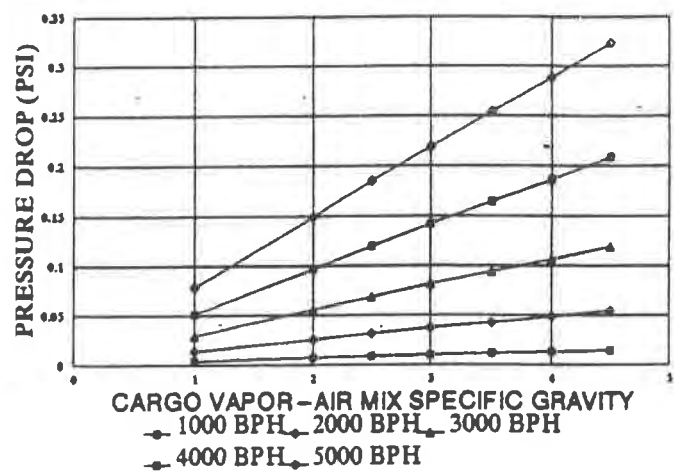


0.0 PSIG SHORE CONNECTION PRESSURE

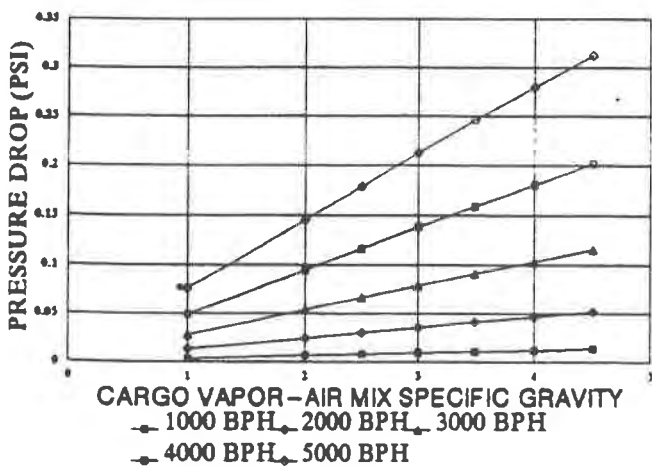

-0.5 PSIG SHORE CONNECTION PRESSURE

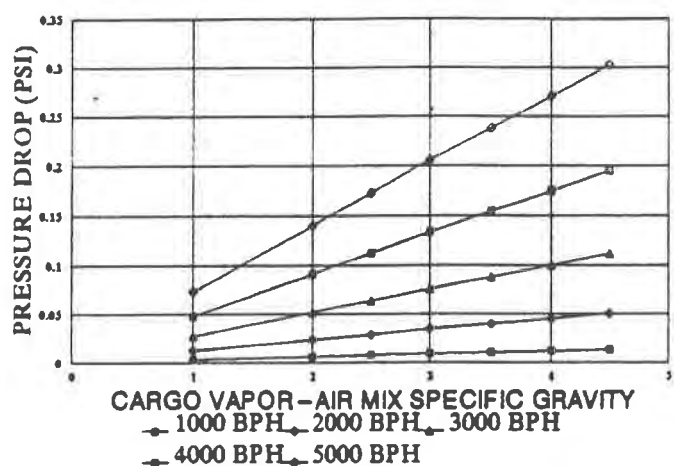

-1.0 PSIG SHORE CONNECTION PRESSURE

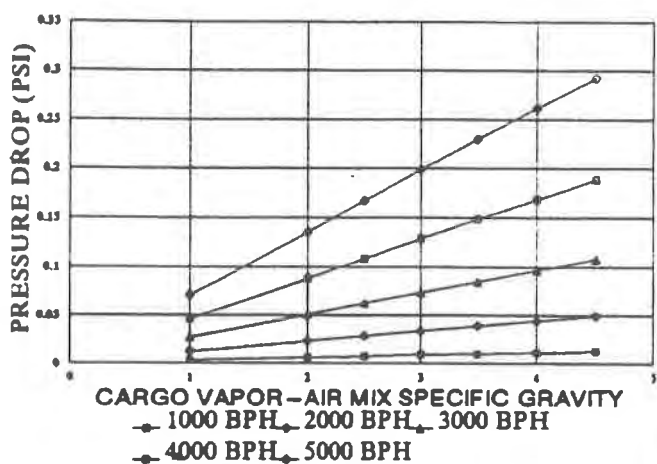**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 110%


1.0 PSIG SHORE CONNECTION PRESSURE

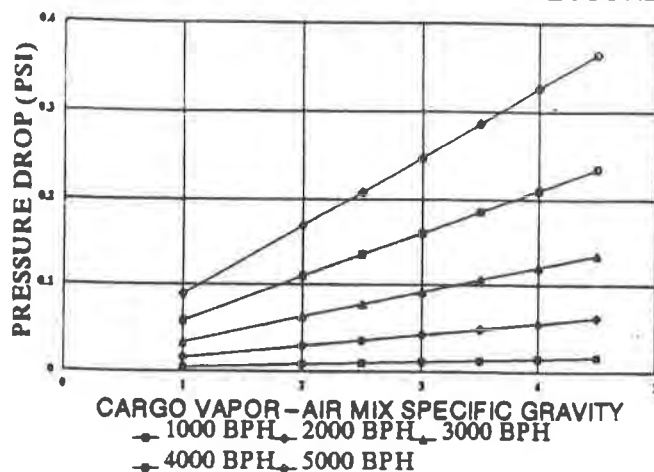


0.5 PSIG SHORE CONNECTION PRESSURE

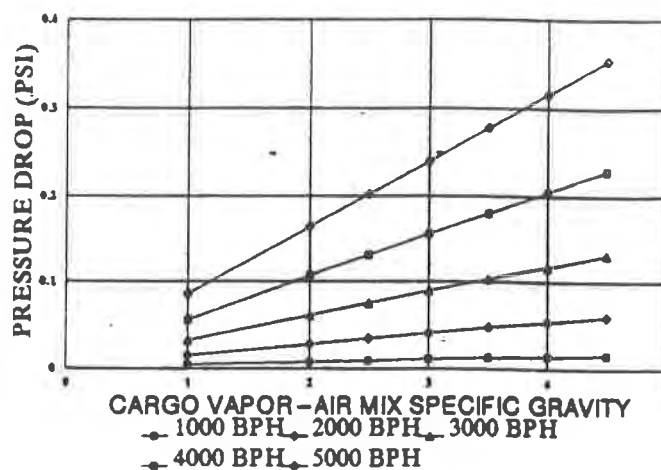


0.0 PSIG SHORE CONNECTION PRESSURE

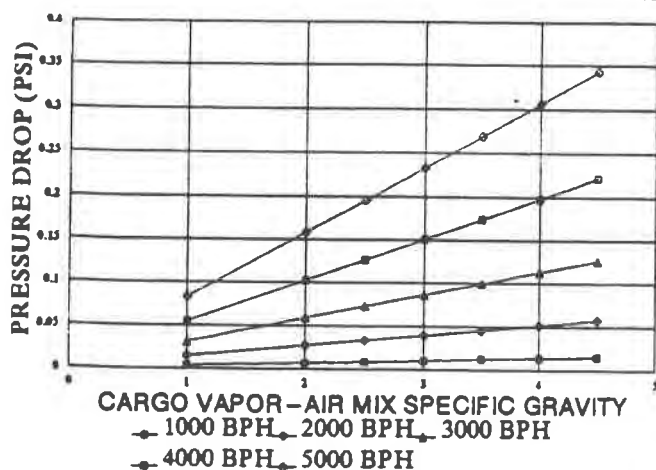

-0.5 PSIG SHORE CONNECTION PRESSURE

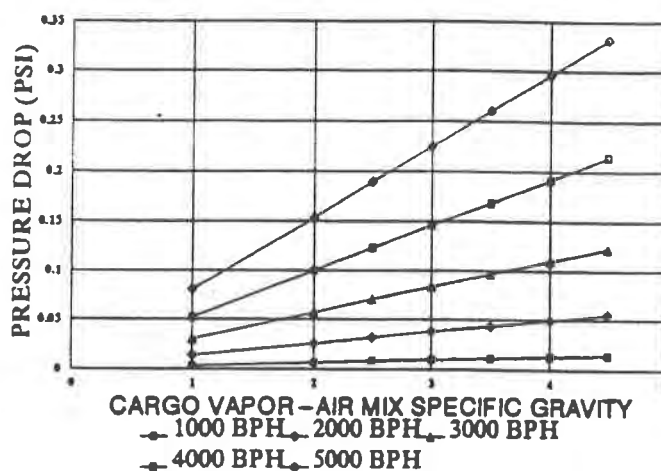

-1.0 PSIG SHORE CONNECTION PRESSURE

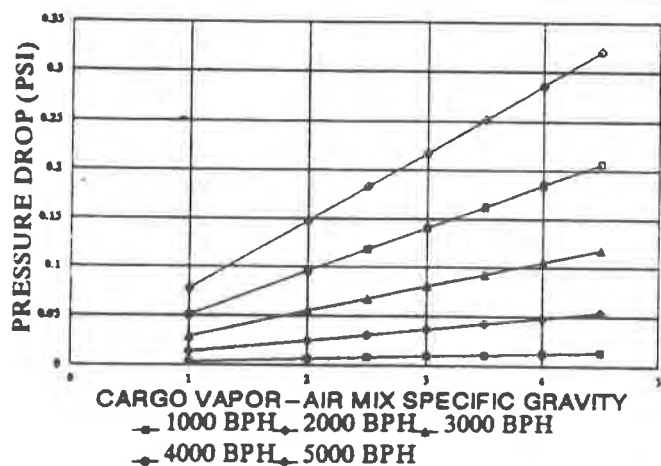**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 115%


1.0 PSIG SHORE CONNECTION PRESSURE

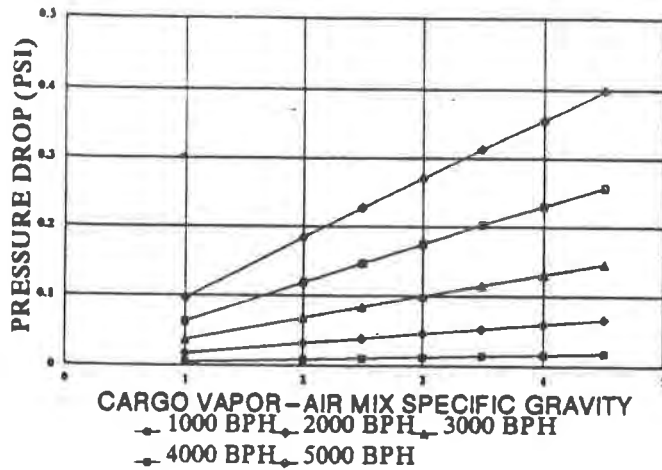


0.5 PSIG SHORE CONNECTION PRESSURE

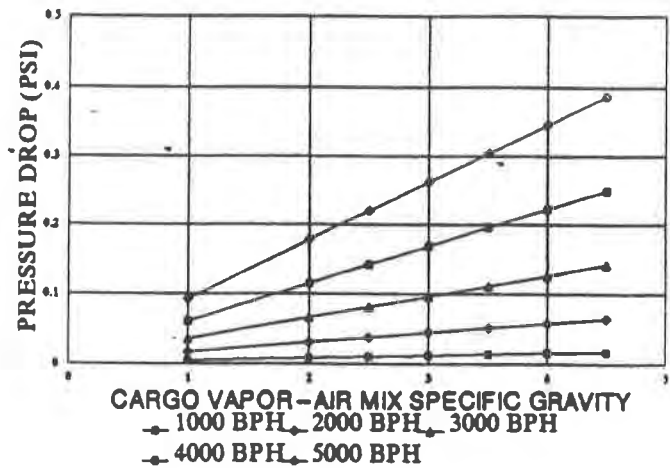


0.0 PSIG SHORE CONNECTION PRESSURE

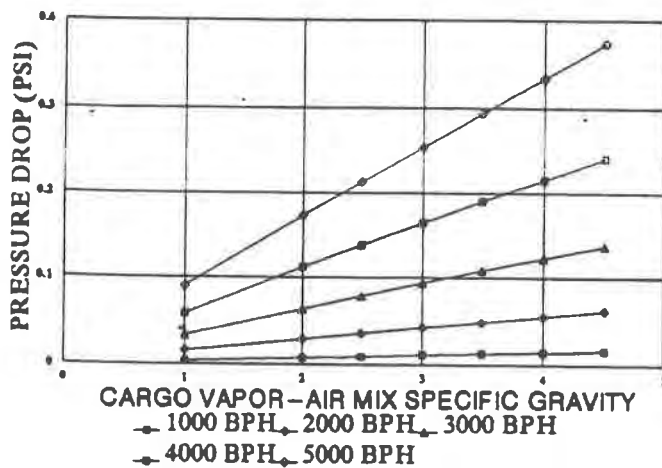

-0.5 PSIG SHORE CONNECTION PRESSURE

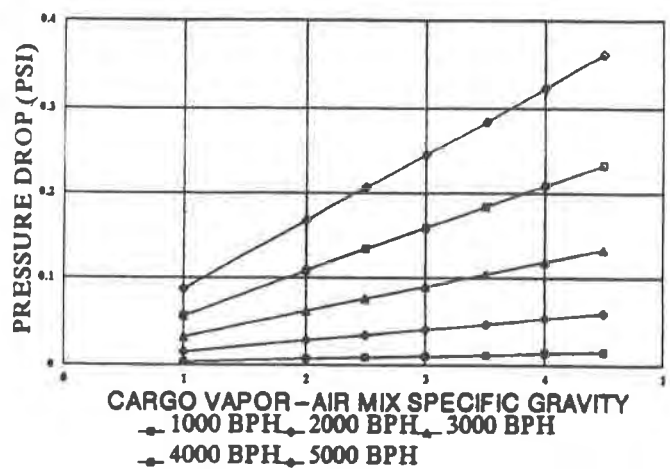

-1.0 PSIG SHORE CONNECTION PRESSURE

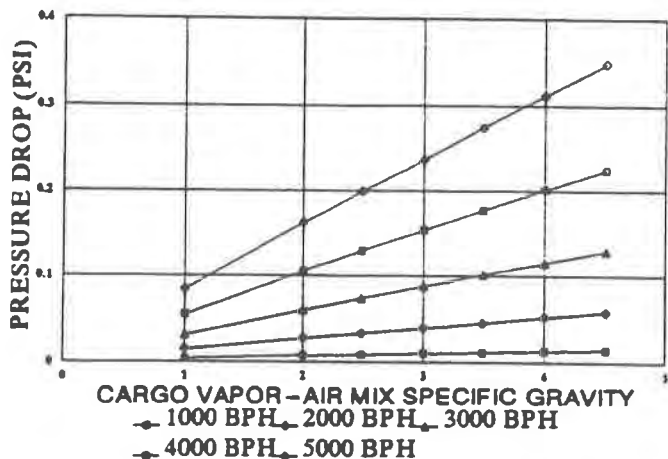**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 120%


1.0 PSIG SHORE CONNECTION PRESSURE

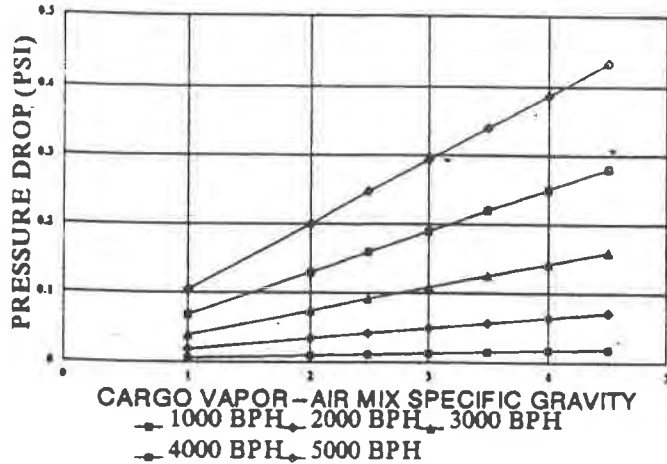


0.5 PSIG SHORE CONNECTION PRESSURE

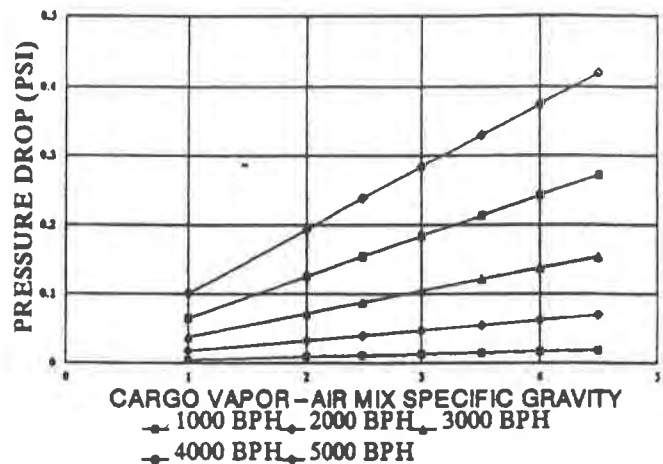


0.0 PSIG SHORE CONNECTION PRESSURE

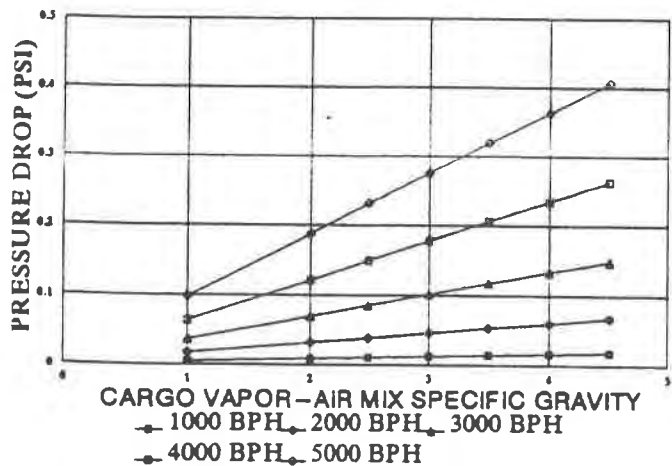

-0.5 PSIG SHORE CONNECTION PRESSURE

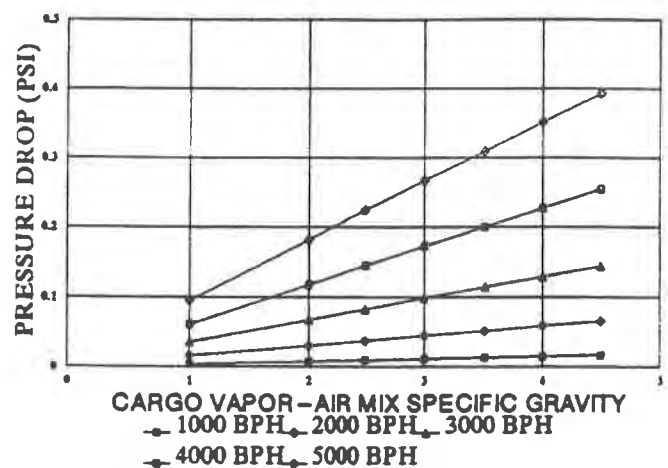

-1.0 PSIG SHORE CONNECTION PRESSURE

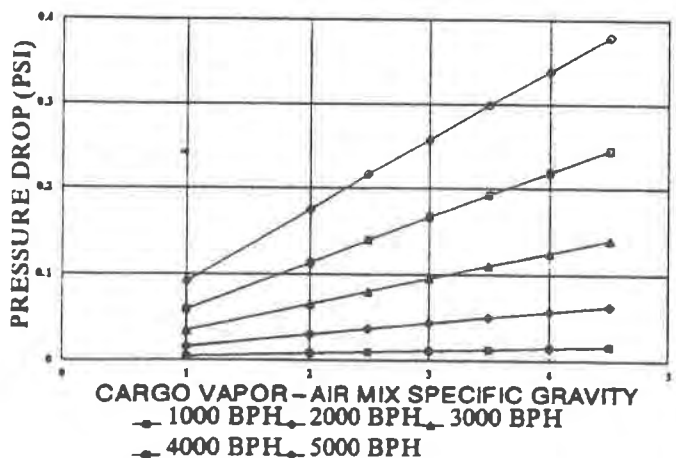**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 125%


1.0 PSIG SHORE CONNECTION PRESSURE

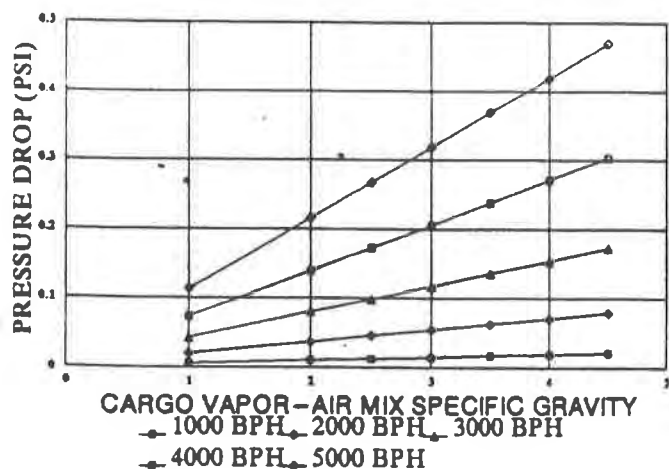


0.5 PSIG SHORE CONNECTION PRESSURE

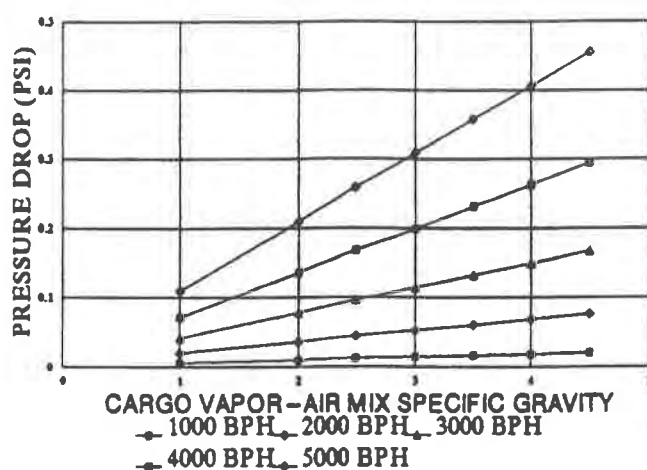


0.0 PSIG SHORE CONNECTION PRESSURE

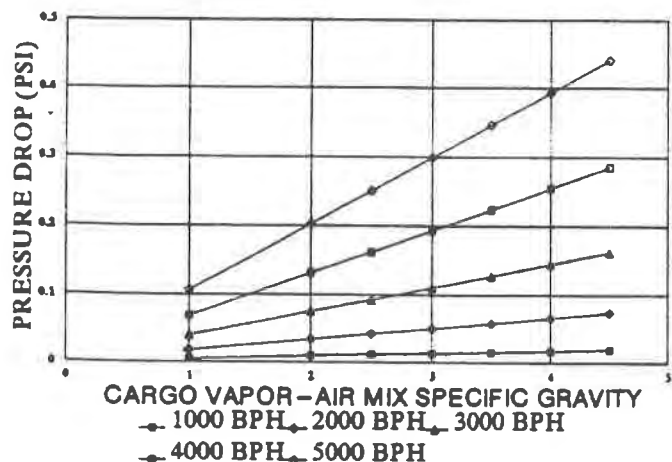

-0.5 PSIG SHORE CONNECTION PRESSURE

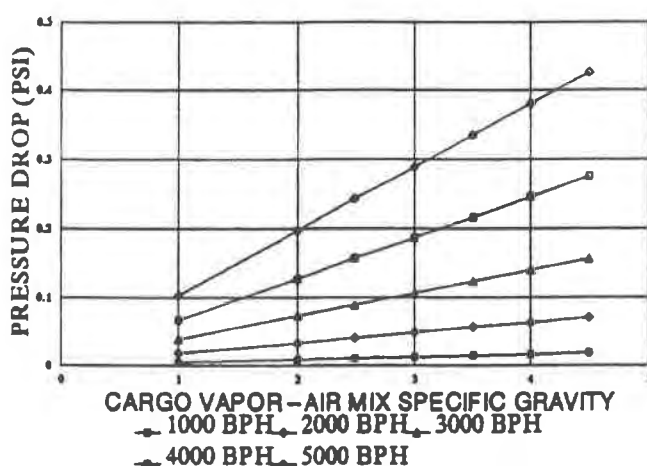

-1.0 PSIG SHORE CONNECTION PRESSURE

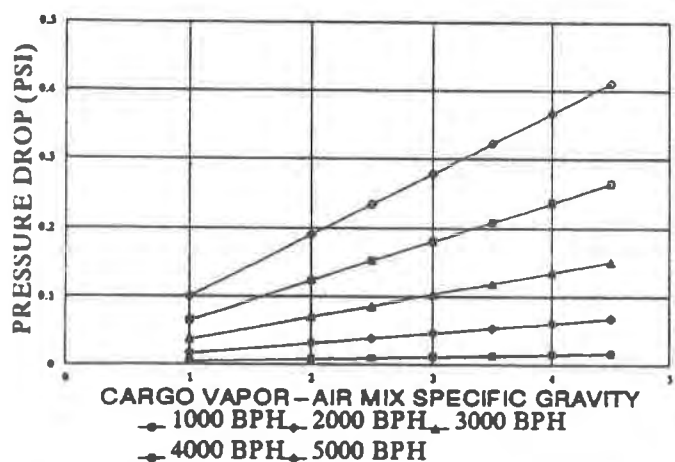**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONN'E'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONN'E'N PRESSURE' IS LESS THAN 80% OF THE 'P/V SETTING', THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 130%


1.0 PSIG SHORE CONNECTION PRESSURE

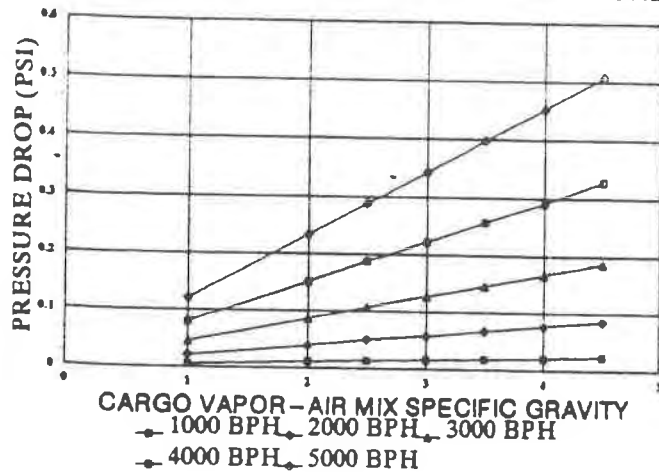


0.5 PSIG SHORE CONNECTION PRESSURE

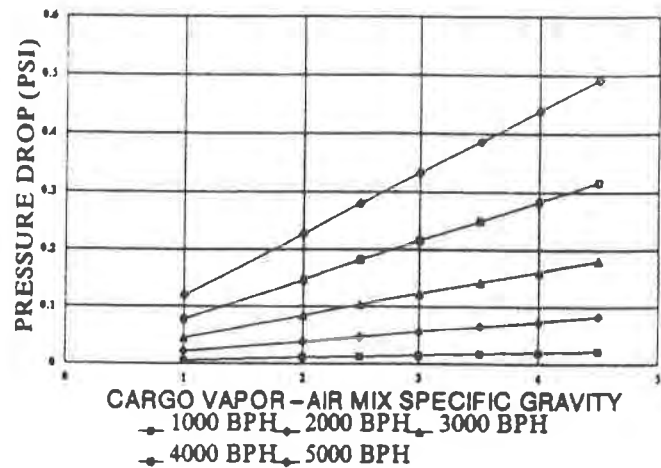


0.0 PSIG SHORE CONNECTION PRESSURE

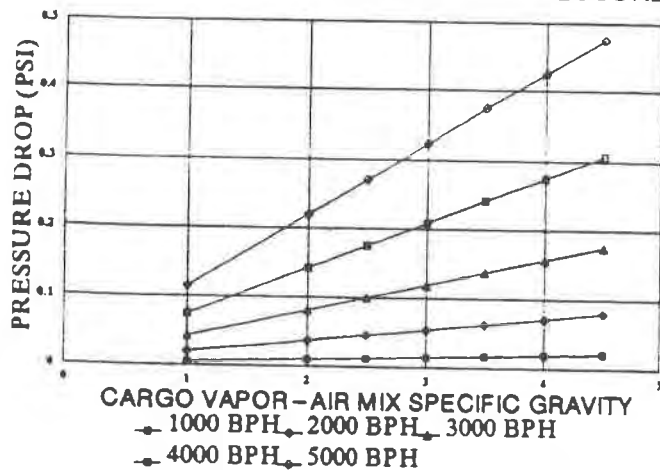

-0.5 PSIG SHORE CONNECTION PRESSURE

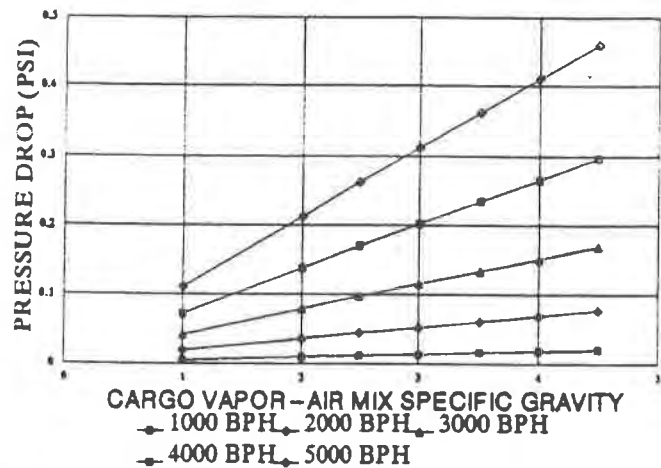

-1.0 PSIG SHORE CONNECTION PRESSURE

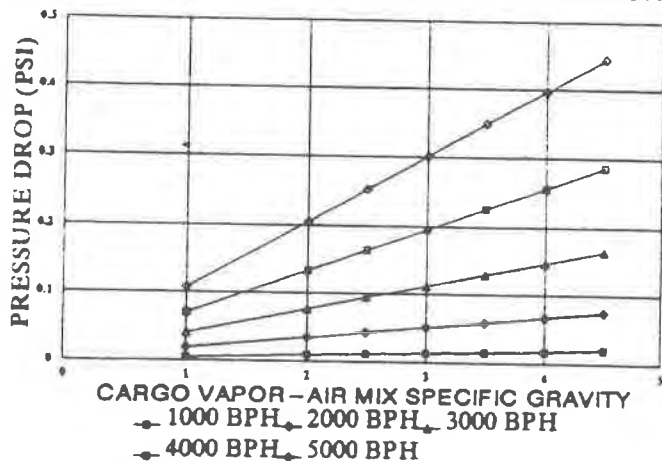
**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.


- A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 135%


1.0 PSIG SHORE CONNECTION PRESSURE

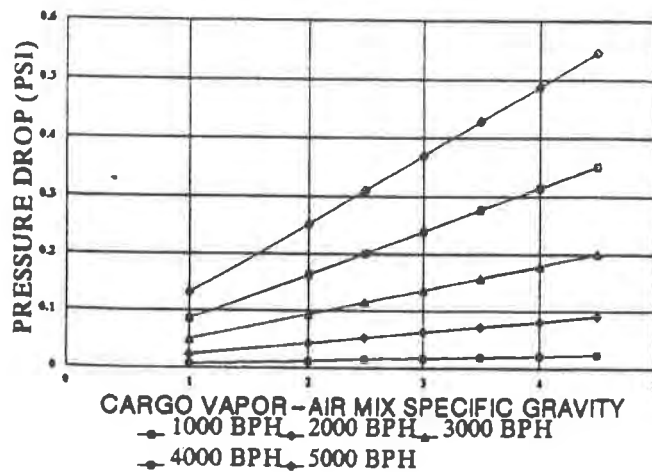


0.5 PSIG SHORE CONNECTION PRESSURE

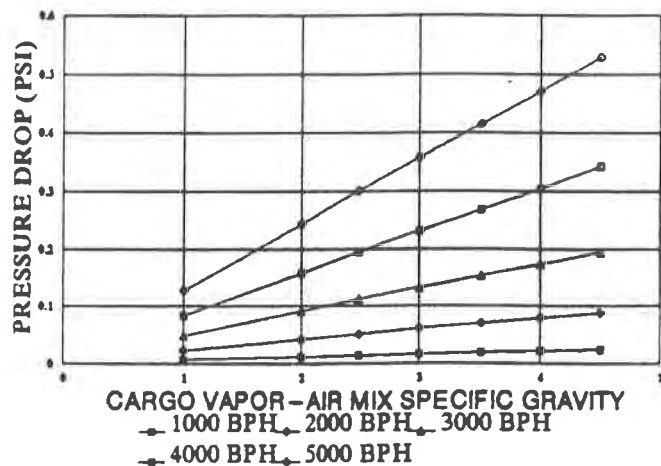


0.0 PSIG SHORE CONNECTION PRESSURE

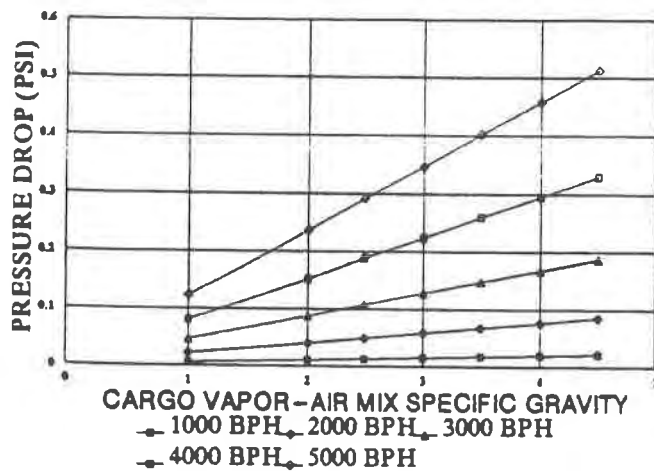

-0.5 PSIG SHORE CONNECTION PRESSURE

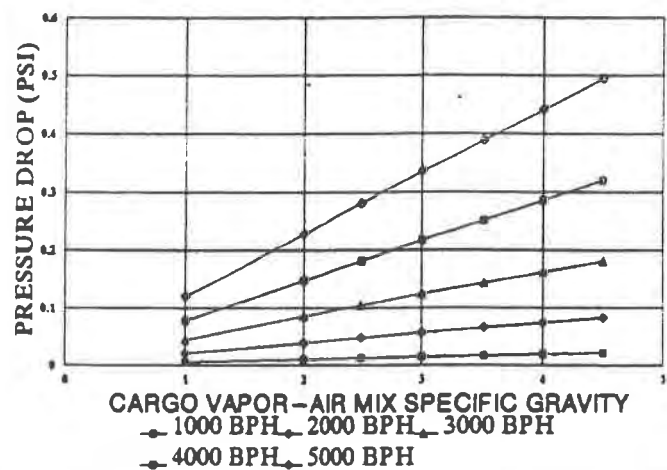

-1.0 PSIG SHORE CONNECTION PRESSURE

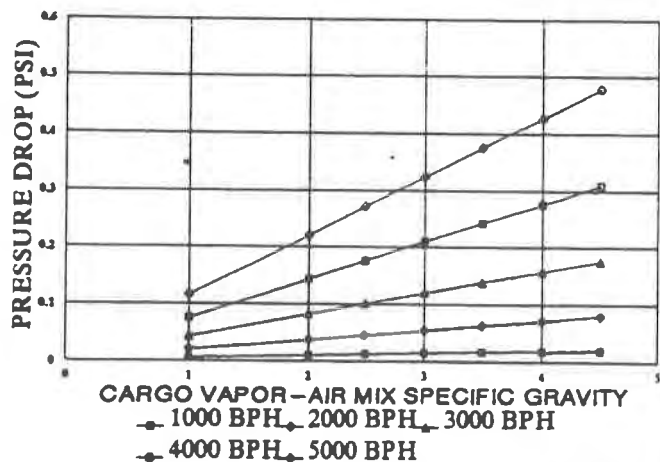**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 140%


1.0 PSIG SHORE CONNECTION PRESSURE

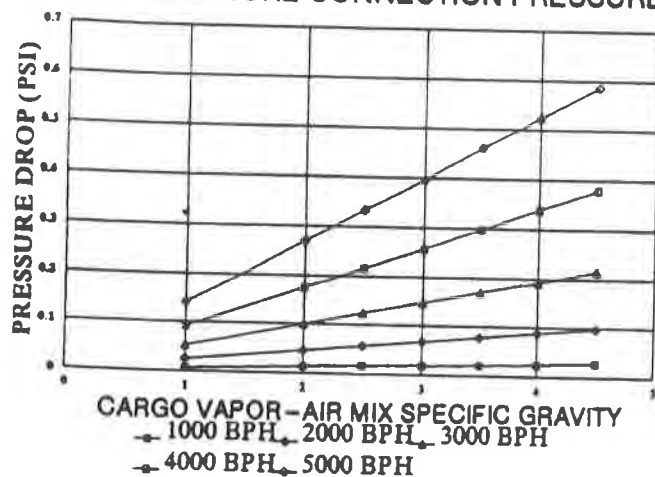


0.5 PSIG SHORE CONNECTION PRESSURE

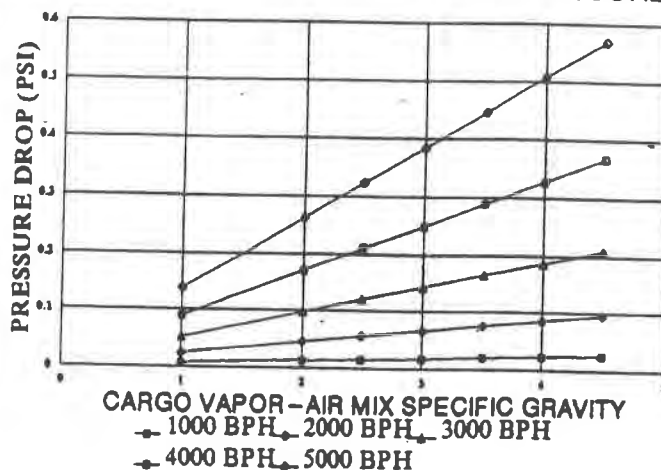


0.0 PSIG SHORE CONNECTION PRESSURE

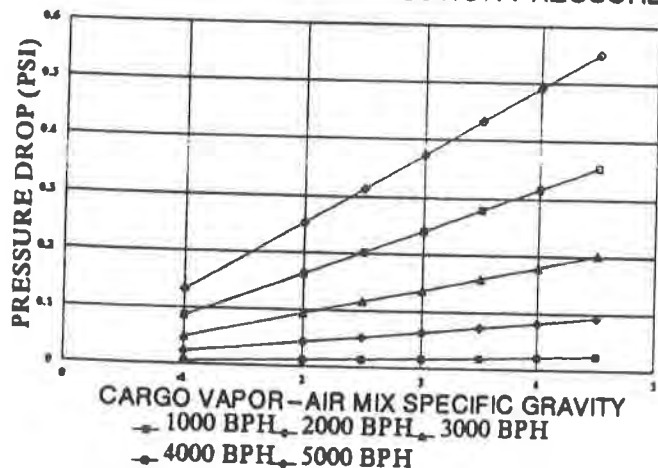

-0.5 PSIG SHORE CONNECTION PRESSURE

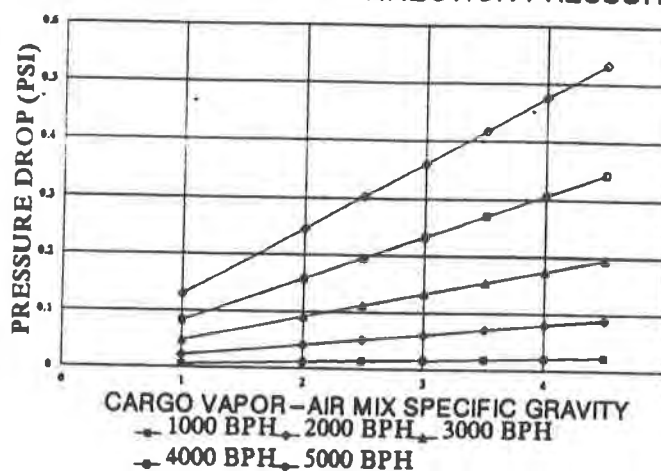

-1.0 PSIG SHORE CONNECTION PRESSURE

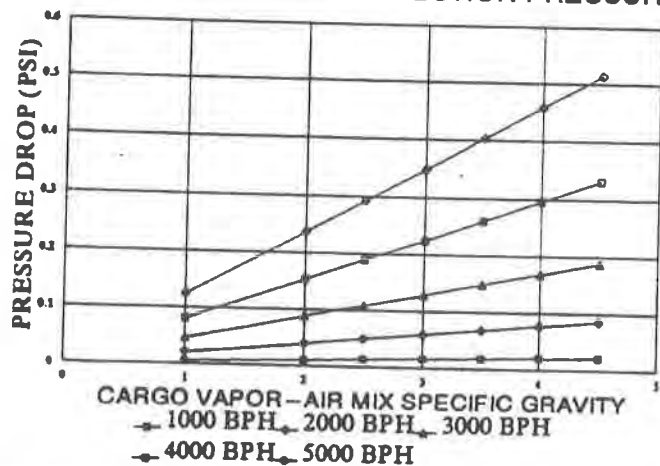
**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.


- A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 145%


1.0 PSIG SHORE CONNECTION PRESSURE

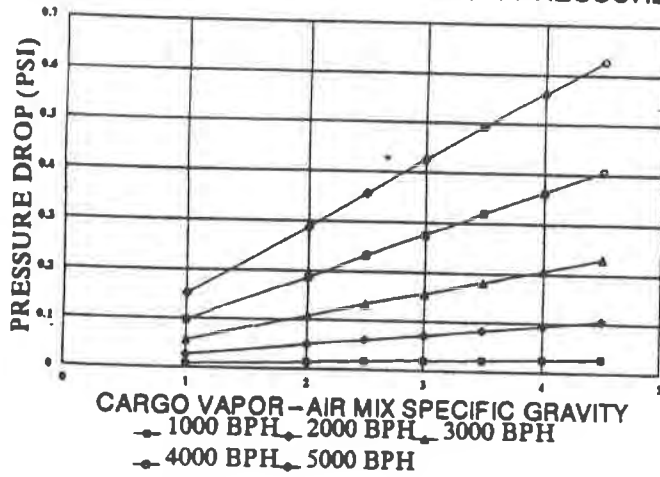


0.5 PSIG SHORE CONNECTION PRESSURE

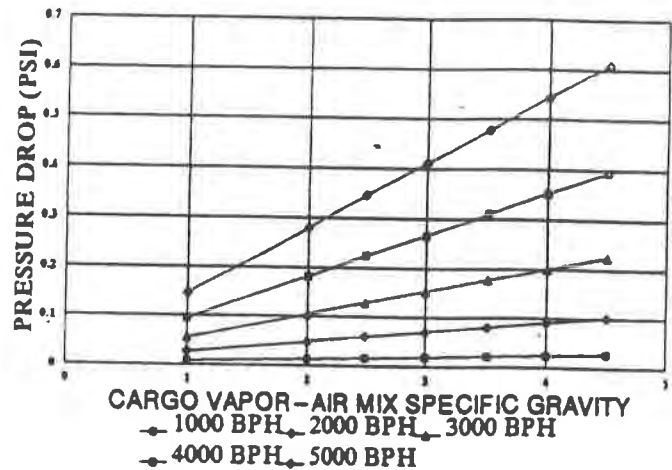


0.0 PSIG SHORE CONNECTION PRESSURE

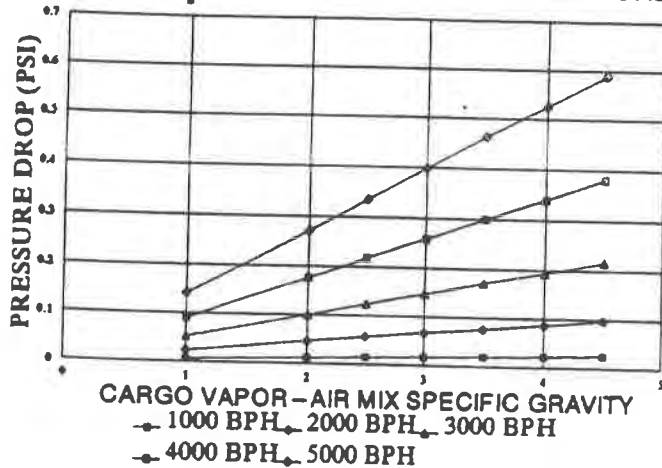

-0.5 PSIG SHORE CONNECTION PRESSURE

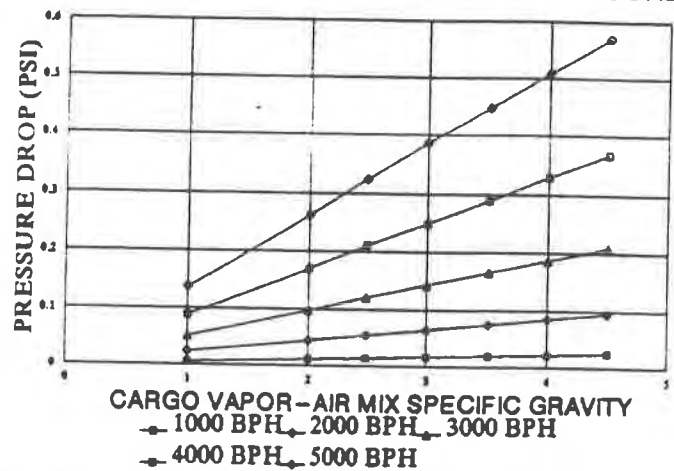

-1.0 PSIG SHORE CONNECTION PRESSURE

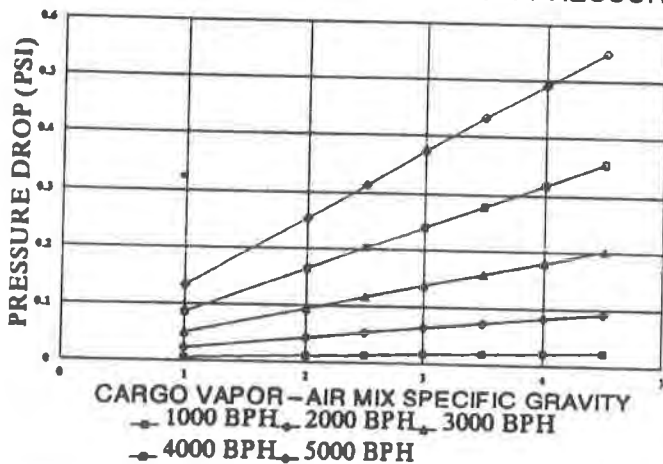**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

- A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)	
46 CFR SUBCHAPT O, TABLE 151														
ACETIC ACID	AAC	1.05	1	60.052	2.07	0.92	16.200	0.057	0.943	0.076	0.081	1.061	1.018	
ACETIC ANHYDRIDE	ACA	1.08	1	102.050	3.50	0.40	16.200	0.025	0.975	0.076	0.081	1.062	1.008	
ACETONITRILE	ATN	0.78	3	41.053	1.41	0.03	16.200	0.002	0.998	0.076	0.076	1.001	1.001	
ACRYLIC ACID	ACR	1.05	2	72.064	2.48	0.40	16.200	0.025	0.975	0.076	0.079	1.037	1.008	
ACRYLONITRILE	ACN	0.81	4	53.064	1.80	5.00	16.200	0.309	0.691	0.076	0.095	1.247	1.100	
ADIPONITRILE	ADN	0.95	1	108.000	3.73	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000	
ALUMINUM SULFATE SOLUTION	ASX	1.76												
AMINOETHYLETHANOLAMINE	AEE	1.03	1	104.150	3.59	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000	
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	1.44	1			NF/NC								
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH		3	35.050	1.21	NF/NC								
ANTHRACENE OIL (COAL TAR FRACTION)	AHO													
BENZENE	BNZ	0.88	1	78.114	2.80	4.50	16.200	0.278	0.722	0.076	0.114	1.500	1.250	
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	0.84	1		2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146	
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	0.84	1		2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146	
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	0.84	1	106.080	2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146	
iso-BUTYL ACRYLATE	BAI	0.88	2	128.170	4.42	0.60	16.200	0.037	0.963	0.076	0.086	1.127	1.012	
n-BUTYL ACRYLATE	BTC	0.90	2	128.170	4.40	0.40	16.200	0.025	0.975	0.076	0.083	1.084	1.008	
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	0.90	2		4.42	0.60	16.200	0.037	0.963	0.076	0.086	1.127	1.012	
BUTYL METHACRYLATE	BMH	0.88	2	142.200	4.90	0.29	16.200	0.018	0.982	0.076	0.081	1.070	1.006	
iso-BUTYRALDEHYDE	BAD	0.80	1	72.107	2.50	7.80	16.200	0.481	0.519	0.076	0.131	1.722	1.156	
n-BUTYRALDEHYDE	BTR	0.80	1	72.107	2.50	7.80	16.200	0.481	0.519	0.076	0.131	1.722	1.156	
BUTYRALDEHYDES (CRUDE)	BFA	0.82	1	72.060	2.48	8.00	16.200	0.494	0.506	0.076	0.132	1.731	1.160	
BUTYRALDEHYDE (ISO-, N-)	BAE	0.82	1		2.48	8.00	16.200	0.494	0.506	0.076	0.132	1.731	1.160	
CAMPHOR OIL (LIGHT)	CPO	0.92	8											
CARBON TETRACHLORIDE	CBT	1.59	3	153.820	5.31	NF/NC								
CAUSTIC POTASH SOLUTION	CPS	1.50	1			NF/NC								
CAUSTIC SODA SOLUTION	CSS	1.50	1			NF/NC								
CHLOROBENZENE	CRB	1.11	1	112.559	3.88	0.80	16.200	0.049	0.951	0.076	0.087	1.142	1.016	
CHLOROFORM	CRF	1.48	3	119.380	4.12	NF/NC								
CHLOROSULFONIC ACID	CSA	1.79												
COAL TAR NAPHTHA SOLVENT	NCT	0.88	1		3.66	0.20	16.200	0.012	0.988	0.076	0.079	1.033	1.004	
CREOSOTE (COAL TAR)	CCT	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000	
CREOSOTE (WOOD)	CWD	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000	
CRESOLS (ALL ISOMERS)	CRS	1.05	1	108.130	3.72	0.06	16.200	0.004	0.996	0.076	0.077	1.010	1.001	
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS	1.05	1											
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CFP	1.07	3		3.72	0.05	16.200	0.003	0.997	0.076	0.077	1.008	1.001	
CRESYLATE SPENT CAUSTIC	CSC	1.55	1			NF/NC								
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX (TAR ?)		1											
CROTONALDEHYDE	CTA	0.85	4	70.050	2.41	2.00	16.200	0.123	0.877	0.076	0.089	1.174	1.040	

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC' R WEIGHT OF CARGO MWC	SPECIF GRAV OF VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
CYCLOHEXANONE	CCH	0.95	1	98.145	3.40	0.02	16.200	0.001	0.999	0.076	0.076	1.003	1.000
CYCLOHEXYLAMINE	CHA	0.87	1		3.42	0.62	16.200	0.038	0.962	0.076	0.083	1.093	1.012
DECYL ACRYLATE (iso-, n-)	DAT	0.89	2	212.330	7.30	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
DICHLOROBENZENE (ALL ISOMERS)	DBX	1.30	3		5.07	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
1,1-DICHLOROETHANE	DCH	1.18	1	98.960	3.41	9.90	16.200	0.611	0.389	0.076	0.188	2.473	1.198
2,2-DICHLOROETHYL ETHER	DEE	1.22	1	143.000	4.90	0.04	16.200	0.002	0.998	0.076	0.077	1.010	1.001
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DCM	1.32	5	84.940	2.93	NF/NC							
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DDE												
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DAD		1										
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	NDTI												
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DPX	1.16	3	112.960	3.90	6.30	16.200	0.389	0.611	0.076	0.162	2.128	1.126
1,3-DICHLOROPROPENE	DPU	1.23	4	110.980	3.84	5.50	16.200	0.340	0.660	0.076	0.150	1.964	1.110
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DMK	1.21	1		3.90	6.30	16.200	0.389	0.611	0.076	0.162	2.128	1.126
2,2-DICHLOROPROPIONIC ACID	DCN												
DIETHANOLAMINE	DEA	1.09	1	105.140	3.65	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
DIETHYLAMINE	DEN	0.71	3	73.139	2.50	1.00	16.200	0.062	0.938	0.076	0.083	1.093	1.020
DIETHYLENETRIAMINE	DET	0.96	1	103.170	3.48	0.04	16.200	0.002	0.998	0.076	0.077	1.006	1.001
DIETHYL ETHER, SEE ETHYL ETHER	DEH			74.123	2.56								
DIISOBUTYLAMINE	DBU	0.75	3	129.247	4.46	0.46	16.200	0.028	0.972	0.076	0.084	1.098	1.009
DIISOPROPANOLAMINE	DIP	0.98	1	133.190	4.59	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
DIISOPROPYLAMINE	DIA	0.72	3	101.193	3.50	3.70	16.200	0.228	0.772	0.076	0.120	1.571	1.074
N,N-DIMETHYLACETAMIDE	DAC	0.95	3		3.00	0.20	16.200	0.012	0.988	0.076	0.078	1.025	1.004
DIMETHYLETHANOLAMINE	DMB	0.89	1		3.03	0.50	16.200	0.031	0.969	0.076	0.081	1.063	1.010
DIMETHYLFORMAMIDE	DMF	0.95	1	73.090	2.51	0.30	16.200	0.019	0.981	0.076	0.078	1.028	1.006
1,4-DIOXANE	DOX	1.04	1		3.03	1.84	16.200	0.114	0.886	0.076	0.094	1.231	1.037
DI-N-PROPYLAMINE	DNA	0.74	3	58.080	3.50	1.50	16.200	0.093	0.907	0.076	0.094	1.232	1.030
ETHANOLAMINE	MEA	1.02	1	61.080	2.10	0.03	16.200	0.002	0.998	0.076	0.076	1.002	1.001
ETHYL ACRYLATE	EAC	0.93	2	100.118	3.50	2.00	16.200	0.123	0.877	0.076	0.100	1.309	1.040
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.80	6	45.060	1.56	15.50	16.200	0.957	0.043	0.076	0.117	1.536	1.310
N-ETHYLBUTYLAMINE	EBA	0.74	3	101.190	3.50	1.20	16.200	0.074	0.926	0.076	0.090	1.185	1.024
N-ETHYLCYCLOHEXYLAMINE	ECC	0.86	1	127.140	4.40	0.50	16.200	0.031	0.969	0.076	0.084	1.105	1.010
ETHYLENE CYANOHYDRIN	ETC	1.04	1	71.080	2.45	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
ETHYLENEDIAMINE	EDA	0.91	1	60.099	2.10	0.90	16.200	0.056	0.944	0.076	0.081	1.061	1.018
ETHYLENE DIBROMIDE	EDB	2.17				NF/NC							
ETHYLENE DICHLORIDE	EDC	1.26	1	98.960	3.42	4.00	16.200	0.247	0.753	0.076	0.122	1.598	1.080
ETHYLENE GLYCOL PROPYL ETHER	EGP	0.91	1		4.80	0.60	16.200	0.037	0.963	0.076	0.087	1.141	1.012
2-ETHYLHEXYL ACRYLATE	EAI	0.89	2	184.200	6.35	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
ETHYLIDENE NORBORNENE	ENB	0.90	3		4.10	0.33	16.200	0.020	0.980	0.076	0.081	1.063	1.007
ETHYL METHACRYLATE	ETM	0.92	2		3.94	1.00	16.200	0.062	0.938	0.076	0.090	1.182	1.020
2-ETHYL-3-PROPYLACROLEIN	EPA	0.85	1	126.190	4.35	0.12	16.200	0.007	0.993	0.076	0.078	1.025	1.002
FERRIC CHLORIDE SOLUTIONS	FCS												
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	1.13	1		1.03	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.003

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO Mwc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Mv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Mv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
FORMIC ACID	FMA	1.22	1		1.60	2.10	16.200	0.130	0.870	0.076	0.082	1.078	1.042
FURFURAL	PFA	1.20	1	96.085	3.31	0.15	16.200	0.009	0.991	0.076	0.078	1.021	1.003
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA		1			NF/NC							
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.93	1	116.140	4.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
HEXAMETHYLENIMINE	HMI	0.88	1		1.00	0.50	16.200	0.031	0.969	0.076	0.076	1.000	1.010
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	1.21											
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))													
ISOPRENE	IPR	0.69	7	68.120	2.35	23.00	16.200	1.420	-0.420	0.076	0.222	2.917	1.460
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING:KPL													
MESITYL OXIDE	MSO	0.86	1		3.50	0.67	16.200	0.041	0.959	0.076	0.084	1.103	1.013
METHYL ACRYLATE	MAM	0.95	2	86.091	3.00	4.10	16.200	0.253	0.747	0.076	0.115	1.506	1.082
METHYLCYCLOPENTADIENE DIMER	MCK	0.94	1		0.93	0.15	16.200	0.009	0.991	0.076	0.076	0.999	1.003
METHYL DIETHANOLAMINE	MDE	1.04	1		4.10	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
2-METHYL-5-ETHYLPYRIDINE	MEP	0.92	1	121.000	4.18	0.16	16.200	0.010	0.990	0.076	0.079	1.031	1.003
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)													
METHYL METHACRYLATE	MM	0.94	2	100.110	3.45	2.02	16.200	0.125	0.875	0.076	0.099	1.306	1.040
2-METHYLPYRIDINE	MPR	0.95	3	93.129	3.20	0.50	16.200	0.031	0.969	0.076	0.081	1.068	1.010
alpha-METHYLSTYRENE	MSR	0.89	2	118.179	4.08	0.40	16.200	0.025	0.975	0.076	0.082	1.076	1.008
MORPHOLINE	MPL	1.00	1	87.122	3.00	0.80	16.200	0.049	0.951	0.076	0.084	1.099	1.016
NITRIC ACID (70% OR LESS)	NCD												
NITROPROPANE (-1, OR -2)	NPM	0.99	1	89.090	3.06	1.05	16.200	0.065	0.935	0.076	0.086	1.134	1.021
OCTYL NITRATES (ALL ISOMERS)	ONE	1.00	1		6.00	0.31	16.200	0.019	0.981	0.076	0.083	1.096	1.006
OLEUM	OLM	1.98			2.76	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
PENTACHLOROETHANE	PCE	1.67				NF/NC							
1, 3-PENTADIENE	PDE	0.68	7	68.060	2.36	17.06	16.200	1.053	-0.053	0.076	0.185	2.432	1.341
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PER	1.62	1	165.820	5.72	NF/NC							
PHOSPHORIC ACID	PAC	1.83											
POLYETHYLENE POLYAMINES	PEB	0.99	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI	1.20	1		13.79	0.00							
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)													
iso-PROPANOLAMINE	MPA	0.96	1	76.000	2.59	0.08	16.200	0.005	0.995	0.076	0.077	1.008	1.002
PROPANOLAMINE (iso-, n-)	PAX	0.96	1		2.59	0.08	16.200	0.005	0.995	0.076	0.077	1.008	1.002
PROPIONIC ACID	PNA	1.00	1	74.080	2.56	0.30	16.200	0.019	0.981	0.076	0.078	1.029	1.006
iso-PROPYLAMINE	IPP	0.69	5	59.112	2.04	23.42	16.200	1.446	-0.446	0.076	0.191	2.504	1.468
iso-PROPYL ETHER	IPE	0.72	1		3.50	6.64	16.200	0.410	0.590	0.076	0.154	2.025	1.133
PYRIDINE	PRD	0.98	1	79.102	2.72	1.30	16.200	0.080	0.920	0.076	0.087	1.138	1.026
SODIUM ALUMINATE SOLUTION	SAU												
SODIUM CHLORATE SOLUTION (50% OR LESS)	SDD	1.63	1			NF/NC							
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDL					NF/NC							
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)													
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)	SHP	1.10				NF/NC							
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SSH	1.32											

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H I S	LIQUID SPECIF. GRAVITY	USCQ VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO SQv (2)	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H2S<200 PPM)	SSI	1.32										
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H2S GREATER THAN 200 PPM)	SSJ	1.32										
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	STS											
STYRENE MONOMER	STY	0.92	104.150	3.60	NF/NC							
SULFURIC ACID	SFA	1.84		3.40	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.000
SULFURIC ACID, SPENT	SAC	1.39			0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	TEC	1.59	147.410	5.09	0.01	16.200	0.001	0.999	0.076	0.076	0.999	1.000
TETRAETHYLENEPENTAMINE	TTP	1.00	1	6.80								
TETRAHYDROFURAN	THF	0.89	1	72.107	0.00	16.200	0.000	1.000	0.076	0.076	1.000	1.000
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	THF	0.89	1	72.107	8.50	16.200	0.525	0.475	0.076	0.090	1.184	1.170
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)	TCM	1.44	1	133.390	1.02	16.200	0.063	0.937	0.076	0.093	1.227	1.020
TRICHLOROETHYLENE												
1,2,3-TRICHLOROPROPANE	TCL	1.46	1	131.380	3.46	16.200	0.214	0.786	0.076	0.133	1.748	1.069
TRIETHANOLAMINE	TCN	1.39	3	147.432	0.15	16.200	0.009	0.991	0.076	0.079	1.043	1.003
TRIETHYLAMINE	TEA	1.13	1	149.190	5.14	16.200	0.001	0.999	0.076	0.076	1.003	1.000
TRIETHYLENETETRAMINE	TEN	0.73	3	101.193	3.49	16.200	0.154	0.846	0.076	0.105	1.384	1.050
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH3)	TET	0.98	1	146.240	5.04	16.200	0.001	0.999	0.076	0.076	1.003	1.000
VALERALDEHYDE (iso-, n-)	UAS		1		NF/NC							
VALERALDEHYDE (iso-)		0.79	1	86.134	5.00	16.200	0.309	0.691	0.076	0.123	1.617	1.100
VALERALDEHYDE (n-)	IVA	0.79	1		5.00	16.200	0.309	0.691	0.076	0.123	1.617	1.100
VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	VAL	0.84	1		0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
VINYL ACETATE	VBL		1									
VINYLTOLUENE	VAM	0.94	2	86.091	5.80	16.200	0.358	0.642	0.076	0.130	1.705	1.116
	VNT	0.90	2		0.12	16.200	0.007	0.993	0.076	0.078	1.023	1.002

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
46 CFR SUBCHAPT O BUT NOT TABLE 151													
1,1-DICHLOROPROPANE	DPB	1.16	3		3.90	6.30	16.200	0.309	0.611	0.076	0.162	2.128	1.126
1,1,1-TRICHLOROETHANE		1.51	1	133.390	4.60	NF/NC							
1,2-DICHLOROPROPANE	DPP	1.16	3		3.50	2.60	16.200	0.160	0.840	0.076	0.107	1.401	1.052
1,3-CYCLOPENTADIENE			1										
1,3-DICHLOROPROPANE	DPC	1.16	3		3.90	3.80	16.200	0.235	0.765	0.076	0.128	1.680	1.076
2-METHYL-2-HYDROXY-3-BUTYNE	MHB	0.86	1		2.90	1.14	16.200	0.070	0.930	0.076	0.086	1.134	1.023
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70%)	DDA												
3-PENTENENITRILE	PNT (CRUDE ?)		8										
AEROTHEME TT (1,1,1-TRICHLOROETHANE)			8	133.390	4.60								
ALKYLBENZENE			1										
AMINOETHYLPYPERAZINE	AEP		1										
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		0.70			2.80	4.50	16.200	0.278	0.722	0.076	0.114	1.500	1.250
BENZENE SULFONYL CHLORIDE	BSC	1.38	1		6.09	0.00	16.200	0.000	1.000	0.076	0.076	1.000	1.000
BENZYL ACETATE	BZE	1.04	1		5.18	0.02	16.200	0.001	0.999	0.076	0.077	1.005	1.000
BENZYL CHLORIDE (STABILIZED)	BCL	1.10	4		4.36	0.09	16.200	0.006	0.994	0.076	0.078	1.019	1.002
BUTANOL			1										
BUTYL ETHER (n-)	BTE	0.77	3		4.50	0.40	16.200	0.025	0.975	0.076	0.083	1.086	1.008
BUTYLENE OXIDE (1,2-)	BTO	0.83	2		2.49	9.18	16.200	0.567	0.433	0.076	0.140	1.844	1.184
BUTYRIC ACID	BRA	0.96	1		3.00	0.07	16.200	0.004	0.996	0.076	0.077	1.009	1.001
CARBOLIC ACID	CBO	1.04	3		3.25	0.06	16.200	0.004	0.996	0.076	0.077	1.008	1.001
CHLOROACETIC ACID (80% OR LESS)	CHM	1.58			3.26	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	1.26	1		3.70	0.02	16.200	0.001	0.999	0.076	0.076	1.003	1.000
CHLOROTOLUENE (m-)	CTM	1.07	1		4.40	0.32	16.200	0.020	0.980	0.076	0.081	1.067	1.006
CHLOROTOLUENE (o-)	CTO	1.08	1		4.40	0.32	16.200	0.020	0.980	0.076	0.081	1.067	1.006
CHLOROTOLUENE (p)	CRN	1.07	1		4.36	0.09	16.200	0.006	0.994	0.076	0.078	1.019	1.002
CHLOROTOLUENES (MIXED ISOMERS)	CHI	1.08	1		4.40	0.53	16.200	0.033	0.967	0.076	0.085	1.111	1.011
CREOSOTE (ALL ISOMERS)	CCW	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CRESYLIC ACID TAR	CRX	1.05	1		1.00	0.10	16.200	0.006	0.994	0.076	0.076	1.000	1.002
CYCLOHEPTANE	CYE	0.81	1		3.39	1.40	16.200	0.086	0.914	0.076	0.092	1.207	1.028
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CYX	0.95	1		3.38	1.00	16.200	0.062	0.938	0.076	0.087	1.147	1.020
CYCLOHEXYL ACETATE	CYC	0.97	1		4.90	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CSB	1.50	1		4.55	4.50	16.200	0.278	0.722	0.076	0.151	1.986	1.090
CYCLOPENTANE	CYP	0.74	1		2.40	13.15	16.200	0.812	0.188	0.076	0.163	2.136	1.263
DECANOIC ACID	DCO	5.94	1		5.93	0.00							
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)		0.98											
DICHLOROISOPROPYL ETHER (2,2'-)	DCI	1.11	1		5.90	0.06	16.200	0.004	0.996	0.076	0.078	1.018	1.001
DICHLOROPROPANE		1.16											
DICHLOROPROPENE		1.23											
DIETHYL SULFATE	DSU	1.18	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID, SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'W OF CARGO MW	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROW RATE VGR (9)
DIETHYLETHANOLAMINE	***	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****	*****
DODECYL BENZENE	DAB	0.89	1		4.03	0.18	16.200	0.011	0.989	0.076	0.079	1.034	1.00
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE			1										
DRISOLENE	DOT												
ETHANOL (see ethyl alcohol)			1										
ETHYL BROMIDE			1	46.069	1.59								
ETHYL TERT-BUTYL ETHER			8	108.966	3.76								
ETHYLAMINE	EBE	0.73	1		3.50	5.00	16.200	0.309	0.691	0.076	0.135	1.772	1.100
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EAM	0.80	6	45.085	1.55	40.80	16.200	2.519	-1.519	0.076	0.102	2.305	1.816
ETHYL MERCAPTAN (SAME AS ETHANETHIOL)	ETX	1.44	1		4.60	3.70	16.200	0.228	0.772	0.076	0.139	1.822	1.074
ETHYLPHENOL			6										
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	EPL	1.04	1		4.21	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
HYDROSULFIDE	MTM	0.79	1		1.10	6.63	16.200	0.409	0.591	0.076	0.079	1.041	1.133
INDENES			8										
ISOBUTYL ACETATE			8										
ISOPRENE, PENTADIENE MIXTURE	IBA			116.160	4.01	0.36	16.200	0.022	0.978	0.076	0.081	1.068	1.007
ISO-PROPYL ALCOHOL	IPN												
LAURIC ACID		0.79	1	60.096	2.07	3.00	16.200	0.185	0.815	0.076	0.091	1.199	1.060
METHACRYLONITRILE	LRA	0.88	1	6.910	0.00								
METHANOL	MET	0.80	2		2.31	3.39	16.200	0.209	0.791	0.076	0.097	1.274	1.068
METHYL STYRENE		0.79	1	32.042	1.11								
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES			2										
METHYLCYCLOHEXANE	MIA												
METHYLHEXANE (SAME AS HEPTANE)	MCY	0.77	1		3.40	2.37	16.200	0.146	0.854	0.076	0.103	1.351	1.047
MONOETHANOLAMINE			1										
MONOISOPROPANOLAMINE	MEA	1.02		61.084	2.11	0.10	16.200	0.006	0.994	0.076	0.077	1.007	1.002
NAPHTHALENE (MOLTEN)		0.96		75.110	2.59	0.20	16.200	0.012	0.988	0.076	0.078	1.020	1.004
NEODECANOIC ACID	NTM	1.15	1		4.41	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
NITRILOTRIACETIC ACID	NEA	0.92	1		6.00	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
NITROPHENOL (MOLTEN)	NAA (4SALTS ?		8			NF/NC							
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE	NTP	1.49	1		4.79	0.00							
NITROTOLUENE (o-,p-)	NNM	1.05	1		3.06	1.10	16.200	0.068	0.932	0.076	0.087	1.140	1.022
PARALDEHYDE	NIT	1.16	1		4.72	0.02	16.200	0.001	0.999	0.076	0.076	1.005	1.000
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)	PDH	0.99	1		4.55	8.30	16.200	0.512	0.488	0.076	0.215	2.819	1.166
PROPIONALDEHYDE	PAD	0.81	2		2.00	13.76	16.200	0.849	0.151	0.076	0.141	1.849	1.275
PROPIONIC ANHYDRIDE	PAH	1.01	1		4.50	0.11	16.200	0.007	0.993	0.076	0.078	1.024	1.002
PROPIONITRILE	PCN	0.70	1		1.90	1.17	16.200	0.072	0.928	0.076	0.081	1.065	1.023
PROPYLAMINE (n-)	PRA	0.72	1		2.04	13.55	16.200	0.836	0.164	0.076	0.142	1.870	1.271
PROPYLBENZENE			1		0.20	4.14	16.200	0.256	0.744	0.076	0.061	0.796	1.083
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)	GPY	0.84	1		2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146
PYROLYSIS RESIDUAL FUELS		0.89											
SEWAGE, RAW	SWR												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Ma, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Mv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Mv-a, 115/ Ma, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
SODIUM SULFIDE (SOLID IN WATER)	SDS	1.53	0										
STYRENE	STY	0.92	2	104.152	3.60	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.008
STYRENE CRUDE	STX	0.92	2		3.60	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.008
STYRENE TAR	STT												
TETRAMETHYLBENZENE (1,2,3,5-)	TTB	0.89	1		4.20	0.14	16.200	0.009	0.991	0.076	0.078	1.028	1.003
TOLUIDINE (o-)	TLI	1.00	1		3.69	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
TRICHLOROBENZENE (1,2,4-)	TCB	1.45	1		6.25	0.03	16.200	0.002	0.998	0.076	0.077	1.010	1.001
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHOXY ACETIC ACID SOL'N	TPE		0										
TRIPHENYLBORANE	UDA	0.89	1		6.42	0.00							
UNDECANOIC ACID	HPN	0.85	1		3.40	4.40	16.200	0.272	0.728	0.076	0.126	1.652	1.008
HYDROCARBON 5-9													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY, SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115 (9)	VAPOR AIR MIX GROW RATE VGR (10)	
46 CFR SUBCHAPTER D, TABLE 30.25-1														
Acetone														
Acetophenone	ACT	0.79	1	58.080	2.00	10.00	16.200	0.617	0.383	0.076	0.123	1.617	1.200	
Acetyl Tributyl Citrate	ACP	1.03	1	120.060	4.14	0.60	16.200	0.037	0.963	0.076	0.085	1.116	1.012	
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALE	1.05		402.460	13.89									
Alcohols (C13 and above)	ALY													
Alcoholic beverages, N.O.S.														
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates														
Alcohol (C12 - C15) Poly(1-3)ethoxylates														
Alcohol (C12 - C15) Poly(3-11)ethoxylates														
Alkenylsuccinic acid														
Alkenylsuccinic Anhydride														
Alkyl (C9 - C17) Benzenes														
Alkylbenzenesulfonic acid (4% or less)	AKB													
Alkyl Phthalates (n-)	ABS													
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)														
Aminoethyldiethanolamine, Aminoethylethanolamine solution														
Amyl Acetate (commercial, iso-, n-, sec-)	AEC	0.87	1		4.50	2.02	16.200	0.125	0.875	0.076	0.109	1.436	1.040	
AMYL ACETATE (n-)	AML	0.88	1		4.48	0.33	16.200	0.020	0.980	0.076	0.082	1.071	1.007	
AMYL ACETATE (iso-)	IAT	0.88	1		4.48	0.33	16.200	0.020	0.980	0.076	0.082	1.071	1.007	
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl alcohol (n-)	AAN	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl alcohol (tert-)	AAI													
AMYL ALCOHOL, PRIMARY	APM	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
AMYL ALCONOL, (sec-)	ASE	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amylene	AMZ													
AMYL ALCOHOL, (iso-)	IAA	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl Methyl Ketone	AMK													
Asphalt	ASP	1.04												
ASPHALT BLENDING STOCKS: Roofers flux	ARF													
ASPHALT BLENDING STOCKS: Straight run residue	ASR													
Behenyl alcohol														
Benzene Tricarboxylic acid Trioctyl Ester														
Benzyl alcohol														
Bicyclic Terpenel Polyamide salt	BAL	1.05	1	108.140	3.73	0.10	16.200	0.006	0.994	0.076	0.077	1.017	1.002	
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3)	gBFX													
Butane	BMX	1.03												
Butene, SEE BUTYLENE														
Butene Oligomer	BOL													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAP GROWTH RATE VG (9)
BAX	0.87	1	116.160	4.00	0.60	16.200	0.037	0.963	0.076	0.085	1.111	1.01
BCN	0.88	1		4.00	0.80	16.200	0.049	0.951	0.076	0.087	1.148	1.01
BTA	0.89	1		4.00	1.50	16.200	0.093	0.907	0.076	0.097	1.278	1.03
IAL	0.81	1		2.60	0.90	16.200	0.056	0.944	0.076	0.083	1.089	1.01
BAN	0.81	1		2.60	0.90	16.200	0.056	0.944	0.076	0.083	1.089	1.01
BAS	0.81	1		2.60	0.50	16.200	0.031	0.969	0.076	0.080	1.049	1.01
BAT	0.78	1		2.60	1.30	16.200	0.080	0.920	0.076	0.086	1.128	1.02
BPH	1.12	1		10.80	2.80	16.200	0.173	0.827	0.076	0.097	1.277	1.05
BTN					0.01	16.200	0.001	0.999	0.076	0.077	1.006	1.00
BUG												
BHK			102.134	3.53								
BUE	0.85	1		5.11	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
BLA												
CLS	1.02	1		3.90	0.05	16.200	0.003	0.997	0.076	0.077	1.009	1.001
	0.90											
COR	1.11											
CUM	0.86	1	120.090	4.20	0.60	16.200	0.037	0.963	0.076	0.085	1.119	1.012
CHK	0.78	1	84.162	2.90	4.50	16.200	0.278	0.722	0.076	0.116	1.528	1.090
CHN	0.95	1	100.160	3.45	0.15	16.200	0.009	0.991	0.076	0.078	1.023	1.003
CPD	0.69	2		4.55	0.25	16.200	0.015	0.985	0.076	0.080	1.055	1.005
CMP	0.86	1		4.62	0.11	16.200	0.007	0.993	0.076	0.078	1.025	1.002
DHN	0.89	1		4.76	0.10	16.200	0.006	0.994	0.076	0.078	1.023	1.002
IDA	0.83	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
DAL	0.83	1		5.01	0.00							
DDC												
DCE	0.74	1		4.80	0.12	16.200	0.007	0.993	0.076	0.078	1.028	1.002

STDVAP1

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'W WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
Decyl alcohol (all isomers) (DECANOL)	DAK	0.83	1	158.170	5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
DECYL ALCOHOL (iso-)	ISA	0.83	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
DECYL ALCOHOL (n-)	DAN	0.83	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Decylbenzene (n-)	DBZ	0.86	1		7.52	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Detergent Alkylate													
Diacetone alcohol	DAA	0.97	1		4.00	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
Dialkyl (C10-C14) Benzenes	DAB												
Dialkyl (C7-C13) Phthalates	DAH												
Dibutyl Carbinol													
Dibutyl Phthalate (ortho-)	DPA	1.05	1	278.350	9.59	0.00							
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPT	0.98	2		4.55	0.25	16.200	0.015	0.985	0.076	0.080	1.055	1.005
Diethylbenzene	DEB	0.87	1		4.62	0.08	16.200	0.005	0.995	0.076	0.078	1.010	1.002
Diethylene Glycol	DEG	1.12	1	106.122	3.66	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Diethylene Glycol Butyl Ether	DME	0.95	1		5.50	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diethylene Glycol Butyl Ether Acetate	DEM												
Diethylene Glycol Dibutyl Ether	DIG												
Diethylene Glycol Diethyl Ether													
Diethylene Glycol Ethyl Ether	DGE												
Diethylene Glycol Ethyl Ether Acetate	DGA	0.99	1		4.62	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Diethylene Glycol Methyl Ether	DGM	1.03	1		4.14	0.03	16.200	0.002	0.998	0.076	0.077	1.006	1.001
Diethylene Glycol Methyl Ether Acetate	DGR												
Diethylene Glycol Phenyl Ether	DGP												
Diethylene Glycol Phthalate	DGL												
Di-(2-ethylhexyl)adipate	DEH												
Di-(2-ethylhexyl)phthalate	DIE												
Diethyl Phthalate	DPH												
Diglycidyl Ether of Bisphenol A	BDE												
Diheptyl Phthalate	DHP												
Dihexyl Phthalate	DHA												
Diisobutylcarbinol	DBC	0.81	1		4.97	0.09	16.200	0.006	0.994	0.076	0.078	1.022	1.002
Diisobutylene	DBL	0.72	1		3.86	2.00	16.200	0.123	0.877	0.076	0.103	1.353	1.040
Diisobutyl Ketone	DIK	0.81	1		4.90	0.16	16.200	0.010	0.990	0.076	0.079	1.039	1.003
Diisobutyl Phthalate	DIT												
Diisodecyl Phthalate	DID												
Diisononyl Adipate	DNY												
Diisononyl Phthalate	DIN												
Diisocetyl Phthalate	DIO												
Diisopropylbenzene (all isomers)	DIX	0.86	1		5.60	0.03	16.200	0.002	0.998	0.076	0.077	1.009	1.001
Diisopropyl Naphthalene	DII												
Dimethyl Adipate	DIA												
Dimethylbenzene													
Dimethyl Glutarate	DGT												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCO VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (Lbm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (Lbm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
Dimethyl Phthalate	DTL	1.19	1		6.69	0.00							
Dimethyl Polysiloxane	DMP												
2,2-Dimethylpropane-1,3-diol	DDI												
Dimethyl Succinate	DSE												
Dinonyl Phthalate	DIF	0.97	1		14.40	0.01	16.200	0.001	0.999	0.076	0.077	1.008	1.000
Di(octylphenyl)amine													
Diocetyl Phthalate	DOP	0.98	1		13.47	0.00							
Dipentene	DPN	0.84	1		4.90	0.10	16.200	0.006	0.994	0.076	0.078	1.024	1.002
Diphenyl	DIL	0.99	1	154.212	5.31	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl, Diphenyl Ether mixture	DDO	1.07	1		5.86	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl Ether	DPE	1.07	1	170.211	5.87	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl Ether, Biphenyl Ether mixture	DOB												
Dipropylene Glycol	DPG	1.03	1		4.63	0.07	16.200	0.004	0.996	0.076	0.077	1.016	1.001
Dipropylene Glycol Dibenzoate	DGY												
Dipropylene Glycol Methyl Ether	DPY												
DISTILLATES: Flashed feed stocks	DFF	0.75	1		3.40	2.30	16.200	0.142	0.858	0.076	0.102	1.341	1.046
DISTILLATES: Straight run	DSR	0.73	1		3.40	2.30	16.200	0.142	0.858	0.076	0.102	1.341	1.046
Ditridecyl Phthalate	DTP												
Diundecyl Phthalate	DUP												
Dodecane (all isomers)	DOC			170.340	5.88								
Dodecanol	DDN			186.339	6.43								
Dodecene (all isomers)	DOZ	0.76	1	168.324	5.81	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
DODECENE	DOD	0.76	1		5.81	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
Dodecylbenzene	DDB	0.86			8.40	4.70	16.200	0.290	0.710	0.076	0.240	3.147	1.094
Dodecyl Phenol	DOL												
Drilling mud (low toxicity) (if flammable or combustible)/													
Epoxytated linear alcohols, C11-C15													
Ethane	ETH	0.47		30.070	1.04								
2-Ethoxyethanol	EEO	1.04											
2-Ethoxyethyl Acetate	EEA	1.04											
Ethoxylated alcohols, C11-C15,SEE THE ALCOHOL POLYETHOXYLATES													
Ethoxy Triglycol (crude)	ETG	1.02	1		6.14	0.00							
Ethyl Acetate	ETA	0.90	1	88.107	3.04	4.50	16.200	0.278	0.722	0.076	0.119	1.567	1.090
Ethyl Acetoacetate	EAA	1.03	1		4.48	0.20	16.200	0.012	0.988	0.076	0.079	1.043	1.004
Ethyl alcohol (ETHANOL)	EAL	0.79	1	46.050	1.60	3.50	16.200	0.216	0.784	0.076	0.086	1.130	1.070
Ethyl Amyl Ketone	EAK												
Ethyl Benzene	ETB	0.87	1	106.168	3.56	0.60	16.200	0.037	0.963	0.076	0.083	1.095	1.012
Ethyl Butanol	EBT	0.83	1		3.52	0.12	16.200	0.007	0.993	0.076	0.078	1.019	1.002
Ethyl Butyrate	EBR	0.88	1	116.160	4.00	1.00	16.200	0.062	0.938	0.076	0.090	1.185	1.020
Ethyl Cyclohexane	ECY	0.79	1		3.87	0.50	16.200	0.031	0.969	0.076	0.083	1.089	1.010
Ethylene	ETL			28.054	0.97								
Ethylene Carbonate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY, SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR
Ethylene Glycol	EGL	1.13	1	62.069	2.21	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
Ethylene Glycol Acetate	EGO												
Ethylene Glycol Butyl Ether	EGM												
ETHYLENE GLYCOL BUTYL ETHER ACETATE	EMA	0.94	1		5.52	0.05	16.200	0.003	0.997	0.076	0.077	1.014	1.001
Ethylene Glycol Ether Acetate													
Ethylene Glycol Tert-Butyl Ether													
Ethylene Glycol Diacetate	EGY	1.10	1		5.03	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Ethylene Glycol Dibutyl Ether	EGB												
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGF												
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGA												
Ethylene Glycol Isopropyl Ether	EGI												
Ethylene Glycol Methyl Butyl Ether													
Ethylene Glycol Methyl Ether	EME	1.10	1		4.80	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Ethylene Glycol Methyl Ether Acetate	EGT												
Ethylene Glycol Phenyl Ether	EPE	1.10	1		4.80	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixt	EDX												
Ethylene-Propylene Copolymer (in liquid mixtures)													
Ethyl-3-Ethoxypropionate	EEP												
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	0.82	1		4.41	0.17	16.200	0.010	0.990	0.076	0.079	1.036	1.003
2-Ethylhexanoic acid	EHO												
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)													
2-Ethylhexanoic acid, SEE 2-ETHYLHEXANOIC ACID	EHX	0.84	1	130.230	4.50	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE												
Ethyl Hexyl Tallate	EHT												
Ethyl Propionate	EPR	0.89	1		1.60	3.50	16.200	0.216	0.784	0.076	0.086	1.130	1.070
Ethyl Toluene	ETE	0.88	1		4.15	0.28	16.200	0.017	0.983	0.076	0.080	1.054	1.006
Fatty acid (saturated, C13 and above)													
Fatty acid Amides													
Formamide	FAM	1.13	1		1.55	0.10	16.200	0.006	0.994	0.076	0.076	1.003	1.002
Furfuryl Alcohol	FAL	1.13	1		3.40	0.05	16.200	0.003	0.997	0.076	0.077	1.007	1.001
Gas oil, cracked	GOC												
GASOLINE BLENDING STOCKS: Alkylates	GAK	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINE BLENDING STOCKS: Reformates	GRF	0.80	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Automotive (containing not over 4.23 grams lead per gal)	GAT	0.74	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon)	GAV	0.71	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Casinghead (natural)	GCS	0.67	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Polymer	GPL	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Straight run	GSR	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
Glycerine	GCR	1.26	1		3.17	0.00							
Glycerol, SEE GLYCERINE													
Glycerol Polyalkoxylate				92.095	3.18								
Glycerol Triacetate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'W WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPO AIR MIX GROW RATI VGR (9)
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID													
Glycidyl Ester of Tridecyl Acetic acid													
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID													
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE													
Glycols, Resins and Solvents mixtures													
Glycol Triacetate, SEE GLYCERYL TRIACETATE													
Glyoxal solution (40% or less)													
Grease													
Heptadecane													
Heptane (all isomers) (METHYHEXANE)	HMX	0.68	1	100.120	3.45	2.50	16.200	0.154	0.846	0.076	0.105	1.378	1.050
HEPTANE (N-)	HPT	0.68	1		3.45	2.50	16.200	0.154	0.846	0.076	0.105	1.378	1.050
Heptanoic acid	HEP	0.92	1		4.49	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Heptanol (all isomers)	HTX	0.82	1		4.00	0.04	16.200	0.002	0.998	0.076	0.077	1.007	1.001
HEPTANOL	HTN	0.82	1		4.00	0.04	16.200	0.002	0.998	0.076	0.077	1.007	1.001
Heptene (all isomers)	HPX	0.70	2		3.40	2.90	16.200	0.179	0.821	0.076	0.109	1.430	1.058
HEPTENE (1-)	HTE	0.70	1		3.40	2.80	16.200	0.173	0.827	0.076	0.108	1.415	1.056
Heptyl Acetate	HPE	0.88	1		5.50	0.10	16.200	0.006	0.994	0.076	0.078	1.028	1.002
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR													
Hexaethylene Glycol													
Hexamethylene Glycol													
Hexamethylenetetramine solutions	HTS												
Hexane (all isomers)	HXS	0.66	1	86.110	3.00	7.00	16.200	0.432	0.568	0.076	0.142	1.864	1.140
HEXANE	HXA	0.66	1		3.00	7.00	16.200	0.432	0.568	0.076	0.142	1.864	1.140
Hexanoic acid	HXO	0.93	1		4.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Hexanol	HXN	0.82	1		3.52	1.00	16.200	0.062	0.938	0.076	0.088	1.156	1.020
Hexene (all isomers)	HEX	0.67	2	84.090	2.90	8.00	16.200	0.494	0.506	0.076	0.148	1.938	1.160
HEXENE (1-)	HXE	0.67	1		2.90	8.20	16.200	0.506	0.494	0.076	0.149	1.962	1.164
HEXENE (2-)	HXT	0.67	1		2.90	8.20	16.200	0.506	0.494	0.076	0.149	1.962	1.164
Hexyl Acetate	HAE												
Hexylene Glycol	HXG	0.92	4		1.10	0.01	16.200	0.001	0.999	0.076	0.076	1.000	1.000
Mog Grease, SEE LARD													
2-Hydroxy-4-(methylthio)butanoic acid	HBA												
HYDROCARBON 5-9 (MOVED TO SUB-O, NON TABLE 151, 6/24/95)	HPN												
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/													
Isophorone	IPH	0.93	1		4.75	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
JET FUELS: JP-1 (Kerosene)	JPO	0.80	1		4.50	0.14	16.200	0.009	0.991	0.076	0.078	1.030	1.003
JET FUELS: JP-3	JPT	0.80	1		4.50	8.51	16.200	0.525	0.475	0.076	0.216	2.839	1.170
JET FUELS: JP-4	JPF	0.81	1		4.00	3.40	16.200	0.210	0.790	0.076	0.124	1.630	1.068
JET FUELS: JP-5 (Kerosene, heavy)	JPV	0.82	1		4.00	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
JET FUELS: JP-8	JPE		1										
Kerosene	KRS	0.81	1		4.50	0.15	16.200	0.009	0.991	0.076	0.079	1.032	1.003
Lactic acid													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115 (9)	VAPOR AIR MIX GROWTH RATE VGR (9)
Lard												
Latex, liquid synthetic, including: Styrene-Butadien rubber		LLS										
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer												
Magnesium Nonyl Phenol Sulfide												
Magnesium Sulfonate		MSE										
Maleic Anhydride Copolymer												
2-Mercaptobenzothiazol (in liquid mixtures)												
Methane		MTM		16.043	0.55							
3-Methoxy-1-Butanol												
3-Methoxybutyl Acetate		MOA										
1-Methoxy-2-Propyl Acetate		MPO										
Methoxy Trigylcol, SEE TRIETHYLENE GLYCOL METHYL ETHER		MTG										
Methyl Acetate	0.92	1	74.080	2.60	6.10	16.200	0.377	0.623	0.076	0.122	1.603	1.122
Methyl Acetoacetate		MAE										
Methyl alcohol (SEE METHANOL)	0.79	1		1.10	6.63	16.200	0.409	0.591	0.076	0.079	1.041	1.133
Methyl Amyl Acetate	0.86	1		4.97	0.33	16.200	0.020	0.980	0.076	0.082	1.081	1.007
Methyl Amyl alcohol	0.81	1		3.52	0.43	16.200	0.027	0.973	0.076	0.081	1.067	1.009
Methyl Amyl Ketone		MAK	114.188	3.94								
Methyl Butanol, SEE THE AMYL ALCOHOLS												
Methyl Butanol		MBL										
Methyl n-Butyl Ketone	0.81	1	100.160	3.50	0.97	16.200	0.060	0.940	0.076	0.088	1.150	1.019
Methyl Butynol		MBY										
Methyl Butyrate	0.90	1	102.134	3.53	1.26	16.200	0.078	0.922	0.076	0.091	1.197	1.025
Methyl Ethyl Ketone	0.80	1	72.107	2.50	4.50	16.200	0.278	0.722	0.076	0.108	1.417	1.090
Methyl Formal (DIMETHYL FORMAL)	0.86	1		2.60	15.42	16.200	0.952	0.048	0.076	0.192	2.523	1.308
Methyl Heptyl Ketone	0.83	1		4.90	0.06	16.200	0.004	0.996	0.076	0.077	1.014	1.001
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	0.84	MIC										
Methyl Isobutyl Ketone	0.80	1	100.160	3.45	1.15	16.200	0.071	0.929	0.076	0.089	1.174	1.023
3-Methyl-3-Methoxybutanol												
3-Methyl-3-Methoxybutyl Acetate												
1-Methyl Naphthalene	1.02	1		4.91	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Methyl Pentene		MNA										
2-METHYL-1-PENTENE	0.69	1		2.90	6.30	16.200	0.389	0.611	0.076	0.132	1.739	1.126
5-METHYL-1-PENTENE	0.67	1		2.90	8.49	16.200	0.524	0.476	0.076	0.152	1.996	1.170
N-Methyl-2-Pyrrolidone		MPY										
Methyl Tert-Butyl Ether (MTBE)	0.74	1		3.10	0.04	16.200	0.002	0.998	0.076	0.077	1.005	1.001
Metolachlor		MBE										
Mineral spirits		MCO										
Myrcene	0.75	1		4.30	0.20	16.200	0.012	0.988	0.076	0.079	1.041	1.004
NAPHTHA: Aromatic (Having less than 10% Benzene)	0.80	1		4.70	0.17	16.200	0.010	0.990	0.076	0.079	1.039	1.003
NAPHTHA: Cracking fraction	0.85	1										
NAPHTHA: Heavy	0.85	1										

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	CHRS	LIQUID SPECIF. GRAVITY	USCO VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7)	VAPOR-AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8)	VAPOR-AIR MIX SPECIFIC GRAVITY Wv-a, 115 / Wa, 115 (9)	VAPOR-AIR MIX GROWTH RATE VGR (9)
		(1)	(13)	(1)	(2)	(15) (PSIA)	(PSIA)			(LBm/FT ³)	(LBm/FT ³)		
NAPHTHA: Paraffinic		.6 -.85	1										
NAPHTHA: Petroleum	PTN	.6 -.85	1										
NAPHTHA: Solvent	NSV	0.87	1		3.50	0.20	16.200	0.012	0.988	0.076	0.078	1.031	1.004
NAPHTHA: Stoddard solvent	NSS	0.78	1		4.30	0.20	16.200	0.012	0.988	0.076	0.079	1.041	1.004
NAPHTHA: Varnish makers' and painters' (75t)	NVM	0.77	1		4.30	0.19	16.200	0.012	0.988	0.076	0.079	1.039	1.004
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solNFS	NTI	1.02											
Naphthenic acid	NAX	0.72	1	128.259	4.40	0.27	16.200	0.017	0.983	0.076	0.080	1.057	1.005
Nonane (all isomers)	NAN	0.72	1		4.40	0.27	16.200	0.017	0.983	0.076	0.080	1.057	1.005
NONANE	NNA												
Nonanoic acid (all isomers)													
Nonanoic, Tridecanoic acid mixture													
Nonene	NON	0.73	2	126.140	4.30	0.35	16.200	0.022	0.978	0.076	0.082	1.071	1.007
Nonyl alcohol (all isomers)	NNS	0.94	1	144.160	5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
NONYL ALCOHOL	NNN	0.94	1		5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
NONYL ALCOHOL (iso-)	NNI	0.94	1		5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
Nonyl Methacrylate Monomer													
Nonyl Phenol	NNP	0.95	1		7.60	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Nonyl Phenol Poly(4-12)ethoxylates	NPE												
Nonyl Phenol Sulfide (90% or less)													
Noxious liquid, N.O.S. (17) ("Trade name," contains "principal components"), Category D (if f													
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appendix III													
Octadecane													
Octadecenoamide solution (Oleamide)	ODD												
Octane (all isomers)	OAX	0.70	1		3.90	0.79	16.200	0.049	0.951	0.076	0.087	1.141	1.016
OCTANE	OAN	0.70			3.90	0.79	16.200	0.049	0.951	0.076	0.087	1.141	1.016
Octanoic acid (all isomers)	OAA	0.91	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octanol (all isomers)	OCX	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
OCTANOL	OTA	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octene (all isomers)	OTX	0.72	2	122.200	3.90	0.90	16.200	0.056	0.944	0.076	0.088	1.161	1.018
OCTENE (1-)	OTE	0.72	1		3.86	1.00	16.200	0.062	0.938	0.076	0.090	1.177	1.020
Octyl Acetate													
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OCX	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
OCTYL ALCOHOL	IOA	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octyl Aldehydes	OAL												
Octyl Decyl Adipate	ODA												
Octyl Epoxystallate	OET												
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE													
OIL, EDIBLE: Babassu	OBb												
OIL, EDIBLE: Beechnut													
OIL, EDIBLE: Castor	OCA												
OIL, EDIBLE: Cocoa butter													
OIL, EDIBLE: Coconut	OCC	0.95											

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP Vv, 115 (5)	PARTIAL VOLUME OF AIR Va, 115 (6)	AIR WEIGHT DENSITY Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
OIL, EDIBLE: Cod liver													
OIL, EDIBLE: Corn	OCO	0.96											
OIL, EDIBLE: Cottonseed	OCs	0.96											
OIL, EDIBLE: Fish, N.O.S.													
OIL, EDIBLE: Grapeseed													
OIL, EDIBLE: Groundnut													
OIL, EDIBLE: Hazelnut													
OIL, EDIBLE: Lard	OLD												
OIL, EDIBLE: Maize													
OIL, EDIBLE: Mustard seed													
OIL, EDIBLE: Nutmeg Butter													
OIL, EDIBLE: Olive	OOL												
OIL, EDIBLE: Palm	OPM												
OIL, EDIBLE: Palm kernel	OPO												
OIL, EDIBLE: Peanut	OPN												
OIL, EDIBLE: Poppy													
OIL, EDIBLE: Raisin seed													
OIL, EDIBLE: Rice bran	ORP												
OIL, EDIBLE: Safflower	OSP												
OIL, EDIBLE: Salad													
OIL, EDIBLE: Sesame													
OIL, EDIBLE: Soya bean	OSB	0.96											
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED		0.95											
OIL, EDIBLE: Sunflower seed	OSN												
OIL, EDIBLE: Tucum	OTC												
OIL, EDIBLE: Vegetable, N.O.S.	OVQ	0.96											
OIL, EDIBLE: Walnut													
OIL, FUEL: No. 1 (Kerosene)	ODN												
OIL, FUEL: No. 1-D	OOD												
OIL, FUEL: No. 2	OTW	0.88	1		8.00	0.56	16.200	0.035	0.965	0.076	0.095	1.242	1.011
OIL, FUEL: No. 2-D	OTD												
OIL, FUEL: No. 4	OFR	0.90	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, FUEL: No. 5	OFV	0.94	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, FUEL: No. 6	OSX	0.95	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, MISC: Absorption	OAS												
OIL, MISC: Aliphatic													
OIL, MISC: Animal, N.O.S.													
OIL, MISC: Aromatic													
OIL, MISC: Aviation F2300													
OIL, MISC: Clarified	OCF												
OIL, MISC: Coal													
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO Mwc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
OIL, MISC: Coconut oil, fatty acid													
OIL, MISC: Coconut oil, fatty acid Methyl Ester													
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTER													
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID													
OIL, MISC: Croton													
OIL, MISC: Crude													
OIL, MISC: Diesel													
OIL, MISC: Gas, low pour													
OIL, MISC: Gas, low sulfur													
OIL, MISC: Heartcut distillate													
OIL, MISC: Lanolin													
OIL, MISC: Linseed													
OIL, MISC: Lubricating													
OIL, MISC: Mineral													
OIL, MISC: Mineral seal													
OIL, MISC: Motor													
OIL, MISC: Neatsfoot													
OIL, MISC: Oiticica													
OIL, MISC: Palm oil, fatty acid Methyl Ester													
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID													
OIL, MISC: Penetrating													
OIL, MISC: Perilla													
OIL, MISC: Pilchard													
OIL, MISC: Pine													
OIL, MISC: Range													
OIL, MISC: Residual													
OIL, MISC: Resin													
OIL, MISC: Resinous petroleum													
OIL, MISC: Road													
OIL, MISC: Rosin													
OIL, MISC: Seal													
OIL, MISC: Soapstock													
OIL, MISC: Soya bean (epoxidized)													
OIL, MISC: Sperm													
OIL, MISC: Spindle													
OIL, MISC: Spray													
OIL, MISC: Tall													
OIL, MISC: Tall, fatty acid													
OIL, MISC: Tanner's													
OIL, MISC: Transformer													
OIL, MISC: Tung													
OIL, MISC: Turbine													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO SGV	SATUR'D, VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/
(1)	(1)	(13)	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)

OIL, MISC: Whale													
OIL, MISC: White (mineral)													
OIL, MISC: Wood													
alpha-Olefins (C13 - C18)													
Olefins (C13 and above, all isomers)	OAM												
Oleic acid	OLA												
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)													
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLUTION													
Palm Stearin	PMS												
n-Paraffins (C10 - C20)	PFN												
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PDC	0.83	1		7.88	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.00
Pentaethylene Glycol	PEP												
Pentaethylenesamine	PTY	0.63	5	72.090	2.48	21.00	16.200	1.296	-0.296	0.076	0.222	2.919	1.42
Pentane (all isomers)	IPT	0.62	5		2.48	27.00	16.200	1.667	-0.667	0.076	0.264	3.467	1.54
PENTANE (iso-)	PTA	0.63	1		2.50	20.44	16.200	1.262	-0.262	0.076	0.220	2.893	1.40
PENTANE (n-)													
Pentanoic acid	PTX	0.64	1		2.40	24.90	16.200	1.537	-0.537	0.076	0.240	3.152	1.49
Pentene (all isomers)	PTE	0.64	1		2.40	24.90	16.200	1.537	-0.537	0.076	0.240	3.152	1.49
PENTENE (1-)													
Petrolatum	PTL												
1-Phenyl-1-Xylyl Ethane	PXE												
Phosphosulfurized Bicyclic Terpene													
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES													
Pinene	PIN	0.86	1		4.70	0.35	16.200	0.022	0.978	0.076	0.082	1.080	1.00
Polyalkenyl Succinic Anhydride Amine													
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixture	PPX												
Polyalkylene Oxide Polyol	PAO	1.04											
Polyamine, Amide mixture													
Polybutadiene, Hydroxyl terminated													
Polybutene	PLB	0.91	1		79.30	0.01	16.200	0.001	0.999	0.076	0.080	1.048	1.00
Polydimethylsiloxane		1.04											
Polyethylene Glycol		1.04											
Polyethylene Glycol Dimethyl Ether													
Polyglycerol													
Polyisobutylene, SEE POLYBUTENE													
Polymerized Esters													
Poly(20)oxyethylene Sorbitan Monooleate	PSM												
Polypropylene	PLP												
Polypropylene Glycol	PGC	1.01	1		1.00	0.10	16.200	0.006	0.994	0.076	0.076	1.000	1.00
Polypropylene Glycol Methyl Ether	PGM	0.92	1		3.11	0.80	16.200	0.049	0.951	0.076	0.084	1.104	1.01
Polysiloxane													
Polystyrene Diakyl Maleate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO Mw	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP Vv, 115 (5)	PARTIAL VOLUME OF AIR Va, 115 (6)	AIR WEIGHT DENSITY Ma, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY Mv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Ma, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
Potassium Oleate	POE												
Propane	PRP	1.04		44.094	1.52								
n-Propoxypropanol	PPX												
Propyl Acetate (iso-)	IAC	0.89	1		3.52	1.80	16.200	0.111	0.889	0.076	0.097	1.280	1.036
Propyl Acetate (n-)	PAT	0.80	1		3.52	1.85	16.200	0.114	0.886	0.076	0.098	1.288	1.037
Propyl alcohol (iso-)	IPA	0.79	1		2.07	3.00	16.200	0.185	0.815	0.076	0.091	1.198	1.060
Propyl alcohol (n-)	PAL	0.80	1		2.07	1.20	16.200	0.074	0.926	0.076	0.082	1.079	1.024
Propylbenzene (n-)	PBZ	0.86	1	60.060	4.14	0.20	16.200	0.012	0.988	0.076	0.079	1.039	1.004
iso-Propylcyclohexane	IPX	0.80	1	126.243	4.35	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Propylene	PPL	1.04		42.081	1.45								
Propylene-Butylene Copolymer	PBP												
Propylene Dimer	PDR												
Propylene Glycol (1,2-PROPANDIOL)	PPG	1.04	1	76.060	2.62	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
Propylene Glycol Monoalkyl Ether	PGE												
Propylene Glycol Ethyl Ether	PGY												
Propylene Glycol Methyl Ether	PME	0.92	1		3.11	0.70	16.200	0.043	0.957	0.076	0.083	1.091	1.014
Propylene Polymer (in liquid mixtures)													
Propylene Tetramer	PTT	0.29		156.310	1.00	0.02	16.200	0.001	0.999	0.076	0.076	1.000	1.000
Propylene Trimer	PTR												
Pseudocumene, SEE TRIMETHYLBENZENES													
Rum													
Sodium Acetate, Glycol, water solutions													
Sodium Acetate solution	SAN												
Sodium Benzoate solution	SBN												
Sodium Sulfonate													
Stearic acid	SRA												
Stearyl alcohol (Octadecanol)													
Sulfolane	SFL	1.26	1		4.14	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Tallow	TLO												
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)													
Tallow fatty acid	TFD												
Tallow Alkyl Nitrile													
Tetradecanol	TTN	0.82	1		7.39	0.00							
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTD	0.77	1		6.77	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Tetradecylbenzene	TBD												
Tetraethylene Glycol	TTG	1.12	1		6.70	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Tetrahydronaphthalene	THN	0.97	1		4.56	0.04	16.200	0.002	0.998	0.076	0.077	1.009	1.001
Tetrapropylbenzene, SEE ALKYL(C9-C17) BENZENES													
Toluene	TOL	0.87	1	92.141	3.14	1.50	16.200	0.093	0.907	0.076	0.091	1.198	1.030
Triaryphosphate													
Tributyl Phosphate	TBP												
Tricresyl Phosphate (less than 1% of the ortho isomer)	TCP	1.16	1		12.69	0.01	16.200	0.001	0.999	0.076	0.077	1.007	1.000

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR
Tridecane	TRD	0.76	1		6.40	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
Tridecanoic acid													
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TDN	0.85	1		6.91	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
1-Tridecene	TDC	0.77	1		6.29	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Tridecylbenzene	TRB												
Triethylbenzene	TEB	0.86	1		5.60	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
Triethylene Glycol	TEG	1.12	1		5.17	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Triethylene Glycol Butyl Ether													
Triethylene Glycol Butyl Ether mixture		1.04											
Triethylene Glycol di-(2-ethylbutyrate)	TGD												
Triethylene Glycol Ether mixture													
Triethylene Glycol Ethyl Ether	TGE												
Triethylene Glycol Methyl Ether													
Triethyl Phosphate	TPS	1.07			6.28	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
Triisooctyl Trimellitate													
Triisopropanolamine	TIP	1.02	8	191.270	6.60								
Trimethylbenzenes (all isomers)	TRE	0.89	1		4.20	0.14	16.200	0.009	0.991	0.076	0.078	1.028	1.001
TRIMETHYL BENZENE (1,2,5-)	TMB	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
TRIMETHYL BENZENE (1,2,3-)	TMD	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TME	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
Trimethylol Propane Polyethoxylate	TPR												
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate													
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	TMP												
Tripropylene, SEE PROPYLENE TRIMER													
Tripropylene Glycol	TGC												
Tripropylene Glycol Methyl Ether	TGM												
Trixylenyl Phosphate	TRP	1.16	1		14.20	0.00							
Turpentine	TPT												
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
Undecanol													
Undecene (1-)	UDC	0.75	1		5.32	0.05	16.200	0.003	0.997	0.076	0.077	1.013	1.001
Undecyl alcohol	UND	0.84	1		5.94	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Undecylbenzene	UDB												
Vinyl Acetate-fumarate Copolymer													
Waxes:	WAX												
WAXES: Candelilla													
WAXES: Carnauba	WAX, WCA												
WAXES: Paraffin	WAX, WPF												
WAXES: Petroleum													
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
White spirit (low (15 - 20%) aromatic)	WSL												
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCO VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO VAPOR SGv (2)	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pc, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
Wool grease													
Xylenes (ortho-, meta-, para-)	XLX	0.89	1	106.168	3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENE (M-)	XLM	0.87	1		3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENE (O-)	XLO	0.89	1		3.66	0.40	16.200	0.025	0.975	0.076	0.081	1.066	1.009
XYLENE (P-)	XLP	0.86	1		3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENOL	XYL	1.01	1		3.66	0.10	16.200	0.006	0.994	0.076	0.077	1.016	1.002
Zinc Dialkyldithiophosphate													

E-2-u

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF. GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAP AI MI GRO RA: VG (9)
	(1)	(13)	(1)	(2)								
46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1												
AROMATIC RESIN OIL 60	ARS	1.02	1	1.00	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.00
AROMATIC RESIN OIL 80	ARS	1.02	1	1.00	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.00
AROMATIC RESIN OILS			8									

E-2-v

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CHRIS	MAX LIQUID	VAPOR-AIR				PIPE SECT I: LOSS	PIPE SECT II: LOSS	THRU		
	TRANSP	MIX	REQUIRED AIR	PRESS	FM REMOTE TK TO PV	FM REMOTE TK TO PV	PIP'G	PRESS		
	RATE	FLOW	EQUIVALENT	ACROSS			REMOTE	@		
	(MLTR)	RATE	-----	PV	TOTAL	TOTAL	TANK	REMOTE		
	Q1	Qv-a	Qa	VALVE	LOSS	LOSS	TO P/V	TANK		
	(10)	(11)	(12)	PV	HtotI	HtotII	* Htot	PV *	Pt	MD
	(BBL/HR)	(BBL/HR)	(BBL/HR)	(FT^3/HR)	(PSI)	(FT)	(FT)	Ploss	Ptk	

46 CFR SUBCHAPT 0, TABLE 151

M-3-P

ACETIC ACID	AAC 5,000	5092	5244	29446	1.635	*****	88.7	*****	0.0	88.7	0.050	1.68	OK
ACETIC ANHYDRIDE	ACA 5,000	5040	5193	29150	1.635	*****	87.0	*****	0.0	87.0	0.049	1.68	OK
ACETONITRILE	ATN 5,000	5003	5005	20101	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
ACRYLIC ACID	ACR 5,000	5040	5131	20010	1.635	*****	87.1	*****	0.0	87.1	0.048	1.68	OK
ACRYLONITRILE	ACN 5,000	5500	6142	34403	1.665	*****	102.3	*****	0.0	102.3	0.067	1.73	OK
ADIPONITRILE	ADN 5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
ALUMINUM SULFATE SOLUTION	ASX												
AMINOETHYLETHANOLAMINE	ASE 5,000	5001	5005	20101	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX												
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH												
ANTHRACENE OIL (COAL TAR FRACTION)	AHO												
BENZENE	BNZ 5,000	6250	7655	42970	1.725	*****	130.3	*****	0.0	130.3	0.103	1.83	OK
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BORSHA 5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB 5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX 5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
iso-BUTYL ACRYLATE	BAI 5,000	5060	5371	30156	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK
n-BUTYL ACRYLATE	BTC 5,000	5040	5247	29462	1.635	*****	86.9	*****	0.0	86.9	0.050	1.68	OK
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR 5,000	5060	5371	30156	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK
BUTYL METHACRYLATE	BMH 5,000	5029	5202	29205	1.635	*****	86.6	*****	0.0	86.6	0.049	1.68	OK
iso-BUTYRALDEHYDE	BAD 5,000	5780	7585	42509	1.725	*****	111.1	*****	0.0	111.1	0.101	1.83	OK
n-BUTYRALDEHYDE	BTR 5,000	5780	7585	42509	1.725	*****	111.1	*****	0.0	111.1	0.101	1.83	OK
BUTYRALDEHYDES (CRUDE)	BFA 5,000	5800	7631	42043	1.725	*****	111.9	*****	0.0	111.9	0.102	1.83	OK
BUTYRALDEHYDE (ISO-, N-)	BAE 5,000	5800	7631	42043	1.725	*****	111.9	*****	0.0	111.9	0.102	1.83	OK
CAMPHOR OIL (LIGHT)	CPO												
CARBON TETRACHLORIDE	CBT												
CAUSTIC POTASH SOLUTION	CPS												
CAUSTIC SODA SOLUTION	CSS												
CHLOROBENZENE	CRB 5,000	5080	5429	30483	1.665	*****	88.1	*****	0.0	88.1	0.053	1.72	OK
CHLOROFORM	CRP												
CHLOROSULFONIC ACID	CSA												
COAL TAR NAPHTHA SOLVENT	NCT 5,000	5020	5102	20645	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	OK
CREOSOTE (COAL TAR)	CCT 5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
CREOSOTE (WOOD)	CWD 5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
CRESOLS (ALL ISOMERS)	CRS 5,000	5006	5031	20240	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS												
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CFP 5,000	5005	5026	20219	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
CRESYLATE SPENT CAUSTIC	CSC												
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX												
CROTONALDEHYDE	CTA 5,000	5200	5635	31636	1.665	*****	92.3	*****	0.0	92.3	0.057	1.72	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR) (10) (BBL/HR)		VAPOR-MIX FLOW RATE Q1 (11) (BBL/HR)		REQUIRED AIR EQUIVALENT Qa (12) (BBL/HR)		PRESS ACROSS PV VALVE (PSI)		PIPE SECT I: LOSS FM REMOTE, TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		PRESS DROP THRU REMOTE TANK		PRESS @ REMOTE TANK		Pc MD
		TOTAL LOSS Htot I (FT)		TOTAL LOSS Htot II (FT)		GRAND TOTAL LOSS Htot = I + II (FT)		TO P/V Wv-a, 11 Ploss (PSI)		PV + Ptk (PSI)								
CYCLOHEXANONE	***																	
CYCLOHEXYLAMINE	CCH	5,000	5002	5009	28126	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
DECYL ACRYLATE (iso-, n-)	CHA	5,000	5062	5291	29709	1.635	*****	87.6	*****	0.0	87.6	0.051	1.69	OK				
DICHLOROBENZENE (ALL ISOMERS)	DAT	5,000	5001	5011	28134	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
1,1-DICHLOROETHANE	DBX	5,000	5010	5073	28481	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68	OK				
2,2-DICHLOROETHYL ETHER	DCH	5,000	5990	9419	52886	1.785	*****	117.3	*****	0.0	117.3	0.153	1.94	OK				
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DEE	5,000	5004	5028	28231	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK				
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DCM																	
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DDE																	
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DAD																	
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DDT																	
1,3-DICHLOROPROPENE	DPX	5,000	5630	8213	46110	1.755	*****	104.5	*****	0.0	104.5	0.118	1.87	OK				
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DPU	5,000	5550	7778	43673	1.725	*****	102.0	*****	0.0	102.0	0.106	1.83	OK				
2,2-DICHLOROPROPIONIC ACID	DMX	5,000	5630	8213	46110	1.755	*****	104.5	*****	0.0	104.5	0.118	1.87	OK				
DIETHANOLAMINE	DCN																	
DIETHYLAMINE	DEA	5,000	5001	5005	28102	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
DIETHYLENETRIAMINE	DEN	5,000	5100	5331	29931	1.635	*****	88.9	*****	0.0	88.9	0.051	1.69	OK				
DIETHYL ETHER, SEE ETHYL ETHER	DET	5,000	5004	5019	28182	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK				
DIISOBUTYLAMINE	DEH																	
DIISOPROPANOLAMINE	DBU	5,000	5046	5288	29691	1.635	*****	87.0	*****	0.0	87.0	0.051	1.69	OK				
DIISOPROPYLAMINE	DIP	5,000	5001	5007	28110	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
N,N-DIMETHYLACETAMIDE	DIA	5,000	5370	6731	37791	1.695	*****	96.8	*****	0.0	96.8	0.080	1.78	OK				
DIMETHYLETHANOLAMINE	DAC	5,000	5020	5082	28532	1.635	*****	86.5	*****	0.0	86.5	0.047	1.68	OK				
DIMETHYLFORMAMIDE	DMD	5,000	5050	5206	29229	1.635	*****	87.3	*****	0.0	87.3	0.049	1.68	OK				
1,4-DIOXANE	DMP	5,000	5030	5100	28634	1.635	*****	86.8	*****	0.0	86.8	0.047	1.68	OK				
DI-N-PROPYLAMINE	DOX	5,000	5184	5751	32288	1.665	*****	91.3	*****	0.0	91.3	0.059	1.72	OK				
ETHANOLAMINE	DNA	5,000	5150	5715	32088	1.665	*****	90.1	*****	0.0	90.1	0.059	1.72	OK				
ETHYL ACRYLATE	MEA	5,000	5003	5008	28119	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
ETHYLAMINE SOLUTION (72% OR LESS)	EAC	5,000	5200	5949	33399	1.665	*****	91.4	*****	0.0	91.4	0.063	1.73	OK				
N-ETHYLBUTYLAMINE	EAN	5,000	6550	8117	45576	1.755	*****	142.7	*****	0.0	142.7	0.118	1.87	OK				
N-ETHYLCYCLOHEXYLAMINE	EBA	5,000	5120	5574	31296	1.665	*****	89.5	*****	0.0	89.5	0.056	1.72	OK				
ETHYLENE CYANOHYDRIN	ECC	5,000	5050	5308	29805	1.635	*****	87.1	*****	0.0	87.1	0.051	1.69	OK				
ETHYLENEDIAMINE	ETC	5,000	5001	5003	28092	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
ETHYLENE DIBROMIDE	EDA	5,000	5090	5243	29439	1.635	*****	88.7	*****	0.0	88.7	0.050	1.68	OK				
ETHYLENE DICHLORIDE	EDB																	
ETHYLENE GLYCOL PROPYL ETHER	EDC	5,000	5400	6825	38322	1.695	*****	97.5	*****	0.0	97.5	0.082	1.78	OK				
2-ETHYLBUTYL ACRYLATE	EOP	5,000	8060	5404	30344	1.665	*****	87.4	*****	0.0	87.4	0.053	1.72	OK				
ETHYLIDENE NORBORNENE	EAI	5,000	5002	5019	28177	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
ETHYL METHACRYLATE	ENB	5,000	5033	5190	29137	1.635	*****	86.7	*****	0.0	86.7	0.049	1.68	OK				
2-ETHYL-3-PROPYLACROLEIN	ETM	5,000	5100	5544	31125	1.665	*****	88.8	*****	0.0	88.8	0.055	1.72	OK				
FERRIC CHLORIDE SOLUTIONS	EPA	5,000	5012	5074	28488	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68	OK				
FORMALDEHYDE SOLUTION (37% TO 50%)	FCS																	
	FMS	5,000	5015	5016	28162	1.635	*****	86.4	*****	0.0	86.4	0.046	1.68	OK				

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE • REMOTE TANK FOR "VGR" • MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX	VAPOR-	REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS HtotI (FT)	PRESS DROPS THRU PIP'G REMOTE TANK PV • Htot Ploss (PSI)	PRESS • REMOTE TANK PV • P Ploss Ptk (PSI)
		LIQUID	AIR			FM REMOTE TK TO PV		FM REMOTE TK TO PV				
		TRANSF	MIX									
		RATE	FLOW									
		(MLTR)	RATE									
		Q1	Qv-a	Qa								
		(10)	(11)	(12)								
		(BBL/ HR)	(BBL/ HR)	(BBL/ HR)	(FT^3/ HR)							
FORMIC ACID	...											
FURFURAL	FMA	5,000	5210	5409	30369	1.665	*****	92.7	*****	0.0	92.7	0.053
GLUTARALDEHYDE SOLUTION (50% OR LESS)	FPA	5,000	5015	5068	20457	1.635	*****	86.3	*****	0.0	86.3	0.047
HEXAMETHYLENEDIAMINE SOLUTION	GTA											
HEXAMETHYLENIMINE	HMC	5,000	5001	5006	20105	1.635	*****	86.0	*****	0.0	86.0	0.046
HYDROCHLORIC ACID SPENT (15% OR LESS)	HMI	5,000	5050	5050	20354	1.635	*****	87.6	*****	0.0	87.6	0.046
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	HCS											
ISOPRENE	IPR	5,000	7300	12467	69999	1.890	*****	172.3	*****	0.0	172.3	0.266
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING KPL)	MSO	5,000	5067	5323	29884	1.635	*****	87.7	*****	0.0	87.7	0.051
MESITYL OXIDE	MAM	5,000	5410	6640	37279	1.695	*****	98.2	*****	0.0	98.2	0.078
METHYL ACRYLATE	MCK	5,000	5015	5013	20148	1.635	*****	86.4	*****	0.0	86.4	0.046
METHYLCYCLOPENTADIENE DIMER	MDE	5,000	5010	5058	20397	1.635	*****	86.2	*****	0.0	86.2	0.046
METHYL DIETHANOLAMINE	MEP	5,000	5016	5094	20602	1.635	*****	86.4	*****	0.0	86.4	0.047
2-METHYL-5-ETHYLPYRIDINE	MMH	5,000	5202	5944	33372	1.665	*****	91.5	*****	0.0	91.5	0.063
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	MPR	5,000	5050	5219	29301	1.635	*****	87.3	*****	0.0	87.3	0.049
METHYL METHACRYLATE	MSR	5,000	5040	5228	29354	1.635	*****	86.9	*****	0.0	86.9	0.049
2-METHYLPYRIDINE	MPL	5,000	5080	5325	29898	1.635	*****	88.2	*****	0.0	88.2	0.051
alpha-METHYLSTYRENE	NPM	5,000	5105	5435	30516	1.665	*****	89.0	*****	0.0	89.0	0.053
MORPHOLINE	ONE	5,000	5031	5266	29568	1.635	*****	86.6	*****	0.0	86.6	0.050
NITRIC ACID (70% OR LESS)	OLM	5,000	5001	5004	28094	1.635	*****	86.0	*****	0.0	86.0	0.045
NITROPROPANE (-1, OR -2)	PCE											
OCTYL NITRATES (ALL ISOMERS)	PDE	5,000	6706	10458	58720	1.815	*****	146.7	*****	0.0	146.7	0.189
OLEUM	PER											
PENTACHLOROETHANE	PAC											
1, 3-PENTADIENE	PEB	5,000	5001	5007	20114	1.635	*****	86.0	*****	0.0	86.0	0.046
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PPI											
PHOSPHORIC ACID	MPA	5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046
POLYETHYLENE POLYAMINES	PAX	5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046
POLYMETHYLENE POLYPHENYL ISOCYANATE	PNA	5,000	5030	5102	20647	1.635	*****	86.8	*****	0.0	86.8	0.047
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)	IPP	5,000	7342	11619	65233	1.890	*****	175.0	*****	0.0	175.0	0.232
iso-PROPANOLAMINE	IPE	5,000	5664	8060	45251	1.755	*****	106.0	*****	0.0	106.0	0.113
PROPANOLAMINE (iso-, n-)	PRD	5,000	5130	5473	30727	1.665	*****	89.8	*****	0.0	89.8	0.054
PROPIONIC ACID	SAU											
iso-PROPYLAMINE	SDD											
iso-PROPYL ETHER	SDL											
PYRIDINE												
SODIUM ALUMINATE SOLUTION												
SODIUM CHLORATE SOLUTION (50% OR LESS)												
SODIUM DICHROMATE SOL'N (70% OR LESS)												
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)												
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)												
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SHP											
	SSH											

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; *7027* AND *7028*

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" = MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-					PIPE SECT I: LOSS	PIPE SECT II: LOSS	DROPTHRU			
	LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV	FM REMOTE TK TO PV	TANK		PRESS	PRESS	
	TRANSF	MIX	EQUIVALENT		ACROSS			TANK		REMOTE	REMOTE	
	RATE	FLOW			PV			TANK		•	TANK	
I	(MLTR)	RATE			PV			TANK		•	TANK	
S	Q1	Qv-a	Qa		VALVE			TANK		•	TANK	
	(10)	(11)	(12)		PV			TANK		•	TANK	
	(BBL/	(BBL/	(BBL/	(FT ³ /				TANK		•	TANK	
	HR)	HR)	HR)	HR)	(PSI)			TANK		•	TANK	
...								TANK		•	TANK	
SSI								TANK		•	TANK	
SSJ								TANK		•	TANK	
STS								TANK		•	TANK	
STY 5,000	5040	5199	29191	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60	
SFA 5,000	5001	5005	28100	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	
SAC 5,000	5001	5000	28070	1.635	*****	86.0	*****	0.0	86.0	0.045	1.60	
TEC												
TTP 5,000	5000	5001	28079	1.635	*****	86.0	*****	0.0	86.0	0.045	1.60	
THP 5,000	5050	6365	35735	1.695	*****	115.7	*****	0.0	115.7	0.072	1.77	
TCM 5,000	5102	5651	31727	1.665	*****	88.4	*****	0.0	88.4	0.057	1.72	
TCL 5,000	5346	7067	39679	1.695	*****	95.3	*****	0.0	95.3	0.080	1.70	
TCN 5,000	5015	5121	28751	1.635	*****	86.3	*****	0.0	86.3	0.048	1.60	
TEA 5,000	5001	5007	28115	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	
TEN 5,000	5250	6177	34681	1.665	*****	93.2	*****	0.0	93.2	0.068	1.73	
TET 5,000	5001	5007	28114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	
UAS												
5,000	5500	6995	39272	1.695	*****	101.2	*****	0.0	101.2	0.087	1.78	
IVA 5,000	5500	6995	39272	1.695	*****	101.2	*****	0.0	101.2	0.087	1.78	
VAL 5,000	5001	5009	28122	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	
VBL												
VAM 5,000	5580	7287	40913	1.725	*****	103.8	*****	0.0	103.8	0.094	1.82	
VNT 5,000	5012	5069	28460	1.635	*****	86.2	*****	0.0	86.2	0.047	1.60	

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	R I S	RATE (MLTR Q1 (10) (BBL/ HR)	FLOW RATE (11) (BBL/ HR)	EQUIVALENT Qa (12) (BBL/ HR)	ACROSS PV VALVE PV (PSI)	TOTAL LOSS Htot I (FT)	TOTAL LOSS Htot II (FT)	GRAND TOTAL LOSS Htot- I+II (FT)	TO P/V Mv-a,11 + Htot Ploss (PSI)	TANK REMOTE PV + Ploss Ptk (PSI)	
46 CFR SUBCHAPT O BUT NOT TABLE 151											
1,1-DICHLOROPROPANE		DPB 5,000	5630	8213	46110 1.755	104.5	0.0	104.5	0.110	1.07	OK
1,1,1-TRICHLOROETHANE											
1,2-DICHLOROPROPANE		DPP 5,000	5260	6227	34960 1.665	93.2	0.0	93.2	0.069	1.73	OK
1,3 CYCLOPENTADIENE											
1,3-DICHLOROPROPANE		DPC 5,000	5380	6974	39156 1.695	96.5	0.0	96.5	0.086	1.70	OK
2-METHYL-2-HYDROXY-3-BUTYNE		MHB 5,000	5114	5445	30573 1.665	89.3	0.0	89.3	0.054	1.72	OK
2,4-DICHLOROPHENOXACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% 3-PENTENITRILE		DDA									
AEROTHEM TT (1,1,1-TRICHLOROETHANE)		PNT									
ALKYLBENZENE											
AMINOMETHYLPYPERAZINE		AEP									
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		5,000	6250	7655	42970 1.725	130.3	0.0	130.3	0.103	1.03	OK
BENZENE SULFONYL CHLORIDE		BSC 5,000	5000	5001	28070 1.635	86.0	0.0	86.0	0.045	1.60	OK
BENZYL ACETATE		BZE 5,000	5002	5015	28157 1.635	86.0	0.0	86.0	0.046	1.60	OK
BENZYL CHLORIDE (STABILIZED)		BCL 5,000	5009	5056	28385 1.635	86.2	0.0	86.2	0.046	1.60	OK
BUTANOL											
BUTYL ETHER (n-)		BTE 5,000	5040	5253	29495 1.635	86.9	0.0	86.9	0.050	1.60	OK
BUTYLENE OXIDE (1,2-)		BTO 5,000	5910	8037	45125 1.755	115.9	0.0	115.9	0.113	1.07	OK
BUTYRIC ACID		BRA 5,000	5007	5029	28234 1.635	86.2	0.0	86.2	0.046	1.60	OK
CARBOLIC ACID		CBO 5,000	5006	5027	28224 1.635	86.1	0.0	86.1	0.046	1.60	OK
CHLOROACETIC ACID (80% OR LESS)		CHM 5,000	5001	5005	28099 1.635	86.0	0.0	86.0	0.046	1.60	OK
CHLOROPROPIONIC ACID (2- OR 3-)		CFM 5,000	5002	5010	28131 1.635	86.0	0.0	86.0	0.046	1.60	OK
CHLOROTOLUENE (m-)		CTM 5,000	5032	5198	29106 1.635	86.7	0.0	86.7	0.049	1.60	OK
CHLOROTOLUENE (o-)		CTO 5,000	5032	5198	29106 1.635	86.7	0.0	86.7	0.049	1.60	OK
CHLOROTOLUENE (p)		CRN 5,000	5009	5056	28385 1.635	86.2	0.0	86.2	0.046	1.60	OK
CHLOROTOLUENES (MIXED ISOMERS)		CHI 5,000	5053	5327	29907 1.635	87.2	0.0	87.2	0.051	1.69	OK
CRESOTE (ALL ISOMERS)		CCW 5,000	5001	5005	28103 1.635	86.0	0.0	86.0	0.046	1.60	OK
CRESYLIC ACID TAR		CRX 5,000	5010	5010	28130 1.635	86.3	0.0	86.3	0.046	1.60	OK
CYCLOHEPTANE		CYE 5,000	5140	5646	31700 1.665	89.7	0.0	89.7	0.057	1.72	OK
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE		CYX 5,000	5100	5462	30666 1.665	88.8	0.0	88.8	0.054	1.72	OK
CYCLOHEXYL ACETATE		CYC 5,000	5001	5007	28113 1.635	86.0	0.0	86.0	0.046	1.60	OK
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE		CSB 5,000	5450	7681	43124 1.725	98.3	0.0	98.3	0.103	1.03	OK
CYCLOPENTANE		CYP 5,000	6315	9230	51825 1.705	131.0	0.0	131.0	0.148	1.93	OK
DECAHOIC ACID		DCO									
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)											
DICHLOROISOPROPYL ETHER (2,2'-)		DCI 5,000	5006	5051	28361 1.635	86.1	0.0	86.1	0.046	1.60	OK
DICHLOROPROPANE											
DICHLOROPROPENE											
DIETHYL SULFATE		DSU 5,000	5001	5008	28116 1.635	86.0	0.0	86.0	0.046	1.60	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		THRU PIP'G REMOTE TANK TO P/V * Htot Ploss (PSI)	PRESS @ REMOTE TANK PV + Ploss Ptk (PSI)	Pt ME			
					FM REMOTE	TK TO PV	FM REMOTE	TK TO PV						
												TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	GRAND TOTAL LOSS Htot-I+II (FT)
DAE	5,000	5018	5102	28645	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	O	
DOT														
EBE	5,000	5500	7321	41103	1.725	*****	100.6	*****	0.0	100.6	0.094	1.82	O	
EAM	5,000	9080	14023	78736	1.975	*****	266.3	*****	0.0	266.3	0.336	2.31	O	
ETX	5,000	5370	7249	40700	1.725	*****	95.9	*****	0.0	95.9	0.092	1.82	O	
EPL	5,000	5002	5012	28140	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	O	
MTM	5,000	5663	5778	32440	1.665	*****	109.5	*****	0.0	109.5	0.060	1.73	O	
IBA	5,000	5036	5204	29218	1.635	*****	86.8	*****	0.0	86.8	0.049	1.68	O	
IPN	5,000	5300	5803	32584	1.665	*****	95.4	*****	0.0	95.4	0.060	1.73	O	
LRA	5,000	5339	6027	33837	1.665	*****	96.4	*****	0.0	96.4	0.065	1.73	O	
MET	5,000													
MIA														
MCY	5,000	5237	6087	34178	1.665	*****	92.7	*****	0.0	92.7	0.066	1.73	OK	
MEA	5,000	5010	5027	28226	1.635	*****	86.3	*****	0.0	86.3	0.046	1.68	OK	
	5,000	5020	5069	28461	1.635	*****	86.5	*****	0.0	86.5	0.047	1.68	OK	
NTM	5,000	5001	5006	28109	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK	
NEA	5,000	5001	5009	28122	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK	
NAA														
NTP														
NNM	5,000	5110	5456	30632	1.665	*****	89.1	*****	0.0	89.1	0.054	1.72	OK	
NIT	5,000	5002	5014	28149	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK	
PDH	5,000	5830	9788	54958	1.785	*****	110.7	*****	0.0	110.7	0.165	1.95	OK	
DPGS														
PAD	5,000	6376	8671	48684	1.755	*****	134.3	*****	0.0	134.3	0.131	1.89	OK	
PAH	5,000	5011	5070	28467	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68	OK	
PCN	5,000	5117	5281	29649	1.635	*****	89.6	*****	0.0	89.6	0.050	1.69	OK	
PRA	5,000	6355	8690	48792	1.755	*****	133.1	*****	0.0	133.1	0.132	1.89	OK	
	5,000	5414	4829	27113	1.635	*****	101.7	*****	0.0	101.7	0.043	1.68	OK	
GPY	5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK	
SWR														

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" = MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS		PIPE SECT II: LOSS		THRU	PRESS	I Pc MD				
		LIQUID	AIR	FM REMOTE TK TO PV		FM REMOTE TK TO PV		PIP'G	•					
		TRANSF	MIX	REQUIRED AIR		PRESS		REMOTE	•					
		RATE	FLOW	EQUIVALENT		ACROSS		TANK	REMOTE					
		(MLTR)	RATE			PV			TANK					
Q1	Qv-a	Qa	VALVE	TOTAL	TOTAL	GRAND	TO P/V							
(10)	(11)	(12)	PV	LOSS	LOSS	TOTAL	Wv-a, 11	PV •						
(BBL/ HR)	(BBL/ HR)	(BBL/ HR)	(FT ³ / HR)	(PSI)	Htot I	Htot II	• Htot	Ploss	Pck					
					(FT)	(FT)	(FT)	(PSI)	(PSI)					
SODIUM SULFIDE (SOLID IN WATER)	SDS													
STYRENE	STY	5,000	5040	5199	29192	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60	OK
STYRENE CRUDE	STX	5,000	5040	5199	29192	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60	OK
STYRENE TAR	STT													
TETRAMETHYLBENZENE (1,2,3,5-)	TTB	5,000	5014	5083	28539	1.635	*****	86.3	*****	0.0	86.3	0.047	1.60	OK
TOLUIDINE (o-)	TLI	5,000	5001	5005	28102	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK
TRICHLOROBENZENE (1,2,4-)	TCB	5,000	5003	5027	28226	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N	TPE													
TRIPHENYLBORANE	UDA													
UNDECANOIC ACID	UDN													
HYDROCARBON 5-9	HFN	5,000	5440	6992	39256	1.695	*****	99.0	*****	0.0	99.0	0.086	1.70	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE • REMOTE TANK FOR
"VGR" • MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR		PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS Htot-I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V WV-a,11 • Htot Ploss (PSI)		PRESS • REMOTE TANK PV • Pt Ptk MD (PSI)	
		LIQUID TRANSP RATE (MLTR)	AIR MIX FLOW RATE Q1 (10) (BBL/ HR)	Q2 (12) (BBL/ HR)	Qa (12) (BBL/ HR)		TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI+II (FT)		TOTAL LOSS HtotI+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V WV-a,11 • Htot Ploss (PSI)	PRESS • REMOTE TANK PV • Pt Ptk MD (PSI)		
		Q1 (10) (BBL/ HR)	Q2 (12) (BBL/ HR)	Qa (12) (BBL/ HR)	Qa (12) (BBL/ HR)										
		Q1 (10) (BBL/ HR)	Q2 (12) (BBL/ HR)	Qa (12) (BBL/ HR)	Qa (12) (BBL/ HR)										
46 CFR SUBCHAPTER D, TABLE 30.25-1															
Acetone	ACT	5,000	6000	7630	42842	1.725	*****	119.7	*****	0.0	119.7	0.102	1.83	OK	
Acetophenone	ACP	5,000	5060	5346	30017	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK	
Acetyl Tributyl Citrate															
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALE														
Alcohols (C13 and above)	ALY														
Alcoholic beverages, N.O.S.															
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates															
Alcohol (C12 - C15) Poly(1-3)ethoxylates															
Alcohol (C12 - C15) Poly(3-11)ethoxylates															
Alkenylsuccinic acid															
Alkenylsuccinic Anhydride															
Alkyl (C9 - C17) Benzenes	AKB														
Alkylbenzenesulfonic acid (4% or less)	ABS														
Alkyl Phthalates (n-)															
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)															
Aminoethyldiethanolamine, Aminoethylethanolamine solution															
Amyl Acetate (commercial, iso-, n-, sec-)	AEC	5,000	5202	6235	35005	1.695	*****	91.1	*****	0.0	91.1	0.069	1.76	OK	
AMYL ACETATE (n-)	AML	5,000	5033	5208	29243	1.635	*****	86.7	*****	0.0	86.7	0.049	1.68	OK	
AMYL ACETATE (iso-)	IAT	5,000	5033	5208	29243	1.635	*****	86.7	*****	0.0	86.7	0.049	1.68	OK	
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK	
Amyl alcohol (n-)	AAN	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK	
Amyl alcohol (tert-)	AAI														
AMYL ALCOHOL, PRIMARY	APM	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK	
AMYL ALCOHOL, (sec-)	ASE	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK	
Amylene	AMZ														
AMYL ALCOHOL, (iso-)	IAA	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK	
Amyl Methyl Ketone	AMK														
Amyl Tallate															
Asphalt	ASP														
ASPHALT BLENDING STOCKS: Roofers flux	ARF														
ASPHALT BLENDING STOCKS: Straight run residue	ASR														
Behenyl alcohol															
Benzene Tricarboxylic acid Trioctyl Ester															
Benzyl alcohol															
Bicyclic Terpenel Polyamide salt	BAL	5,000	5010	5052	28366	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK	
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3)	gBFX														
Butane	BMX														
Butene, SEE BUTYLENE															
Butene Oligomer	BOL														

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR		PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS Htot-I-II (FT)	THRU PIP'G REMOTE TANK TO P/V Mv-a,11 Ploss (PSI)	PRESS @ REMOTE TANK PV Ploss (PSI)
			EQUIVALENT			TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)					
			Qa (12) (BBL/ HR)	(FT^3/ HR)								

BAX	5,000	5060	5334	29947	1.635	*****	87.5	*****	0.0	87.5	0.051	1.69
BCN	5,000	5080	5443	30562	1.665	*****	88.1	*****	0.0	88.1	0.053	1.72
BTA	5,000	5150	5822	32686	1.665	*****	90.1	*****	0.0	90.1	0.061	1.73
	5,000	5090	5311	29822	1.635	*****	88.6	*****	0.0	88.6	0.051	1.69
IAL	5,000	5090	5311	29822	1.635	*****	88.6	*****	0.0	88.6	0.051	1.69
BAN	5,000	5050	5173	29046	1.635	*****	87.4	*****	0.0	87.4	0.048	1.68
BAS	5,000	5130	5449	30597	1.665	*****	89.8	*****	0.0	89.8	0.054	1.72
BAT	5,000	5280	5966	33495	1.665	*****	94.7	*****	0.0	94.7	0.064	1.73
BPH	5,000	5001	5016	28164	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68
BTN												
BUG												
BHK												
BUE	5,000	5010	5073	28484	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68
BLA												
CLS	5,000	5005	5027	28227	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68
COR												
CUM	5,000	5060	5352	30047	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72
CHX	5,000	5450	6736	37823	1.695	*****	99.7	*****	0.0	99.7	0.081	1.78
CHN	5,000	5015	5072	28475	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68
CPD	5,000	5025	5161	28976	1.635	*****	86.5	*****	0.0	86.5	0.048	1.68
CMP	5,000	5011	5072	28479	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68
DHN	5,000	5010	5068	28454	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68
IDA	5,000	5001	5007	28114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68
DAL												
DDC												
DCE	5,000	5012	5082	28534	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS HtotI + II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V WV-a, 11 * Htot Ploss (PSI)		PRESS @ REMOTE TANK PV + P Ploss Pck (PSI)
		LIQUID TRANSF RATE Q1 (MLTR) (10) (BBL/ HR)	AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)										
				Qa (12) (BBL/ HR)	(FT ³ / HR)								
Decyl alcohol (all isomers) (DECANOL)	DAX	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
DECYL ALCOHOL (iso-)	ISA	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
DECYL ALCOHOL (n-)	DAN	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Decylbenzene (n-)	DBZ	5,000	5001	5011	20135	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Detergent Alkylate													
Diacetone alcohol	DAA	5,000	5010	5056	20389	1.635	*****	86.2	*****	0.0	86.2	0.046	1.60
Dialkyl (C10-C14) Benzenes	DAB												
Dialkyl (C7-C13) Phthalates	DAH												
Dibutyl Carbinol	DPA												
Dibutyl Phthalate (ortho-)	DPT	5,000	5025	5161	20976	1.635	*****	86.5	*****	0.0	86.5	0.048	1.60
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DEB	5,000	5008	5053	20369	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60
Diethylbenzene	DEG	5,000	5001	5005	20102	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol	DME	5,000	5001	5008	20118	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Butyl Ether	DEM												
Diethylene Glycol Butyl Ether Acetate	DIG												
Diethylene Glycol Dibutyl Ether	DGE												
Diethylene Glycol Diethyl Ether	DGA	5,000	5002	5013	20147	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Ethyl Ether	DGM	5,000	5003	5018	20172	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Ethyl Ether Acetate	DGR												
Diethylene Glycol Methyl Ether Acetate	DGP												
Diethylene Glycol Phenyl Ether	DGL												
Diethylene Glycol Phthalate	DEH												
Di-(2-ethylhexyl)adipate	DIE												
Di-(2-ethylhexyl)phthalate	DPH												
Diethyl Phthalate	BDE												
Diglycidyl Ether of Bisphenol A	DHP												
Diheptyl Phthalate	DHA												
Dihexyl Phthalate	DBC	5,000	5009	5064	20432	1.635	*****	86.1	*****	0.0	86.1	0.047	1.60
Diisobutylcarbinol	DBL	5,000	5200	6049	33962	1.665	*****	91.4	*****	0.0	91.4	0.065	1.73
Diisobutylene	DIK	5,000	5016	5112	20700	1.635	*****	86.3	*****	0.0	86.3	0.047	1.60
Diisobutyl Ketone	DIT												
Diisobutyl Phthalate	DID												
Diisodecyl Phthalate	DNY												
Diisononyl Adipate	DIN												
Diisononyl Phthalate	DIO												
Diisocetyl Phthalate	DIX	5,000	5003	5024	20210	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diisopropylbenzene (all isomers)	DII												
Diisopropyl Naphthalene	DLA												
Dimethyl Adipate													
Dimethylbenzene													
Dimethyl Glutarate	DGT												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7020"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" = MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR		PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot- I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK P/V Mv-a,11 + Htot Ploss (PSI)		PRESS @ REMOTE TANK PV + P Ploss Ptk (PSI)	P M
		LIQUID	AIR	EQUIVALENT			FM REMOTE TK	TO PV	FM REMOTE TK	TO PV					
		TRANSF	MIX												
		RATE (MLTR Q1 (10) (BBL/ HR)	FLOW RATE (11) (BBL/ HR)	(12) (BBL/ HR)	(FT^3/ HR)										
Dimethyl Phthalate	***														
Dimethyl Polysiloxane	DTL														
2,2-Dimethylpropane-1,3-diol	DMP														
Dimethyl Succinate	DDI														
Dinonyl Phthalate	DSE														
Di(octylphenyl)amine	DIF	5,000	5001	5022	28195	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	0	
Dioctyl Phthalate	DOP														
Dipentene	DPN	5,000	5010	5070	28466	1.635	*****	86.1	*****	0.0	86.1	0.047	1.60	0	
Diphenyl	DIL	5,000	5001	5008	28116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	0	
Diphenyl, Diphenyl Ether mixture	DDO	5,000	5001	5009	28121	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	0	
Diphenyl Ether	DPE	5,000	5001	5009	28121	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	0	
Diphenyl Ether, Biphenyl Ether mixture	DOB														
Dipropylene Glycol	DPG	5,000	5007	5046	28332	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60	0	
Dipropylene Glycol Dibenzoate	DGY														
Dipropylene Glycol Methyl Ether	DPY														
DISTILLATES: Flashed feed stocks	DFF	5,000	5230	6056	34002	1.665	*****	92.5	*****	0.0	92.5	0.066	1.73	OK	
DISTILLATES: Straight run	DSR	5,000	5230	6056	34002	1.665	*****	92.5	*****	0.0	92.5	0.066	1.73	OK	
Di(tridecyl) Phthalate	DTP														
Diundecyl Phthalate	DUP														
Dodecane (all isomers)	DOC														
Dodecanol	DDN														
Dodecane (all isomers)	DOZ	5,000	5002	5017	28160	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK	
DODECENE	DOD	5,000	5002	5017	28160	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK	
Dodecylbenzene	DOB	5,000	5470	9704	54482	1.785	*****	97.4	*****	0.0	97.4	0.162	1.95	OK	
Dodecyl Phenol	DOL														
Drilling mud (low toxicity) (if flammable or combustible)/	ETH														
Epoxylated linear alcohols, C11-C15	EEO														
Ethane	EEA														
2-Ethoxyethanol	ETG														
2-Ethoxyethyl Acetate	ETA	5,000	5450	6822	38301	1.695	*****	99.3	*****	0.0	99.3	0.082	1.78	OK	
Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES	EAA	5,000	5020	5127	28785	1.635	*****	86.4	*****	0.0	86.4	0.048	1.60	OK	
Ethoxy Triglycol (crude)	EAL	5,000	5350	5686	31926	1.665	*****	97.7	*****	0.0	97.7	0.058	1.72	OK	
Ethyl Acetate	EAK														
Ethyl Acetoacetate	ETB	5,000	5060	5295	29727	1.635	*****	87.5	*****	0.0	87.5	0.051	1.69	OK	
Ethyl alcohol (ETHANOL)	EBT	5,000	5012	5059	28402	1.635	*****	86.3	*****	0.0	86.3	0.046	1.60	OK	
Ethyl Amyl Ketone	EBR	5,000	5100	5552	31174	1.665	*****	88.8	*****	0.0	88.8	0.056	1.72	OK	
Ethyl Benzene	ECY	5,000	5050	5269	29503	1.635	*****	87.2	*****	0.0	87.2	0.050	1.69	OK	
Ethyl Butanol	ETL														
Ethyl Butyrate															
Ethyl Cyclohexane															
Ethylene															
Ethylene Carbonate															

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	(FT^3/ HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot= I+II (FT)	THRU PIP'G REMOTE TANK TO P/V Wv-a,11 * Htot Ploss (PSI)	PRESS @ REMOTE TANK PV * Ploss Pck (PSI)
							FM REMOTE TK TO PV		FM REMOTE TK TO PV				
							TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)			
Ethylene Glycol	EG	5,000	5001	5003	28089	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Acetate	EQ												
Ethylene Glycol Butyl Ether	EQM												
ETHYLENE GLYCOL BUTYL ETHER ACETATE	EMA	5,000	5005	5040	28297	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Ether Acetate													
Ethylene Glycol Tert-Butyl Ether													
Ethylene Glycol Diacetate	EGY	5,000	5001	5007	28114	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Dibutyl Ether	EGB												
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGF												
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGA												
Ethylene Glycol Isopropyl Ether	EGI												
Ethylene Glycol Methyl Butyl Ether													
Ethylene Glycol Methyl Ether	EME	5,000	5001	5007	28112	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Methyl Ether Acetate	EGT												
Ethylene Glycol Phenyl Ether	EPE	5,000	5001	5007	28112	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixt	EDX												
Ethylene-Propylene Copolymer (in liquid mixtures)													
Ethyl-3-Ethoxypropionate	EEP												
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	5,000	5017	5106	28668	1.635	86.3	0.0	86.3	0.047	1.60		
2-Ethylhexanoic acid	EHO												
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	ENX	5,000	5002	5013	28145	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID													
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE												
Ethyl Hexyl Tallate	EHT												
Ethyl Propionate	EPR	5,000	5350	5606	31926	1.665	97.7	0.0	97.7	0.058	1.72		
Ethyl Toluene	ETE	5,000	5028	5163	28989	1.635	86.6	0.0	86.6	0.048	1.60		
Fatty acid (saturated, C13 and above)													
Fatty acid Amides													
Formamide	FAM	5,000	5010	5019	28177	1.635	86.3	0.0	86.3	0.046	1.60		
Furfuryl Alcohol	FAL	5,000	5005	5024	28205	1.635	86.1	0.0	86.1	0.046	1.60		
Gas oil, cracked	GOC												
GASOLINE BLENDING STOCKS: Alkylates	GAK	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINE BLENDING STOCKS: Reformates	GRP	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Automotive (containing not over 4.23 grams lead per gal)	GAT	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon)	GAV	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Casinghead (natural)	GCS	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Polymer	GPL	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Straight run	GSR	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
Glycerine	GCR												
Glycerol, SEE GLYCERINE													
Glycerol Polyalkoxylate													
Glycerol Triacetate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	MAX LIQUID TRANSF RATE (MLTR)	VAPOR-MIX FLOW RATE (10) (BBL/HR)	REQUIRED AIR EQUIVALENT (11) (BBL/HR)	PRESS ACROSS PV VALVE (12) (FT ³ /HR)	PRESS (PSI)	PIPE SECT I: LOSS FM REMOTE TK. TO PV		PIPE SECT II: LOSS FM REMOTE TK. TO PV		GRAND TOTAL LOSS Htot I (FT)	GRAND TOTAL LOSS Htot II (FT)	GRAND TOTAL LOSS Htot I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK Wv-a.11 Ploss (PSI)	PRESS @ REMOTE TANK PV Ptk (PSI)	PI ME						
						TOTAL LOSS		TOTAL LOSS													
						Htot I		Htot II													
						(FT)		(FT)													
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRI GLT																					
Glycidyl Ester of Tridecyl Acetic acid																					
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETI																					
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE																					
Glycols, Resins and Solvents mixtures																					
Gylcol Triacetate, SEE GLYCERYL TRIACETATE																					
Glyoxal solution (40% or less)																					
Grease																					
Heptadecane																					
Heptane (all isomers) (METHYHEXANE)	HMX 5,000	5250	6163	34604	1.665	*****	93.2	*****	0.0	93.2	0.068	1.73	OK								
HEPTANE (N-)	HPT 5,000	5250	6163	34604	1.665	*****	93.2	*****	0.0	93.2	0.068	1.73	OK								
Heptanoic acid	HEP 5,000	5001	5006	28109	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK								
Heptanol (all isomers)	HTX 5,000	5004	5023	28200	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK								
HEPTANOL	HTN 5,000	5004	5023	28200	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK								
Heptene (all isomers)	HPX 5,000	5290	6325	35513	1.695	*****	94.2	*****	0.0	94.2	0.071	1.77	OK								
HEPTENE (1-)	HTE 5,000	5280	6280	35262	1.695	*****	93.9	*****	0.0	93.9	0.070	1.77	OK								
Heptyl Acetate	HPE 5,000	5010	5079	28518	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68	OK								
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR																					
Hexaethylene Glycol																					
Hexamethylene Glycol																					
Hexamethylenetetramine solutions																					
Hexane (all isomers)	HTS																				
HEXANE	HXS 5,000	5700	7783	43696	1.725	*****	107.8	*****	0.0	107.8	0.106	1.83	OK								
Hexanoic acid	HXA 5,000	5700	7783	43696	1.725	*****	107.8	*****	0.0	107.8	0.106	1.83	OK								
Hexanol	HXO 5,000	5001	5006	28105	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK								
Hexene (all isomers)	HXM 5,000	5100	5482	30782	1.665	*****	88.8	*****	0.0	88.8	0.054	1.72	OK								
HEXENE (1-)	HEX 5,000	5000	8075	45338	1.755	*****	111.3	*****	0.0	111.3	0.114	1.87	OK								
HEXENE (2-)	HXB 5,000	5820	8152	45769	1.755	*****	111.9	*****	0.0	111.9	0.116	1.87	OK								
Hexyl Acetate	HXT 5,000	5820	8152	45769	1.755	*****	111.9	*****	0.0	111.9	0.116	1.87	OK								
Hexylene Glycol	HAE																				
Hog Grease, SEE LARD	HXG 5,000	5001	5001	28080	1.635	*****	86.0	*****	0.0	86.0	0.045	1.68	OK								
2-Hydroxy-4-(methylthio)butanoic acid																					
HYDROCARBON 5-9 (MOVED TO SUB-O, NON TABLE 151, 6/24/95)	HBA																				
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINA	HPN																				
Isophorone	IPH 5,000	5001	5007	28111	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK								
JET FUELS: JP-1 (Kerosene)	JPO 5,000	5014	5089	28575	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68	OK								
JET FUELS: JP-3	JPT 5,000	5051	9858	55348	1.815	*****	111.5	*****	0.0	111.5	0.167	1.98	OK								
JET FUELS: JP-4	JPP 5,000	5340	6817	38275	1.695	*****	95.4	*****	0.0	95.4	0.082	1.78	OK								
JET FUELS: JP-5 (Kerosene, heavy)	JPV 5,000	5010	5056	28389	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK								
JET FUELS: JP-8	JPE																				
Kerosene	KRS 5,000	5015	5096	28610	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68	OK								
Lactic acid																					

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS				PIPE SECT II: LOSS				DROPT THRU		
	LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV		FM REMOTE TK TO PV		PIP'G	PRESS		
	TRANSF	MIX	EQUIVALENT		ACROSS					REMOTE	@		
	RATE	FLOW			PV					TANK	REMOTE		
	(MLTR)	RATE			VALVE					TO P/V	TANK		
	Q1	Qv-a	Qa			PV					Wv-a,11	PV . P	
(10)	(11)	(12)								• Htot	Ploss M		
(BBL/ HR)	(BBL/ HR)	(BBL/ HR)	(FT^3/ HR)			HtotI			HtotII	Htot-I+II	Ploss		
				(PSI)			(FT)			(FT)	(PSI)	(PSI)	
LLS													
Cop													
MSE													
TH													
NOA													
NPO													
TTG	5,000	5610	7102	39873	1.695	*****	105.3	*****	0.0	105.3	0.089	1.78	OK
IAE													
AL	5,000	5663	5778	32440	1.665	*****	109.5	*****	0.0	109.5	0.060	1.73	OK
AC	5,000	5033	5233	29379	1.635	*****	86.7	*****	0.0	86.7	0.050	1.68	OK
AA	5,000	5043	5209	29246	1.635	*****	87.1	*****	0.0	87.1	0.049	1.68	OK
AK													
BL													
OK	5,000	5097	5465	30685	1.665	*****	88.7	*****	0.0	88.7	0.054	1.72	OK
BY													
BU	5,000	5126	5608	31485	1.665	*****	89.7	*****	0.0	89.7	0.057	1.72	OK
EK	5,000	5450	6487	36421	1.695	*****	100.0	*****	0.0	100.0	0.075	1.77	OK
5,000	6542	10391	58343	1.815	*****	139.4	*****	0.0	139.4	0.186	2.00	OK	
OK	5,000	5006	5042	28309	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
C													
K	5,000	5115	5542	31116	1.665	*****	89.3	*****	0.0	89.3	0.055	1.72	OK
A	5,000	5001	5007	28113	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
N	5,000	5630	7424	41684	1.725	*****	105.4	*****	0.0	105.4	0.097	1.82	OK
N	5,000	5849	8263	46394	1.755	*****	113.0	*****	0.0	113.0	0.119	1.87	OK
Y													
E	5,000	5004	5017	28169	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
O													
S	5,000	5020	5121	28754	1.635	*****	86.4	*****	0.0	86.4	0.048	1.68	OK
R	5,000	5017	5114	28710	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	MAX ALLOWABLE LIQUID TRANSFER RATE										PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		PRESS DROP THRU PIP'G REMOTE TANK TO P/V	PRESS @ REMOTE TANK	P
	C H R I S	LIQUID	AIR	REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	TOTAL LOSS Htot I (FT)	TOTAL LOSS Htot II (FT)	GRAND TOTAL LOSS Htot I+II (FT)	(PSI)	(PSI)							
		TRANSP	MIX														
		RATE (MLTR) Q1 (10) (BBL/HR)	FLOW RATE Qv-a (11) (BBL/HR)								Qa (12) (BBL/HR)	(FT ³ /HR)					
NAPHTHA: Paraffinic	PTN	NSV 5,000	5020	5097	28617	1.635	86.4	0.0	86.4	0.047	1.60	C					
NAPHTHA: Petroleum	NSS 5,000	5020	5121	28754	1.635	86.4	0.0	86.4	0.048	1.60	C						
NAPHTHA: Solvent	NVM 5,000	5019	5115	28720	1.635	86.4	0.0	86.4	0.047	1.60	C						
NAPHTHA: Stoddard solvent	NTI	MAX 5,000	5027	5168	29014	1.635	86.6	0.0	86.6	0.048	1.60	O					
NAPHTHA: Varnish makers' and painters' (75%)	NAN 5,000	5027	5168	29014	1.635	86.6	0.0	86.6	0.048	1.60	O						
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt	solNFS	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK					
Naphthenic acid	NTI	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK					
Nonane (all isomers)	NNA	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK					
NONANE	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Nonanoic acid (all isomers)	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
Nonanoic, Tridecanoic acid mixture	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
Nonene	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						
Nonyl alcohol (all isomers)	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
NONYL ALCOHOL	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
NONYL ALCOHOL (iso-)	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Nonyl Methacrylate Monomer	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
Nonyl Phenol	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
Nonyl Phenol Poly(4-12)ethoxylates	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						
Nonyl Phenol Sulfide (90% or less)	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Noxious liquid, N.O.S. (17) ("Trade name," contains principal compone	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal com	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Octadecene	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
Octadecenoamide solution (Oleamide)	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
Octane (all isomers)	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						
OCTANE	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Octanoic acid (all isomers)	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Octanol (all isomers)	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
OCTANOL	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
Octene (all isomers)	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
OCTENE (1-)	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						
Octyl Acetate	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
OCTYL ALCOHOL	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
Octyl Aldehydes	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
Octyl Decyl Adipate	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
Octyl Epoxystallate	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE	NNS 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
OIL, EDIBLE: Babassu	NNN 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
OIL, EDIBLE: Beechnut	NNI 5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.60	OK						
OIL, EDIBLE: Castor	NNP 5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.60	OK						
OIL, EDIBLE: Cocoa butter	NPE	ODD	OAX 5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72	OK				
OIL, EDIBLE: Coconut	NON 5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.60	OK						

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE													
CARGO	C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS				PIPE SECT II: LOSS				PRESS	DRO THRU PIP'G REMOTE TANK TO P/V * Htot Ploss (PSI)
		LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV		FM REMOTE TK TO PV		THRU		
		TRANSP	MIX	EQUIVALENT	ACROSS					PIP'G			
		RATE	FLOW		PV					REMOTE			
		RATE	RATE		PV					TANK	PRESS		
		(MLTR)	(11)	(12)	VALVE					REMO			
		Q1	Qv-a	Qa	PV					TANK			
		(10)	(11)	(12)	PV					TANK			
		(BBL/ HR)	(BBL/ HR)	(BBL/ HR)	(FT^3/ HR)					TANK			
					(PSI)					TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			
										TANK			

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-				PIPE SECT I: LOSS		PIPE SECT II: LOSS		PRESS		PRESS		OK
		LIQUID	AIR	REQUIRED AIR	PRESS	FM REMOTE TK TO PV	FM REMOTE TK TO PV	TOTAL	TOTAL	GRAND	TANK	REMOTE	TANK	
		TRANSF	MIX	EQUIVALENT	ACROSS			LOSS	LOSS	TOTAL	TO P/V	TO P/V	TO P/V	
		RATE	FLOW		PV			LOSS	LOSS	LOSS	LOSS	LOSS	LOSS	
		(MLTR)	RATE		VALVE			HtotI	HtotII	Htot-I+II	(PSI)	(PSI)	(PSI)	
		(10)	(11)	(12)	PV			(FT)	(FT)	(FT)				
		(BBL/	(BBL/	(BBL/	(FT^3/									
		HR)	HR)	HR)	HR)	(PSI)								
OIL, MISC: Coconut oil, fatty acid	...													
OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM													
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL, FATTY ACID METH														
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACIDCFY														
OIL, MISC: Croton														
OIL, MISC: Crude														
OIL, MISC: Diesel	OIL 5,000	6250	6319	35479	1.695		132.7		0.0	132.7	0.072	1.77	OK	
OIL, MISC: Gas, low pour	ODS 5,000	5069	5322	29000	1.635		87.8		0.0	87.8	0.051	1.69	OK	
OIL, MISC: Gas, low sulfur														
OIL, MISC: Heartcut distillate														
OIL, MISC: Lanolin														
OIL, MISC: Linseed														
OIL, MISC: Lubricating														
OIL, MISC: Mineral	OLB 5,000	5015	5015	28150	1.635		86.4		0.0	86.4	0.046	1.60	OK	
OIL, MISC: Mineral seal														
OIL, MISC: Motor	OMS													
OIL, MISC: Neatsfoot	OMT													
OIL, MISC: Oiticica	ONF													
OIL, MISC: Palm oil, fatty acid Methyl Ester	OOI													
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID MOPE	OPE													
OIL, MISC: Penetrating	MOPE													
OIL, MISC: Perilla	OPT													
OIL, MISC: Pilchard														
OIL, MISC: Pine														
OIL, MISC: Range	OPI													
OIL, MISC: Residual	ORG													
OIL, MISC: Resin														
OIL, MISC: Resinous petroleum	ORS 5,000	5015	5015	28150	1.635		86.4		0.0	86.4	0.046	1.60	OK	
OIL, MISC: Road	ORD													
OIL, MISC: Rosin	ORN													
OIL, MISC: Seal														
OIL, MISC: Soapstock														
OIL, MISC: Soya bean (epoxidized)	OIS													
OIL, MISC: Sperm														
OIL, MISC: Spindle	OSP													
OIL, MISC: Spray	OSD													
OIL, MISC: Tall	OSY													
OIL, MISC: Tall, fatty acid	OTL													
OIL, MISC: Tanner's	TOP													
OIL, MISC: Transformer	OTN													
OIL, MISC: Tung	OTP													
OIL, MISC: Turbine	OTG													
	OTB 5,000	5030	5231	29370	1.635		86.6		0.0	86.6	0.050	1.60	OK	

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VOR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot-I+II (FT)	THRU PIP'G REMOTE TANK TO P/V Hv-a,11 Ploss (PSI)	PRESS @ REMOTE TANK PV + Ploss Ptk (PSI)	Pt MD
						FM REMOTE TK TO PV		FM REMOTE TK TO PV					
						TOTAL LOSS		TOTAL LOSS					
						Htot I (FT)		Htot II (FT)					
OIL, MISC: Whale													
OIL, MISC: White (mineral)													
OIL, MISC: Wood													
alpha-Olefins (C13 - C18)													
Olefins (C13 and above, all isomers)	OAM												
Oleic acid	OLA												
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)													
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMI													
Palm Stearin	PMS												
n-Paraffins (C10 - C20)	PFN												
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PDC	5,000	5001	5012	28139	1.635	86.0	0.0	86.0	0.046	1.68	OK	
Pentaethylene Glycol													
Pentaethylenhexamine	PEP												
Pentane (all isomers)	PTY	5,000	7100	12130	68103	1.890	163.1	0.0	163.1	0.252	2.14	OK	
PENTANE (iso-)	IPT	5,000	7700	14337	80495	2.015	190.5	0.0	190.5	0.349	2.36	OK	
PENTANE (n-)	PTA	5,000	7044	11980	67265	1.890	160.5	0.0	160.5	0.246	2.14	OK	
Pentanoic acid													
Pentene (all isomers)	PTX	5,000	7490	13298	74660	1.930	180.9	0.0	180.9	0.301	2.23	OK	
PENTENE (1-)	PTE	5,000	7490	13298	74660	1.930	180.9	0.0	180.9	0.301	2.23	OK	
Petrolatum	PTL												
1-Phenyl-1-Xylol Ethane	PXE												
Phosphosulfurized Bicyclic Terpene													
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES													
Pinene	PIN	5,000	5035	5232	29378	1.635	86.7	0.0	86.7	0.050	1.68	OK	
Polyalkenyl Succinic Anhydride Amine													
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtur	PPX												
Polyalkylene Oxide Polyol	PAO												
Palamine, Amide mixture													
Polybutadiene, Hydroxyl terminated													
Polybutene	PLB	5,000	5001	5121	28750	1.635	85.7	0.0	85.7	0.048	1.68	OK	
Polydimethylsiloxane													
Polyethylene Glycol													
Polyethylene Glycol Dimethyl Ether													
Polyglycerol													
Polyisobutylene, SEE POLYBUTENE													
Polymerized Esters													
Poly(20)oxyethylene Sorbitan Monooleate	PSM												
Polypropylene	PLP												
Polypropylene Glycol	PGC	5,000	5010	5010	28130	1.635	86.3	0.0	86.3	0.046	1.68	OK	
Polypropylene Glycol Methyl Ether	PGM	5,000	5080	5338	29972	1.635	88.2	0.0	88.2	0.051	1.69	OK	
Polysiloxane													
Polystyrene Diakyl Maleate													

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

MAX VAPOR -

STDVAP1

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	R I S	RATE (MLTR)	FLOW Qv-a (11)	EQUIVALENT Qa (12)	ACROSS PV VALVE PV	TOTAL LOSS Htot I (FT)	TOTAL LOSS Htot II (FT)	GRAND TOTAL LOSS Htot= I+II (FT)	TANK TO P/V Wv-a, 11 * Htot Ploss (PSI)	REMOTE TANK PV + Ploss Ptk (PSI)	PI Ptk Ptk		
		(10)	(BBL/ HR)	(BBL/ HR)	(FT^3/ HR)							(PSI)	
Potassium Oleate	***												
Propane	POE												
n-Propoxypropanol	PRP												
Propyl Acetate (iso-)	PXP												
Propyl Acetate (n-)	IAC 5,000	5180	5861	32905	1.665	*****	91.1	*****	0.0	91.1	0.062	1.73	O
Propyl alcohol (iso-)	PAT 5,000	5185	5884	33036	1.665	*****	91.3	*****	0.0	91.3	0.062	1.73	O
Propyl alcohol (n-)	IPA 5,000	5300	5801	32573	1.665	*****	95.4	*****	0.0	95.4	0.060	1.73	O
Propylbenzene (n-)	PAL 5,000	5120	5319	29865	1.635	*****	89.6	*****	0.0	89.6	0.051	1.69	O
iso-Propylcyclohexane	PBZ 5,000	5020	5116	28727	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	O
Propylene	IPX 5,000	5001	5006	28108	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	O
Propylene-Butylene Copolymer	PPL												
Propylene Dimer	PBP												
Propylene Glycol (1,2-PROPANDIOL)	PDR												
Propylene Glycol Monoalkyl Ether	PPQ 5,000	5001	5004	28093	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
Propylene Glycol Ethyl Ether	PGE												
Propylene Glycol Methyl Ether	PGY												
Propylene Polymer (in liquid mixtures)	PME 5,000	5070	5296	29736	1.635	*****	87.9	*****	0.0	87.9	0.051	1.69	OK
Propylene Tetramer	PTT 5,000	5002	5002	28085	1.635	*****	86.0	*****	0.0	86.0	0.045	1.68	OK
Propylene Trimer	PTR												
Pseudocumene, SEE TRIMETHYLBENZENES													
Rum													
Sodium Acetate, Glycol, water solutions													
Sodium Acetate solution													
Sodium Benzoate solution	SAN												
Sodium Sulfonate	SBN												
Stearic acid													
Stearyl alcohol (Octadecanol)	SRA												
Sulfolane													
Tallow	SFL 5,000	5001	5006	28106	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)	TLO												
Tallow fatty acid													
Tallow Alkyl Nitrile	TFD												
Tetradecanol													
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTN												
Tetradecylbenzene	TTD 5,000	5001	5010	28129	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
Tetraethylene Glycol	TBD												
Tetrahydronaphthalene	TTG 5,000	5001	5010	28128	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
Tetrapropylbenzene, SEE ALKYL(C9-C17) BENZENES	THN 5,000	5004	5026	28219	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
Toluene													
Triaryphosphate	TOL 5,000	5150	5637	31651	1.665	*****	90.6	*****	0.0	90.6	0.057	1.72	OK
Tributyl Phosphate	TBP												
Tricresyl Phosphate (less than 1% of the ortho isomer)	TCP 5,000	5001	5019	28180	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK

STDVAP1

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * ALLOWABLE LIQUID TRANSFER RATE

CARGO

CARGO	MAX LIQUID TRANSF RATE (MLTR)	VAPOR- AIR MIX FLOW RATE (Qv-a) (BBL/HR)	REQUIRED AIR EQUIVALENT (Qa) (BBL/HR)	PRESS ACROSS PV VALVE (FT ³ /HR)	PRESS (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS I+II (FT)	PRESS @ REMOTE TANK		IS Ptk MDW
						TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)		PIP'G TO P/V Wv-a, 11 * Htot Ploss (PSI)	PRESS @ REMOTE TANK PV * Ploss Ptk (PSI)	
Tridecane	TRD 5,000	5002	5019	28178	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Tridecanoic acid	TDN 5,000	5001	5010	28130	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TDC 5,000	5001	5009	28125	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
1-Tridecane	TRB												
Tridecylbenzene	TEB 5,000	5002	5016	28164	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Triethylbenzene	TEG 5,000	5001	5008	28115	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Triethylene Glycol													
Triethylene Glycol Butyl Ether													
Triethylene Glycol Butyl Ether mixture													
Triethylene Glycol di-(2-ethylbutyrate)	TGD												
Triethylene Glycol Ether mixture													
Triethylene Glycol Ether	TGE												
Triethylene Glycol Methyl Ether													
Triethyl Phosphate	TPS 5,000	5002	5018	28176	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Triisooctyl Trimellitate													
Triisopropanolamine	TIP												
Trimethylbenzenes (all isomers)	TRB 5,000	5014	5083	28539	1.635	86.3	0.0	86.3	0.0	86.3	0.047	1.60	OK
TRIMETHYL BENZENE (1,2,5-)	TMB 5,000	5014	5082	28531	1.635	86.3	0.0	86.3	0.0	86.3	0.047	1.60	OK
TRIMETHYL BENZENE (1,2,3-)	TMD 5,000	5014	5082	28531	1.635	86.3	0.0	86.3	0.0	86.3	0.047	1.60	OK
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TME 5,000	5014	5082	28531	1.635	86.3	0.0	86.3	0.0	86.3	0.047	1.60	OK
Trimethylol Propane Polyethoxylate	TPR												
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate													
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	TMP												
Tripropylene, SEE PROPYLENE TRIMER													
Tripropylene Glycol	TGC												
Tripropylene Glycol Methyl Ether	TGM												
Trixylenyl Phosphate	TRP												
Turpentine	TPT												
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%))													
Undecanol	UDC 5,000	5005	5038	28288	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Undecene (1-)	UND 5,000	5001	5009	28122	1.635	86.0	0.0	86.0	0.0	86.0	0.046	1.60	OK
Undecyl alcohol	UDB												
Undecylbenzene													
Vinyl Acetate-fumarate Copolymer													
Waxes:	WAX												
WAXES: Candelilla													
WAXES: Carnauba	WAX,												
WAXES: Paraffin	WAX,												
WAXES: Petroleum													
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
White spirit (low (15 - 20%) aromatic)	WSL												
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.													

SUMMARY TABLE FOR "GASOLINE"

(VGR = 1.25) (S.G.mlx = 2.911)


PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR CONNECTION
PRESSURE DROP IS BASED ON VAPOR-AIR MIX @ VGR * THE INDICATED LIQUID TRANSFER RATE
(TABULATED DATA IS FOR THE INDICATED PRESSURE AT THE SHORE CONNECTION)

LIQUID TRANSFER RATE				PRESSURE DROP (PSI)				
PERCENT MAX XFER RATE	LIQUID BBL PER HR	LIQUID GAL PER MIN	LIQUID CU FT PER MIN	1.0 PSIG PRESS. ● VAP. CONN.	0.5 PSIG PRESS. ● VAP. CONN.	0.0 PSIG PRESS. ● VAP. CONN.	-0.5 PSIG PRESS. ● VAP. CONN.	-1.0 PSIG PRESS. ● VAP. CONN.
20	1000.0	700.00	93.6	0.0137	0.0133	0.0129	0.0125	0.0121
40	2000.0	1400.00	187.2	0.0521	0.0505	0.0491	0.0474	0.0461
60	3000.0	2100.00	280.7	0.1143	0.1108	0.1074	0.1037	0.1004
80	4000.0	2800.00	374.3	0.1996	0.1936	0.1877	0.1817	0.1758
100 *	5000.0	3500.00	467.9	0.3087	0.2994	0.2900	0.2805	0.2711

* MAXIMUM LIQUID TRANSFER RATE

GRAPH FOR "GASOLINE"

PRESSURE DROP vs LIQUID TRANSFER RATE

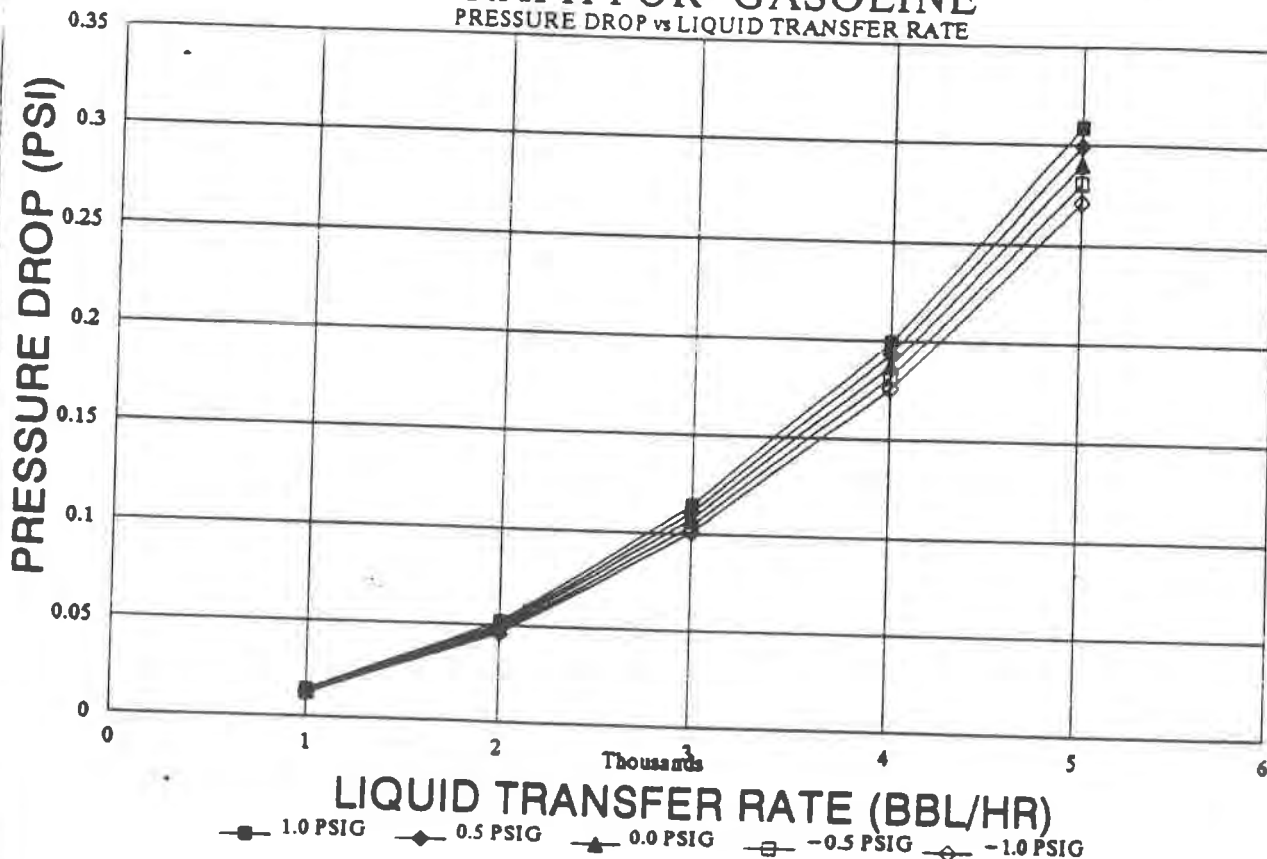

PRESSURE DROP IS BASED ON VAPOR-AIR MIX @ VGR * THE INDICATED LIQUID TRANSFER RATE
(TABULATED DATA IS FOR THE INDICATED PRESSURE AT THE SHORE CONNECTION)
(VGR = 1.25) (S.G.mlx = 2.911)

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

1.0 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	Wg/Wa	LBS/CU FT	0.215	0.215	0.215	0.215	0.215
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5	"	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % * P	Pcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60	"	GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)	"	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
PRESSURE @ REQ'D FLOW	INPUT	P2	PSIG	1.0	1.0	1.0	1.0	1.0
	J +14.7	"	PSIA	15.7	15.7	15.7	15.7	15.7
	K*144	"	PSFA	2260.8	2260.8	2260.8	2260.8	2260.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12	"	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		6.28E+04	1.26E+05	1.88E+05	2.51E+05	3.14E+05
RELATIVE ROUGHNESS	P/N	e/D		0.00023	0.00023	0.00023	0.00023	0.00023
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02118	0.01892	0.01783	0.01711	0.01670
HEAD LOSS: PIPE	DD*(Q/W)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.361	15.579	33.045	56.352	85.949
HEAD LOSS: TOTAL	X*Y+Z+AA+EE	HL	FT PROD. (GAS)	9.203	34.945	76.618	133.816	206.985
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12	"	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/W)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X*Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.203	34.945	76.618	133.816	206.985
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2262.78	2268.31	2277.26	2289.54	2305.26
	GG/144	"	PSIA	15.71	15.75	15.81	15.90	16.01
	HH-14.7	"	PSIG	1.01	1.05	1.11	1.20	1.31
(P1 - P2) / P1	(HH-K) / HH			0.1%	0.3%	0.7%	1.3%	1.9%
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1-P2)	(II-J)		PSI	0.0137	0.0521	0.1143	0.1996	0.3087

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

0.5 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _s /W _{av}	LBS/CU FT	0.208	0.208	0.208	0.208	0.208
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
"	D*2.09E-5	"	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	F	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	X % * F	Fcg	BBL/HR	1250	2500	3750	5000	6250
"	G*42/60	"	GAL/MIN	875	1750	2625	3500	4375
"	H/(7.48*60)	"	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	0.5	0.5	0.5	0.5	0.5
"	J*14.7	"	PSIA	15.2	15.2	15.2	15.2	15.2
"	K*144	"	PSFA	2188.8	2188.8	2188.8	2188.8	2188.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
"	M/12	"	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		6.08E+04	1.22E+05	1.82E+05	2.43E+05	3.04E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02131	0.01892	0.01783	0.01719	0.01676
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.388	15.579	33.045	56.627	86.252
HEAD LOSS: TOTAL	X*Y+Z+AA+EE	HL	FT PROD. (GAS)	9.230	34.945	76.618	134.090	207.289
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
"	M/12	"	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC					
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X*Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.230	34.945	76.618	134.090	207.289
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2190.72	2196.07	2204.73	2216.68	2231.91
"	GG/144	"	PSIA	15.21	15.25	15.31	15.39	15.50
"	HH-14.7	"	PSIG	0.51	0.55	0.61	0.69	0.80
(P1 - P2) / P1	(HH-K) / HH			0.1%	0.3%	0.7%	1.3%	1.9%
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1 - P2)	(II-J)		PSI	0.0133	0.0505	0.1106	0.1936	0.2994

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =					20	40	60	80	100
CARGO = "GASOLINE" VGR = 1.25					PERCENT	PERCENT	PERCENT	PERCENT	PERCENT
0.0 PSIG <--- "					VGR*MAX	VGR*MAX	VGR*MAX	VGR*MAX	VGR*MAX
TP	ITEM	DATA "SOURCE"	SYMBOL	UNITS	TRANSFER	TRANSFER	TRANSFER	TRANSFER	TRANSFER
					RATE	RATE	RATE	RATE	RATE
CARGO:									
	"GASOLINE"								
B	SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
C	SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _s /W _{av}	LBS/CU FT	0.201	0.201	0.201	0.201	0.201
D	ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
E	"	D*2.09E-5	"	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:									
F	VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
G	% OF VGR*MAX ALLOW TRANS RATE	X % = P	Pcg	BBL/HR	1250	2500	3750	5000	6250
H	"	G*42/60	"	GAL/MIN	875	1750	2625	3500	4375
I	"	H/(7.48*60)	"	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION									
J	SETTING	INPUT	P2	PSIG	0.0	0.0	0.0	0.0	0.0
K	"	J +14.7	"	PSIA	14.7	14.7	14.7	14.7	14.7
L	"	K*144	"	PSFA	2116.8	2116.8	2116.8	2116.8	2116.8
VAP RECOV'Y PIPING: SECTION I									
M	INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
N	"	M/12	"	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
O	INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
P	ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
Q	LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I									
R	VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
S	CORFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
T	CORFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
U	NO. OF BENDS	INPUT	N		9	9	9	9	9
V	CORFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
W	CORFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
X	HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
Y	HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
Z	HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
AA	HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BB	REYNOLDS NO.	R*N*C/E*32.2	R		5.88E+04	1.18E+05	1.76E+05	2.35E+05	2.94E+05
CC	RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
DD	MOODY DIAG FRICTION FACTOR	INPUT	f		0.02145	0.01918	0.01797	0.01728	0.01682
EE	HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.416	15.795	33.304	56.920	86.572
FF	HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.258	35.161	76.877	134.383	207.609
VAP RECOV'Y PIPING: SECTION II									
M	INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
N	"	M/12	"	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
O	INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
P	ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
Q	LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II									
R	VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
S	CORFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
T	CORFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
U	NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
V	CORFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
W	CORFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
X	HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
Y	HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
Z	HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
AA	HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BB	REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
CC	RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
DD	MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
EE	HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
FF	HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
FF	HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.258	35.161	76.877	134.383	207.609
GG	PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2116.66	2123.87	2132.26	2143.83	2158.55
HH	"	GG/144	"	PSIA	14.71	14.75	14.81	14.89	14.99
II	"	HH-14.7	"	PSIG	0.01	0.05	0.11	0.19	0.29
JJ	(P1 - P2) / P1	(HH-K) / HH	"		0.1%	0.3%	0.7%	1.3%	1.9%
KK	(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
PP	(P1 - P2)	(II - J)		PSI	0.0129	0.0491	0.1074	0.1877	0.2900

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR = 1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

-0.5 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _v /W _{av}	LBS/CU FT	0.194	0.194	0.194	0.194	0.194
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5	*	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % = P	Pcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60	*	GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)	*	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	-0.5	-0.5	-0.5	-0.5	-0.5
	J*14.7	*	PSIA	14.2	14.2	14.2	14.2	14.2
	K*144	*	PSFA	2044.8	2044.8	2044.8	2044.8	2044.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12	*	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R=N*C/E*32.2	R		5.68E+04	1.14E+05	1.70E+05	2.27E+05	2.84E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02159	0.01918	0.01797	0.01737	0.01689
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.446	15.795	33.304	57.233	86.910
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.287	35.161	76.877	134.697	207.947
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12	*	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R=N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FP(I) + FP(II)	HLtot	FT PROD. (GAS)	9.287	35.161	76.877	134.697	207.947
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2046.60	2051.63	2059.74	2070.97	2085.20
	GG/144	*	PSIA	14.21	14.25	14.30	14.38	14.48
	HH-14.7	*	PSIG	-0.49	-0.45	-0.40	-0.32	-0.22
	(HH-K)/HH	*		0.14	0.34	0.74	1.34	1.94
(P1 - P2) / P1				YES	YES	YES	YES	YES
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1-P2)	(II-J)		PSI	0.0125	0.0474	0.1037	0.1817	0.2805

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

-1.0 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _g /W _{av}	LBS/CU FT	0.187	0.187	0.187	0.187	0.187
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5	*	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	F	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % = P	Fcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60	*	GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)	*	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	-1.0	-1.0	-1.0	-1.0	-1.0
	J +14.7	*	PSIA	13.7	13.7	13.7	13.7	13.7
	K*144	*	PSFA	1972.8	1972.8	1972.8	1972.8	1972.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12	*	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		5.48E+04	1.10E+05	1.64E+05	2.19E+05	2.74E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02174	0.01948	0.01813	0.01748	0.01695
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.477	16.041	33.587	57.570	87.268
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.318	35.407	77.160	135.033	208.305
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12	*	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	PF(I) + PF(II)	HLtot	FT PROD. (GAS)	9.318	35.407	77.160	135.033	208.305
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	1974.55	1979.44	1987.26	1998.11	2011.84
	GG/144	*	PSIA	13.71	13.75	13.80	13.88	13.97
	HH-14.7	*	PSIG	-0.99	-0.95	-0.90	-0.82	-0.73
	(HH-K)/HH	*		0.1%	0.3%	0.7%	1.3%	1.9%
(P1 - P2) / P1				YES	YES	YES	YES	YES
(P1 - P2) / P1 < 10% ??				0.0121	0.0461	0.1004	0.1758	0.2711
(P1-P2)	(II-J)		PSI					

A FOR TRANSFER RATE VS PRESSURE DROP

NOTES:

- a. 46 CFR 39.30.1 (b) REQUIRES THAT, FOR GASOLINE, CRUDE OIL, AND BENZENE, PRESSURE DROP THROUGH THE VAPOR COLLECTION SYSTEM FROM THE MOST REMOTE CARGO TANK TO THE VESSEL VAPOR CONNECTION MUST BE DETERMINED BASED ON A 50 PERCENT CARGO VAPOR AND AIR MIXTURE. PER DALTON'S LAW OF PARTIAL PRESSURES, AND ASSUMING THE MIXTURE IS 50/50 BY VOLUME, THE SPECIFIC GRAVITY OF THE MIXTURE CAN BE DETERMINED AS FOLLOWS:

$$SG_{mix} = \{ (N/2) * MW_{air} \} + \{ (N/2) * MW_{cargo} \} / (N * MW_{air})$$

WHERE
N = TOTAL NO. MOLECULES PER UNIT VOLUME
MW_{air} = MOLECULAR WEIGHT OF AIR
MW_{cargo} = MOLECULAR WEIGHT OF CARGO VAPOR

$$SG_{mix} = 0.5 * (MW_{air} + MW_{cargo}) / MW_{air}$$

A CORRESPONDING RELATIONSHIP IN TERMS OF SPECIFIC GRAVITY IS:

$$SG_{mix} = (SG_{air} + SG_{cargo}) / 2$$

FOR PRODUCTS OTHER THAN THOSE CITED ABOVE, THE SPECIFIC GRAVITY OF THE MIX CAN BE DETERMINED AS:

$$SG_{mix} = W_{v-a,115} / W_{a,115}$$

WHERE

W_{v-a,115} = VAPOR-AIR MIX WEIGHT DENSITY, & W_{a,115} = AIR WEIGHT DENSITY, BOTH AT 115 DEG F.

- b. THE SPECIFIC WEIGHT OF THE VAPOR/AIR MIXTURE IS OBTAINED BY MULTIPLYING THE SPECIFIC GRAVITY OF THE VAPOR/AIR MIXTURE BY THE WEIGHT OF AIR AS OBTAINED FROM THE FORMULA IN CRANE T.P. 410 (PAGE A-10) [I.E.,

$$W_s = (M * P) / (10.72 * T)$$

WHERE M IS THE MOLECULAR WEIGHT OF AIR (28.97), P IS PRESSURE IN PSIA (SEE BELOW), AND T IS ABSOLUTE TEMPERATURE IN RANKINE (F + 460) WITH T = 115 DEGREES FAHRENHEIT PER USCG GUIDANCE.

IF $(P_1 - P_2) / P_1 < 10\%$ THE ASSUMPTION THAT $W_s = W_{s1} = W_{s2}$ (WITH W_{s2} EVALUATED @ P_2) CAN BE CONSIDERED TO BE APPROPRIATE; OTHERWISE, A SECOND ITERATION SHOULD BE PERFORMED USING

$$W_s = W_{sav} = (W_{s1} + W_{s2}) / 2$$

(WITH W_{s1} EVALUATED @ P_1 AND W_{s2} @ P_2).

- c. THE PRECISE VISCOSITY OF THE CARGO VAPOR-AIR MIXTURE IS NOT KNOWN; HOWEVER, THE VISCOSITY OF AIR @ 100 DEGREES F IS 0.019 CENTIPOISE (SEE CRANE T.P. 410 (PAGE A-5)).

FOR PURPOSES OF THESE CALCULATIONS, ASSUMPTION THAT THE VISCOSITY OF THE CARGO-AIR MIXTURE IS THAT OF AIR AT 100 DEGREES F IS CONSIDERED REASONABLE.

FOR REFERENCE AND COMPARISON, REPRESENTATIVE VALUES OF ABSOLUTE (DYNAMIC) VISCOSITY OF VARIOUS HYDROCARBON VAPOR AND NATURAL GASES MAY BE FOUND IN CRANE T.P. 410 (PAGE A-5).

"LENGTH" IS THE DISTANCE BETWEEN THE MOST REMOTE CARGO TANK VAPOR INLET AND THE VESSEL'S VAPOR CONNECTION, AND IS ESTIMATED CONSERVATIVELY HIGH.

BEND HEAD LOSS ASSUMES

SECTION I:

TEE (THRU RUN)

TEE (THRU BRANCH)

OTHER

TOTAL QTY FITTINGS:

SECTION II:

TEE (THRU RUN)

TEE (THRU BRANCH)

OTHER

TOTAL QTY FITTINGS:

BASED ON FROM DARCY'S EQUATION:

$$P_1 - P_2 = W_s * f * L_{eq} * [V^2 / (2 * G)] / D$$

(ADJUSTED AS REQ'D FOR UNIT COMPATIBILITY)

QTY	LOSS	QT	LOSS
	COEFF.		COEFF.
3	0.60	90 DEG EL L.R.1	0.75
3	1.80	90 DEG EL	0 N/A
0	0.75	45 DEG EL L.R.2	0.40
9		AVERAGE COEFF.:	0.972
0	0.6	90 DEG EL L.R.0	0.75
0	1.8	90 DEG EL	0 N/A
0	0.75	45 DEG EL L.R.0	0.40
0		AVERAGE COEFF.:	0.000

CALCULATIONS FOR PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 DESIGN TEMPERATURE
 "TARGET" MAX LIQUID TRANSFER RATE
 PRESSURE AT VESSEL VAPOR SHORE CONNECTION
 PIPING SECTION I:

MOST REMOTE CARGO TANK OUTLET TO SHORE CONN
 DISTANCE ENROUTE TO PV
 ENTRANCE LOSS (K_e)
 BEND LOSS (K_b)

VALVE LOSS (K_v)

EXIT LOSS (K_{ex})
 PIPING SECTION II:

I MOST REMOTE CARGO TANK OUTLET TO SHORE CONN
 DISTANCE ENROUTE TO PV
 ENTRANCE LOSS (K_e)
 BEND LOSS (K_b)

VALVE LOSS (K_v)

EXIT LOSS (K_{ex})
 CARGO VISCOSITY

- NOTES: 1. LIQUID SPECIFIC GRAVITY; MOLECULAR WEIGHT OF CARGO
 2. SPECIFIC GRAVITY OF CARGO VAPOR
 3. SATURATED VAPOR PRESSURE @ 115 F
 4. TOTAL VAPOR-AIR PRESSURE @ 115 F
 5. PARTIAL VOLUME OF VAPOR @ 115 F
 6. PARTIAL VOLUME OF AIR @ 115 F
 7. AIR WEIGHT DENSITY @ 115 F & SHORE CONN. PRESS.
 8. VAPOR-AIR WEIGHT DENSITY @ 115 F & SHORE CONN. PRESS.
 9. VAPOR GROWTH RATE (SEE ALSO NOTE NO. 14)
 10. LIQUID TRANSFER RATE
 11. VAPOR-AIR MIXTURE FLOW RATE
 12. REQUIRED AIR EQUIVALENT FLOW RATE

TABLE IV: INPUT DATA & NOTES

(MDWP)	N/A	PSIG	
(T)	-115	F	
(TMLTR)	5000	BPH	
(Pa/c)	1.00	PSIG	15.7 PSIA
NOM I.D.	8	IN	I.D.
ROUGHNESS	0.00015		7.981 IN
		AREA	0.347 FT ²

INCREMENTS FOR PERCENT OF MLTR:	
1.	20.0% *
2.	40.0% *
3.	60.0% *
4.	80.0% *
5.	100.0% *
6.	100.0% *
7.	100.0% *

	280	FT	
	0.5		
	QTY	LOSS COEF	TOTAL
TEE (THRU RUN)	3	0.60	1.800
TEE (THRU BRANCH)	3	1.80	5.400
OTHER	0	0.75	0.000
TOTAL:	9	AVG:	0.972
	QTY	LOSS COEF	TOTAL
GATE	0	0.19	0.000
BUTTERFLY	1	0.65	0.650
OTHER	0	N/A	0.000
	1	AVG:	0.650
	0		
NOM I.D.	N/A	IN	I.D.
ROUGHNESS	0.00015		0.000 IN
		AREA	0.000 FT ²

QTY	LOSS COEFF	TOTAL
1	0.75	0.750
0	N/A	0.000
2	0.40	0.800

	0	FT	
	0		
	QTY	LOSS COEF	TOTAL
TEE (THRU RUN)	0	0.60	0.000
TEE (THRU BRANCH)	0	1.80	0.000
OTHER	0	0.75	0.000
TOTAL:	0	AVG:	0.000
	QTY	LOSS COEF	TOTAL
GATE	0	0.19	0.000
BUTTERFLY	0	0.65	0.000
OTHER	0	N/A	0.000
	0	AVG:	0.000
	0		
	0.019	CP	3.97E-07 LB SEC/FT ²

SGv
 Pv,115
 Pt,115
 Vv,115
 Va,115
 Wa,115
 Wv-a,115
 VGR
 Q1
 Qv-a
 Qa

OBTAIN FROM REFERENCE SOURCE
 (CARGO MM / AIR MM), OR FM REF. SOURCE
 OBTAIN FROM REFERENCE SOURCE
 EST'D TO BE SAME SHORE PRESS (Pa/c)
 Pv,115 / Pt,115
 (Pt,115 - Pv,115) / Pt,115
 Mwa = Pa/c Mwa = MOLEC. WT. OF AIR
 10.72*(460+T)
 [(SGv*Vv,115)+Va,115]*(0.0047*Pa/c)
 ESTIMATED TO BE 1 + (0.25*Pv,115/12.5)
 Q1 = VGR
 Qv-a*(Wv-a,115/Wa,115)^.5

13. USCG VAP COLLECT'N SYS. CARGO CATEGORIES
 1. NO ADD'L VCS REQMTS ABOVE THOSE FOR BENZENE, GASOLINE & CRUDE OIL
 2. POLYMERIZES
 3. HIGHLY TOXIC
 4. POLYMERIZES & HIGHLY TOXIC
 5. HIGH VAPOR GROWTH RATE
 6. HIGH VAP GROWTH RATE & HIGHLY TOXIC
 7. HIGH VAP GROWTH RATE & POLYMERIZES
 8. MORE INFO NEEDED BEFORE REQMTS CAN BE DETERMINED
 14. VGR = 1.25 FOR GASOLINE, CRUDE OIL, AND BENZENE.
 15. NF/NC = NON-FLAMMABLE/NON-COMBUSTIBLE

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)
CARGO	1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
46 CFR SUBCHAPT D, TABLE 151					
ACETIC ACID					
ACETIC ANHYDRIDE					
ACETONITRILE					
ACRYLIC ACID					
ACRYLONITRILE					
ADIPONITRILE					
ALUMINUM SULFATE SOLUTION					
AMINOETHYLETHANOLAMINE					
AMMONIUM BISULFITE SOLN (70% OR LESS)					
AMMONIUM HYDROXIDE (28% OR LESS NH3)					
ANTHRACENE OIL (COAL TAR FRACTION)					
BENZENE					
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)					
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)					
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)					
iso-BUTYL ACRYLATE					
n-BUTYL ACRYLATE					
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)					
BUTYL METHACRYLATE					
iso-BUTYRALDEHYDE					
n-BUTYRALDEHYDE					
BUTYRALDEHYDES (CRUDE)					
BUTYRALDEHYDE (ISO-, N-)					
AMPHOR OIL (LIGHT)					
ARBON TETRACHLORIDE					
AUSTIC POTASH SOLUTION					
CAUSTIC SODA SOLUTION					
CHLOROBENZENE					
CHLOROPFORM					
CHLOROSULFONIC ACID					
COAL TAR NAPHTHA SOLVENT					
CREOSOTE (COAL TAR)					
CREOSOTE (WOOD)					
CRESOLS (ALL ISOMERS)					
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))					
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)					
CRESYLATE SPENT CAUSTIC					
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC					
CROTONALDEHYDE					
CYCLOHEXANONE					
CYCLOHEXYLAMINE					
DECYL ACRYLATE (iso-, n-)					
DICHLOROBENZENE (ALL ISOMERS)					
1,1-DICHLOROETHANE					
2,2-DICHLOROETHYL ETHER					
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)					
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION					
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION					
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION					
1,1-, 1,2- OR 1,3- DICHLOROPROPANE					
1,3-DICHLOROPROPENE					
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES					
2,2-DICHLOROPROPIONIC ACID					
DIETHANOLAMINE					
DIETHYLAMINE					
DIETHYLENTRIAMINE					
DIETHYL ETHER, SEE ETHYL ETHER					
DIISOBUTYLAMINE					
DIISOPROPANOLAMINE					
AAC	0.004	0.014	0.030	0.052	0.080
ACA	0.004	0.014	0.030	0.051	0.079
ATN	0.003	0.013	0.028	0.048	0.074
ACR	0.004	0.013	0.029	0.050	0.077
ACN	0.005	0.019	0.041	0.071	0.109
ADN	0.003	0.013	0.028	0.048	0.074
ASX					
AEE	0.003	0.013	0.028	0.048	0.074
ABX					
AMH					
AHO					
BNZ	0.008	0.028	0.062	0.108	0.166
BHA	0.008	0.029	0.063	0.109	0.168
BHB	0.008	0.029	0.063	0.109	0.168
BTX	0.008	0.029	0.063	0.109	0.168
BAI	0.004	0.015	0.032	0.055	0.084
BTC	0.004	0.014	0.030	0.052	0.080
BAR	0.004	0.015	0.032	0.055	0.084
BMH	0.004	0.014	0.030	0.052	0.079
BAD	0.007	0.028	0.061	0.106	0.163
BTR	0.007	0.028	0.061	0.106	0.163
BFA	0.008	0.028	0.062	0.107	0.165
BAE	0.008	0.028	0.062	0.107	0.165
CPO					
CBT					
CPS					
CSS					
CRB	0.004	0.015	0.032	0.056	0.086
CRP					
CSA					
NCT	0.004	0.013	0.029	0.050	0.076
CCT	0.003	0.013	0.028	0.048	0.074
CMD	0.003	0.013	0.028	0.048	0.074
CRS	0.004	0.013	0.028	0.048	0.074
CRS					
CPP	0.004	0.013	0.028	0.048	0.074
CSC					
CAX					
CYA	0.004	0.016	0.035	0.060	0.093
CCR	0.003	0.013	0.028	0.048	0.074
CHA	0.004	0.014	0.031	0.053	0.082
DAT	0.003	0.013	0.028	0.048	0.074
DBX	0.004	0.013	0.028	0.049	0.075
DCH	0.011	0.042	0.092	0.161	0.247
DEE	0.004	0.013	0.028	0.048	0.074
DCM					
DOS					
DAD					
DTI					
DPK	0.009	0.032	0.071	0.123	0.190
DFU	0.008	0.029	0.064	0.111	0.171
DMX	0.009	0.032	0.071	0.123	0.190
DCW					
DEA	0.003	0.013	0.028	0.048	0.074
DEH	0.004	0.014	0.031	0.054	0.083
DET	0.003	0.013	0.028	0.048	0.074
DEH					
DBU	0.004	0.014	0.031	0.053	0.082
DIP	0.003	0.013	0.028	0.048	0.074

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX	MAX	MAX	MAX	MAX
		LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)
		1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
DIISOPROPYLAMINE	DIA	0.006	0.022	0.048	0.085	0.130
N,N-DIMETHYLACETAMIDE	DAC	0.004	0.013	0.028	0.049	0.076
DIMETHYLETHANOLAMINE	DME	0.004	0.014	0.030	0.052	0.079
DIMETHYLFORMAMIDE	DMP	0.004	0.013	0.029	0.050	0.076
1,4-DIOXANE	DOX	0.004	0.017	0.036	0.062	0.096
DI-N-PROPYLAMINE	DNA	0.004	0.016	0.036	0.062	0.095
ETHANOLAMINE	MEA	0.003	0.013	0.028	0.048	0.074
ETHYL ACRYLATE	EAC	0.005	0.018	0.038	0.067	0.103
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.008	0.032	0.070	0.121	0.187
N-ETHYLBUTYLAMINE	EBA	0.004	0.016	0.034	0.059	0.091
N-ETHYLCYCLOHEXYLAMINE	ECC	0.004	0.014	0.031	0.054	0.082
ETHYLENE CYANOHYDRIN	ETC	0.003	0.013	0.028	0.048	0.073
ETHYLENEDIAMINE	EDA	0.004	0.014	0.030	0.052	0.080
ETHYLENE DIBROMIDE	EDB					
ETHYLENE DICHLORIDE	EDC	0.006	0.023	0.050	0.086	0.133
ETHYLENE GLYCOL PROPYL ETHER	EGP	0.004	0.015	0.032	0.055	0.085
2-ETHYLHEXYL ACRYLATE	EAI	0.003	0.013	0.028	0.048	0.074
ETHYLIDENE NORBORNENE	ENB	0.004	0.014	0.030	0.051	0.079
ETHYL METHACRYLATE	ETM	0.004	0.016	0.034	0.058	0.090
2-ETHYL-3-PROPYLACROLEIN	EPA	0.004	0.013	0.028	0.049	0.076
FERRIC CHLORIDE SOLUTIONS	FCS					
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	0.003	0.013	0.028	0.048	0.074
FORMIC ACID	FMA	0.004	0.015	0.032	0.056	0.085
FURFURAL	PFA	0.004	0.013	0.028	0.049	0.075
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA					
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.003	0.013	0.028	0.048	0.074
HEXAMETHYLENEIMINE	HMI	0.004	0.013	0.028	0.049	0.075
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS					
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	IPR	0.019	0.072	0.158	0.277	0.428
ISOPRENE	KPL					
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT >= 3%) (INCL'G: BLACK, GREEN OR WHITE)	MSO	0.004	0.014	0.031	0.054	0.083
MESITYL OXIDE	MMW	0.006	0.022	0.047	0.082	0.126
METHYL ACRYLATE	MCK	0.003	0.013	0.028	0.048	0.074
METHYLCYCLOPENTADIENE DIMER	MDE	0.004	0.013	0.028	0.049	0.075
METHYL DIETHANOLAMINE	MEP	0.004	0.013	0.029	0.050	0.076
2-METHYL-5-ETHYLPYRIDINE						
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	MMH	0.005	0.018	0.038	0.066	0.103
METHYL METHACRYLATE	MPR	0.004	0.014	0.030	0.052	0.080
2-METHYLPYRIDINE	MSR	0.004	0.014	0.030	0.052	0.080
alpha-METHYLSTYRENE	MPL	0.004	0.014	0.031	0.054	0.083
MORPHOLINE	NCD					
NITRIC ACID (70% OR LESS)	NPM	0.004	0.015	0.032	0.056	0.086
NITROPROPANE (-1, OR -2)	ONE	0.004	0.014	0.030	0.053	0.081
OCTYL NITRATES (ALL ISOMERS)	OLM	0.003	0.013	0.028	0.048	0.074
OLEUM	PCE					
PENTACHLOROETHANE	PDE	0.014	0.051	0.112	0.197	0.304
1, 1-PENTADIENE	PER					
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PAC					
PHOSPHORIC ACID	PEB	0.003	0.013	0.028	0.048	0.074
POLYETHYLENE POLYAMINES	PPI	0.003	0.013	0.028	0.048	0.073
POLYMETHYLENE POLYPHENYL ISOCYANATE	MPA	0.004	0.013	0.028	0.048	0.074
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)	PAI	0.004	0.013	0.028	0.048	0.074
iso-PROPANOLAMINE	PMA	0.004	0.013	0.029	0.050	0.076
PROPANOLAMINE (iso-, n-)	IPP	0.017	0.063	0.138	0.241	0.373
PROPIONIC ACID	IPB	0.008	0.031	0.068	0.119	0.183
iso-PROPYLAMINE	PRD	0.004	0.015	0.033	0.057	0.087
iso-PROPYL ETHER	SAU					
PYRIDINE	SDO					
SODIUM ALUMINATE SOLUTION	SDL					
SODIUM CHLORATE SOLUTION (50% OR LESS)						
SODIUM DICHROMATE SOL'N (70% OR LESS)						
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)						

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

SODIUM HYPOCHLORITE SOL'N (15% OR LESS)
 SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H₂S 15 PPM OR LESS)
 SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H₂S<200 PPM)
 SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H₂S GREATER THAN 200 PPM)
 SODIUM THIOCYANATE SOLUTION (56% OR LESS)
 STYRENE MONOMER
 SULFURIC ACID
 SULFURIC ACID, SPENT
 1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)
 TETRAETHYLENEPENTAMINE
 TETRAHYDROFURAN
 1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)
 TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)
 TRICHLOROETHYLENE
 1,2,3-TRICHLOROPROPANE
 TRIETHANOLAMINE
 TRIETHYLAMINE
 TRIETHYLENETETRAMINE
 UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH₃)
 VALERALDEHYDE (iso-, n-)
 VALERALDEHYDE (iso-)
 VALERALDEHYDE (n-)
 VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)
 VINYL ACETATE
 VINYL TOLUENE

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSF	TRANSF	TRANSF	TRANSF	TRANSF
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BBL/	(BBL/	(BBL/	(BBL/	(BBL/
	HR)	HR)	HR)	HR)	HR)
SHP					
SSH					
SSI					
SSJ					
STS					
STY	0.004	0.014	0.030	0.052	0.079
SPA	0.003	0.013	0.028	0.048	0.074
SAC	0.003	0.013	0.028	0.048	0.073
TEC					
TTP	0.003	0.013	0.028	0.048	0.073
THP	0.005	0.020	0.044	0.076	0.117
TCM	0.004	0.016	0.035	0.060	0.093
TCL	0.007	0.024	0.053	0.092	0.142
TCN	0.004	0.013	0.029	0.050	0.077
TEA	0.003	0.013	0.028	0.048	0.074
TEN	0.005	0.019	0.041	0.071	0.110
TET	0.003	0.013	0.028	0.048	0.074
UAS					
IVA	0.006	0.024	0.052	0.091	0.140
VAL	0.006	0.024	0.052	0.091	0.140
VBL	0.003	0.013	0.028	0.048	0.074
VAM	0.007	0.026	0.056	0.098	0.151
VNT	0.004	0.013	0.028	0.049	0.075

CARGO: C9809: COMOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSP	TRANSP	TRANSP	TRANSP	TRANSP
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BBL/	(BBL/	(BBL/	(BBL/	(BBL/
	HR)	HR)	HR)	HR)	HR)

CARGO

46 CFR SUBCHAPTER O BUT NOT TABLE 151

1,1-DICHLOROPROPANE
 1,1,1-TRICHLOROETHANE
 1,2-DICHLOROPROPANE
 1,3 CYCLOPENTADIENE
 1,3-DICHLOROPROPANE
 2-METHYL-2-HYDROXY-3-BUTYNE
 2,4-DICHLOROPHENOXACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)
 3-PENTHENITRILE
 AEROTHENE TT (1,1,1-TRICHLOROETHANE)
 ALKYL BENZENE
 AMINOSTHYLPIPERAZINE
 BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)
 BENZENE SULFONYL CHLORIDE
 BENZYL ACETATE
 BENZYL CHLORIDE (STABILIZED)
 BUTANOL
 BUTYL ETHER (n-)
 BUTYLENE OXIDE (1,2-)
 BUTYRIC ACID
 CARBOLIC ACID
 CHLOROACETIC ACID (80% OR LESS)
 CHLOROPROPIONIC ACID (2- OR 3-)
 CHLOROTOLUENE (m-)
 CHLOROTOLUENE (o-)
 CHLOROTOLUENE (p)
 CHLOROTOLUENES (MIXED ISOMERS)
 CREOSOTE (ALL ISOMERS)
 CRESYLIC ACID TAR
 CYCLOHEPTANE
 CYCLOHEXANONE, CYCLOHEXANOL MIXTURE
 CYCLOHEXYL ACETATE
 CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE
 CYCLOPENTANE
 DECAOIC ACID
 DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)
 DICHLOROISOPROPYL ETHER (2,2'-)
 DICHLOROPROPANE
 DICHLOROPROPENE
 DIETHYL SULFATE
 DIETHYLETHANOLAMINE
 DODECYL BENZENE
 DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE
 DRIPOLONE
 ETHANOL (see ethyl alcohol)
 ETHYL BROMIDE
 ETHYL TERT-BUTYL ETHER
 ETHYLAMINE
 ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE
 ETHYLMERCAPTAN (SAME AS ETHANETHIOL)
 ETHYLPHENOL
 FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES
 HYDROSULFIDE
 INDANES
 ISOBUTYL ACETATE
 ISOPRENE, PENTADIENE MIXTURE
 ISO-PROPYL ALCOHOL
 LAURIC ACID
 METACRYLONITRILE
 METHANOL

DPB	0.009	0.032	0.071	0.123	0.190
DPP	0.005	0.019	0.042	0.073	0.112
DPC	0.006	0.024	0.052	0.090	0.139
MHB	0.004	0.015	0.032	0.056	0.086
DDA					
PNT					
ASP					
BSC	0.008	0.028	0.062	0.108	0.165
BZE	0.003	0.013	0.028	0.048	0.073
BCL	0.004	0.013	0.028	0.048	0.074
BTE	0.004	0.014	0.030	0.053	0.081
BTO	0.008	0.031	0.068	0.118	0.182
BRA	0.004	0.013	0.028	0.048	0.074
CBO	0.004	0.013	0.028	0.048	0.074
CHM	0.003	0.013	0.028	0.048	0.074
CPM	0.003	0.013	0.028	0.048	0.074
CTM	0.004	0.014	0.030	0.051	0.079
CTO	0.004	0.014	0.030	0.051	0.079
CRN	0.004	0.013	0.028	0.049	0.075
CHI	0.004	0.014	0.031	0.054	0.083
CCW	0.003	0.013	0.028	0.048	0.074
CRX	0.003	0.013	0.028	0.048	0.074
CYE	0.004	0.016	0.035	0.060	0.093
CYX	0.004	0.015	0.033	0.057	0.087
CYC	0.003	0.013	0.028	0.048	0.074
CSB	0.008	0.028	0.062	0.108	0.167
CYP	0.011	0.040	0.088	0.155	0.235
DCO	0.003	0.013	0.028	0.048	0.073
DCI	0.004	0.013	0.028	0.049	0.075
DSU	0.003	0.013	0.028	0.048	0.074
DAB	0.004	0.013	0.029	0.050	0.075
DOT					
EBE	0.007	0.026	0.057	0.099	0.152
EAM	0.024	0.090	0.199	0.348	0.539
ETX	0.007	0.026	0.056	0.097	0.149
EPL	0.003	0.013	0.028	0.048	0.074
MTM	0.005	0.017	0.036	0.063	0.097
IBA	0.004	0.014	0.030	0.052	0.079
IPW					
LRA	0.005	0.017	0.037	0.064	0.098
MBT	0.005	0.018	0.039	0.068	0.105

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)
	1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
METHYL STYRENE					
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES					
METHYLCYCLOHEXANE					
METHYLHEPTANE (SAME AS HEPTANE)					
MORPHOLANOLAMINE					
MORPHOISOPROPANOLAMINE					
NAPHTHALENE (MOLTEN)					
NEODECANOIC ACID					
NITRILOTRIACETIC ACID					
NITROPHENOL (MOLTEN)					
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE					
NITROTOLUENE (o-, p-)					
PARALDEHYDE					
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)					
PROPIONALDEHYDE					
PROPIONIC ANHYDRIDE					
PROPIONITRILE					
PROPYLAMINE (n-)					
PROPYLBENZENE					
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)					
PYROLYSIS RESIDUAL FUELS					
SEWAGE, RAW					
SODIUM SULFIDE (SOLID IN WATER)					
STYRENE					
STYRENE CRUDE					
STYRENE TAR					
TETRAMETHYLBENZENE (1,2,3,5-)					
TOLUIDINE (o-)					
TRICHLOROBENZENE (1,2,4-)					
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N					
TRIPHENYLBORANE					
UNDECANOIC ACID					
HYDROCARBON 5-9					
MIA					
MCY	0.005	0.018	0.040	0.070	0.107
MEA	0.004	0.013	0.028	0.048	0.074
NTM	0.004	0.013	0.028	0.049	0.075
NEA	0.003	0.013	0.028	0.048	0.074
NAA	0.003	0.013	0.028	0.048	0.074
NTP					
NRM	0.004	0.015	0.033	0.056	0.087
NIT	0.003	0.013	0.028	0.048	0.074
PDH	0.012	0.045	0.099	0.172	0.267
PGS					
PAD	0.010	0.036	0.079	0.137	0.212
PAH	0.004	0.013	0.028	0.049	0.075
PCN	0.004	0.014	0.031	0.053	0.081
PRA	0.010	0.036	0.079	0.138	0.213
	0.003	0.012	0.026	0.045	0.069
GPY	0.008	0.029	0.063	0.109	0.168
SWR					
SDS					
STY	0.004	0.014	0.030	0.052	0.079
STX	0.004	0.014	0.030	0.052	0.079
STT					
TTB	0.004	0.013	0.028	0.049	0.076
TLI	0.003	0.013	0.028	0.048	0.074
TCB	0.004	0.013	0.028	0.048	0.074
TPE					
UDA	0.003	0.013	0.028	0.048	0.073
HPN	0.006	0.024	0.052	0.091	0.140

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
C	MAX	MAX	MAX	MAX	MAX
H	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
R	TRANSP	TRANSP	TRANSP	TRANSP	TRANSP
I	RATE	RATE	RATE	RATE	RATE
S	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
	1,000	2,000	3,000	4,000	5,000
	(DBL/	(DBL/	(DBL/	(DBL/	(DBL/
	HR)	HR)	HR)	HR)	HR)

46 CFR SUBCHAPTER D, TABLE 30.25-1

Acetone					
Acetophenone					
Acetyl Tributyl Citrate	ACT	0.008	0.028	0.062	0.107
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ACP	0.004	0.014	0.031	0.054
Alcohols (C13 and above)					
Alcoholic beverages, N.O.S.	ALF				
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates	ALY				
Alcohol (C12 - C15) Poly(1-3)ethoxylates					
Alcohol (C12 - C15) Poly(3-11)ethoxylates					
Alkenylsuccinic acid					
Alkenylsuccinic Anhydride					
Alkyl (C9 - C17) Benzenes					
Alkylbenzenesulfonic acid (4% or less)	AKB				
Alkyl Phthalates (n-)	ABS				
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)					
Aminoethyldiethanolamine, Aminoethylethanolamine solution					
Amyl Acetate (commercial, iso-, n-, sec-)					
AMYL ACETATE (n-)	ARC	0.005	0.019	0.042	0.073
AMYL ACETATE (iso-)	AML	0.004	0.014	0.030	0.052
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	IAT	0.004	0.014	0.030	0.052
Amyl alcohol (n-)	AAI	0.004	0.013	0.029	0.050
Amyl alcohol (tert-)	AAH	0.004	0.013	0.029	0.050
AMYL ALCOHOL, PRIMARY	AAI				
AMYL ALCOHOL, (sec-)	APM	0.004	0.013	0.029	0.050
Amylene	ASE	0.004	0.013	0.029	0.050
AMYL ALCOHOL, (iso-)	AMZ				
Amyl Methyl Ketone	IAA	0.004	0.013	0.029	0.050
Amyl Tallate	AMK				
Asphalt					
ASPHALT BLENDING STOCKS: Roofers flux	ASP				
ASPHALT BLENDING STOCKS: Straight run residue	ARF				
Behenyl alcohol	ASR				
Benzene Tricarboxylic acid Trioctyl Ester					
Benzyl alcohol					
Bicyclic Terpenol Polyamide salt	BAL	0.004	0.013	0.028	0.049
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, Polyalkyls	SPX				
Butane	BMC				
Butene, SEE BUTYLENE					
Butene Oligomer					
Butyl Acetate (iso-, n-)	BOL				
BUTYL ACETATE (n-)	BAX	0.004	0.014	0.031	0.054
Butyl Acetate (sec-)	BCN	0.004	0.015	0.032	0.056
Butyl alcohol (iso-, n-, sec-, tert-)	STA	0.005	0.017	0.037	0.064
BUTYL ALCOHOL (ISO-)		0.004	0.014	0.031	0.054
BUTYL ALCOHOL (N-)	IAL	0.004	0.014	0.031	0.054
BUTYL ALCOHOL (SEC-)	BAW	0.004	0.014	0.029	0.051
BUTYL ALCOHOL (TERT-)	BAS	0.004	0.015	0.032	0.056
Butyl Benzyl Phthalate	BAT	0.005	0.018	0.039	0.067
Butylene	BPH	0.003	0.013	0.028	0.048
Butylene Glycol	BTN				
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL	BUG				
Butylene Polyglycol, SEE BUTYLENE GLYCOL					
iso-Butyl Formate					
n-Butyl Formate					
Butyl Heptyl Ketone					
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE					
Butyl Stearate					
Butyl Toluene					
Butyrolactone (gamma)					
	BHK				
	BUE	0.004	0.013	0.028	0.049
	BLA				

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
	TRANSF	TRANSF	TRANSF	TRANSF	TRANSF
	RATE	RATE	RATE	RATE	RATE
	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
	1,000	2,000	3,000	4,000	5,000
	(DBL/ HR)	(DBL/ HR)	(DBL/ HR)	(DBL/ HR)	(DBL/ HR)

CARGO

	HR)	HR)	HR)	HR)	HR)
Calcium Alkylphenate					
Calcium Alkyl Salicylate					
Calcium Amino Nonyl Phenolate					
Calcium Carboxylate					
Caprolactam solutions					
Carbon black base	CLS	0.004	0.013	0.028	0.048
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)					0.074
Cetyl-Stearal alcohol					
Cleaning spirit (unleaded)					
Coal tar					
Cumene	COR				
Cycloaliphatic resins	CUM	0.004	0.014	0.031	0.054
Cyclohexane					0.284
Cyclohexanol	CHX	0.006	0.022	0.048	0.085
1,3-Cyclopentadiene dimer (molten)	CHN	0.004	0.013	0.028	0.049
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	CPD	0.004	0.014	0.029	0.051
Cymene (para-)					0.273
Decahydronaphthalene	CHP	0.004	0.013	0.028	0.049
Decaldehyde (iso-)	DEI	0.004	0.013	0.028	0.049
Decaldehyde (n-)	IDA	0.003	0.013	0.028	0.048
Decane	DAL	0.003	0.013	0.028	0.048
Decene	DOC				0.073
Decyl alcohol (all isomers) (DECANOL)	DCE	0.004	0.013	0.028	0.049
DECYL ALCOHOL (iso-)	DAX	0.003	0.013	0.028	0.048
DECYL ALCOHOL (n-)	ISA	0.003	0.013	0.028	0.048
Decylbenzene (n-)	DAN	0.003	0.013	0.028	0.048
Detergent Alkylate	DBZ	0.003	0.013	0.028	0.048
Diacetone alcohol					0.074
Dialkyl (C10-C14) Benzenes	DAA	0.004	0.013	0.028	0.049
Dialkyl (C7-C13) Phthalates	DAB				0.075
Dibutyl Carbinol	DAH				
Dibutyl Phthalate (ortho-)					
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPA				
Diethylbenzene	DPT	0.004	0.014	0.029	0.051
Diethylene Glycol	DEB	0.004	0.013	0.028	0.049
Diethylene Glycol Butyl Ether	DEG	0.003	0.013	0.028	0.048
Diethylene Glycol Butyl Ether Acetate	DHE	0.003	0.013	0.028	0.048
Diethylene Glycol Dibutyl Ether	DEM				0.074
Diethylene Glycol Diethyl Ether	DIG				
Diethylene Glycol Ethyl Ether					
Diethylene Glycol Ethyl Ether Acetate	DGE				
Diethylene Glycol Methyl Ether	DGA	0.003	0.013	0.028	0.048
Diethylene Glycol Methyl Ether Acetate	DGM	0.003	0.013	0.028	0.048
Diethylene Glycol Phenyl Ether	DGR				0.074
Diethylene Glycol Phthalate	DGP				
Di-(2-ethylhexyl)adipate	DGL				
Di-(2-ethylhexyl)phthalate	DEH				
Diethyl Phthalate	DIE				
Diglycidyl Ether of Bisphenol A	DPH				
Diheptyl Phthalate	DEE				
Dihexyl Phthalate	DEP				
Diisobutylcarbinol	DEA				
Diisobutylene	DBC	0.004	0.013	0.028	0.049
Diisobutyl Ketone	DBL	0.005	0.018	0.040	0.069
Diisobutyl Phthalate	DIK	0.004	0.013	0.029	0.050
Diisodecyl Phthalate	DIT				0.077
Diisononyl Adipate	DID				
Diisononyl Phthalate	DNY				
Diisocetyl Phthalate	DIN				
Diisopropylbenzene (all isomers)	DIO				
Diisopropyl Naphthalene	DIX	0.004	0.013	0.028	0.048
Di-methyl Adipate	DII				0.074
	DIA				

BARGE: C9809: COMOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	CARGO	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR) 1,000 (BDL/ HR)	MAX LIQUID TRANSF RATE (MLTR) 2,000 (BDL/ HR)	MAX LIQUID TRANSF RATE (MLTR) 3,000 (BDL/ HR)	MAX LIQUID TRANSF RATE (MLTR) 4,000 (BDL/ HR)	MAX LIQUID TRANSF RATE (MLTR) 5,000 (BDL/ HR)
	Dimethylbenzene					
	Dimethyl Glutarate					
	Dimethyl Phthalate					
	Dimethyl Polysiloxane					
	2,2-Dimethylpropane-1,3-diol					
	Dimethyl Succinate					
	Dinonyl Phthalate					
	Di(octylphenyl)amine					
	Diocetyl Phthalate					
	Dipentene					
	Diphenyl					
	Diphenyl, Diphenyl Ether mixture					
	Diphenyl Ether					
	Diphenyl Ether, Biphenyl Ether mixture					
	Dipropylene Glycol					
	Dipropylene Glycol Dibenzoate					
	Dipropylene Glycol Methyl Ether					
	DISTILLATES: Flashed feed stocks					
	DISTILLATES: Straight run					
	Ditridacyl Phthalate					
	Diundecyl Phthalate					
	Dodecane (all isomers)					
	Dodecanol					
	Dodecene (all isomers)					
	DODECENE					
	Dodecylbenzene					
	Dodecyl Phenol					
	Drilling mud (low toxicity) (if flammable or combustible)/					
	Epoxyated linear alcohols, C11-C15					
	Ethane					
	2-Ethoxyethanol					
	2-Ethoxyethyl Acetate					
	Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES					
	Ethoxy Triglycol (crude)					
	Ethyl Acetate					
	Ethyl Acetoacetate					
	Ethyl alcohol (ETHANOL)					
	Ethyl Amyl Ketone					
	Ethyl Benzene					
	Ethyl Butanol					
	Ethyl Butyrate					
	Ethyl Cyclohexane					
	Ethylene					
	Ethylene Carbonate					
	Ethylene Glycol					
	Ethylene Glycol Acetate					
	Ethylene Glycol Butyl Ether					
	ETHYLENE GLYCOL BUTYL ETHER ACETATE					
	Ethylene Glycol Ether Acetate					
	Ethylene Glycol Tert-Butyl Ether					
	Ethylene Glycol Diacetate					
	Ethylene Glycol Dibutyl Ether					
	Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL					
	Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE					
	Ethylene Glycol Isopropyl Ether					
	Ethylene Glycol Methyl Butyl Ether					
	Ethylene Glycol Methyl Ether					
	Ethylene Glycol Methyl Ether Acetate					
	Ethylene Glycol Phenyl Ether					
	Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture					
	Ethylene-Propylene Copolymer (in liquid mixtures)					
	Ethyl-3-Ethoxypropionate					
	DOT					
	DTL	0.003	0.013	0.028	0.048	0.073
	DMP					
	DDI					
	DSE					
	DIP	0.004	0.013	0.028	0.048	0.074
	DOP	0.003	0.013	0.028	0.048	0.073
	DPW	0.004	0.013	0.028	0.049	0.075
	DIL	0.003	0.013	0.028	0.048	0.074
	DDO	0.003	0.013	0.028	0.048	0.074
	DPE	0.003	0.013	0.028	0.048	0.074
	DOB					
	DPG	0.004	0.013	0.028	0.049	0.075
	DGY					
	DPY					
	DFF	0.005	0.018	0.040	0.069	0.106
	DSR	0.005	0.018	0.040	0.069	0.106
	DTP					
	DUP					
	DOC					
	DDN					
	DOZ	0.003	0.013	0.028	0.048	0.074
	DOD	0.003	0.013	0.028	0.048	0.074
	DDB	0.012	0.044	0.097	0.169	0.262
	DOL					
	ETH					
	EEO					
	EEA					
	ETG	0.003	0.013	0.028	0.048	0.073
	ETA	0.006	0.023	0.050	0.087	0.133
	EAA	0.004	0.013	0.029	0.050	0.077
	EAL	0.004	0.016	0.035	0.061	0.094
	EAK					
	ETS	0.004	0.014	0.031	0.053	0.082
	EST	0.004	0.013	0.028	0.049	0.075
	EBR	0.004	0.016	0.034	0.058	0.090
	ECY	0.004	0.014	0.031	0.053	0.081
	ETL					
	EGL	0.003	0.013	0.028	0.048	0.073
	EGO					
	EGM					
	EGA	0.004	0.013	0.028	0.049	0.075
	EGY	0.003	0.013	0.028	0.048	0.074
	EGB					
	EGP					
	EGA					
	EGI					
	EGS	0.003	0.013	0.028	0.048	0.074
	EGT	0.003	0.013	0.028	0.048	0.074
	EGX					
	EEP					

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)
	1,000	2,000	3,000	4,000	5,000
EHA	0.004	0.013	0.029	0.050	0.076
EHO					
EHX	0.003	0.013	0.028	0.048	0.074
EHE					
EHT					
EPR	0.004	0.016	0.035	0.061	0.094
ETE	0.004	0.014	0.029	0.051	0.078
FAM	0.003	0.013	0.028	0.048	0.074
FAL	0.004	0.013	0.028	0.048	0.074
GOC					
GAK	0.014	0.052	0.114	0.200	0.309
GRF	0.014	0.052	0.114	0.200	0.309
GAT	0.014	0.052	0.114	0.200	0.309
GAV	0.014	0.052	0.114	0.200	0.309
GCS	0.014	0.052	0.114	0.200	0.309
GPL	0.014	0.052	0.114	0.200	0.309
GSR	0.014	0.052	0.114	0.200	0.309
GCR	0.003	0.013	0.028	0.048	0.073
GLT					
HMX	0.005	0.019	0.041	0.071	0.110
HPT	0.005	0.019	0.041	0.071	0.110
HBP	0.003	0.013	0.028	0.048	0.074
HTX	0.004	0.013	0.028	0.048	0.074
HTW	0.004	0.013	0.028	0.048	0.074
HPX	0.005	0.020	0.043	0.075	0.115
HTE	0.005	0.020	0.042	0.074	0.114
HPE	0.004	0.013	0.028	0.049	0.076
HTS					
HXS	0.008	0.029	0.064	0.112	0.172
HXA	0.008	0.029	0.064	0.112	0.172
HKO	0.003	0.013	0.028	0.048	0.074
HON	0.004	0.015	0.033	0.057	0.088
HXX	0.008	0.031	0.069	0.120	0.184
HXE	0.009	0.032	0.070	0.122	0.188
HXT	0.009	0.032	0.070	0.122	0.188
HAE					
HIG	0.003	0.013	0.028	0.048	0.073
HBA					
HPN					
IPH	0.003	0.013	0.028	0.048	0.074
JPO	0.004	0.013	0.029	0.049	0.076
JPT	0.012	0.046	0.100	0.175	0.270
JPF	0.006	0.023	0.050	0.086	0.133

RESORP1

BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
C H R I S	MAX LIQUID TRANSP RATE (MLTR) 1,000 (BSL/ HR)	MAX LIQUID TRANSP RATE (MLTR) 2,000 (BSL/ HR)	MAX LIQUID TRANSP RATE (MLTR) 3,000 (BSL/ HR)	MAX LIQUID TRANSP RATE (MLTR) 4,000 (BSL/ HR)	MAX LIQUID TRANSP RATE (MLTR) 5,000 (BSL/ HR)
JTV	0.004	0.013	0.028	0.049	0.075
JPE					
KRS	0.004	0.013	0.029	0.050	0.076
LLS					
MSE					
MTH					
MOA					
MPO					
MTG					
MTT	0.007	0.025	0.054	0.094	0.144
MAE					
MAL	0.005	0.017	0.036	0.063	0.097
MAC	0.004	0.014	0.030	0.052	0.080
MAA	0.004	0.014	0.030	0.052	0.079
MAK					
MBL					
MBK	0.004	0.015	0.033	0.057	0.087
MBY					
MSU	0.004	0.016	0.034	0.059	0.092
MEK	0.006	0.021	0.045	0.079	0.121
MTP	0.013	0.051	0.111	0.194	0.300
MEK	0.004	0.013	0.028	0.049	0.075
MIC					
MIK	0.004	0.015	0.034	0.058	0.090
MOA	0.003	0.013	0.028	0.048	0.074
MPW	0.007	0.027	0.058	0.102	0.156
MTW	0.009	0.033	0.072	0.125	0.192
MPY					
MBE	0.003	0.013	0.028	0.048	0.074
MCO					
MMS	0.004	0.013	0.029	0.050	0.077
MRE	0.004	0.013	0.029	0.050	0.077
PTW					
RSV	0.004	0.013	0.029	0.050	0.076
RSS	0.004	0.013	0.029	0.050	0.077
RVM	0.004	0.013	0.029	0.050	0.077
RFS					
RTI					
RAX	0.004	0.014	0.029	0.051	0.078
RAN	0.004	0.014	0.029	0.051	0.078
RNA					
RON	0.004	0.014	0.030	0.052	0.079
RMS	0.004	0.013	0.028	0.049	0.075
RGN	0.004	0.013	0.028	0.049	0.075
RNI	0.004	0.013	0.028	0.049	0.075

JET FUELS: JP-5 (Kerosene, heavy)
 JET FUELS: JP-8
 Kerosene
 Lactic acid
 Lard
 Latex, liquid synthetic, including: Styrene-Butadien rubber
 Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer
 Magnesium Monyl Phenol Sulfide
 Magnesium Sulfonate
 Maleic Anhydride Copolymer
 2-Mercaptobenzothiazol (in liquid mixtures)
 Methane
 3-Methoxy-1-Butanol
 3-Methoxybutyl Acetate
 1-Methoxy-2-Propyl Acetate
 Methoxy Triglycol, SEE TRIETHYLENE GLYCOL METHYL ETHER
 Methyl Acetate
 Methyl Acetoacetate
 Methyl alcohol (SEE METHANOL)
 Methyl Amyl Acetate
 Methyl Amyl alcohol
 Methyl Amyl Ketone
 Methyl Butanol, SEE THE AMYL ALCOHOLS
 Methyl Butenol
 Methyl n-Butyl Ketone
 Methyl Butynol
 Methyl Butyrate
 Methyl Ethyl Ketone
 Methyl Formal (DIMETHYL FORMAL)
 Methyl Heptyl Ketone
 Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL
 Methyl Isobutyl Ketone
 3-Methyl-3-Methoxybutanol
 3-Methyl-3-Methoxybutyl Acetate
 1-Methyl Naphthalene
 Methyl Pentene
 2-METHYL-1-PENTENE
 5-METHYL-1-PENTENE
 N-Methyl-2-Pyrrolidone
 Methyl Tert-Butyl Ether (MTBE)
 Metolachlor
 Mineral spirits
 Myrcene
 NAPHTHA: Aromatic (Having less than 10% Benzene)
 NAPHTHA: Cracking fraction
 NAPHTHA: Heavy
 NAPHTHA: Paraffinic
 NAPHTHA: Petroleum
 NAPHTHA: Solvent
 NAPHTHA: Stoddard solvent
 NAPHTHA: Varnish makers' and painters' (75%)
 Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution
 Naphthenic acid
 Nonane (all isomers)
 NONANE
 Nonanoic acid (all isomers)
 Nonanoic, Tridecanoic acid mixture
 Nonene
 Nonyl alcohol (all isomers)
 NONYL ALCOHOL
 NONYL ALCOHOL (iso-)
 Nonyl Methacrylate Monomer

BARGE: C9809: CONOCO, INC., "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)
		1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
Monyl Phenol	***					
Monyl Phenol Poly(4-12)ethoxylates	NMP	0.003	0.013	0.028	0.048	0.074
Monyl Phenol Sulfide (90% or less)	JFE					
Mortious liquid, N.O.S. (17) ("Trade name," contains "principal components"), Category						
Non-Mortious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appe						
Octadecane						
Octadecenoamide solution (Oleamide)	OOD					
Octane (all isomers)	OAX	0.004	0.015	0.032	0.056	0.086
OCTANE	OAN	0.004	0.015	0.032	0.056	0.086
Octanoic acid (all isomers)	OAA	0.003	0.013	0.028	0.048	0.074
Octanol (all isomers)	OAX	0.003	0.013	0.028	0.048	0.074
OCTANOL	OTA	0.003	0.013	0.028	0.048	0.074
Octene (all isomers)	OTE	0.004	0.015	0.033	0.057	0.088
OCTENE (1-)	OTE	0.004	0.015	0.033	0.058	0.089
Octyl Acetate						
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OAX	0.003	0.013	0.028	0.048	0.074
OCTYL ALCOHOL	IOA	0.003	0.013	0.028	0.048	0.074
Octyl Aldehydes	OAL					
Octyl Decyl Adipate	ODA					
Octyl Epoxystallate	OST					
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE						
OIL, EDIBLE: Babassu	ORB					
OIL, EDIBLE: Beechnut						
OIL, EDIBLE: Castor	OCA					
OIL, EDIBLE: Cocoa butter						
OIL, EDIBLE: Coconut	CCC					
OIL, EDIBLE: Cod liver						
OIL, EDIBLE: Corn	CCO					
OIL, EDIBLE: Cottonseed	OCS					
OIL, EDIBLE: Fish, N.O.S.	OFS					
OIL, EDIBLE: Grape seed						
OIL, EDIBLE: Groundnut						
OIL, EDIBLE: Hazelnut						
OIL, EDIBLE: Lard	OLD					
OIL, EDIBLE: Maize						
OIL, EDIBLE: Mustard seed						
OIL, EDIBLE: Nutmeg Butter						
OIL, EDIBLE: Olive	OOL					
OIL, EDIBLE: Palm	OPM					
OIL, EDIBLE: Palm kernel	OPO					
OIL, EDIBLE: Peanut	OPN					
OIL, EDIBLE: Poppy						
OIL, EDIBLE: Raisin seed						
OIL, EDIBLE: Rice bran						
OIL, EDIBLE: Safflower	ORP					
OIL, EDIBLE: Salad	OST					
OIL, EDIBLE: Sesame						
OIL, EDIBLE: Soya bean						
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB					
OIL, EDIBLE: Sunflower seed						
OIL, EDIBLE: Tucum	OSM					
OIL, EDIBLE: Vegetable, N.O.S.	OTC					
OIL, EDIBLE: Walnut	OVG					
OIL, FUEL: No. 1 (Kerosene)						
OIL, FUEL: No. 1-D	OCN					
OIL, FUEL: No. 2	OOD					
OIL, FUEL: No. 2-D	OTW	0.004	0.016	0.035	0.060	0.093
OIL, FUEL: No. 4	OTD					
OIL, FUEL: No. 5	OPR	0.004	0.013	0.028	0.049	0.075
OIL, FUEL: No. 6	OPV	0.004	0.013	0.028	0.049	0.075
OIL, MISC: Absorption	OSX	0.004	0.013	0.028	0.049	0.075
OIL, MISC: Aliphatic	OAS					

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

C H R I S	CARGO		20.0%	40.0%	60.0%	80.0%	100.0%
			MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)
		OCF					
		OCM					
		CFY					
		OIL	0.005	0.020	0.043	0.075	0.115
		ODS	0.004	0.014	0.031	0.054	0.083
		OLB	0.003	0.013	0.028	0.048	0.074
		OMS					
		OMT					
		ONP					
		OOI					
		OPE					
		OPE					
		OPT					
		OPI					
		ORG					
		ORS	0.003	0.013	0.028	0.048	0.074
		ORD					
		ORN					
		OIS					
		OSP					
		OSD					
		OSY					
		OTL					
		TOP					
		OTN					
		OTF					
		OTG					
		OTS	0.004	0.014	0.030	0.052	0.080
		OAM					
		OLA					
		PMS					
		PPH					
		POC	0.003	0.013	0.028	0.048	0.074
		PEP					
		PTY	0.018	0.068	0.150	0.262	0.405

PRESDRPI

BARGE: C9809: CONOCO, INC.; *7027* AND *7028*

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	CARGO	20.0% MAX LIQUID TRANSP RATE (MLTR)	40.0% MAX LIQUID TRANSP RATE (MLTR)	60.0% MAX LIQUID TRANSP RATE (MLTR)	80.0% MAX LIQUID TRANSP RATE (MLTR)	100.0% MAX LIQUID TRANSP RATE (MLTR)
		1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
	PENTANE (iso-)	...				
	PENTANE (n-)	IPT 0.025	0.094	0.206	0.362	0.561
	Pentanoic acid	PTA 0.017	0.066	0.146	0.256	0.396
	Pentene (all isomers)					
	PENTENE (1-)	PTX 0.021	0.081	0.179	0.313	0.485
	Petrolatum	PTE 0.021	0.081	0.179	0.313	0.485
	1-Phenyl-1-Xylyl Ethane	PTL				
	Phosphosulfurized Bicyclic Terpene	PKE				
	Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES					
	Pinene					
	Polyalkenyl Succinic Anhydride Amine	PIN 0.004	0.014	0.030	0.052	0.080
	Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures					
	Polyalkylene Oxide Polyol	PPX				
	Polamines, Amide mixture	PAO				
	Polybutadiene, Hydroxyl terminated					
	Polybutene					
	Polydimethylsiloxane	PLB 0.004	0.013	0.029	0.050	0.077
	Polyethylene Glycol					
	Polyethylene Glycol Dimethyl Ether					
	Polyglycerol					
	Polyisobutylene, SEE POLYBUTENE					
	Polymerized Esters					
	Poly(20)oxyethylene Sorbitan Monooleate					
	Polypropylene	PSM				
	Polypropylene Glycol	PLP				
	Polypropylene Glycol Methyl Ether	POC 0.003	0.013	0.028	0.048	0.074
	Polyxiloxane	PGM 0.004	0.014	0.031	0.054	0.083
	Polystyrene Diakyl Maleate					
	Potassium Oleate					
	Propane	POE				
	n-Propoxypropanol	PRP				
	Propyl Acetate (iso-)	PKP				
	Propyl Acetate (n-)	IAC 0.005	0.017	0.037	0.065	0.100
	Propyl alcohol (iso-)	PAT 0.005	0.017	0.038	0.065	0.100
	Propyl alcohol (n-)	IPA 0.005	0.017	0.037	0.064	0.098
	Propylbenzene (n-)	PAL 0.004	0.014	0.031	0.054	0.083
	iso-Propylcyclohexane	PBZ 0.004	0.013	0.029	0.050	0.077
	Propylene	IPX 0.003	0.013	0.028	0.048	0.074
	Propylene-Butylene Copolymer	PFL				
	Propylene Dimer	PBP				
	Propylene Glycol (1,2-PROPANDIOL)	PDR				
	Propylene Glycol Monoalkyl Ether	PPG 0.003	0.013	0.028	0.048	0.074
	Propylene Glycol Ethyl Ether	PGE				
	Propylene Glycol Methyl Ether	PGY				
	Propylene Polymer (in liquid mixtures)	PME 0.004	0.014	0.031	0.053	0.082
	Propylene Tetramer					
	Propylene Trimer	PTT 0.003	0.013	0.028	0.048	0.073
	Pseudocumene, SEE TRIMETHYLBENZENES	PTR				
	Rum					
	Sodium Acetate, Glycol, water solutions					
	Sodium Acetate solution	SAN				
	Sodium Benzoate solution	SEN				
	Sodium Sulfonate					
	Stearic acid					
	Stearyl alcohol (Octadecanol)	SRA				
	Sulfolane					
	Tallow	SPL	0.003	0.013	0.028	0.048
	Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)	TLO				0.074
	Tallow fatty acid					
	Tallow Alkyl Nitrile	TFD				
	Tetradecanol					
	1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTW				
		TTD 0.003	0.013	0.028	0.048	0.074

PRESRPI

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)
Tetradecylbenzene	TBD					
Tetraethylene Glycol	TTG	0.003	0.013	0.028	0.048	0.074
Tetrahydronaphthalene	THN	0.004	0.013	0.028	0.048	0.074
Tetrapropylbenzene, SEE ALKYL(C9-C17) BENZENES						
Toluene	TOL	0.004	0.016	0.035	0.060	0.093
Triarylphosphate	TBP					
Tributyl Phosphate	TCP	0.003	0.013	0.028	0.048	0.074
Tricresyl Phosphate (less than 1% of the ortho isomer)	TRD	0.003	0.013	0.028	0.048	0.074
Tridecane	TDN	0.003	0.013	0.028	0.048	0.074
Tridecanoic acid	TDC	0.003	0.013	0.028	0.048	0.074
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TRB					
1-Tridecene	TEB	0.003	0.013	0.028	0.048	0.074
Tridecylbenzene	TEG	0.003	0.013	0.028	0.048	0.074
Triethylbenzene						
Triethylene Glycol	TGD					
Triethylene Glycol Butyl Ether	TGE					
Triethylene Glycol Butyl Ether mixture						
Triethylene Glycol di-(2-ethylbutyrate)						
Triethylene Glycol Ether mixture						
Triethylene Glycol Ethyl Ether						
Triethylene Glycol Methyl Ether						
Triethyl Phosphate						
Triisooctyl Trimellitate	TPS	0.003	0.013	0.028	0.048	0.074
Triisopropanolamine	TIP					
Trimethylbenzenes (all isomers)	TRB	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,5-)	TMB	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,3-)	TMD	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TME	0.004	0.013	0.028	0.049	0.076
Trimethylol Propane Polyethoxylate	TMR					
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate						
2,2,4-Trimethyl-3-pentanol-1-isobutyrate						
Tripropylene, SEE PROPYLENE TRIMER						
Tripropylene Glycol	TGP					
Tripropylene Glycol Methyl Ether	TGC					
Trixylenyl Phosphate	TGM					
Turpentine	TRP					
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)	TPT					
Undecanol						
Undecene (1-)	UDC	0.004	0.013	0.028	0.049	0.074
Undecyl alcohol	UND	0.003	0.013	0.028	0.048	0.074
Undecylbenzene	UDB					
Vinyl Acetate-fumarate Copolymer						
Waxes:						
WAXES: Candelilla	WAX					
WAXES: Carnauba						
WAXES: Paraffin	WAX					
WAXES: Petroleum	WAX					
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)						
White spirit (low (15 - 20%) aromatic)						
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.	WSL					
Wool grease						
Xylenes (ortho-, meta-, para-)						
XYLENE (M-)	XLX	0.004	0.014	0.030	0.053	0.081
XYLENE (O-)	XLM	0.004	0.014	0.030	0.053	0.081
XYLENE (P-)	XLO	0.004	0.014	0.030	0.052	0.079
XYLENOL	XLP	0.004	0.014	0.030	0.053	0.081
Zinc Dialkyldithiophosphate	XYL	0.004	0.013	0.028	0.049	0.075

RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSF	TRANSF	TRANSF	TRANSF	TRANSF
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BDL/ HR)	(BDL/ HR)	(BDL/ HR)	(BDL/ HR)	(BDL/ HR)

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1

AROMATIC RESIN OIL 60
AROMATIC RESIN OIL 80
AROMATIC RESIN OILS

ARS 0.003 0.013 0.028 0.048 0.074
ARS 0.003 0.013 0.028 0.048 0.074

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{0.5}$ (BPH)	$Q_v \leq (Q_v)_{max}$
-------	-----------------------	-------------------------------	---	--	------------------------

46 CFR SUBCHAPTER O, TABLE 151

ACETIC ACID	AAC	1.05	5,000	5,123	OK
ACETIC ANHYDRIDE	ACA	1.08	5,000	5,203	OK
ACETONITRILE	ATN	0.78	5,000	4,416	OK
ACRYLIC ACID	ACE	1.05	5,000	5,123	OK
ACRYLONITRILE	ACN	0.81	5,000	4,500	OK
ADIPONITRILE	ADN	0.95	5,000	4,873	OK
ALUMINUM SULFATE SOLUTION	ASX	1.76	5,000	6,633	OK
AMINOTHYLETHANOLAMINE	AEE	1.03	5,000	5,070	OK
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	1.44	5,000	6,000	OK
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH				
ANTHRACENE OIL (COAL TAR FRACTION)	AHO				
BENZENE	BNZ	0.88	5,000	4,688	OK
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	0.84	5,000	4,583	OK
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	0.84	5,000	4,583	OK
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	0.84	5,000	4,583	OK
iso-BUTYL ACRYLATE	BAI	0.88	5,000	4,690	OK
n-BUTYL ACRYLATE	BTC	0.90	5,000	4,741	OK
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	0.90	5,000	4,743	OK
BUTYL METHACRYLATE	BMH	0.88	5,000	4,690	OK
iso-BUTYRALDEHYDE	BAD	0.80	5,000	4,481	OK
n-BUTYRALDEHYDE	BTR	0.80	5,000	4,472	OK
BUTYRALDEHYDES (CRUDE)	BFA	0.82	5,000	4,528	OK
BUTYRALDEHYDE (ISO-, N-)	BAE	0.82	5,000	4,528	OK
CAMPOR OIL (LIGHT)	CPO	0.92	5,000	4,804	OK
CARBON TETRACHLORIDE	CBT	1.59	5,000	6,305	OK
CAUSTIC POTASH SOLUTION	CPS	1.50	5,000	6,124	OK
CAUSTIC SODA SOLUTION	CSS	1.50	5,000	6,124	OK
CHLOROBENZENE	CRB	1.11	5,000	5,268	OK
CHLOROPFORM	CRF	1.48	5,000	6,083	OK
CHLOROSULFONIC ACID	CSA	1.79	5,000	6,690	OK
COAL TAR NAPHTHA SOLVENT	NCT	0.88	5,000	4,690	OK
CREOSOTE (COAL TAR)	CCT	1.07	5,000	5,172	OK
CREOSOTE (WOOD)	CWD	1.07	5,000	5,172	OK
CRESOLS (ALL ISOMERS)	CRS	1.05	5,000	5,123	OK
CRESOLS WITH LESS THAN 5% PHENOL (SEE CREOSOLS (ALL ISOMERS))	CRS	1.05	5,000	5,123	OK
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CFP	1.07	5,000	5,172	OK
CRESYLATE SPENT CAUSTIC	CSC	1.55	5,000	6,225	OK
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX (TAR ?)				
CROTONALDEHYDE	CTA	0.85	5,000	4,610	OK
CYCLOHEXANONE	CCH	0.95	5,000	4,873	OK
CYCLOHEXYLAMINE	CHA	0.87	5,000	4,664	OK
DECYL ACRYLATE (iso-, n-)	DAT	0.89	5,000	4,717	OK
DICHLOROBENZENE (ALL ISOMERS)	DBX	1.30	5,000	5,701	OK
1,1-DICHLOROETHANE	DCH	1.18	5,000	5,431	OK
2,2-DICHLOROETHYL ETHER	DDE	1.22	5,000	5,523	OK
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DCM	1.32	5,000	5,745	OK
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DDC				
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DAD				
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DTI				
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DPX	1.16	5,000	5,385	OK
1,3-DICHLOROPROPENE	DFU	1.23	5,000	5,545	OK
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DMX	1.21	5,000	5,500	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
"TARGET" MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
2,2-DICHLOROPROPIONIC ACID	DCN				
DIETHANOLAMINE	DEA	1.09	5,000	5,220	OK
DIETHYLAMINE	DEW	0.71	5,000	4,213	OK
DIETHYLENTRIAMINE	DET	0.96	5,000	4,899	OK
DIETHYL ETHER, SEE ETHYL ETHER	DEH				
DIISOBUTYLAMINE	DBU	0.75	5,000	4,330	OK
DIISOPROPANOLAMINE	DIP	0.98	5,000	4,950	OK
DIISOPROPYLAMINE	DIA	0.72	5,000	4,243	OK
N,N-DIMETHYLACETAMIDE	DAC	0.95	5,000	4,873	OK
DI-METHYLETHANOLAMINE	DMS	0.89	5,000	4,717	OK
DI-METHYLFORMAMIDE	DMP	0.95	5,000	4,873	OK
1,4-DIOXANE	DOX	1.04	5,000	5,099	OK
DI-N-PROPYLAMINE	DNA	0.74	5,000	4,301	OK
ETHANOLAMINE	MEA	1.02	5,000	5,050	OK
ETHYL ACRYLATE	EAC	0.93	5,000	4,822	OK
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.80	5,000	4,472	OK
N-ETHYLBUTYLAMINE	EBA	0.74	5,000	4,301	OK
N-ETHYLCYCLOHEXYLAMINE	BCC	0.86	5,000	4,637	OK
ETHYLENE CYANOHYDRIN	ETC	1.04	5,000	5,099	OK
ETHYLENEDIAMINE	EDA	0.91	5,000	4,770	OK
ETHYLENE DIBROMIDE	EDB	2.17	4,582	6,750	OK
ETHYLENE DICHLORIDE	EDC	1.26	5,000	5,612	OK
ETHYLENE GLYCOL PROPYL ETHER	BGP	0.91	5,000	4,770	OK
2-ETHYLHEXYL ACRYLATE	EAI	0.89	5,000	4,717	OK
ETHYLIDENE NORBORNENE	ENB	0.90	5,000	4,743	OK
ETHYL METHACRYLATE	ETM	0.92	5,000	4,796	OK
2-ETHYL-3-PROPYLACROLEIN	EPA	0.85	5,000	4,610	OK
FERRIC CHLORIDE SOLUTIONS	PCS				
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	1.13	5,000	5,315	OK
FORMIC ACID	FMA	1.22	5,000	5,523	OK
FORMFURAL	FFA	1.20	5,000	5,477	OK
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA				
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.93	5,000	4,822	OK
HEXAMETHYLENIMINE	HMI	0.88	5,000	4,690	OK
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	1.21	5,000	5,500	OK
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	IPR	0.69	5,000	4,153	OK
ISOPRENE	MSO	0.86	5,000	4,637	OK
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: BLACK, GREYPL	MAM	0.95	5,000	4,873	OK
MESITYL OXIDE	MCK	0.94	5,000	4,848	OK
METHYL ACRYLATE	MDE	1.04	5,000	5,099	OK
METHYLCYCLOPENTADIENE DIMER	MEP	0.92	5,000	4,796	OK
METHYL DIETHANOLAMINE	MMH	0.94	5,000	4,848	OK
2-METHYL-5-ETHYLPYRIDINE	MFR	0.95	5,000	4,873	OK
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	MER	0.89	5,000	4,717	OK
METHYL METHACRYLATE	MPL	1.00	5,000	5,000	OK
2-METHYLPYRIDINE	MCD				
alpha-METHYLSTYRENE	NPM	0.99	5,000	4,975	OK
MORPHOLINE	ONE	1.00	5,000	5,000	OK
NITRIC ACID (70% OR LESS)	OLM	1.98	4,797	6,750	OK
NITROPROPANE (-1, OR -2)	PCE	1.67	5,000	6,461	OK
OCTYL NITRATES (ALL ISOMERS)	PDE	0.68	5,000	4,123	OK
OLEUM	PER	1.62	5,000	6,364	OK
PENTACHLOROETHANE					
1, 3-PENTADIENE					
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C98094 CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
-----------------------	--------------------------------------	---	--	------------------------

PHOSPHORIC ACID	PAC	1.83	4,990	6,750	OK
POLYETHYLENE POLYAMINES	PEB	0.99	5,000	4,975	OK
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI	1.20	5,000	5,477	OK
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)					
iso-PROPANOLAMINE					
PROPANOLAMINE (iso-, n-)	MPA	0.96	5,000	4,899	OK
PROPIONIC ACID	PAX	0.96	5,000	4,899	OK
iso-PROPYLAMINE	PNA	1.00	5,000	5,000	OK
iso-PROPYL ETHER	IPP	0.69	5,000	4,153	OK
PYRIDINE	IPE	0.72	5,000	4,243	OK
SODIUM ALUMINATE SOLUTION	PRD	0.98	5,000	4,950	OK
SODIUM CHLORATE SOLUTION (50% OR LESS)	SAU				
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDO	1.63	5,000	6,384	OK
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)	SDL				
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)					
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SHP	1.10	5,000	5,244	OK
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM < H2S < 200 PPM)	SSH	1.32	5,000	5,745	OK
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H2S GREATER THAN 200 PPM)	SSI	1.32	5,000	5,745	OK
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	SSJ	1.32	5,000	5,745	OK
STYRENE MONOMER	STS				
SULFURIC ACID	STY	0.92	5,000	4,796	OK
SULFURIC ACID, SPENT	SPA	1.84	4,976	6,750	OK
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	SAC	1.39	5,000	5,895	OK
TETRAETHYLENEPENTAMINE	TEC	1.59	5,000	6,311	OK
TETRAHYDROFURAN	TTP	1.00	5,000	5,000	OK
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	THP	0.89	5,000	4,717	OK
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)	TCM	1.44	5,000	6,000	OK
TRICHLOROETHYLENE					
1,2,3-TRICHLOROPROPANE	TCL	1.46	5,000	6,042	OK
TRIETHANOLAMINE	TCN	1.39	5,000	5,895	OK
TRIETHYLAMINE	TEA	1.13	5,000	5,315	OK
TRIETHYLENETETRAMINE	TEN	0.73	5,000	4,272	OK
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH3)	TET	0.98	5,000	4,950	OK
VALERALDEHYDE (iso-, n-)	UAS				
VALERALDEHYDE (iso-)					
VALERALDEHYDE (n-)					
VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	IYA	0.79	5,000	4,444	OK
VINYL ACETATE	IVA	0.79	5,000	4,444	OK
VINYLTOLUENE	VAL	0.84	5,000	4,583	OK
	VBL				
	VAM	0.94	5,000	4,848	OK
	VNT	0.90	5,000	4,743	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) MAX 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER - LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{MAX}$
-----------------------	--------------------------------------	---	---	------------------------

46 CFR SUBCHAPT O BUT NOT TABLE 151

1,1-DICHLOROPROPANE	DPB	1.16	5,000	5,385	OK
1,1,1-TRICHLOROETHANE		1.51	5,000	6,144	OK
1,2-DICHLOROPROPANE	DPP	1.16	5,000	5,385	OK
1,3-CYCLOPENTADIENE					
1,3-DICHLOROPROPANE					
2-METHYL-2-HYDROXY-3-BUTYNE	DPC	1.16	5,000	5,385	OK
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)	MMB	0.86	5,000	4,637	OK
3-PENTAMETHYLENE	DDA				
AMETHYLENE TT (1,1,1-TRICHLOROETHANE)	PWT (CRUDE ?)				
ALKYL BENZENE					
AMINOETHYLPIPERAZINE	ABP				
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		0.70	5,000	4,183	OK
BENZENE SULFONYL CHLORIDE	BSC	1.38	5,000	5,874	OK
BENZYL ACETATE	BZE	1.04	5,000	5,099	OK
BENZYL CHLORIDE (STABILIZED)	BCL	1.10	5,000	5,244	OK
BUTANOL					
BUTYL ESTER (n-)	BTE	0.77	5,000	4,387	OK
BUTYLENE OXIDE (1,2-)	BTO	0.83	5,000	4,555	OK
BUTYRIC ACID	BRA	0.96	5,000	4,899	OK
CARBOIC ACID	CBO	1.04	5,000	5,099	OK
CHLOROACETIC ACID (80% OR LESS)	CHM	1.58	5,000	6,285	OK
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	1.26	5,000	5,612	OK
CHLOROTOLUENE (m-)	CTM	1.07	5,000	5,172	OK
CHLOROTOLUENE (o-)	CTO	1.08	5,000	5,196	OK
CHLOROTOLUENE (p)	CRN	1.07	5,000	5,172	OK
CHLOROTOLUENES (MIXED ISOMERS)	CHI	1.08	5,000	5,196	OK
CHLOROTE (ALL ISOMERS)	CCW	1.07	5,000	5,172	OK
CHLOROTOLUENE	CRX	1.05	5,000	5,123	OK
CYCLOHEPTANE	CYE	0.81	5,000	4,500	OK
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CYX	0.95	5,000	4,873	OK
CYCLOHEXYL ACETATE	CYC	0.97	5,000	4,924	OK
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CSB	1.50	5,000	6,124	OK
CYCLOPENTANE	CYP	0.74	5,000	4,301	OK
DECAOIC ACID	DCO	5.94	2,770	6,750	OK
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)		0.98	5,000	4,955	OK
DICHLOROISOPROPYL ETHER (2,2'-)	DCI	1.11	5,000	5,268	OK
DICHLOROPROPANE		1.16	5,000	5,385	OK
DICHLOROPROPENE		1.23	5,000	5,545	OK
DISTYL SULFATE	DSU	1.18	5,000	5,431	OK
DISTYLSULFANOLAMINE	DAS	0.89	5,000	4,717	OK
DODECYL BENZENE					
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE	DOT				
DRIFOLINE					
ETHANOL (see ethyl alcohol)					
ETHYL BROMIDE					
ETHYL TERT-BUTYL ETHER					
ETHYLAMINE	EBE	0.73	5,000	4,272	OK
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EAM	0.80	5,000	4,472	OK
ETHYLAMCAPTAN (SAME AS ETHANETHIOL)	ETX	1.44	5,000	6,000	OK
ETHYLPHENOL					
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	SPL	1.04	5,000	5,099	OK
HYDROSULFIDE	MTM	0.79	5,000	4,444	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SG1 ^{0.5} (BPH)	Qw <= (Qw) max
-----------------------	--------------------------------------	---	--	----------------

INDENES
 ISOBUTYL ACETATE
 ISOPRENE, PENTADIENE MIXTURE
 ISO-PROPYL ALCOHOL
 LAURIC ACID
 METHACRYLONITRILE
 METHANOL
 METHYL STYRENE
 METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES
 METHYLCYCLOHEXANE
 METHYLCYCLOHEXANE (SAME AS HEPTANE)
 MONOETHANOLAMINE
 MONOISOPROPANOLAMINE
 NAPHTHALENE (MOLTEN)
 NEODECANOIC ACID
 NITRILOTRIACETIC ACID
 NITROPHENOL (MOLTEN)
 NITROPROPANE (60%), NITROETHANE (40%) MIXTURE
 NITROTOLUENE (o-,p-)
 PARALDEHYDE
 POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)
 PROPIONALDEHYDE
 PROPIONIC ANHYDRIDE
 PROPIONITRILE
 PROPYLAMINE (n-)
 PROPYLBENZENE
 PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)
 PYROLYSIS RESIDUAL FUELS
 SENGAGE, RAW
 SODIUM SULFIDE (SOLID IN WATER)
 STYRENE
 STYRENE CRUDE
 STYRENE TAR
 TETRAMETHYLBENZENE (1,2,3,5-)
 TOLUIDINE (o-)
 TRICHLOROBENZENE (1,2,4-)
 TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N
 TRIPHENYLBORANE
 UNDECANOIC ACID
 HYDROCARBON 5-9

IBA				
IPN				
LRA	0.79	5,000	4,444	OK
MET	0.88	5,000	4,690	OK
	0.80	5,000	4,472	OK
	0.79	5,000	4,447	OK
MIA				
MCY	0.77	5,000	4,387	OK
MEA	1.02	5,000	5,050	OK
	0.96	5,000	4,899	OK
NTM	1.15	5,000	5,362	OK
NEA	0.92	5,000	4,796	OK
NAA (6SALTS ?)				
NTP	1.49	5,000	6,103	OK
NNM	1.05	5,000	5,123	OK
NTT	1.16	5,000	5,385	OK
PDH	0.99	5,000	4,975	OK
PGS				
PAD	0.81	5,000	4,500	OK
PAH	1.01	5,000	5,025	OK
PCN	0.70	5,000	4,183	OK
PRA	0.72	5,000	4,243	OK
GPY	0.84	5,000	4,583	OK
	0.89	5,000	4,717	OK
SWR				
SDS	1.53	5,000	6,185	OK
STY	0.92	5,000	4,796	OK
STX	0.92	5,000	4,796	OK
STT				
TTB	0.89	5,000	4,717	OK
TLI	1.00	5,000	5,000	OK
TCB	1.45	5,000	6,021	OK
TPE				
UDA	0.89	5,000	4,717	OK
HPN	0.85	5,000	4,610	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
"TARGET" MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MOWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qv)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SGL ^{0.5} (BPH)	Qw <= (Qv) max
-----------------------	--------------------------------------	---	--	----------------

46 CFR SUBCHAPTER D, TABLE 30.25-1

Acetone	ACT	0.79	5,000	4,450	OK
Acetophenone	ACP	1.03	5,000	5,065	OK
Acetyl Tributyl Citrate	1.05	5,000	5,114	OK	
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALC				
Alcohols (C13 and above)	ALY				
Alcoholic beverages, N.O.S.					
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates					
Alcohol (C12 - C15) Poly(1-3)ethoxylates					
Alcohol (C12 - C15) Poly(3-11)ethoxylates					
Alkanylsuccinic acid					
Alkanylsuccinic Anhydride					
Alkyl (C9 - C17) Benzenes					
Alkylbenzenesulfonic acid (4% or less)	AKB				
Alkyl Phthalates (n-)	ABS				
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)					
Aminoethyldiethanolamine, Aminoethylethanolamine solution					
Amyl Acetate (commercial, iso-, n-, sec-)					
AMYL ACETATE (n-)	ABC	0.87	5,000	4,664	OK
AMYL ACETATE (iso-)	AMC	0.88	5,000	4,690	OK
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	IAT	0.88	5,000	4,690	OK
Amyl alcohol (n-)	AAI	0.82	5,000	4,528	OK
Amyl alcohol (tert-)	AAN	0.82	5,000	4,528	OK
AMYL ALCOHOL, PRIMARY	AAI				
AMYL ALCOHOL, (sec-)	APM	0.82	5,000	4,528	OK
Amylene	ASE	0.82	5,000	4,528	OK
AMYL ALCOHOL, (iso-)	AMZ				
Amyl Methyl Ketone	IAA	0.82	5,000	4,528	OK
Amyl Tallate	AMK				
Asphalt					
ASPHALT BLENDING STOCKS: Roofers flux	ASP	1.04	5,000	5,087	OK
ASPHALT BLENDING STOCKS: Straight run residue	ARF				
Behenyl alcohol	ASR				
Benzene Tricarboxylic acid Trioctyl Ester					
Benzyol alcohol					
Bicyclic Terpenol Polyamide salt	BAL	1.05	5,000	5,123	OK
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, PolBFX					
Butane	BMX	1.03	5,000	5,074	OK
Butene, SEE BUTYLENE					
Butene Oligomer	BOL				
Butyl Acetate (iso-, n-)	BAX	0.87	5,000	4,664	OK
BUTYL ACETATE (N-)	BCN	0.88	5,000	4,690	OK
Butyl Acetate (sec-)	STA	0.89	5,000	4,717	OK
Butyl alcohol (iso-, n-, sec-, tert-)					
BUTYL ALCOHOL (ISO-)	IAL	0.81	5,000	4,500	OK
BUTYL ALCOHOL (N-)	BAW	0.81	5,000	4,500	OK
BUTYL ALCOHOL (SEC-)	BAS	0.81	5,000	4,500	OK
BUTYL ALCOHOL (TERT-)	BAT	0.78	5,000	4,416	OK
Butyl Benzyl Phthalate	BPH	1.12	5,000	5,292	OK
Butylene	BTW				
Butylene Glycol	BUG				
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL					
Butylene Polyglycol, SEE BUTYLENE GLYCOL					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5.000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
iso-Butyl Formate					
n-Butyl Formate					
Butyl Heptyl Ketone					
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE	BHK				
Butyl Stearate					
Butyl Toluene					
Butyrolactone (gamma)	BUE	0.85	5,000	4,610	OK
Calcium Alkylphenate	BLA				
Calcium Alkyl Salicylate					
Calcium Amino Nonyl Phenolate					
Calcium Carboxylate					
Caprolactam solutions					
Carbon black base	CLS	1.02	5,000	5,050	OK
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)		0.90	5,000	4,743	OK
Cetyl-Stearal alcohol					
Cleaning spirit (unleaded)					
Coal tar					
Cumene	COR	1.11	5,000	5,268	OK
Cycloaliphatic resins	COM	0.86	5,000	4,640	OK
Cyclohexane					
Cyclohexanol	CHK	0.78	5,000	4,413	OK
1,3-Cyclopentadiene dimer (molten)	CHN	0.95	5,000	4,873	OK
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	CPD	0.69	5,000	4,153	OK
Cymene (para-)					
Decahydronaphthalene	CHP	0.86	5,000	4,637	OK
Decaldehyde (iso-)	CHN	0.89	5,000	4,717	OK
Decaldehyde (n-)	IDA	0.83	5,000	4,555	OK
Decane	DAL	0.83	5,000	4,555	OK
Decene	DDC				
Decyl alcohol (all isomers) (DECANOL)	DCE	0.74	5,000	4,301	OK
DECYL ALCOHOL (iso-)	DAK	0.83	5,000	4,555	OK
DECYL ALCOHOL (n-)	ISA	0.83	5,000	4,555	OK
Decylbenzene (n-)	DAN	0.83	5,000	4,555	OK
Detergent Alkylate	DBZ	0.86	5,000	4,637	OK
Diacetone alcohol					
Dialkyl (C10-C14) Benzenes	DAA	0.97	5,000	4,933	OK
Dialkyl (C7-C13) Phthalates	DAB				
Dibutyl Carbinol	DAB				
Dibutyl Phthalate (ortho-)					
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPA	1.05	5,000	5,123	OK
Diethylbenzene	DPT	0.98	5,000	4,950	OK
Diethylene Glycol	DEB	0.87	5,000	4,664	OK
Diethylene Glycol Butyl Ether	DEG	1.12	5,000	5,292	OK
Diethylene Glycol Butyl Ether Acetate	DME	0.95	5,000	4,873	OK
Diethylene Glycol Dibutyl Ether	DEM				
Diethylene Glycol Diethyl Ether	DIG				
Diethylene Glycol Ethyl Ether					
Diethylene Glycol Ethyl Ether Acetate	DGE				
Diethylene Glycol Methyl Ether	DGA	0.99	5,000	4,975	OK
Diethylene Glycol Methyl Ether Acetate	DGM	1.03	5,000	5,074	OK
Diethylene Glycol Phenyl Ether	DGR				
Diethylene Glycol Phthalate	DGP				
Di-(2-ethylhexyl)adipate	DGL				
Di-(2-ethylhexyl)phthalate	DEN				
Diethyl Phthalate	DIE				
	DPH				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V-SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 1.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) MAX 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG_1^{0.5}$ (BPH)	$Q_w \leq (Q_w)_{MAX}$
Diglycidyl Ether of Bisphenol A				
Diheptyl Phthalate				
Dihexyl Phthalate				
Diisobutylcarbinol				
Diisobutylene				
Diisobutyl Ketone				
Diisobutyl Phthalate				
Diisodecyl Phthalate				
Diisononyl Adipate				
Diisononyl Phthalate				
Diisooctyl Phthalate				
Diisopropylbenzene (all isomers)				
Diisopropyl Naphthalene				
Dimethyl Adipate				
Dimethylbenzene				
Dimethyl Glutarate				
Dimethyl Phthalate				
Dimethyl Polysiloxane				
2,2-Dimethylpropane-1,3-diol				
Dimethyl Succinate				
Dinonyl Phthalate				
Di(octylphenyl)amine				
Diocetyl Phthalate				
Dipentene				
Diphenyl				
Diphenyl, Diphenyl Ether mixture				
Diphenyl Ether				
Diphenyl Ether, Biphenyl Ether mixture				
Dipropylene Glycol				
Dipropylene Glycol Dibenzate				
Dipropylene Glycol Methyl Ether				
DISTILLATES: Flashed feed stocks				
DISTILLATES: Straight run				
Ditridecyl Phthalate				
Diundecyl Phthalate				
Dodecane (all isomers)				
Dodecanol				
Dodecene (all isomers)				
DODECENE				
Dodecylbenzene				
Dodecyl Phenol				
Drilling mud (low toxicity) (if flammable or combustible)/				
Epoxyated linear alcohols, C11-C15				
Ethane				
2-Ethoxyethanol				
2-Ethoxyethyl Acetate				
Ethoxyated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES				
Ethoxy Triglycol (crude)				
Ethyl Acetate				
Ethyl Acetoacetate				
Ethyl alcohol (ETHANOL)				
Ethyl Amyl Ketone				
Ethyl Benzene				
Ethyl Butanol				
Ethyl Butyrate				
DOE				
DEP				
DEA				
DBC	0.81	5,000	4,500	OK
DBL	0.72	5,000	4,243	OK
DIK	0.81	5,000	4,500	OK
DIT				
DID				
DMY				
DIN				
DIO				
DIX	0.86	5,000	4,637	OK
DII				
DLA				
DGT				
DTL	1.19	5,000	5,454	OK
DMP				
DDI				
DSE				
DIP	0.97	5,000	4,924	OK
DOP	0.98	5,000	4,950	OK
DPN	0.84	5,000	4,583	OK
DIL	0.99	5,000	4,975	OK
DDO	1.07	5,000	5,172	OK
DPE	1.07	5,000	5,172	OK
DOB				
DPG	1.03	5,000	5,074	OK
DGY				
DPY				
DFF	0.75	5,000	4,330	OK
DSR	0.73	5,000	4,272	OK
OTF				
DUP				
DOC				
DEW				
DOZ	0.76	5,000	4,359	OK
DDO	0.76	5,000	4,359	OK
DOB	0.86	5,000	4,637	OK
DOL				
ETH	0.47	5,000	3,410	OK
EEO	1.04	5,000	5,099	OK
EEA	1.04	5,000	5,099	OK
ETG	1.02	5,000	5,050	OK
ETA	0.90	5,000	4,743	OK
EAA	1.03	5,000	5,074	OK
EAL	0.79	5,000	4,441	OK
EAK				
ETB	0.87	5,000	4,664	OK
EST	0.83	5,000	4,555	OK
EBR	0.88	5,000	4,690	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; *7027* AND *7028*

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw)max 6,750 BPH

CARGO	C N R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
Ethyl Cyclohexane	ECY	0.79	5,000	4,444	OK
Ethylene	ETL				
Ethylene Carbonate	EGL	1.13	5,000	5,315	OK
Ethylene Glycol	EGG				
Ethylene Glycol Acetate	EGM				
Ethylene Glycol Butyl Ether	EGA	0.94	5,000	4,848	OK
ETHYLENE GLYCOL BUTYL ETHER ACETATE					
Ethylene Glycol Ether Acetate					
Ethylene Glycol Tert-Butyl Ether	EGY	1.10	5,000	5,244	OK
Ethylene Glycol Diacetate	EGD				
Ethylene Glycol Dibutyl Ether	EGB				
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGP				
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGA				
Ethylene Glycol Isopropyl Ether	EGI				
Ethylene Glycol Methyl Butyl Ether					
Ethylene Glycol Methyl Ether	EME	1.10	5,000	5,244	OK
Ethylene Glycol Methyl Ether Acetate	EGT				
Ethylene Glycol Phenyl Ether	EPE	1.10	5,000	5,244	OK
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture	EDI				
Ethylene-Propylene Copolymer (in liquid mixtures)					
Ethyl-3-Ethoxypropionate	EEP				
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	0.82	5,000	4,528	OK
2-Ethylhexanoic acid	EHO				
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHX	0.84	5,000	4,583	OK
Ethylhexanoic acid, SEE 2-ETHYLHEXANOIC ACID					
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE				
Ethyl Hexyl Tallate	EHT				
Ethyl Propionate	EPR	0.89	5,000	4,717	OK
Ethyl Toluene	ETE	0.86	5,000	4,690	OK
Fatty acid (saturated, C13 and above)					
Fatty acid Amides					
Formamide					
Furfuryl Alcohol	FAM	1.13	5,000	5,315	OK
Gas oil, cracked	FAL	1.13	5,000	5,315	OK
GASOLINE BLENDING STOCKS: Alkylates	GOC				
GASOLINE BLENDING STOCKS: Reformates	GAK	0.75	5,000	4,330	OK
GASOLINES: Automotive (containing not over 4.23 grams lead per gallon)	GRF	0.80	5,000	4,472	OK
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon)	GAT	0.74	5,000	4,301	OK
GASOLINES: Casinghead (natural)	GAV	0.71	5,000	4,213	OK
GASOLINES: Polymer	GCS	0.67	5,000	4,093	OK
GASOLINES: Straight run	GPL	0.75	5,000	4,330	OK
Glycerine	GSR	0.75	5,000	4,330	OK
Glycerol, SEE GLYCERINE	GCR	1.26	5,000	5,612	OK
Glycerol Polyalkoxylate					
Glycerol Triacetate					
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID					
Glycidyl Ester of Tridacyl Acetic acid					
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID	GLT				
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE					
Glycols, Resins and Solvents mixtures					
Gylcol Triacetate, SEE GLYCERYL TRIACETATE					
Glyoxal solution (40% or less)					
Grease					
Heptadecane					
Heptane (all isomers) (METHYLCYCANE)	HMX	0.68	5,000	4,135	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C9809: COMOCO, INC.; *7027* AND *7028*

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
TARGET MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qw)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{.5}$ (BPH)	Qw <= (Qw) max
HEPTANE (N-)				
Heptanoic acid	HPT 0.68	5,000	4,123	OK
Heptanol (all isomers)	HEP 0.92	5,000	4,796	OK
HEPTANOL	HTX 0.82	5,000	4,528	OK
Heptene (all isomers)	HTN 0.82	5,000	4,528	OK
HEPTENE (1-)	HPK 0.70	5,000	4,183	OK
Heptyl Acetate	HTE 0.70	5,000	4,183	OK
Herbicide (C15 -H22 -NO2 -Cl), SEE METOLACHLOR	HPE 0.88	5,000	4,690	OK
Hexaethylene Glycol				
Hexamethylene Glycol				
Hexamethylenetetramine solutions				
Hexane (all isomers)	HTS			
HEXANE	HXS 0.66	5,000	4,062	OK
Hexanoic acid	HXA 0.66	5,000	4,062	OK
Hexanol	HKO 0.93	5,000	4,822	OK
Hexene (all isomers)	HKN 0.82	5,000	4,528	OK
HEXENE (1-)	HEX 0.67	5,000	4,093	OK
HEXENE (2-)	HKE 0.67	5,000	4,093	OK
Hexyl Acetate	HKT 0.67	5,000	4,093	OK
Hexylene Glycol	HAE			
Hog Grease, SEE LARD	HKG 0.92	5,000	4,796	OK
2-Hydroxy-4-(methylthio)butanoic acid				
HYDROCARBON 5-9 (MOVED TO SUB-0, NON TABLE 151, 6/24/95)	HBA			
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/	HPN			
Isophorone				
JET FUELS: JP-1 (Kerosene)	IPH 0.93	5,000	4,822	OK
JET FUELS: JP-3	JPO 0.80	5,000	4,472	OK
JET FUELS: JP-4	JPT 0.80	5,000	4,472	OK
JET FUELS: JP-5 (Kerosene, heavy)	JPP 0.81	5,000	4,500	OK
JET FUELS: JP-8	JPV 0.82	5,000	4,528	OK
Kerosene	JPE			
Lactic acid	KRS 0.81	5,000	4,500	OK
Lard				
Latex, liquid synthetic, including: Styrene-Butadien rubber	LLS			
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer				
Magnesium Methyl Phenol Sulfide				
Magnesium Sulfonate	MSE			
Maleic Anhydride Copolymer				
2-Mercaptobenzothiazol (in liquid mixtures)				
Methane				
3-Methoxy-1-Butanol	MTH			
3-Methoxybutyl Acetate				
1-Methoxy-2-Propyl Acetate	MOA			
Methoxy Trigylcol, SEE TRIETHYLENE GLYCOL METHYL ETHER	MPO			
Methyl Acetate	MTG			
Methyl Acetoacetate	MIT 0.92	5,000	4,796	OK
Methyl alcohol (SEE METHANOL)	MAE			
Methyl Amyl Acetate	MAL 0.79	5,000	4,444	OK
Methyl Amyl alcohol	MAC 0.86	5,000	4,637	OK
Methyl Amyl Ketone	MAA 0.81	5,000	4,500	OK
Methyl Butanol, SEE THE AMYL ALCOHOLS	MAK			
Methyl Butanol				
Methyl n-Butyl Ketone	MBL			
Methyl Butynol	MBK 0.81	5,000	4,500	OK
Methyl Butyrate	MBY			
	MBU 0.90	5,000	4,743	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 2.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{0.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
Methyl Ethyl Ketone	MEK	0.80	5,000	4,472	OK
Methyl Formal (DIMETHYL FORMAL)	MTF	0.86	5,000	4,637	OK
Methyl Heptyl Ketone	MHK	0.83	5,000	4,555	OK
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	MIC	0.84	5,000	4,583	OK
Methyl Isobutyl Ketone	MIK	0.80	5,000	4,472	OK
3-Methyl-3-Methoxybutanol					
3-Methyl-3-Methoxybutyl Acetate					
1-Methyl Naphthalene					
Methyl Pentene	MNA	1.02	5,000	5,050	OK
2-METHYL-1-PENTENE	MPN	0.69	5,000	4,153	OK
5-METHYL-1-PENTENE	MTN	0.67	5,000	4,093	OK
N-Methyl-2-Pyrrolidone	MPY				
Methyl Tert-Butyl Ether (MTBE)	MBE	0.74	5,000	4,301	OK
Metolachlor	MCO				
Mineral spirits	MNS	0.75	5,000	4,330	OK
Myrcene	MRE	0.80	5,000	4,472	OK
NAPHTHA: Aromatic (Having less than 10% Benzene)		.6 -.85			
NAPHTHA: Cracking fraction		.6 -.85			
NAPHTHA: Heavy		.6 -.85			
NAPHTHA: Paraffinic		.6 -.85			
NAPHTHA: Petroleum		.6 -.85			
NAPHTHA: Solvent	PTN	.6 -.85			
NAPHTHA: Stoddard solvent	NSV	0.87	5,000	4,664	OK
NAPHTHA: Varnish makers' and painters' (75%)	NSS	0.78	5,000	4,416	OK
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution	NVM	0.77	5,000	4,387	OK
Naphthenic acid	NPS				
Nonane (all isomers)	NTI	1.02	5,000	5,050	OK
NONANE	NAX	0.72	5,000	4,243	OK
Nonanoic acid (all isomers)	NAN	0.72	5,000	4,243	OK
Nonanoic, Tridecanoic acid mixture	NDA				
Nonene					
Nonyl alcohol (all isomers)	NON	0.73	5,000	4,272	OK
NONYL ALCOHOL	NNS	0.94	5,000	4,848	OK
NONYL ALCOHOL (iso-)	NNN	0.94	5,000	4,848	OK
Nonyl Methacrylate Monomer	NNI	0.94	5,000	4,848	OK
Nonyl Phenol					
Nonyl Phenol Poly(4-12)ethoxylates	NWP	0.95	5,000	4,873	OK
Nonyl Phenol Sulfide (90% or less)	NPE				
Noxious liquid, N.O.S. (17) ("Trade name," contains principal components"), Category D (i					
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appendix					
Octadecene					
Octadecenoamide solution (Oleamide)	ODD				
Octane (all isomers)	OAX	0.70	5,000	4,183	OK
OCTANE	OAN	0.70	5,000	4,183	OK
Octanoic acid (all isomers)	OAA	0.91	5,000	4,770	OK
Octanol (all isomers)	OCC	0.83	5,000	4,555	OK
OCTANOL	OTA	0.83	5,000	4,555	OK
Octene (all isomers)	OTX	0.72	5,000	4,243	OK
OCTENE (1-)	OTE	0.72	5,000	4,243	OK
Octyl Acetate					
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OCC	0.83	5,000	4,555	OK
OCTYL ALCOHOL	IOA	0.83	5,000	4,555	OK
Octyl Aldehydes	OAL				
Octyl Decyl Adipate	ODA				
Octyl Epoxystallate	OET				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C E R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{1.5}$ (BPH)	$Q_w < (Q_v)_{max}$
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE					
OIL, EDIBLE: Babassu	OSB				
OIL, EDIBLE: Beechnut	OCA				
OIL, EDIBLE: Castor					
OIL, EDIBLE: Cocoa butter					
OIL, EDIBLE: Coconut					
OIL, EDIBLE: Cod liver	OCC	0.95	5,000	4,884	OK
OIL, EDIBLE: Corn					
OIL, EDIBLE: Cottonseed	OCO	0.96	5,000	4,886	OK
OIL, EDIBLE: Fish, N.O.S.	OCS				
OIL, EDIBLE: Grapeseed	OPS	0.96	5,000	4,899	OK
OIL, EDIBLE: Groundnut					
OIL, EDIBLE: Hazelnut					
OIL, EDIBLE: Lard					
OIL, EDIBLE: Maize	OLD				
OIL, EDIBLE: Mustard seed					
OIL, EDIBLE: Nutmeg Butter					
OIL, EDIBLE: Olive					
OIL, EDIBLE: Palm	OOL				
OIL, EDIBLE: Palm kernel	OPM				
OIL, EDIBLE: Peanut	OPO				
OIL, EDIBLE: Poppy	OPW				
OIL, EDIBLE: Raisin seed					
OIL, EDIBLE: Rice bran					
OIL, EDIBLE: Safflower	ORP				
OIL, EDIBLE: Salad	OSF				
OIL, EDIBLE: Sesame					
OIL, EDIBLE: Soya bean					
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB	0.96	5,000	4,899	OK
OIL, EDIBLE: Sunflower seed		0.95	5,000	4,873	OK
OIL, EDIBLE: Tucum	OSN				
OIL, EDIBLE: Vegetable, N.O.S.	OTC				
OIL, EDIBLE: Walnut	OVG	0.96	5,000	4,899	OK
OIL, FUEL: No. 1 (Kerosene)					
OIL, FUEL: No. 1-D	OCN				
OIL, FUEL: No. 2	OOD				
OIL, FUEL: No. 2-D	OTW	0.88	5,000	4,690	OK
OIL, FUEL: No. 4	OTD				
OIL, FUEL: No. 5	OFR	0.90	5,000	4,743	OK
OIL, FUEL: No. 6	OFV	0.94	5,000	4,848	OK
OIL, MISC: Absorption	OSX	0.95	5,000	4,873	OK
OIL, MISC: Aliphatic	OAS				
OIL, MISC: Animal, N.O.S.					
OIL, MISC: Aromatic					
OIL, MISC: Aviation P2300					
OIL, MISC: Clarified					
OIL, MISC: Coal	OCF				
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER					
OIL, MISC: Coconut oil, fatty acid					
OIL, MISC: Coconut oil, fatty acid Methyl Ester					
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTER	OCM				
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID	CFY	0.95	5,000	4,873	OK
OIL, MISC: Croton					
OIL, MISC: Crude	OIL	0.95	5,000	4,873	OK
OIL, MISC: Diesel	ODS	0.90	5,000	4,743	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
OIL, MISC: Gas, low pour					
OIL, MISC: Gas, low sulfur					
OIL, MISC: Heartcut distillate					
OIL, MISC: Lanolin					
OIL, MISC: Linseed					
OIL, MISC: Lubricating					
OIL, MISC: Mineral					
OIL, MISC: Mineral seal	OLB	0.90	5,000	4,743	OK
OIL, MISC: Motor					
OIL, MISC: Neefsfoot	OMS				
OIL, MISC: Oiticica	OMT				
OIL, MISC: Palm oil, fatty acid Methyl Ester	OMF				
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID METHYL ESTER	OOI				
OIL, MISC: Penetrating	OPE	0.95	5,000	4,873	OK
OIL, MISC: Perilla	OPT				
OIL, MISC: Pilchard					
OIL, MISC: Pine					
OIL, MISC: Range	OPI				
OIL, MISC: Residual	ORG				
OIL, MISC: Resin					
OIL, MISC: Resinous petroleum	ORS	1.02	5,000	5,050	OK
OIL, MISC: Road					
OIL, MISC: Rosin	ORD				
OIL, MISC: Seal	ORN				
OIL, MISC: Soapstock					
OIL, MISC: Soya bean (epoxidized)	OIS				
OIL, MISC: Sperm					
OIL, MISC: Spindle	OSP				
OIL, MISC: Spray	OSD				
OIL, MISC: Tall	OSY				
OIL, MISC: Tall, fatty acid	OTL				
OIL, MISC: Tanner's	TOP				
OIL, MISC: Transformer	OTN				
OIL, MISC: Tung	OTF				
OIL, MISC: Turbine	OTG				
OIL, MISC: Whale	OTB	0.87	5,000	4,664	OK
OIL, MISC: White (mineral)					
OIL, MISC: Wood					
alpha-Olefins (C13 - C18)					
Olefins (C13 and above, all isomers)	OAM				
Oleic acid	OLA	0.72	5,000	4,243	OK
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)					
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLUTION					
Palm Stearin					
n-Paraffins (C10 - C20)	PMS				
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PPN				
Pentaethylene Glycol	PDC	0.83	5,000	4,555	OK
Pentaethylenhexamine					
Pentane (all isomers)	PEP				
PENTANE (iso-)	PTY	0.63	5,000	3,957	OK
PENTANE (n-)	IPT	0.62	5,000	3,937	OK
Pentanoic acid	PTA	0.63	5,000	3,969	OK
Pentane (all isomers)					
PENTENE (1-)	PTX	0.64	5,000	4,000	OK
Petrolatum	PTE	0.64	5,000	4,000	OK
	PTL				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG

(Ps/v) 1.750 PSIG

(Pp/v) 1.500 PSIG

(TMLTR) 5.000 BPH

(Qv) max 6.750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
1-Phenyl-1-Xylyl Ethane				
Phosphosulfurized Bicyclic Terpene				
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES				
Pinene				
Polyalkenyl Succinic Anhydride Amine				
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures				
Polyalkylene Oxide Polyol				
Polamine, Amide mixture				
Polybutadiene, Hydroxyl terminated				
Polybutene				
Polydimethylsiloxane				
Polyethylene Glycol				
Polyethylene Glycol Dimethyl Ether				
Polyglycerol				
Polyisobutylene, SEE POLYBUTENE				
Polymerized Esters				
Poly(20)oxyethylene Sorbitan Monooleate				
Polypropylene				
Polypropylene Glycol				
Polypropylene Glycol Methyl Ether				
Polysiloxane				
Polystyrene Diakyl Maleate				
Potassium Oleate				
Propane				
n-Propoxypropanol				
Propyl Acetate (iso-)				
Propyl Acetate (n-)				
Propyl alcohol (iso-)				
Propyl alcohol (n-)				
Propylbenzene (n-)				
iso-Propylcyclohexane				
Propylene				
Propylene-Butylene Copolymer				
Propylene Dimer				
Propylene Glycol (1,2-PROPANDIOL)				
Propylene Glycol Monoalkyl Ether				
Propylene Glycol Ethyl Ether				
Propylene Glycol Methyl Ether				
Propylene Polymer (in liquid mixtures)				
Propylene Tetramer				
Propylene Trimer				
Pseudocumene, SEE TRIMETHYLBENZENES				
Rum				
Sodium Acetate, Glycol, water solutions				
Sodium Acetate solution				
Sodium Benzoate solution				
Sodium Sulfonate				
Stearic acid				
Stearyl alcohol (Octadecanol)				
Sulfolane				
Tallow				
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)				
Tallow fatty acid				
Tallow Alkyl Nitrile				
Tetradecanol				
PXE				
PIN	0.86	5,000	4,637	OK
PPX				
PAO	1.04	5,000	5,099	OK
PLB	0.91	5,000	4,770	OK
	1.04	5,000	5,099	OK
	1.04	5,000	5,099	OK
PSM				
PLP				
PGC	1.01	5,000	5,025	OK
PGM	0.92	5,000	4,796	OK
POE				
PRP	1.04	5,000	5,099	OK
PKP				
IAC	0.89	5,000	4,717	OK
PAT	0.00			
IPA	0.79	5,000	4,444	OK
PAL	0.80	5,000	4,472	OK
PBZ	0.86	5,000	4,637	OK
IPX	0.80	5,000	4,472	OK
PPL	1.04	5,000	5,099	OK
PBP				
PDR				
PFG	1.04	5,000	5,099	OK
PGE				
PGY				
PME	0.92	5,000	4,796	OK
PTT	0.29	5,000	2,693	OK
PTR				
SAN				
SEN				
SRA				
SFL	1.26	5,000	5,612	OK
TLO				
TFD				
TTM	0.82	5,000	4,528	OK

SPILLVLV

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809; CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 1.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5.000 BPH
 (Qw)max 6,750 BPH

CARGO	C H I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) * SG1^{.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTD	0.77	5,000	4,387	OK
Tetradecylbenzene	TBD				
Tetraethylene Glycol	TTG	1.12	5,000	5,292	OK
Tetrahydronaphthalene	TBN	0.97	5,000	4,924	OK
Tetrapropylbenzene, SEE ALKYL (C9-C17) BENZENES					
Toluene	TOL	0.87	5,000	4,664	OK
Triaryphosphate	TBP				
Tributyl Phosphate	TCP	1.16	5,000	5,385	OK
Tricresyl Phosphate (less than 1% of the ortho isomer)	TRD	0.76	5,000	4,359	OK
Tridecane	TDW	0.85	5,000	4,610	OK
Tridecanoic acid	TDC	0.77	5,000	4,387	OK
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TRB				
1-Tridecene	TEB	0.86	5,000	4,637	OK
Tridecylbenzene	TEG	1.12	5,000	5,292	OK
Triethylbenzene		1.04	5,000	5,099	OK
Triethylene Glycol	TGD				
Triethylene Glycol Butyl Ether	TGE				
Triethylene Glycol Butyl Ether mixture					
Triethylene Glycol di-(2-ethylbutyrate)	TPS	1.07	5,000	5,172	OK
Triethylene Glycol Ether mixture	TIP	1.02	5,000	5,050	OK
Triethylene Glycol Ethyl Ether	TRE	0.89	5,000	4,717	OK
Triethylene Glycol Methyl Ether	TMB	0.89	5,000	4,717	OK
Triethyl Phosphate	TMD	0.89	5,000	4,717	OK
Triisooctyl Trimellitate	TME	0.89	5,000	4,717	OK
Triisopropanolamine	TPR				
Trimethylbenzenes (all isomers)	TMP				
TRIMETHYL BENZENE (1,2,5-)	TGC				
TRIMETHYL BENZENE (1,2,3-)	TGM				
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TRP	1.16	5,000	5,385	OK
Trimethylol Propane Polyethoxylate	TPT				
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate					
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	UDC	0.75	5,000	4,330	OK
Tripropylene, SEE PROPYLENE TRIMER	UND	0.84	5,000	4,583	OK
Tripropylene Glycol	UDB				
Tripropylene Glycol Methyl Ether					
Trixylenyl Phosphate	MAX				
Turpentine	MAX, WCA				
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)	MAX, WPP				
Undecanol					
Undecene (1-)					
Undecyl alcohol					
Undecylbenzene					
Vinyl Acetate-fumarate Copolymer					
Waxes:					
WAXES: Candelilla					
WAXES: Carnauba					
WAXES: Paraffin					
WAXES: Petroleum					
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)					
White spirit (low (15 - 20%) aromatic)					
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.					
Wool grease					
Xylenes (ortho-, meta-, para-)					
XYLENE (M-)	XLX	0.89	5,000	4,717	OK
XYLENE (O-)	XLN	0.87	5,000	4,664	OK
	XLO	0.89	5,000	4,717	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) max 6,750 BPH

CARGO

C	LIQUID	CARGO	EQUIVALENT	
H	SPECIFIC	MAX	WATER	
R	GRAVITY	LIQUID	LIQUID	$Q_w \leq (Q_w)_{max}$
I		TRANSFER	TRANSFER	
S	(1)	RATE	RATE	
		(Q1)	$Q_w = (Q1) \cdot SG1^{.5}$	
		(BPH)	(BPH)	

XYLENE (P-)
 XYLENOL
 Zinc Dialkyldithiophosphate

XLP	0.86	5,000	4,637	OK
XYL	1.01	5,000	5,025	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SG1 ^{0.5} (BPH)	Qw < (Qv) max
(1)				

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1

AROMATIC RESIN OIL 60
 AROMATIC RESIN OIL 80
 AROMATIC RESIN OILS

ARS	1.02	5,000	5,050	OK
ARS	1.02	5,000	5,050	OK

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
-------	-----------------------	--	--

46 CFR SUBCHAPT O, TABLE 151

ACETIC ACID	AAC	5,000	5,000
ACETIC ANHYDRIDE	ACA	5,000	5,000
ACETONITRILE	ATN	5,000	5,000
ACRYLIC ACID	ACR	5,000	5,000
ACRYLONITRILE	ACN	5,000	5,000
ADIPONITRILE	ADN	5,000	5,000
ALUMINUM SULFATE SOLUTION	ASX	5,000	
AMINOETHYLETHANOLAMINE	AEE	5,000	5,000
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	5,000	
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH		
ANTHRACENE OIL (COAL TAR FRACTION)	ANO		
BENZENE	BNZ	5,000	5,000
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	5,000	5,000
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	5,000	5,000
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	5,000	5,000
iso-BUTYL ACRYLATE	BAI	5,000	5,000
n-BUTYL ACRYLATE	BTC	5,000	5,000
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	5,000	5,000
BUTYL METHACRYLATE	BMH	5,000	5,000
iso-BUTYRALDEHYDE	BAD	5,000	5,000
n-BUTYRALDEHYDE	BTR	5,000	5,000
BUTYRALDEHYDES (CRUDE)	BFA	5,000	5,000
BUTYRALDEHYDE (ISO-, N-)	BAE	5,000	5,000
CAMPHOR OIL (LIGHT)	CPO	5,000	
CARBON TETRACHLORIDE	CBT	5,000	
CAUSTIC POTASH SOLUTION	CPS	5,000	
CAUSTIC SODA SOLUTION	CSS	5,000	
CHLOROBENZENE	CRB	5,000	5,000
CHLOROPFORM	CRF	5,000	
CHLOROSULFONIC ACID	CSA	5,000	
COAL TAR NAPHTHA SOLVENT	NCT	5,000	5,000
CREOSOTE (COAL TAR)	CCT	5,000	5,000
CREOSOTE (WOOD)	CWD	5,000	5,000
CRESOLS (ALL ISOMERS)	CRS	5,000	5,000
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS	5,000	
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CRS	5,000	
CRESYLATE SPENT CAUSTIC	CFP	5,000	5,000
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CSC	5,000	
CROTONALDEHYDE	CAX		
CYCLOHEXANONE	CTA	5,000	5,000
CYCLOHEXYLAMINE	CCH	5,000	5,000
DECYL ACRYLATE (iso-, n-)	CHA	5,000	5,000
DICHLOROBENZENE (ALL ISOMERS)	DAT	5,000	5,000
1,1-DICHLOROETHANE	DSX	5,000	5,000
2,2-DICHLOROETHYL ETHER	DCH	5,000	5,000
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DEE	5,000	5,000
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DCM	5,000	
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DDE		
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DAD		
1,1-, 1,2- OR 1,3- DICHLOROPROPANE	DTI		
1,3-DICHLOROPROPENE	DPX	5,000	5,000
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DPD	5,000	5,000
2,2-DICHLOROPROPIONIC ACID	DMX	5,000	5,000
DIETHANOLAMINE	DCN		
DIETHYLAMINE	DEA	5,000	5,000
DIETHYLENEDIAMINE	DEN	5,000	5,000
DIETHYL ETHER, SEE ETHYL ETHER	DET	5,000	5,000
	DEE		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
DIISOBUTYLAMINE	DBU	5,000	5,000
DIISOPROPANOLAMINE	DIP	5,000	5,000
DIISOPROPYLAMINE	DIA	5,000	5,000
N,N-DIMETHYLACETAMIDE	DAC	5,000	5,000
DIMETHYLETHANOLAMINE	DME	5,000	5,000
DIMETHYLFORMAMIDE	DMP	5,000	5,000
1,4-DIOXANE	DOX	5,000	5,000
DI-N-PROPYLAMINE	DNA	5,000	5,000
ETHANOLAMINE	MEA	5,000	5,000
ETHYL ACRYLATE	EAC	5,000	5,000
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	5,000	5,000
N-ETHYLBUTYLAMINE	EBA	5,000	5,000
N-ETHYLCYCLOHEXYLAMINE	ECC	5,000	5,000
ETHYLENE CYANOHYDRIN	ETC	5,000	5,000
ETHYLENEDIAMINE	EDA	5,000	5,000
ETHYLENE DIIBROMIDE	EDB	4,582	
ETHYLENE DICHLORIDE	EDC	5,000	5,000
ETHYLENE GLYCOL PROPYL ETHER	EGP	5,000	5,000
2-ETHYLBUTYL ACRYLATE	EAI	5,000	5,000
ETHYLIDENE NORBORNENE	ENB	5,000	5,000
ETHYL METHACRYLATE	ETM	5,000	5,000
2-ETHYL-3-PROPYLACROLEIN	EPA	5,000	5,000
FERRIC CHLORIDE SOLUTIONS	FCS		
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	5,000	5,000
FORMIC ACID	FMA	5,000	5,000
FORMFURAL	FFA	5,000	5,000
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA		
HEXAMETHYLENEDIAMINE SOLUTION	HMC	5,000	5,000
HEXAMETHYLENEIMINE	HMI	5,000	5,000
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	5,000	
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))			
ISOPRENE	IPR	5,000	5,000
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: BLACK, KPL)	KPL		
MESITYL OXIDE	MSO	5,000	5,000
METHYL ACRYLATE	MAM	5,000	5,000
METHYLCYCLOPENTADIENE DIMER	MCK	5,000	5,000
METHYL DIETHANOLAMINE	MDE	5,000	5,000
2-METHYL-5-ETHYLPYRIDINE	MEP	5,000	5,000
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)			
METHYL METHACRYLATE	MMH	5,000	5,000
2-METHYLPYRIDINE	MPR	5,000	5,000
alpha-METHYLSTYRENE	MSR	5,000	5,000
MORPHOLINE	MPL	5,000	5,000
NITRIC ACID (70% OR LESS)	NCD		
NITROPROPANE (-1, OR -2)	NPM	5,000	5,000
OCTYL NITRATES (ALL ISOMERS)	ONE	5,000	5,000
OLEUM	OLM	4,797	5,000
PENTACHLOROETHANE	PCE	5,000	
1, 3-PENTADIENE	PDE	5,000	5,000
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PER	5,000	
PHOSPHORIC ACID	PAC	4,990	
POLYETHYLENE POLYAMINES	PEB	5,000	5,000
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI	5,000	
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)			
iso-PROPANOLAMINE	MPA	5,000	5,000
PROPANOLAMINE (iso-, n-)	PAX	5,000	5,000
PROPIONIC ACID	PMA	5,000	5,000
iso-PROPYLAMINE	IPP	5,000	5,000
iso-PROPYL ETHER	IFE	5,000	5,000
PYRIDINE	PRD	5,000	5,000
SODIUM ALUMINATE SOLUTION	SAD		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C E R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
SODIUM CHLORATE SOLUTION (50% OR LESS)	SDO	5,000	
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDL		
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)			
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)	SDP	5,000	
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H ₂ S 15 PPM OR LESS)	SSH	5,000	
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H ₂ S<200 PPM)	SSI	5,000	
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H ₂ S GREATER THAN 200 PPM)	SSJ	5,000	
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	STS		
STYRENE MONOMER	STY	5,000	5,000
SULFURIC ACID	SFA	4,976	5,000
SULFURIC ACID, SPENT	SAC	5,000	5,000
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	TBC	5,000	
TETRAETHYLENEPENTAMINE	TTP	5,000	5,000
TETRAHYDROFURAN	THF	5,000	5,000
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	TCM	5,000	5,000
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)			
TRICHLOROETHYLENE	TCL	5,000	5,000
1,2,3-TRICHLOROPROPANE	TCN	5,000	5,000
TRISNANOLAMINE	TEA	5,000	5,000
TRIETHYLAMINE	TEN	5,000	5,000
TRIETHYLENETETRAMINE	TET	5,000	5,000
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH ₃)	UAS		
VALERALDEHYDE (iso-, n-)		5,000	5,000
VALERALDEHYDE (iso-)	IVA	5,000	5,000
VALERALDEHYDE (n-)	VAL	5,000	5,000
VANILLIN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	VBL		
VINYL ACETATE	VAM	5,000	5,000
VINYLTOLUENE	VMT	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BDL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BDL/ HR)
46 CFR SUBCHAPT O BUT NOT TABLE 151 *****			
1,1-DICHLOROPROPANE			
1,1,1-TRICHLOROETHANE	DPB	5,000	5,000
1,2-DICHLOROPROPANE		5,000	
1,3 CYCLOPENTADIENE	DPP	5,000	5,000
1,3-DICHLOROPROPANE			
2-METHYL-2-HYDROXY-3-BUTYNE	DPC	5,000	5,000
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)DDA	MHB	5,000	5,000
3-PENTENITRILE			
AEROTHEME TT (1,1,1-TRICHLOROETHANE)	PNT		
ALKYLBENZENE			
AMINOTHYLPYPERAZINE			
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)	AEP	5,000	5,000
BENZENE SULFONYL CHLORIDE	BSC	5,000	5,000
BENZYL ACETATE	BZE	5,000	5,000
BENZYL CHLORIDE (STABILIZED)	BCL	5,000	5,000
BUTANOL			
BUTYL ETHER (n-)			
BUTYLENE OXIDE (i,2-)	BTE	5,000	5,000
BUTYRIC ACID	BTO	5,000	5,000
CARBOIC ACID	BRA	5,000	5,000
CHLOROACETIC ACID (80% OR LESS)	CBO	5,000	5,000
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	5,000	5,000
CHLOROTOLUENE (m-)	CPM	5,000	5,000
CHLOROTOLUENE (o-)	CTM	5,000	5,000
CHLOROTOLUENE (p)	CTO	5,000	5,000
CHLOROTOLUENES (MIXED ISOMERS)	CRM	5,000	5,000
CRESOTE (ALL ISOMERS)	CHI	5,000	5,000
CRESYLIC ACID TAR	CCW	5,000	5,000
CYCLOHEPTANE	CRK	5,000	5,000
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CYE	5,000	5,000
CYCLOHEXYL ACETATE	CYX	5,000	5,000
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CYC	5,000	5,000
CYCLOPENTANE	CSB	5,000	5,000
DECAHOIC ACID	CYP	5,000	5,000
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)	DCO	2,770	
DICHLOROISOPROPYL ETHER (2,2'-)		5,000	
DICHLOROPROPANE	DCI	5,000	5,000
DICHLOROPROPENE		5,000	
DITHYL SULFATE		5,000	
DITHYLETHANOLAMINE	DSU	5,000	5,000
DODECYL BENZENE	DAB	5,000	5,000
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE			
DRIPOLINE	DOT		
ETHANOL (see ethyl alcohol)			
ETHYL BROMIDE			
ETHYL TERT-BUTYL ETHER			
ETHYLAMINE	EBE	5,000	5,000
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EAM	5,000	5,000
ETHYLMERCAPTAN (SAME AS ETHANETHIOL)	ETX	5,000	5,000
ETHYLPHENOL			
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	EPL	5,000	5,000
HYDROSULFIDE	MTM	5,000	5,000
INDENES			
ISOBUTYL ACETATE			
ISOPRENE, PENTADIENE MIXTURE	IRA		5,000
ISO-PROPYL ALCOHOL	IPW		
LAURIC ACID		5,000	5,000
METHACRYLONITRILE	LRA	5,000	
	MET	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
METHANOL			
METHYL STYRENE		5,000	
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES			
METHYLCYCLOHEXANE	MIA		
METHYLCYCLOHEXANE (SAME AS HEPTANE)	MCY	5,000	5,000
MONOETHANOLAMINE			
MONOISOPROPANOLAMINE	MEA	5,000	5,000
NAPHTHALENE (MOLTEN)		5,000	5,000
NEODECANOIC ACID	NTM	5,000	5,000
NITRILOTRIACETIC ACID	NEA	5,000	5,000
NITROPHENOL (MOLTEN)	NAA		
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE	NTP	5,000	
NITROTOLUENE (o-,p-)	NNM	5,000	5,000
PARALDEHYDE	NIT	5,000	5,000
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)	PDB	5,000	5,000
PROPIONALDEHYDE	PGS		
PROPYNIC ANHYDRIDE	PAD	5,000	5,000
PROPYNITRILE	PAH	5,000	5,000
PROPYLAMINE (n-)	PCN	5,000	5,000
PROPYLBENZENE	PRA	5,000	5,000
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)			5,000
PYROLYSIS RESIDUAL FUELS	GPY	5,000	5,000
SEWAGE, RAW		5,000	
SODIUM SULFIDE (SOLID IN WATER)	SWR		
STYRENE	SDS	5,000	
STYRENE CRUDE	STY	5,000	5,000
STYRENE TAR	STI	5,000	5,000
TETRAMETHYLBENZENE (1,2,3,5-)	STT		
TOLUIDINE (o-)	TTB	5,000	5,000
TRICHLOROBENZENE (1,2,4-)	TLI	5,000	5,000
TRIIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N	TCB	5,000	5,000
TRIPHENYLBORANE			
UNDECANOIC ACID	TPE		
HYDROCARBON 5-9	UDA	5,000	
	HFW	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)

46 CFR SUBCHAPTER D, TABLE 30.25-1			
Acetone	ACT	5,000	5,000
Acetophenone	ACP	5,000	5,000
Acetyl Tributyl Citrate		5,000	
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALC		
Alcohols (C13 and above)	ALY		
Alcoholic beverages, N.O.S.			
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates			
Alcohol (C12 - C15) Poly(1-3)ethoxylates			
Alcohol (C12 - C15) Poly(3-11)ethoxylates			
Alkenylsuccinic acid			
Alkenylsuccinic Anhydride			
Alkyl (C9 - C17) Benzenes			
Alkylbenzenesulfonic acid (4t or less)	AKB		
Alkyl Phthalates (n-)	ABS		
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2t or less)			
Aminoethyldiethanolamine, Aminoethylethanolamine solution			
Amyl Acetate-(commercial, iso-, n-, sec-)	AMC	5,000	5,000
AMYL ACETATE (n-)	AML	5,000	5,000
AMYL ACETATE (iso-)	IAT	5,000	5,000
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	5,000	5,000
Amyl alcohol (n-)	AAN	5,000	5,000
Amyl alcohol (tert-)	AAI		
AMYL ALCOHOL, PRIMARY	APM	5,000	5,000
AMYL ALCOHOL, (sec-)	ASE	5,000	5,000
Amylene	AME		
AMYL ALCOHOL, (iso-)	IAA	5,000	5,000
Amyl Methyl Ketone	AMK		
Amyl Tallate			
Asphalt	ASP	5,000	
ASPHALT BLENDING STOCKS: Roofers flux	ARF		
ASPHALT BLENDING STOCKS: Straight run residue	ASR		
Behenyl alcohol			
Benzene Tricarboxylic acid Trioctyl Ester			
Benzyl alcohol	BAL	5,000	5,000
Bicyclic Terpenel Polyamide salt			
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, BFX	BMX	5,000	
Butane			
Butene, SEE BUTYLENE			
Butene Oligomer	BOL		
Butyl Acetate (iso-, n-)	BAX	5,000	5,000
BUTYL ACETATE (N-)	BCN	5,000	5,000
Butyl Acetate (sec-)	ETA	5,000	5,000
Butyl alcohol (iso-, n-, sec-, tert-)			
BUTYL ALCOHOL (ISO-)	IAL	5,000	5,000
BUTYL ALCOHOL (N-)	BAW	5,000	5,000
BUTYL ALCOHOL (SEC-)	BAS	5,000	5,000
BUTYL ALCOHOL (TERT-)	BAT	5,000	5,000
Butyl Benzyl Phthalate	BPH	5,000	5,000
Butylene	BTW		
Butylene Glycol	BUG		
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL			
Butylene Polyglycol, SEE BUTYLENE GLYCOL			
iso-Butyl Formate			
n-Butyl Formate			
Butyl Heptyl Ketone			
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE	BHK		
Butyl Stearate			
Butyl Toluene	BUE	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
Butyrolactone (gamma)	BLA		
Calcium Alkylphenate			
Calcium Alkyl Salicylate			
Calcium Amino Monyl Phenolate			
Calcium Carboxylate			
Caprolactam solutions			
Carbon black base	CLS	5,000	5,000
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)		5,000	
Cetyl-Stearal alcohol			
Cleaning spirit (unleaded)			
Coal tar			
Cumene	COR	5,000	
Cycloaliphatic resins	CUM	5,000	5,000
Cyclohexane			
Cyclohexanol	CHK	5,000	5,000
1,3-Cyclopentadiene dimer (molten)	CHN	5,000	5,000
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	CPD	5,000	5,000
Cymene (para-)			
Decahydronaphthalene	CHP	5,000	5,000
Decaldehyde (iso-)	CHN	5,000	5,000
Decaldehyde (n-)	IDA	5,000	5,000
Decane	DAL	5,000	
Decene	DDC		
Decyl alcohol (all isomers) (DECANOL)	DCE	5,000	5,000
DECYL ALCOHOL (iso-)	DAX	5,000	5,000
DECYL ALCOHOL (n-)	ISA	5,000	5,000
Decylbenzene (n-)	DAN	5,000	5,000
Detergent Alkylate	DBZ	5,000	5,000
Diacetone alcohol			
Dialkyl (C10-C14) Benzenes	DAA	5,000	5,000
Dialkyl (C7-C13) Phthalates	DAB		
Dibutyl Carbinol	DAH		
Dibutyl Phthalate (ortho-)			
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPA	5,000	
Diethylbenzene	DPT	5,000	5,000
Diethylene Glycol	DEB	5,000	5,000
Diethylene Glycol Butyl Ether	DEG	5,000	5,000
Diethylene Glycol Butyl Ether Acetate	DNE	5,000	5,000
Diethylene Glycol Dibutyl Ether	DEM		
Diethylene Glycol Diethyl Ether	DIG		
Diethylene Glycol Ethyl Ether			
Diethylene Glycol Ethyl Ether Acetate	DGE		
Diethylene Glycol Methyl Ether	DGA	5,000	5,000
Diethylene Glycol Methyl Ether Acetate	DGM	5,000	5,000
Diethylene Glycol Phenyl Ether	DGR		
Diethylene Glycol Phthalate	DGP		
Di-(2-ethylhexyl) adipate	DGL		
Di-(2-ethylhexyl) phthalate	DEH		
Diethyl Phthalate	DIE		
Diglycidyl Ether of Bisphenol A	DPH		
Diheptyl Phthalate	BDE		
Dihexyl Phthalate	DHP		
Diisobutylcarbinol	DHA		
Diisobutylene	DBC	5,000	5,000
Diisobutyl Ketone	DBL	5,000	5,000
Diisobutyl Phthalate	DIK	5,000	5,000
Diisodecyl Phthalate	DIT		
Diisononyl Adipate	DID		
Diisononyl Phthalate	DNY		
Diisocetyl Phthalate	DIN		
Diisopropylbenzene (all isomers)	DIO		
	DIX	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Diisopropyl Naphthalene	DII		
Dimethyl Adipate	DLA		
Dimethylbenzene			
Dimethyl Glutarate			
Dimethyl Phthalate	DOT		
Dimethyl Polysiloxane	DTL	5,000	
2,2-Dimethylpropane-1,3-diol	DMP		
Dimethyl Succinate	DDI		
Dinonyl Phthalate	DSE		
Di(octylphenyl)amine	DIF	5,000	5,000
Diocetyl Phthalate			
Dipentene	DOP	5,000	
Diphenyl	DPN	5,000	5,000
Diphenyl, Diphenyl Ether mixture	DIL	5,000	5,000
Diphenyl Ether	DDO	5,000	5,000
Diphenyl Ether, Biphenyl Ether mixture	DPE	5,000	5,000
Dipropylene Glycol	DOB		
Dipropylene Glycol Dibenzosate	DPG	5,000	5,000
Dipropylene Glycol Methyl Ether	DGY		
DISTILLATES: Flashed feed stocks	DPY		
DISTILLATES: Straight run	DFF	5,000	5,000
Ditridecyl Phthalate	DSR	5,000	5,000
Diundecyl Phthalate	DTP		
Dodecane (all isomers)	DUP		
Dodecanol	DOC		
Dodecene (all isomers)	DDN		
DODECENE	DOZ	5,000	5,000
Dodecylbenzene	DDO	5,000	5,000
Dodecyl Phenol	DOB	5,000	5,000
Drilling mud (low toxicity) (if flammable or combustible)/	DOL		
Epoxyated linear alcohols, C11-C15			
Ethane			
2-Ethoxyethanol	ETH	5,000	
2-Ethoxyethyl Acetate	EEO	5,000	
Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES	EEA	5,000	
Ethoxy Triglycol (crude)			
Ethyl Acetate	ETG	5,000	
Ethyl Acetoacetate	ETA	5,000	5,000
Ethyl alcohol (ETHANOL)	EAA	5,000	5,000
Ethyl Amyl Ketone	EAL	5,000	5,000
Ethyl Benzene	EAK		
Ethyl Butanol	ETB	5,000	5,000
Ethyl Butyrate	EBT	5,000	5,000
Ethyl Cyclohexane	EBR	5,000	5,000
Ethylene	ECY	5,000	5,000
Ethylene Carbonate	ETL		
Ethylene Glycol			
Ethylene Glycol Acetate	EGL	5,000	5,000
Ethylene Glycol Butyl Ether	EGO		
ETHYLENE GLYCOL BUTYL ETHER ACETATE	EGM		
Ethylene Glycol Ether Acetate	EMA	5,000	5,000
Ethylene Glycol Tert-Butyl Ether			
Ethylene Glycol Diacetate			
Ethylene Glycol Dibutyl Ether	EGY	5,000	5,000
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHYL ACETATE	EGS		
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGP		
Ethylene Glycol Isopropyl Ether	EGA		
Ethylene Glycol Methyl Butyl Ether	EGI		
Ethylene Glycol Methyl Ether			
Ethylene Glycol Methyl Ether Acetate	EME	5,000	5,000
Ethylene Glycol Phenyl Ether	EGT		
	EPE	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

CARGO	C N R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
-----	---	---	---
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture	KDX		
Ethylene-Propylene Copolymer (in liquid mixtures)			
Ethyl-3-Ethoxypropionate	EEP		
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	5,000	5,000
2-Ethylhexanoic acid	EHO		
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHX	5,000	5,000
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID			
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE		
Ethyl Hexyl Tallate	EHT		
Ethyl Propionate	EPR	5,000	5,000
Ethyl Toluene	ETE	5,000	5,000
Fatty acid (saturated, C13 and above)			
Fatty acid Amides			
Formamide	FAM	5,000	5,000
Furfuryl Alcohol	FAL	5,000	5,000
Gas oil, cracked	GOC		
GASOLINE BLENDING STOCKS: Alkylates	GAX	5,000	5,000
GASOLINE BLENDING STOCKS: Reformates	GRF	5,000	5,000
GASOLINES: Automotive (containing not over 4.23 grams lead per gallon)	GAT	5,000	5,000
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon) Avia	GAV	5,000	5,000
GASOLINES: Casinghead (natural)	GCS	5,000	5,000
GASOLINES: Polymer	GPL	5,000	5,000
GASOLINES: Straight run	GSR	5,000	5,000
Glycerine	GCR	5,000	
Glycerol, SEE GLYCERINE			
Glycerol Polyalkoxylate			
Glycerol Triacetate			
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL A			
Glycidyl Ester of Tridecyl Acetic acid	GLT		
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID			
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE			
Glycols, Resins and Solvents mixtures			
Gylcol Triacetate, SEE GLYCERYL TRIACETATE			
Glyoxal solution (40% or less)			
Grease			
Heptadecane			
Heptane (all isomers) (METHYHEXANE)	HPX	5,000	5,000
HEPTANE (N-)	HPT	5,000	5,000
Heptanoic acid	HEP	5,000	5,000
Heptanol (all isomers)	HTX	5,000	5,000
HEPTANOL	HTN	5,000	5,000
Heptene (all isomers)	HPE	5,000	5,000
HEPTENE (1-)	HTE	5,000	5,000
Heptyl Acetate	HPE	5,000	5,000
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR			
Hexaethylene Glycol			
Hexamethylene Glycol			
Hexamethylenetetramine solutions	HTS		
Hexane (all isomers)	HXS	5,000	5,000
HEXANE	HXA	5,000	5,000
Hexanoic acid	HKO	5,000	5,000
Hexanol	HON	5,000	5,000
Hexene (all isomers)	HKE	5,000	5,000
HEXENE (1-)	HKE	5,000	5,000
HEXENE (2-)	HKT	5,000	5,000
Hexyl Acetate	HAR		
Hexylene Glycol	HIG	5,000	5,000
Hog Grease, SEE LARD			
2-Hydroxy-4-(methylthio)butanoic acid	HBA		
HYDROCARBON 5-9 (MOVED TO SUB-0, NOW TABLE 151, 6/24/95)	HFN		
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/			

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: COMOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
Isophorone			
JET FUELS: JP-1 (Kerosene)	IPH	5,000	5,000
JET FUELS: JP-3	JPO	5,000	5,000
JET FUELS: JP-4	JPT	5,000	5,000
JET FUELS: JP-5 (Kerosene, heavy)	JPF	5,000	5,000
JET FUELS: JP-8	JPV	5,000	5,000
Kerosene	JPE		
Lactic acid	KLS	5,000	5,000
Lard			
Latex, liquid synthetic, including: Styrene-Butadien rubber	LLS		
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer			
Magnesium Nonyl Phenol Sulfide			
Magnesium Sulfonate	MSE		
Maleic Anhydride Copolymer			
2-Mercaptobenzothiazol (in liquid mixtures)			
Methane	MTM		
3-Methoxy-1-Butanol			
3-Methoxybutyl Acetate	MOA		
1-Methoxy-2-Propyl Acetate	MPO		
Methoxy Triglycol, SEE TRIETHYLENE GLYCOL METHYL ETHER	MTG		
Methyl Acetate	MTT	5,000	5,000
Methyl Acetoacetate	MAE		
Methyl alcohol (SEE METHANOL)	MAL	5,000	5,000
Methyl Amyl Acetate	MAC	5,000	5,000
Methyl Amyl alcohol	MAA	5,000	5,000
Methyl Amyl Ketone	MAK		
Methyl Butanol, SEE THE AMYL ALCOHOLS			
Methyl Butanol	MBL		
Methyl n-Butyl Ketone	MBK	5,000	5,000
Methyl Butynol	MBY		
Methyl Butyrate	MBU	5,000	5,000
Methyl Ethyl Ketone	MEK	5,000	5,000
Methyl Formal (DIMETHYL FORMAL)	MTF	5,000	5,000
Methyl Heptyl Ketone	MEH	5,000	5,000
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	MIC	5,000	5,000
Methyl Isobutyl Ketone	MIX	5,000	5,000
3-Methyl-3-Methoxybutanol			
3-Methyl-3-Methoxybutyl Acetate			
1-Methyl Naphthalene	MNA	5,000	5,000
Methyl Pentene			
2-METHYL-1-PENTENE	MPN	5,000	5,000
5-METHYL-1-PENTENE	MTN	5,000	5,000
N-Methyl-2-Pyrrolidone	MPY		
Methyl Tert-Butyl Ether (MTBE)	MBE	5,000	5,000
Metolachlor	MCO		
Mineral spirits	MMS	5,000	5,000
Myrcene	MRE	5,000	5,000
NAPHTHA: Aromatic (Having less than 10% Benzene)			
NAPHTHA: Cracking fraction			
NAPHTHA: Heavy			
NAPHTHA: Paraffinic			
NAPHTHA: Petroleum			
NAPHTHA: Solvent	PTN		
NAPHTHA: Stoddard solvent	NSV	5,000	5,000
NAPHTHA: Varnish makers' and painters' (75%)	NSS	5,000	5,000
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution	NVM	5,000	5,000
Naphthenic acid	NFS		
Nonane (all isomers)	NTI	5,000	
NONANE	NAX	5,000	5,000
Nonanoic acid (all isomers)	NAN	5,000	5,000
Nonanoic, Tridecanoic acid mixture	NDA		

MLTSCM

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C N R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Nonene			
Nonyl alcohol (all isomers)	NON	5,000	5,000
NONYL ALCOHOL	NNS	5,000	5,000
NONYL ALCOHOL (iso-)	NNN	5,000	5,000
Nonyl Methacrylate Monomer	NMT	5,000	5,000
Nonyl Phenol			
Nonyl Phenol Poly(4-12)ethoxylates	NKP	5,000	5,000
Nonyl Phenol Sulfide (90% or less)	NPE		
Toxic liquid, N.O.S. (17) ("Trade name," contains "principal components"),			
Non-Toxic liquid, N.O.S. (18) ("Trade name," contains principal components)			
Octadecene			
Octadecenoamide solution (Oleamide)			
Octane (all isomers)	ODD		
OCTANE	OAX	5,000	5,000
Octanoic acid (all isomers)	OAN	5,000	5,000
Octanol (all isomers)	OAA	5,000	5,000
OCTANOL	OCC	5,000	5,000
Octene (all isomers)	OTA	5,000	5,000
OCTENE (1-)	OTX	5,000	5,000
Octyl Acetate	OTE	5,000	5,000
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)			
OCTYL ALCOHOL	OCK	5,000	5,000
Octyl Aldehydes	ICA	5,000	5,000
Octyl Decyl Adipate	OAL		
Octyl Epoxystallate	ODA		
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE	OET		
OIL, EDIBLE: Babassu			
OIL, EDIBLE: Beechnut	OBB		
OIL, EDIBLE: Castor			
OIL, EDIBLE: Cocoa butter	OCA		
OIL, EDIBLE: Coconut			
OIL, EDIBLE: Cod liver	OCC	5,000	
OIL, EDIBLE: Corn			
OIL, EDIBLE: Cottonseed	OCO	5,000	
OIL, EDIBLE: Fish, N.O.S.	OCS		
OIL, EDIBLE: Grapeseed	OFS	5,000	
OIL, EDIBLE: Groundnut			
OIL, EDIBLE: Hazelnut			
OIL, EDIBLE: Lard			
OIL, EDIBLE: Maize	OLD		
OIL, EDIBLE: Mustard seed			
OIL, EDIBLE: Nutmeg Butter			
OIL, EDIBLE: Olive			
OIL, EDIBLE: Palm	OOL		
OIL, EDIBLE: Palm kernel	OPM		
OIL, EDIBLE: Peanut	OPO		
OIL, EDIBLE: Poppy	OPW		
OIL, EDIBLE: Raisin seed			
OIL, EDIBLE: Rice bran			
OIL, EDIBLE: Safflower	ORP		
OIL, EDIBLE: Salad	OSF		
OIL, EDIBLE: Sesame			
OIL, EDIBLE: Soya bean			
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB	5,000	
OIL, EDIBLE: Sunflower seed		5,000	
OIL, EDIBLE: Tucum	OSW		
OIL, EDIBLE: Vegetable, N.O.S.	OTC		
OIL, EDIBLE: Walnut	OVG	5,000	
OIL, FUEL: No. 1 (Kerosene)	OCW		
OIL, FUEL: No. 1-D	OOD		
OIL, FUEL: No. 2	OTW	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
OIL, FUEL: No. 2-D	OTD		
OIL, FUEL: No. 4	OPR	5,000	5,000
OIL, FUEL: No. 5	OPV	5,000	5,000
OIL, FUEL: No. 6	OSX	5,000	5,000
OIL, MISC: Absorption	OAS		
OIL, MISC: Aliphatic			
OIL, MISC: Animal, N.O.S.			
OIL, MISC: Aromatic			
OIL, MISC: Aviation F2300			
OIL, MISC: Clarified			
OIL, MISC: Coal	OCF		
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER			
OIL, MISC: Coconut oil, fatty acid			
OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM		
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTE	CFY	5,000	
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID			
OIL, MISC: Croton			
OIL, MISC: Crude	OIL	5,000	5,000
OIL, MISC: Diesel	ODS	5,000	5,000
OIL, MISC: Gas, low pour			
OIL, MISC: Gas, low sulfur			
OIL, MISC: Heartcut distillate			
OIL, MISC: Lanolin			
OIL, MISC: Linseed			
OIL, MISC: Lubricating			
OIL, MISC: Mineral	OLB	5,000	5,000
OIL, MISC: Mineral seal			
OIL, MISC: Motor	OMS		
OIL, MISC: Neatsfoot	OMT		
OIL, MISC: Oiticica	OMF		
OIL, MISC: Palm oil, fatty acid Methyl Ester	OOI		
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID METHYL	OPE	5,000	
OIL, MISC: Penetrating	EOPE		
OIL, MISC: Perilla	OPT		
OIL, MISC: Pilchard			
OIL, MISC: Pine			
OIL, MISC: Range	OPI		
OIL, MISC: Residual	ORG		
OIL, MISC: Resin			
OIL, MISC: Resinous petroleum	ORS	5,000	5,000
OIL, MISC: Road			
OIL, MISC: Rosin	ORD		
OIL, MISC: Seal	ORN		
OIL, MISC: Soapstock			
OIL, MISC: Soya bean (epoxidized)	OIS		
OIL, MISC: Speru			
OIL, MISC: Spindle	OSP		
OIL, MISC: Spray	OSD		
OIL, MISC: Tall	OSY		
OIL, MISC: Tall, fatty acid	OTL		
OIL, MISC: Tanner's	TOP		
OIL, MISC: Transformer	OTN		
OIL, MISC: Tung	OTF		
OIL, MISC: Turbine	OTG		
OIL, MISC: Whale	OTB	5,000	5,000
OIL, MISC: White (mineral)			
OIL, MISC: Wood			
alpha-Olefing (C13 - C18)	OAM	5,000	
Olefins (C13 and above, all isomers)	OLA		
Oleic acid			
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)			

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLU			
Palm Stearin	PMS		
n-Paraffins (C10 - C20)	PFN		
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PDC	5,000	5,000
Pentaethylene Glycol			
Pentaethylenhexamine	PEP		
Pentane (all isomers)	PTY	5,000	5,000
PEPTANE (iso-)	IPT	5,000	5,000
PENTANE (n-)	PTA	5,000	5,000
Pentanoic acid			
Pentene (all isomers)			
PEPTENE (1-)	PTX	5,000	5,000
Petrolatum	PTE	5,000	5,000
1-Phenyl-1-Xylol Ethane	PTL		
Phosphosulfurized Bicyclic Terpene	PKE		
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES			
Pinene			
Polyalkenyl Succinic Anhydride Amine	PIN	5,000	5,000
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures	PFY		
Polyalkylene Oxide Polyol	PAO	5,000	
Polamine, Amide mixture			
Polybutadiene, Hydroxyl terminated			
Polybutene			
Polydimethylsiloxane	PLB	5,000	5,000
Polyethylene Glycol		5,000	
Polyethylene Glycol Dimethyl Ether		5,000	
Polyglycerol			
Polyisobutylene, SEE POLYBUTENE			
Polymerized Esters			
Poly(20)oxyethylene Sorbitan Monooleate			
Polypropylene	PSM		
Polypropylene Glycol	PLP		
Polypropylene Glycol Methyl Ether	PGC	5,000	5,000
Polysiloxane	PGM	5,000	5,000
Polystyrene Diakyl Maleate			
Potassium Oleate			
Propane	POE		
n-Propoxypropanol	PRP	5,000	
Propyl Acetate (iso-)	FKP		
Propyl Acetate (n-)	LAC	5,000	5,000
Propyl alcohol (iso-)	PAT		5,000
Propyl alcohol (n-)	IPA	5,000	5,000
Propylbenzene (n-)	PAL	5,000	5,000
iso-Propylcyclohexane	PBZ	5,000	5,000
Propylene	IPX	5,000	5,000
Propylene-Butylene Copolymer	PPL	5,000	
Propylene Dimer	PBP		
Propylene Glycol (1,2-PROPANDIOL)	PDR		
Propylene Glycol Monoalkyl Ether	PPG	5,000	5,000
Propylene Glycol Ethyl Ether	PGE		
Propylene Glycol Methyl Ether	PGY		
Propylene Polymer (in liquid mixtures)	PWE	5,000	5,000
Propylene Tetramer			
Propylene Trimer	PTT	5,000	5,000
Pseudocumene, SEE TRIMETHYLBENZENES	PTR		
Rum			
Sodium Acetate, Glycol, water solutions			
Sodium Acetate solution	SAN		
Sodium Benzoate solution	SBN		
Sodium Sulfonate			
Stearic acid	SRA		

SUMMARY COMPARISON OF "SPILL VALVE" VS "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BDL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BDL/ HR)
Stearyl alcohol (Octadecanol)			
Sulfolane			
Tallow	SFL	5,000	5,000
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)	TLO		
Tallow fatty acid			
Tallow Alkyl Nitrile	TFD		
Tetradecanol			
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TIN	5,000	
Tetradecylbenzene	TTD	5,000	5,000
Tetraethylene Glycol	TED		
Tetrahydronaphthalene	TTG	5,000	5,000
Tetrapropylbenzene, SEE ALKYL (C9-C17) BENZENES	TEN	5,000	5,000
Toluene			
Triaryphosphate	TOL	5,000	5,000
Tributyl Phosphate			
Tricresyl Phosphate (less than 1% of the ortho isomer)	TBP		
Tridecane	TCP	5,000	5,000
Tridecanoic acid	TRD	5,000	5,000
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)			
1-Tridecane	TDN	5,000	5,000
Tridecylbenzene	TDC	5,000	5,000
Triethylbenzene	TEB	5,000	5,000
Triethylene Glycol	TEG	5,000	5,000
Triethylene Glycol Butyl Ether			
Triethylene Glycol Butyl Ether mixture			
Triethylene Glycol di-(2-ethylbutyrate)		5,000	
Triethylene Glycol Ether mixture	TGD		
Triethylene Glycol Ethyl Ether			
Triethylene Glycol Methyl Ether	TGE		
Triethyl Phosphate			
Triisooctyl Trimellitate	TPS	5,000	5,000
Triisopropanolamine			
Trimethylbenzenes (all isomers)	TIP	5,000	
TRIMETHYL BENZENE (1,2,5-)	TRE	5,000	5,000
TRIMETHYL BENZENE (1,2,3-)	TMB	5,000	5,000
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TMD	5,000	5,000
Trimethylol Propane Polyethoxylate	TME	5,000	5,000
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate			
2,2,4-Trimethyl-3-pentanol-1-isobutyrate			
Tripropylene, SEE PROPYLENE TRIMER	TMP		
Tripropylene Glycol			
Tripropylene Glycol Methyl Ether	TOC		
Trixylenyl Phosphate	TGM		
Turpentine	TRP	5,000	
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)	TPT		
Undecanol			
Undecene (1-)			
Undecyl alcohol	UDC	5,000	5,000
Undecylbenzene	UND	5,000	5,000
Vinyl Acetate-fumarate Copolymer	UDS		
Waxes:			
WAXES: Candelilla	WAX		
WAXES: Carnauba			
WAXES: Paraffin	WAX,		
WAXES: Petroleum	WAX,		
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)			
White spirit (low (15 - 20%) aromatic)			
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.	WSL		
Wool grease			
Xylenes (ortho-, meta-, para-)			
XYLENE (M-)	XLX	5,000	5,000
	XLN	5,000	5,000

MLTSUM1

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
CARGO		

XYLENE (O-)	XLO 5,000	5,000
XYLENE (P-)	XLP 5,000	5,000
XYLENOL	XYL 5,000	5,000
Zinc Dialkyldithiophosphate		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C	MAX	MAX
	H	LIQUID	LIQUID
	R	TRANSFER	TRANSFER
	I	RATE	RATE
	S	PER	PER
		SPILL	P/V
		VALVE	VALVE
		(BBL/	(BBL/
		HR)	HR)

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1			

AROMATIC RESIN OIL 60	ARS	5,000	5,000
AROMATIC RESIN OIL 80	ARS	5,000	5,000
AROMATIC RESIN OILS			