

VAPOR CONTROL SYSTEM INSTALLATION

FOR BARGES: "7027" AND "7028"

CONOCO, INC.

I. INTENT AND TECHNICAL APPROACH

The enclosed information is being submitted to obtain approval for the installation and use of a vapor control system. The information is structured to address (1) the regulations of 33 CFR Parts 154, 155, 156, and 46 CFR Parts 30, 32, 35, and 39 as revised and amended June 21, 1990 (re: gasoline, crude oil, and benzene) and (2) the guidelines of the enclosure to USCG letter of 24 August 1993 and as revised 20 September 1993 (i.e., GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM). It is desired that U.S.C.G. authorize use of the vapor control system with all 46 CFR Subchapter "O" and "D" cargoes for which the system meets applicable regulations (e.g., benzene, gasoline, and crude oil) as well as other U.S.C.G. "inhouse" guidelines.

The technical approach used herein to determine maximum liquid transfer rate imposed by (a) the capacity of the cargo tank venting system [see 46 CFR 39.20-11], and (b) the pressure drop between the most remote tank and the shore connection [see 46 CFR 39.30-1(D)(3)] is summarized as follows:

1. Pertinent vessel and piping system parameters are obtained for (a) maximum design working pressure, (b) pressure vacuum valve setting and flow characteristics, and (c) piping system parameters (see APPENDIX E-1).
2. Cargoes for which the vapor control system is to be used are identified (see APPENDIX E-2).
3. Cargo data is obtained for (a) USCG vapor control system category, (b) specific gravity of cargo vapor, and (c) saturated vapor pressure at 115 degrees F (see APPENDIX E-2).
4. The vapor-air mix density, specific gravity, and growth rate (VGR) are determined for each cargo for which adequate data is available (see APPENDIX E-2).

II. BARGE TYPE AND DESCRIPTION:

The vessels of concern are a 297'-6" X 54'-0" X 12'-0", double side, double bottom, tank barges intended for service on rivers, lakes, bays and sounds. They are equipped with a raked end and a box end. Each barge has six (6) cargo tanks, and is served by a cargo pump, and a transverse load and unload header.

III. INDIVIDUAL BARGE DATA:

<u>NAME</u>	<u>BUILDER</u>	<u>HULL</u>
7027	TRINITY/ASHLAND CITY	4317
7028	TRINITY/ASHLAND CITY	4318

IV. CARGO PRODUCT(S):

The vapor control system is to be used with cargo product(s) listed in APPENDIX E and as otherwise authorized by U.S.C.G.

V. CARGO HOSES:

The vessels will not carry cargo vapor hoses. Accordingly, and with reference to 46 CFR 39.30-1(c), hoses are not included in the pressure drop calculations presented by this analysis.

VI. MAXIMUM DESIGN WORKING PRESSURE:

Per previous documentation the barge structure is reported to be suitable for a 3.0 PSIG MAXIMUM DESIGN WORKING PRESSURE.

(Note: This MAXIMUM DESIGN WORKING PRESSURE is considered appropriate for both pressure and vacuum conditions.)

VII. MAXIMUM LIQUID TRANSFER RATE:

The maximum liquid transfer rate (MLTR) is to be 5,000 BBL/HR unless otherwise limited by (1) the max capacity of the cargo tank venting system (see APPENDIX E-3), or (2) by the sum of the "shore connection pressure" plus the "pressure drop" from the most remote tank to the shore connection being in excess of 80% of the P/V setting as determined from the graphs of APPENDIX G for specific loading conditions.

5. The pressure drop across the PV valve, piping system losses, pressure at the tank most remote from the PV valve, and MAXIMUM LIQUID TRANSFER RATE as limited by the vapor control system are determined (see APPENDIX E-3).

These parameters are based on a vapor-air mix flow rate of "VGR" times a "liquid transfer rate" equal to the lesser of 5,000 BBL/HR (i.e., an owner/operator criteria) or the maximum flow rate which results in a pressure at the most remote tank not exceeding the cargo tank MAXIMUM DESIGN WORKING PRESSURE (see SECTION VI below).

6. A set of graphs is developed for various values of vapor growth rate (VGR) (see APPENDIX G). The values of VGR bracket the values determined in the above described analysis. Each set consists of five graphs - i.e., one graph for each of five conditions of pressure at the shore connection loading header ranging from -1.0 PSIG to 1.0 PSIG. Each graph shows the relationship between the "pressure drop" from the most remote tank to the shore connection and the "liquid flow rate" for a range of cargo vapor-air specific gravity. The pressure drop is based on a vapor-air mix flow rate of "VGR" times the noted liquid transfer rate.

Each graph page contains a description of the intended procedure for its use.

APPENDIX F provides a detailed illustration of the pressure drop calculation process.

APPENDIX H provides a detailed listing by cargo of the pressure drop from the most remote tank to the shore connection for a 1.0 PSIG pressure at the shore connection.

VIII. VAPOR CONTROL SYSTEM (46 CFR 39.20-1):

FIGURE 1 and TABLE LM-1 provide a diagram and list of material, respectively, of the vapor control system and related equipment.

When the vapor control system is to be used:

A. Pressure/vacuum valves (if any) other than the vapor control system pressure/vacuum valve(s) will be removed and the connections sealed with standard threaded pipe caps or equal.

B. Above-deck vapor piping will be lettered and painted in accordance with 46 CFR 39.20-1(d).

C. The shore connection flange will be in accordance with 46 CFR 39.20-1(f).

IX. CARGO GAUGING SYSTEM:

A. One (1) visual tank level indicator (i.e., sight glass) will be installed at the access hatch to each cargo tank to provide liquid level determination in accordance with 46 CFR 39.20-3(a). Descriptive literature is provided in TABLE LM-1 and in APPENDIX A.

B. One (1) high level indicating device (i.e., dipstick) will be installed in each cargo tank to indicate when the liquid level in the cargo tank is within about 3.28 feet of the tank top in accordance with 46 CFR 39.20-3 (b). Descriptive literature is provided in TABLE LM-1 and in APPENDIX B.

X. LIQUID OVERFILL PROTECTION (46 CFR 39.20-9):

Primary tank barge liquid overfill protection will be provided by installation of a high level alarm/shutdown system which complies with the requirements of 46 CFR 39.20-9 (b). Additional tank barge liquid overfill protection will be provided by installation of spill valves which comply with the requirements of 46 CFR 39.20-9(d). Each spill valve will serve two (2) cargo tanks (P/S) by use of an adapter. Descriptive literature on both protection measures is provided in TABLE LM-1 and in APPENDIX C.

Calculations for the allowable flow of the spill valve (without exceeding the MAX DESIGN WORKING PRESSURE) are provided as APPENDIX I; however, these flow rates do not govern the MAX LIQUID TRANSFER RATE since primary liquid overfill protection is provided by the high level alarm and shutdown system.

APPENDIX J provides a summary comparison of the spill valve and the P/V transfer rates.

XI. VAPOR OVERPRESSURE AND VACUUM PROTECTION (46 CFR 39.20-11):

To satisfy the requirements of 46 CFR 39.20-11, the cargo tank venting system is to be fitted with one (1) pressure vacuum relief valve. Descriptive literature is provided in TABLE LM-1 and in APPENDIX D. It will be installed in the above deck vapor control piping.

A. VAPOR OVERPRESSURE (LOADING) PROTECTION

APPENDIX E develops the maximum liquid (cargo loading) transfer rate for which the pressure in the cargo tank most remote from the P/V valve does not exceed the MAXIMUM DESIGN WORKING PRESSURE. The calculations therein are in general accordance with the USCG-provided GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM.

B. VAPOR VACUUM PROTECTION

It is possible that cargo loading may suddenly be stopped while the shore facility compressor continues to draw a vacuum. In that instance, the P/V valve is required to have sufficient vacuum capability to intake air in quantity equal to the MAXIMUM LIQUID TRANSFER RATE at a pressure (vacuum) which does not exceed the MAXIMUM DESIGN WORKING VACUUM.

With reference to the vacuum curve information in APPENDIX D, the P/V valve has the following vacuum capacity at a vacuum of -1.0 PSIG, a pressure which is less than the -3.0 PSIG MAXIMUM DESIGN WORKING VACUUM:

CARGO PRODUCT WITH HIGHEST REQ'D AIR FLOW RATE	HIGHEST REQUIRED AIR FLOW RATE (MATR)		PV VALVE VACUUM CAPACITY AIR	
	(BBL/HR)	(FT ³ /HR)	(BBL/HR)	(FT ³ /HR)
VARIOUS	5,000	28,074	5,877	33,000

Since the capacity at higher vacuum exceeds the highest required air flow rate, the cargo tank venting system will:

a. Prevent a vacuum in the cargo tank vapor space, whether generated by withdrawal of cargo or vapor at maximum rates, that exceeds the MAXIMUM DESIGN WORKING VACUUM for any tank connected to the vapor collection system; and

b. Not relieve at a vacuum corresponding to a vacuum in the cargo tank vapor space of less than 0.5 PSIG below atmospheric pressure.

XII. OPERATIONAL REQUIREMENTS (46 CFR 39.30-1):

To satisfy the requirements of 46 CFR 39.30-1(b) and (d), data is developed showing the relationship between "pressure drop" through the vapor control system from the most remote cargo tank to the vessel shore connection and "liquid transfer rate" for various values of vapor-air mix growth rate, vapor-air mix specific gravity, and pressure at the shore connection.

Detailed support calculations for the data are voluminous, and repetitive. Accordingly, an illustrative sample calculation and graph (vice complete calculations and graphs for all individual products) are provided as APPENDIX F. The calculation procedure is in general accordance with the USCG-provided GUIDELINES FOR DETERMINING THE MAXIMUM LIQUID TRANSFER RATE FOR A TANK VESSEL TRANSFERRING A FLAMMABLE OR COMBUSTIBLE CARGO USING A VAPOR CONTROL SYSTEM. Output results from the complete calculations are presented in the graphs of APPENDIX G. Further, a listing is provided, by cargo, of the pressure drop from the most remote cargo tank to the shore connection for a 1.0 PSIG pressure at the shore connection. Descriptive literature similar to those graphs and table is to be included in the vessel "TRANSFER PROCEDURES" by the owner-operator.

VAPOR CONTROL SYSTEM INSTALLATION

FOR BARGES:

"7027" AND "7028"


CONOCO, INC.

TABLE LM-1
LIST OF MATERIAL
FOR VAPOR CONTROL SYSTEM


PIECE MARK	ITEM	QTY	SIZE	SPECIFICATION
12	PIPING FITTINGS FLANGES		8"	SCHED 40, STEEL, ASTM A-53 OR A-106 GRADE B 2" & SMALLER: 3000# FORGED STEEL SCR'D ASTM 105; AND 2 1/2" & LARGER: BUTT WELD SCHED 40 ASTM A234 GR B, ANSI B-16.9 150# SLIP-ON OR WELD NECK FLANGES, STEEL ASTM A-105, ANSI B-16.5; AND/OR 150# FF WELD NECK FLANGES, ASTM A 181
15	VALVE	3	8"	BUTTERFLY VALVE, STEEL W/S.S. TRIM, KEYSTONE OR EQUAL, 150#
16	P.V. VALVE	1	8"	MIDLAND, MODEL A-883, S.S., SET AT 1.5 PSIG PRESSURE, & -0.5 PSIG VACUUM
18	HIGH LEVEL INDICATING DEVICE	6	N/A	MIDLAND MODEL B-610, MAGNETIC DIPSTICK, 300 SERIES STAINLESS STEEL WETTED PARTS
19	HIGH LEVEL SENSOR ALARM & SHUTDOWN SYSTEM	1	N/A	MIDLAND MODEL B-595 TANK HIGH LEVEL AND OVERFILL SENSOR (ONE SENSOR IN EACH TANK)
20	SPIILL VALVE	3	10"	MIDLAND MODEL A-7103, SET @ 1.75 PSIG
22	VISUAL TANK LEVEL INDICATOR	6	N/A	ERL MODEL SGM-1 MARINE SIGHT GLASS

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 100%


1.0 PSIG SHORE CONNECTION PRESSURE

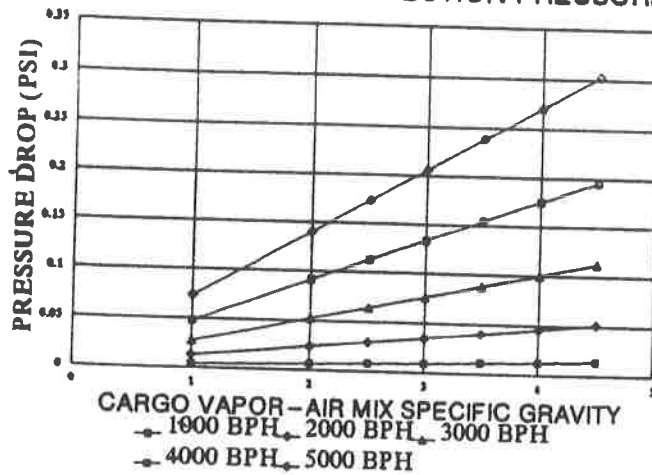


0.5 PSIG SHORE CONNECTION PRESSURE

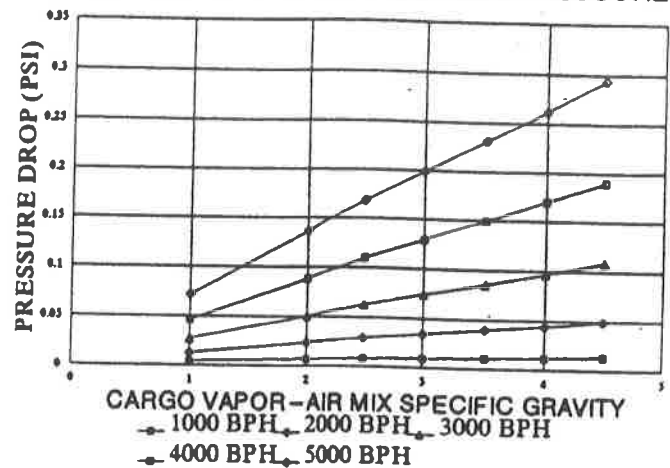


0.0 PSIG SHORE CONNECTION PRESSURE

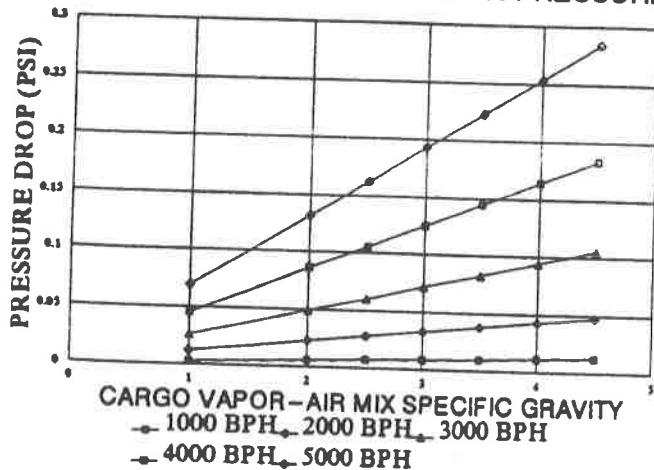

-0.5 PSIG SHORE CONNECTION PRESSURE

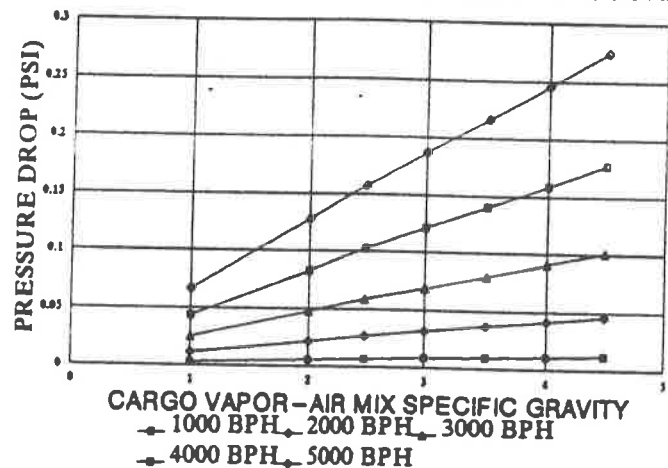

-1.0 PSIG SHORE CONNECTION PRESSURE

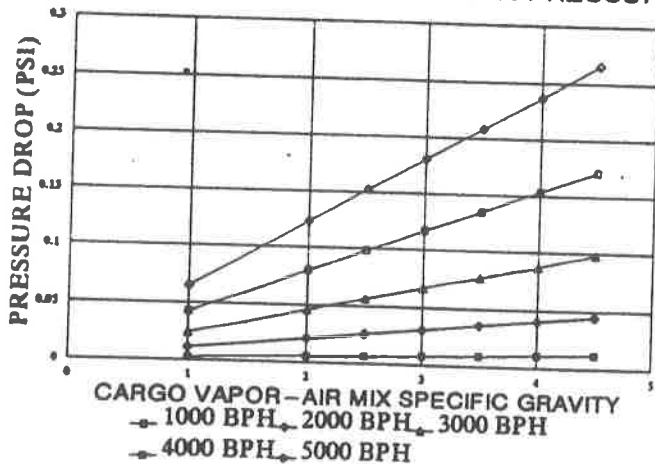
**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.


A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 105%


1.0 PSIG SHORE CONNECTION PRESSURE

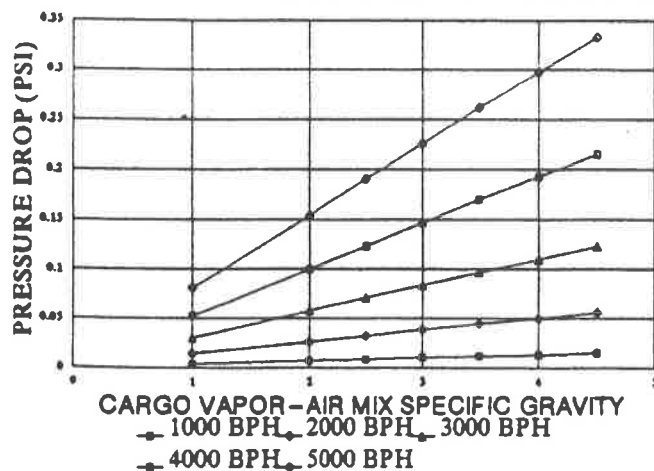


0.5 PSIG SHORE CONNECTION PRESSURE

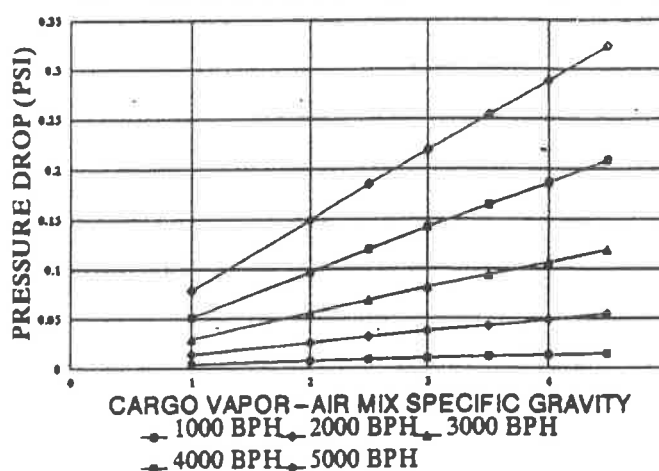


0.0 PSIG SHORE CONNECTION PRESSURE

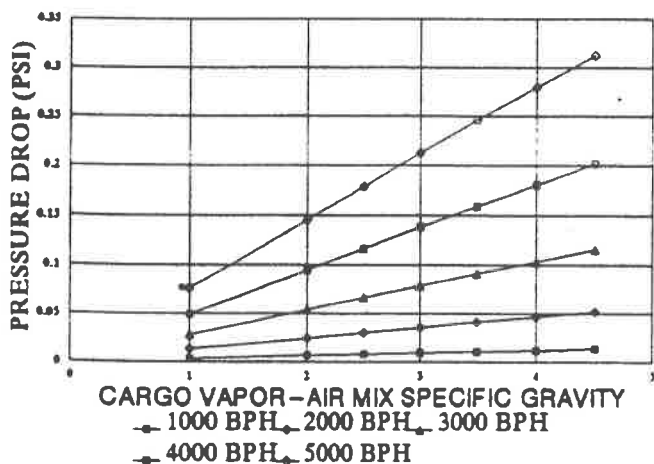

-0.5 PSIG SHORE CONNECTION PRESSURE

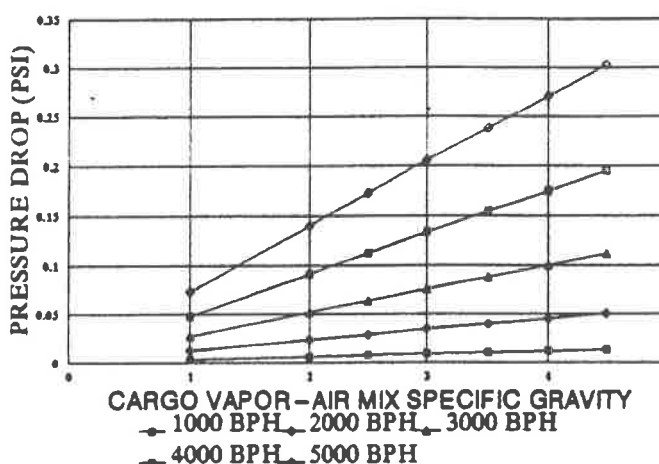

-1.0 PSIG SHORE CONNECTION PRESSURE

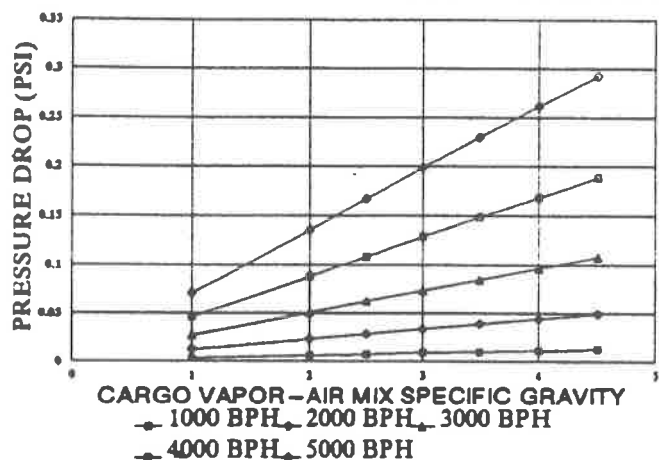**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 110%


1.0 PSIG SHORE CONNECTION PRESSURE

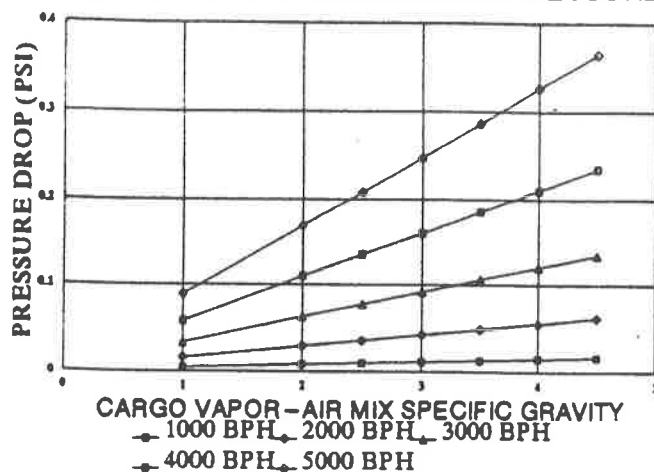


0.5 PSIG SHORE CONNECTION PRESSURE

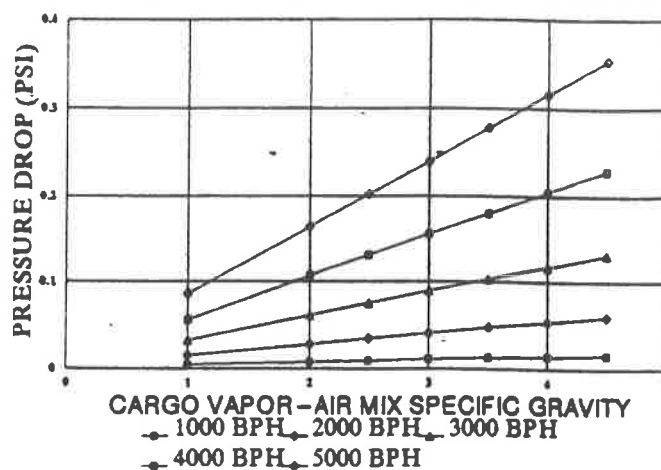


0.0 PSIG SHORE CONNECTION PRESSURE

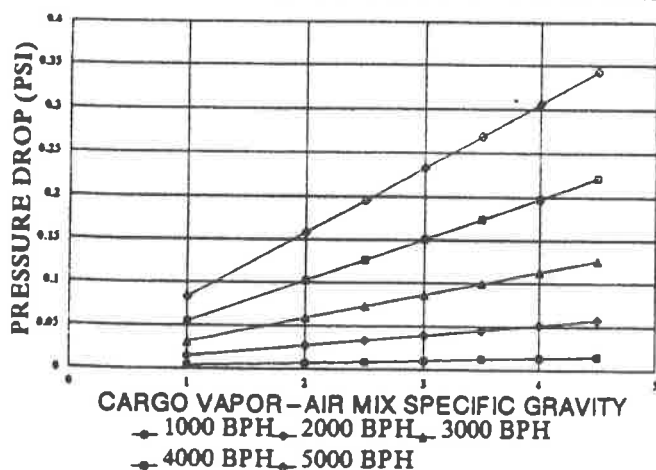

-0.5 PSIG SHORE CONNECTION PRESSURE

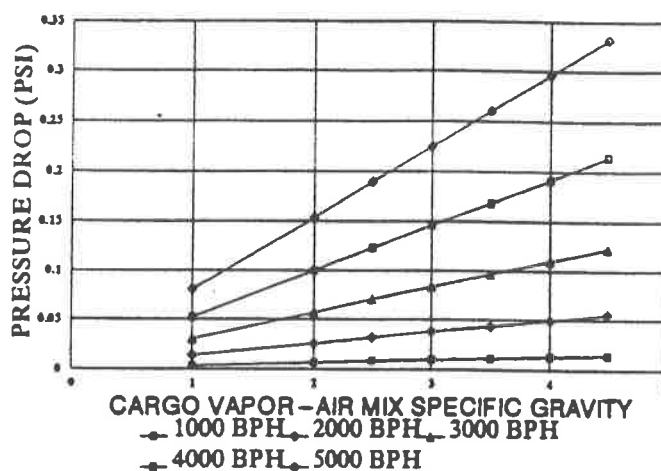

-1.0 PSIG SHORE CONNECTION PRESSURE

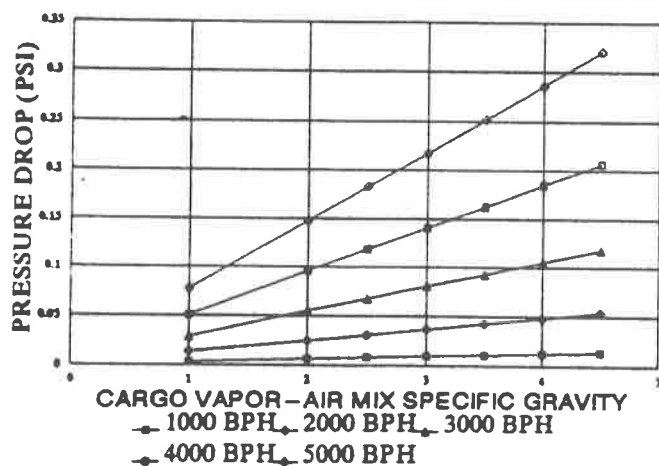**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 115%


1.0 PSIG SHORE CONNECTION PRESSURE

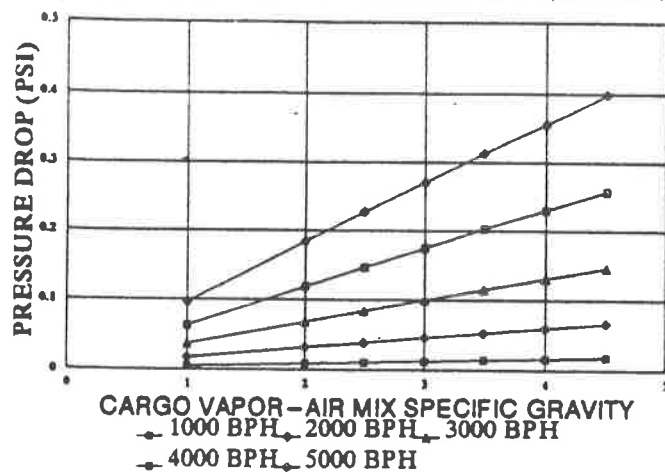


0.5 PSIG SHORE CONNECTION PRESSURE

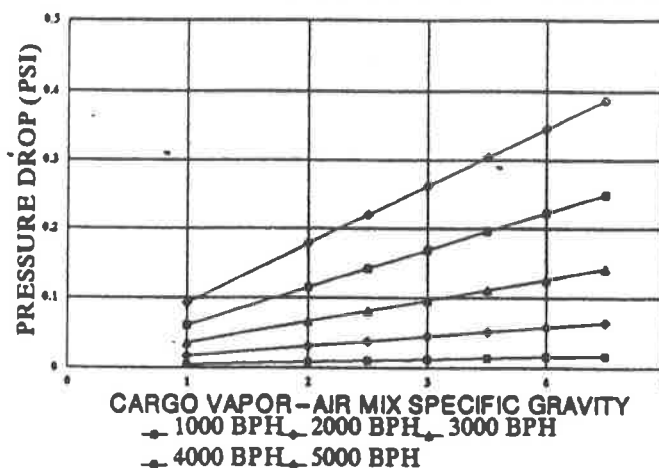


0.0 PSIG SHORE CONNECTION PRESSURE

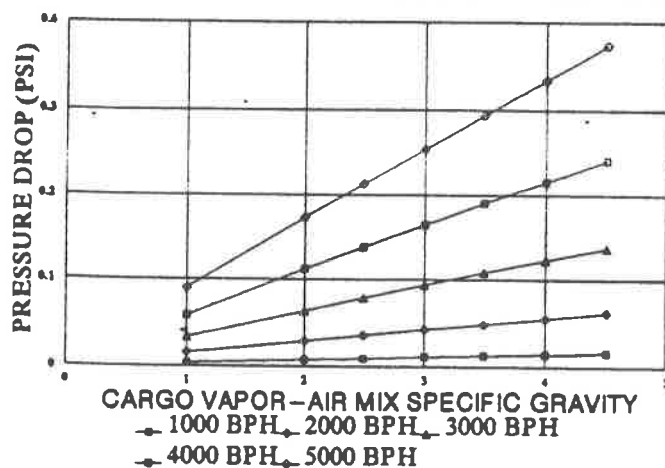

-0.5 PSIG SHORE CONNECTION PRESSURE

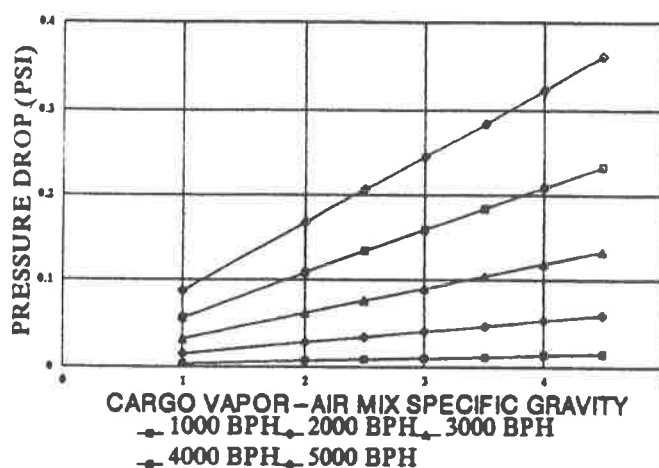

-1.0 PSIG SHORE CONNECTION PRESSURE

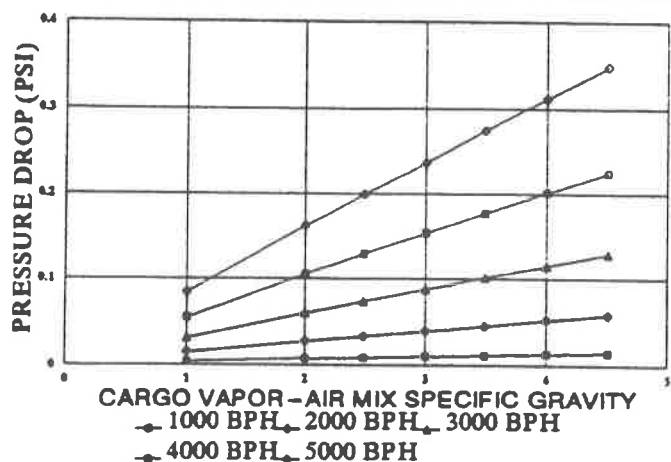**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 120%


1.0 PSIG SHORE CONNECTION PRESSURE

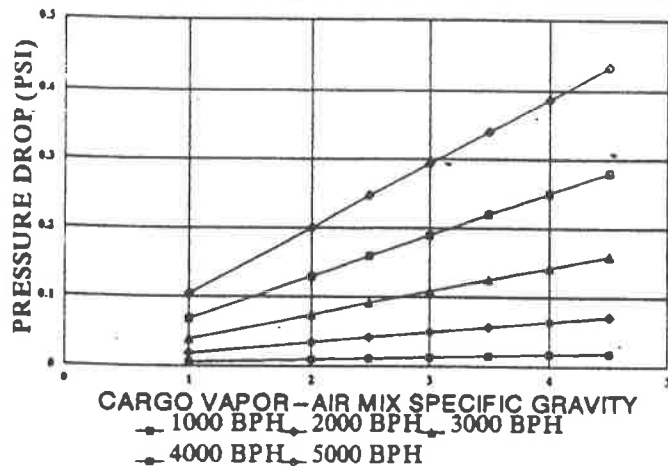


0.5 PSIG SHORE CONNECTION PRESSURE

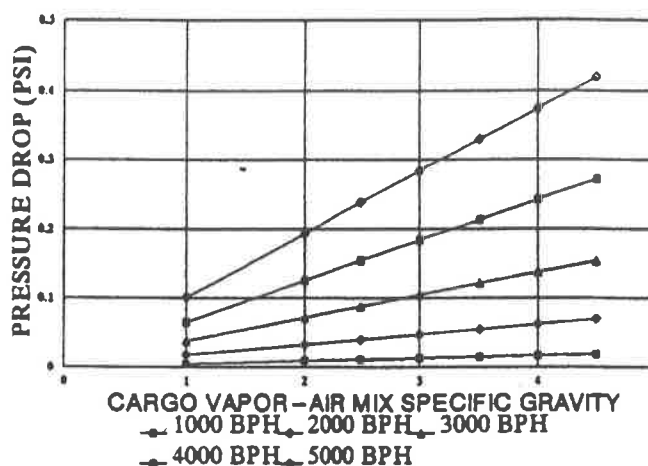


0.0 PSIG SHORE CONNECTION PRESSURE

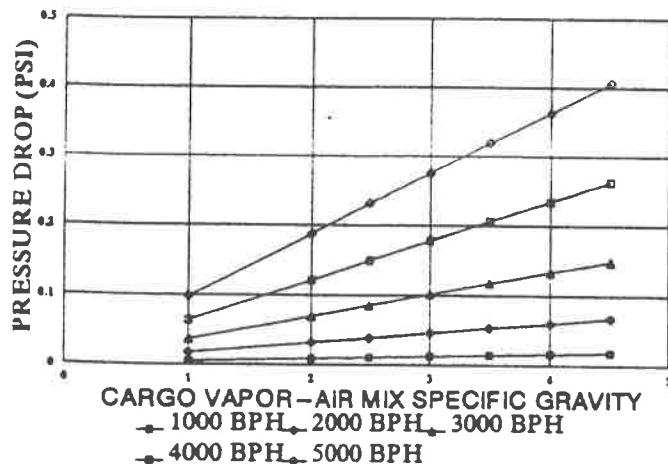

-0.5 PSIG SHORE CONNECTION PRESSURE

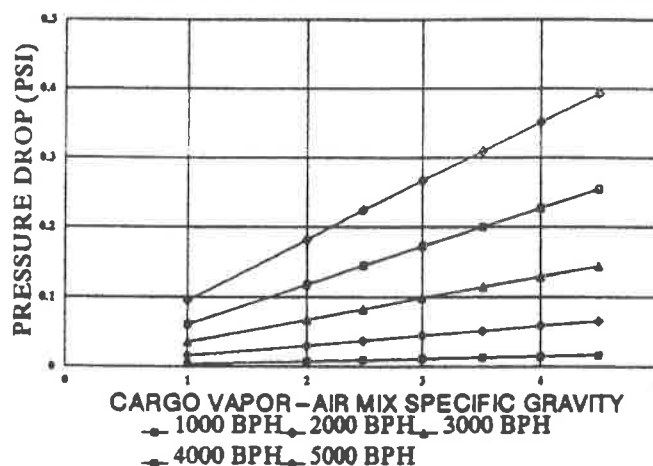

-1.0 PSIG SHORE CONNECTION PRESSURE

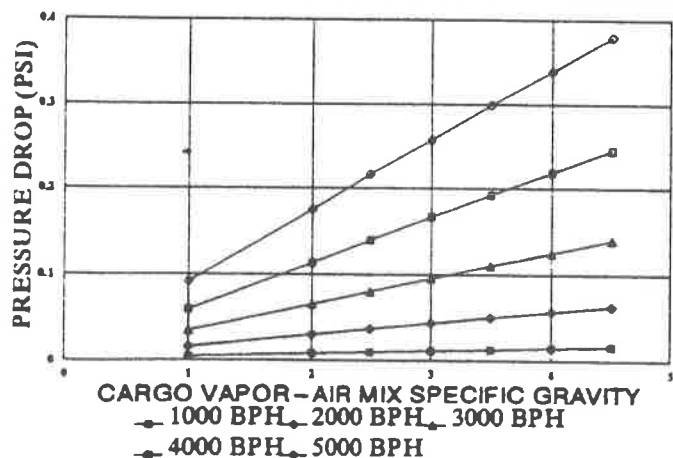**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 125%


1.0 PSIG SHORE CONNECTION PRESSURE

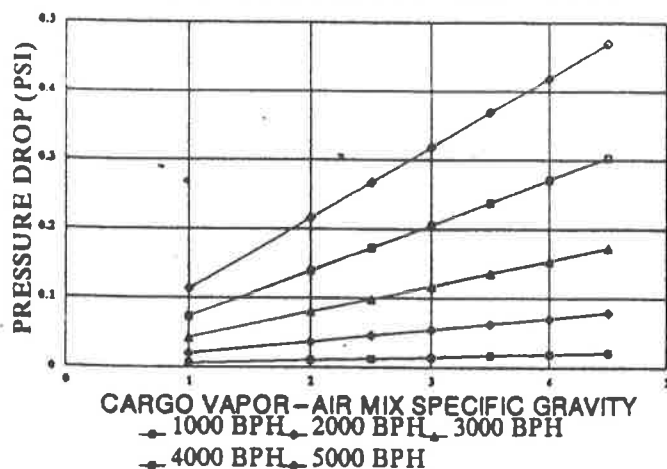


0.5 PSIG SHORE CONNECTION PRESSURE

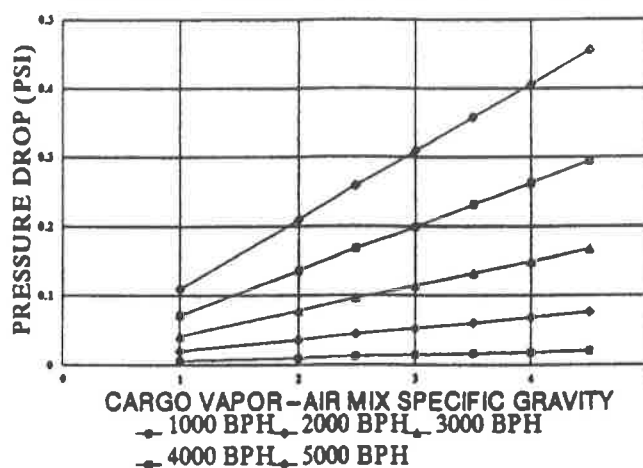


0.0 PSIG SHORE CONNECTION PRESSURE

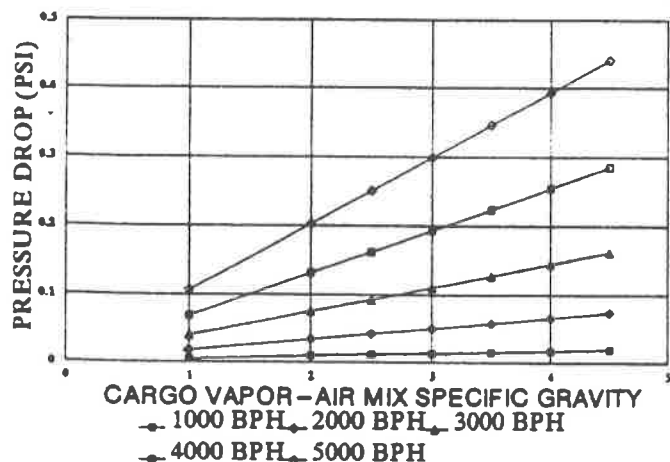

-0.5 PSIG SHORE CONNECTION PRESSURE

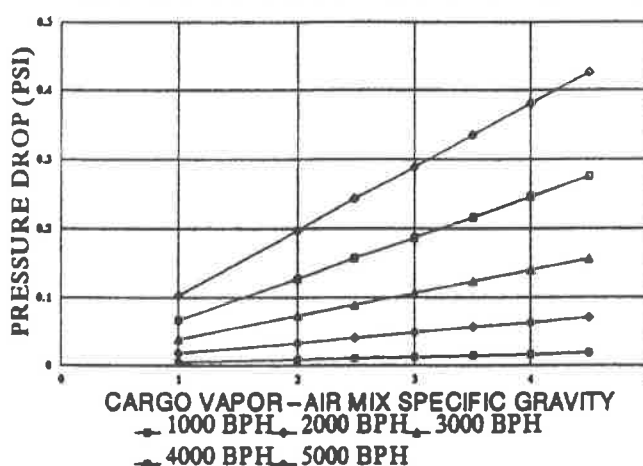

-1.0 PSIG SHORE CONNECTION PRESSURE

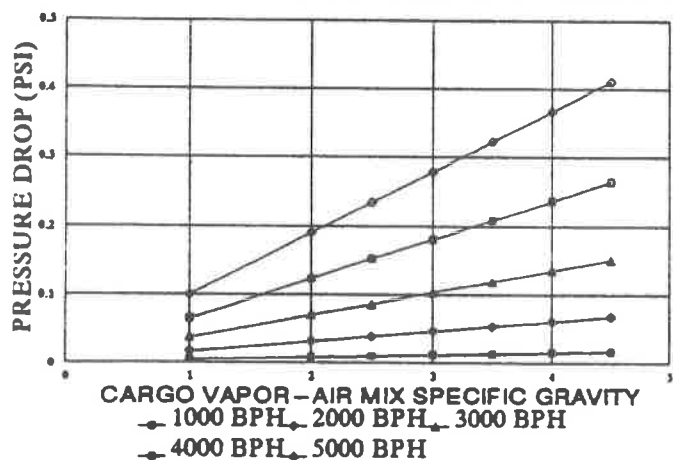**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE 'P/V SETTING', THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 130%


1.0 PSIG SHORE CONNECTION PRESSURE

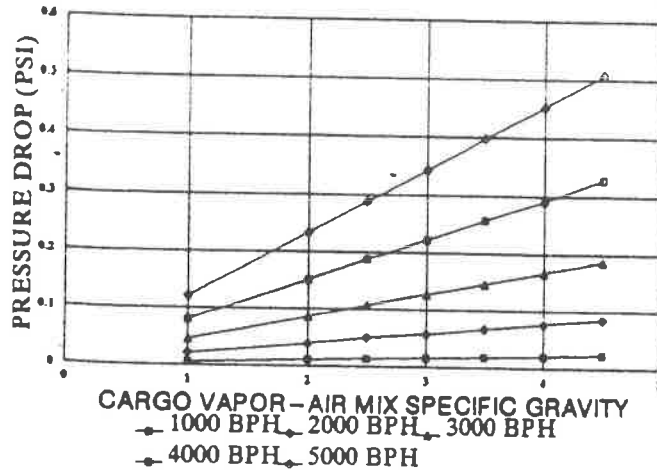


0.5 PSIG SHORE CONNECTION PRESSURE

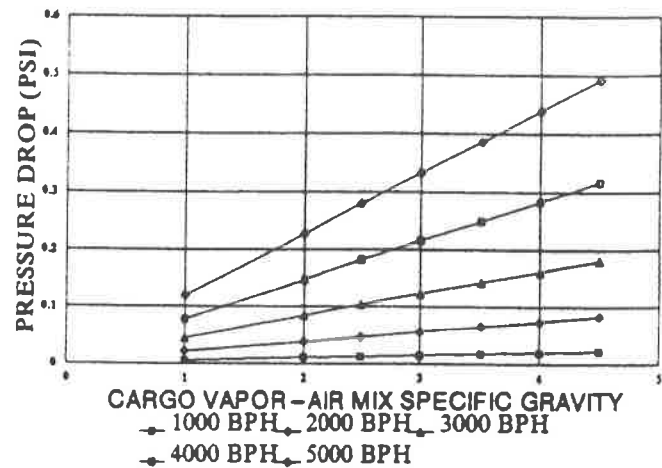


0.0 PSIG SHORE CONNECTION PRESSURE

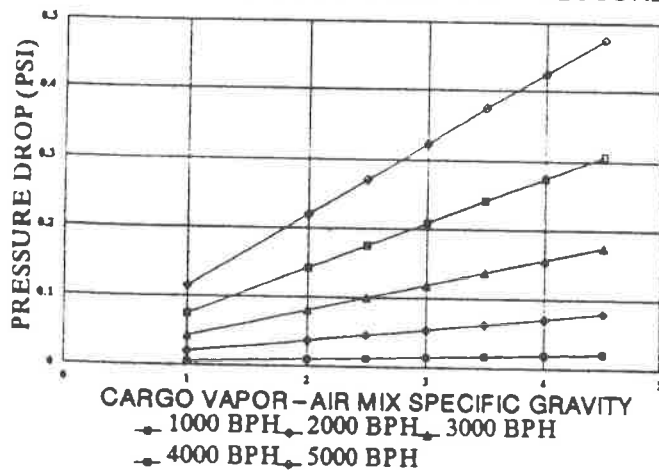

-0.5 PSIG SHORE CONNECTION PRESSURE

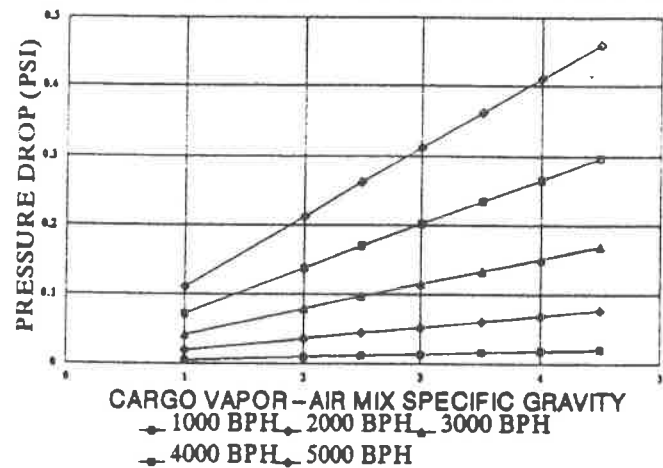

-1.0 PSIG SHORE CONNECTION PRESSURE

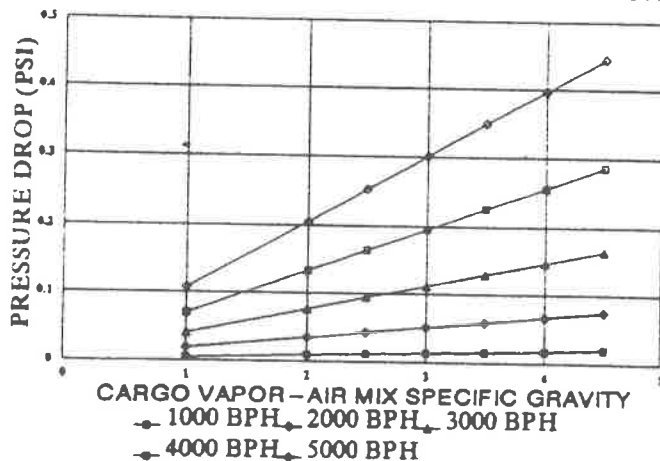**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 135%


1.0 PSIG SHORE CONNECTION PRESSURE

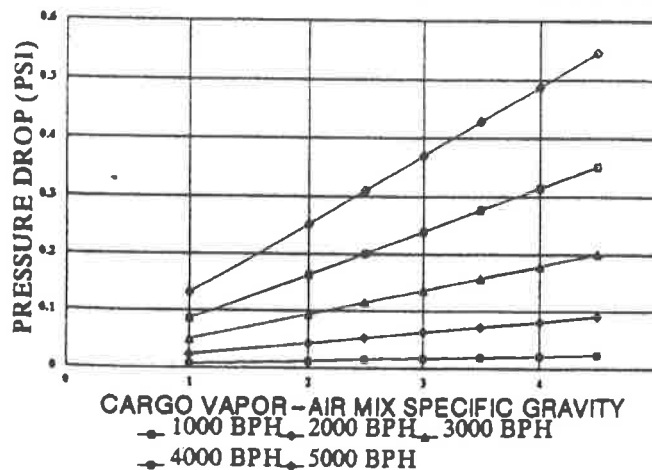


0.5 PSIG SHORE CONNECTION PRESSURE

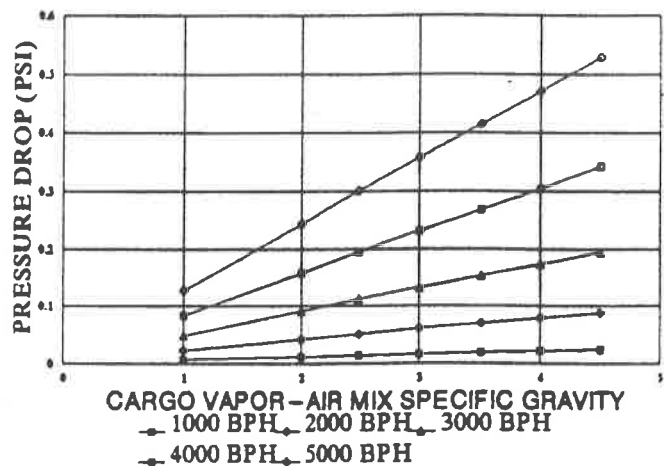


0.0 PSIG SHORE CONNECTION PRESSURE

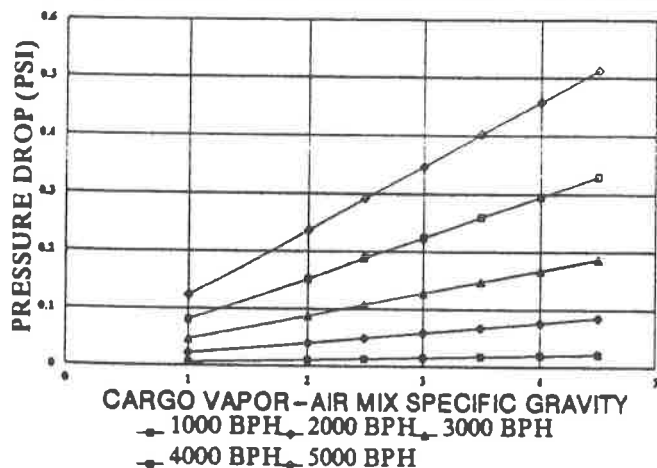

-0.5 PSIG SHORE CONNECTION PRESSURE

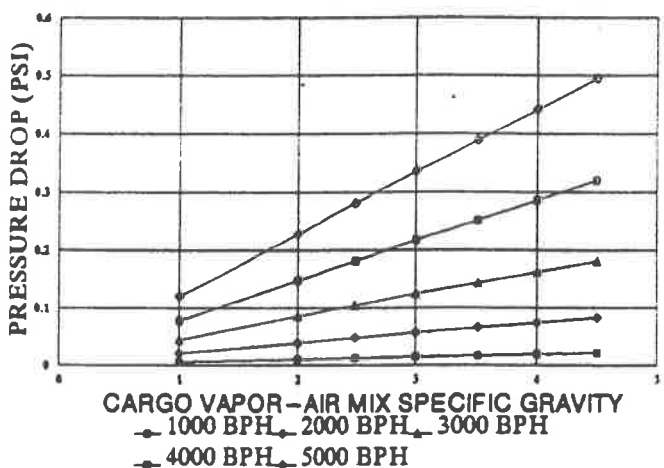

-1.0 PSIG SHORE CONNECTION PRESSURE

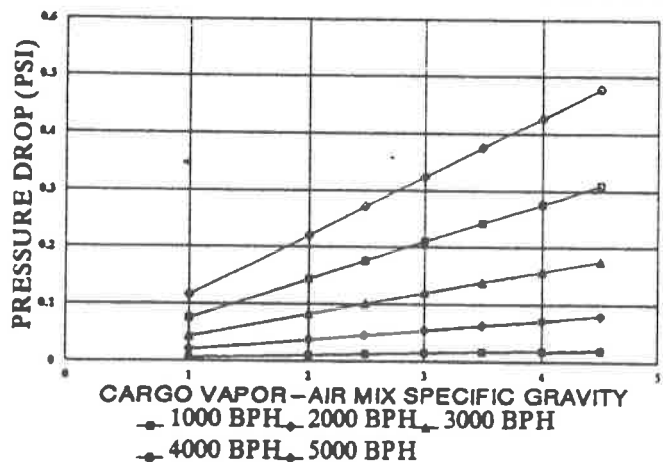**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**


1. OBTAIN: (a) VAP.-AIR MIX GROWTH RATE (VGR), (b) VAP.-AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.


B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 140%


1.0 PSIG SHORE CONNECTION PRESSURE

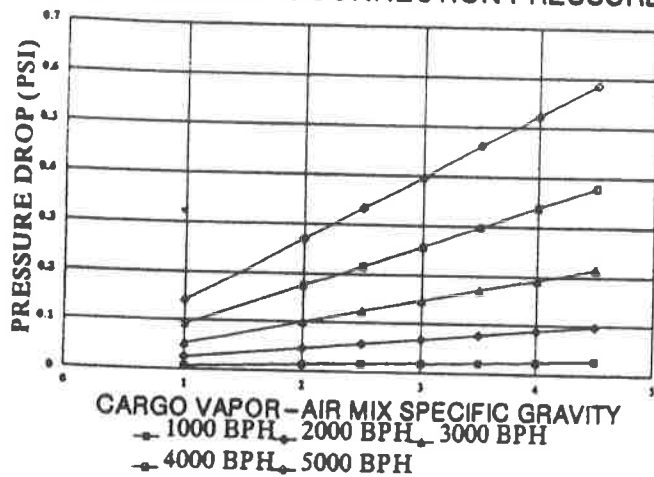


0.5 PSIG SHORE CONNECTION PRESSURE

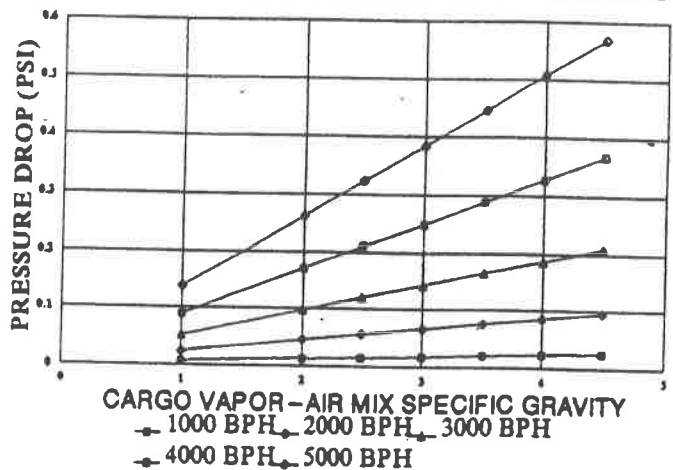


0.0 PSIG SHORE CONNECTION PRESSURE

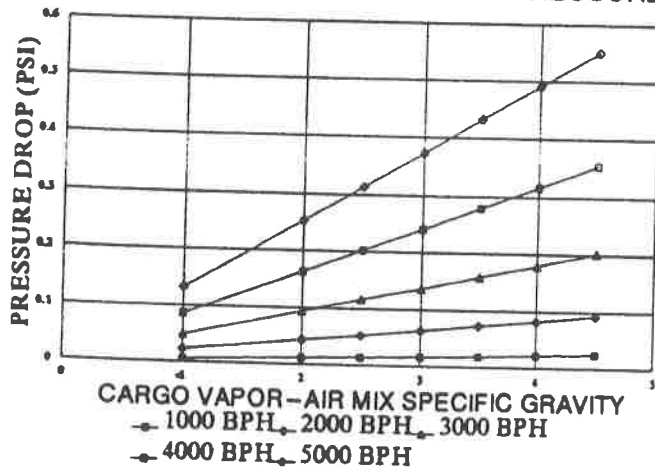

-0.5 PSIG SHORE CONNECTION PRESSURE

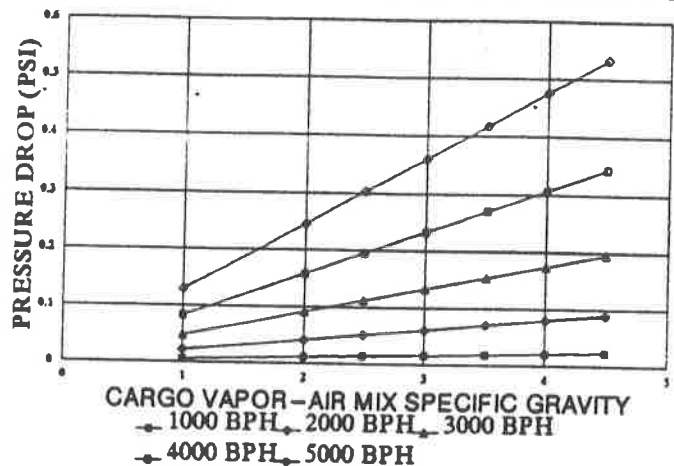

-1.0 PSIG SHORE CONNECTION PRESSURE

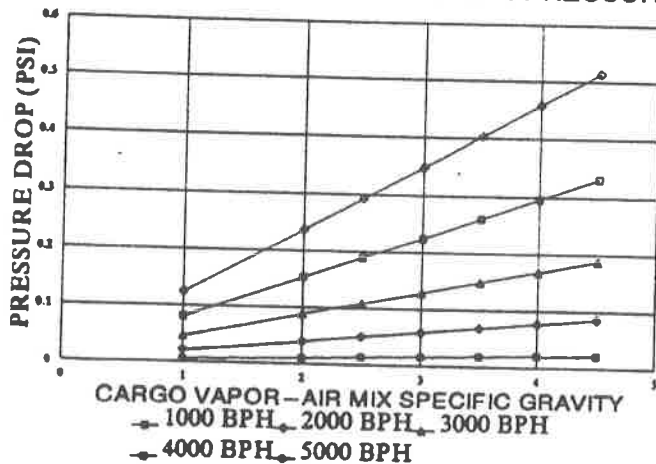
**DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:**

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.


- A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

GRAPH(S) FOR VAPOR GROWTH RATE (VGR) OF 145%


1.0 PSIG SHORE CONNECTION PRESSURE

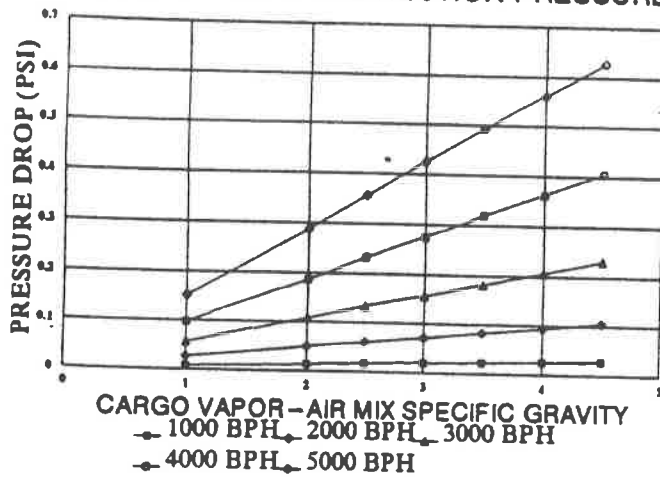


0.5 PSIG SHORE CONNECTION PRESSURE

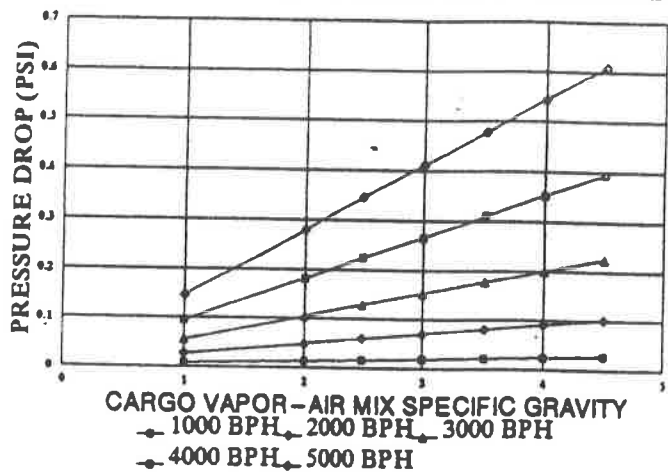


0.0 PSIG SHORE CONNECTION PRESSURE

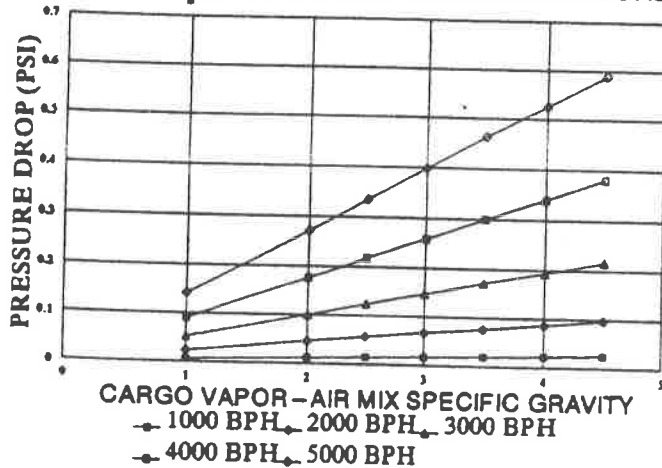

-0.5 PSIG SHORE CONNECTION PRESSURE

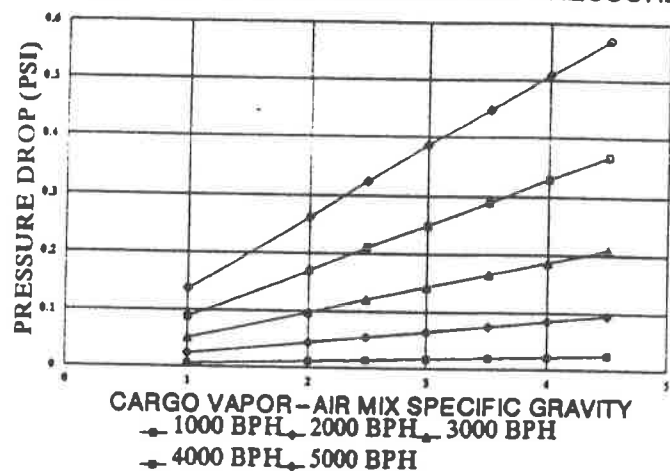

-1.0 PSIG SHORE CONNECTION PRESSURE

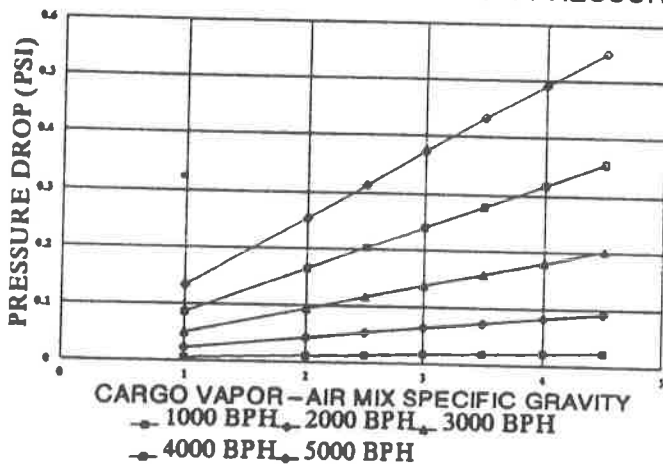

DIRECTIONS: FOR THE CARGO TO BE TRANSFER'D:

1. OBTAIN: (a) VAP. - AIR MIX GROWTH RATE (VGR), (b) VAP. - AIR MIX SPECIFIC GRAVITY, (c) MAX LIQUID TRANSFER RATE (MLTR), & (d) PRESSURE TO BE MAINTAINED @ THE SHORE CONNECTION.
2. SELECT THE GRAPH PAGE THAT APPLIES TO THE LESSER OF THE SAME OR NEXT HIGHER 'VGR'.
3. FROM THAT PAGE, SELECT THE GRAPH THAT APPLIES TO THE NEXT HIGHER 'SHORE CONNECTION PRESSURE'.
4. ENTER THAT GRAPH WITH 'SPECIFIC GRAVITY' & 'MAX LIQUID TRANSFER RATE' TO DETERMINE 'PRESSURE DROP' FROM THE MOST REMOTE CARGO TANK TO THE SHORE CONNEC'N.
5. IF THE SUM OF 'PRESS. DROP' + 'SHORE CONNEC'N PRESSURE' IS LESS THAN 80% OF THE P/V SETTING, THEN THE 'MLTR' IS OK.

- A. FLOW RATES SHOWN HEREON (I.E., 'BPH') ARE LIQUID TRANSFER RATES.
 B. PRESSURE DROP IS FOR CARGO VAPOR-AIR MIX FLOW RATE OF 'VGR' TIMES THE LIQUID TRANSFER RATE, AND IS FROM MOST REMOTE TANK TO SHORE CONNECTION.

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO VAPOR SGv (2)	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
46 CFR SUBCHAPT O, TABLE 151													
ACETIC ACID	AAC	1.05	1	60.052	2.07	0.92	16.200	0.057	0.943	0.076	0.081	1.061	1.018
ACETIC ANHYDRIDE	ACA	1.08	1	102.050	3.50	0.40	16.200	0.025	0.975	0.076	0.081	1.062	1.008
ACETONITRILE	ATN	0.78	3	41.053	1.41	0.03	16.200	0.002	0.998	0.076	0.076	1.001	1.001
ACRYLIC ACID	ACR	1.05	2	72.064	2.48	0.40	16.200	0.025	0.975	0.076	0.079	1.037	1.008
ACRYLONITRILE	ACN	0.81	4	53.064	1.80	5.00	16.200	0.309	0.691	0.076	0.095	1.247	1.100
ADIPONITRILE	ADN	0.95	1	108.000	3.73	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
ALUMINUM SULFATE SOLUTION	ASX	1.76											
AMINOETHYLETHANOLAMINE	AEE	1.03	1	104.150	3.59	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	1.44	1			NF/NC							
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH		3	35.050	1.21	NF/NC							
ANTHRACENE OIL (COAL TAR FRACTION)	AHO												
BENZENE	BNZ	0.88	1	78.114	2.80	4.50	16.200	0.278	0.722	0.076	0.114	1.500	1.250
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	0.84	1		2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	0.84	1		2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	0.84	1	106.080	2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146
iso-BUTYL ACRYLATE	BAI	0.88	2	128.170	4.42	0.60	16.200	0.037	0.963	0.076	0.086	1.127	1.012
n-BUTYL ACRYLATE	BTC	0.90	2	128.170	4.40	0.40	16.200	0.025	0.975	0.076	0.083	1.084	1.008
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	0.90	2		4.42	0.60	16.200	0.037	0.963	0.076	0.086	1.127	1.012
BUTYL METHACRYLATE	BMH	0.88	2	142.200	4.90	0.29	16.200	0.018	0.982	0.076	0.081	1.070	1.006
iso-BUTYRALDEHYDE	BAD	0.80	1	72.107	2.50	7.80	16.200	0.481	0.519	0.076	0.131	1.722	1.156
n-BUTYRALDEHYDE	BTR	0.80	1	72.107	2.50	7.80	16.200	0.481	0.519	0.076	0.131	1.722	1.156
BUTYRALDEHYDES (CRUDE)	BFA	0.82	1	72.060	2.48	8.00	16.200	0.494	0.506	0.076	0.132	1.731	1.160
BUTYRALDEHYDE (ISO-, N-)	BAE	0.82	1		2.48	8.00	16.200	0.494	0.506	0.076	0.132	1.731	1.160
CAMPHOR OIL (LIGHT)	CPO	0.92	8										
CARBON TETRACHLORIDE	CBT	1.59	3	153.820	5.31	NF/NC							
CAUSTIC POTASH SOLUTION	CPS	1.50	1			NF/NC							
CAUSTIC SODA SOLUTION	CSS	1.50	1			NF/NC							
CHLOROBENZENE	CRB	1.11	1	112.559	3.88	0.80	16.200	0.049	0.951	0.076	0.087	1.142	1.016
CHLOROFORM	CRF	1.48	3	119.380	4.12	NF/NC							
CHLOROSULFONIC ACID	CSA	1.79											
COAL TAR NAPHTHA SOLVENT	NCT	0.88	1		3.66	0.20	16.200	0.012	0.988	0.076	0.079	1.033	1.004
CREOSOTE (COAL TAR)	CCT	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CREOSOTE (WOOD)	CWD	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CRESOLS (ALL ISOMERS)	CRS	1.05	1	108.130	3.72	0.06	16.200	0.004	0.996	0.076	0.077	1.010	1.001
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS	1.05	1										
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CFP	1.07	3		3.72	0.05	16.200	0.003	0.997	0.076	0.077	1.008	1.001
CRESYLATE SPENT CAUSTIC	CSC	1.55	1			NF/NC							
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX (TAR ?)		1										
CROTONALDEHYDE	CTA	0.85	4	70.050	2.41	2.00	16.200	0.123	0.877	0.076	0.089	1.174	1.040

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
CYCLOHEXANONE	CCH	0.95	1	98.145	3.40	0.02	16.200	0.001	0.999	0.076	0.076	1.003	1.000
CYCLOHEXYLAMINE	CHA	0.87	1		3.42	0.62	16.200	0.038	0.962	0.076	0.083	1.093	1.012
DECYL ACRYLATE (iso-, n-)	DAT	0.89	2	212.330	7.30	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
DICHLOROBENZENE (ALL ISOMERS)	DBX	1.30	3		5.07	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
1,1-DICHLOROETHANE	DCH	1.18	1	98.960	3.41	9.90	16.200	0.611	0.389	0.076	0.188	2.473	1.198
2,2-DICHLOROETHYL ETHER	DEE	1.22	1	143.000	4.90	0.04	16.200	0.002	0.998	0.076	0.077	1.010	1.001
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DCM	1.32	5	84.940	2.93	NF/NC							
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DDE												
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DAD		1										
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	NDTI												
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DPX	1.16	3	112.960	3.90	6.30	16.200	0.389	0.611	0.076	0.162	2.128	1.126
1,3-DICHLOROPROPENE	DPU	1.23	4	110.980	3.84	5.50	16.200	0.340	0.660	0.076	0.150	1.964	1.110
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DMK	1.21	1		3.90	6.30	16.200	0.389	0.611	0.076	0.162	2.128	1.126
2,2-DICHLOROPROPIONIC ACID	DCN												
DIETHANOLAMINE	DEA	1.09	1	105.140	3.65	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
DIETHYLAMINE	DEN	0.71	3	73.139	2.50	1.00	16.200	0.062	0.938	0.076	0.083	1.093	1.020
DIETHYLENETRIAMINE	DET	0.96	1	103.170	3.48	0.04	16.200	0.002	0.998	0.076	0.077	1.006	1.001
DIETHYL ETHER, SEE ETHYL ETHER	DEH			74.123	2.56								
DIISOBUTYLAMINE	DBU	0.75	3	129.247	4.46	0.46	16.200	0.028	0.972	0.076	0.084	1.098	1.009
DIISOPROPANOLAMINE	DIP	0.98	1	133.190	4.59	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
DIISOPROPYLAMINE	DIA	0.72	3	101.193	3.50	3.70	16.200	0.228	0.772	0.076	0.120	1.571	1.074
N,N-DIMETHYLACETAMIDE	DAC	0.95	3		3.00	0.20	16.200	0.012	0.988	0.076	0.078	1.025	1.004
DIMETHYLETHANOLAMINE	DMB	0.89	1		3.03	0.50	16.200	0.031	0.969	0.076	0.081	1.063	1.010
DIMETHYLFORMAMIDE	DMF	0.95	1	73.090	2.51	0.30	16.200	0.019	0.981	0.076	0.078	1.028	1.006
1,4-DIOXANE	DOX	1.04	1		3.03	1.84	16.200	0.114	0.886	0.076	0.094	1.231	1.037
DI-N-PROPYLAMINE	DNA	0.74	3	58.080	3.50	1.50	16.200	0.093	0.907	0.076	0.094	1.232	1.030
ETHANOLAMINE	MEA	1.02	1	61.080	2.10	0.03	16.200	0.002	0.998	0.076	0.076	1.002	1.001
ETHYL ACRYLATE	EAC	0.93	2	100.118	3.50	2.00	16.200	0.123	0.877	0.076	0.100	1.309	1.040
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.80	6	45.060	1.56	15.50	16.200	0.957	0.043	0.076	0.117	1.536	1.310
N-ETHYLBUTYLAMINE	EBA	0.74	3	101.190	3.50	1.20	16.200	0.074	0.926	0.076	0.090	1.185	1.024
N-ETHYLCYCLOHEXYLAMINE	ECC	0.86	1	127.140	4.40	0.50	16.200	0.031	0.969	0.076	0.084	1.105	1.010
ETHYLENE CYANOHYDRIN	ETC	1.04	1	71.080	2.45	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
ETHYLENEDIAMINE	EDA	0.91	1	60.099	2.10	0.90	16.200	0.056	0.944	0.076	0.081	1.061	1.018
ETHYLENE DIBROMIDE	EDB	2.17				NF/NC							
ETHYLENE DICHLORIDE	EDC	1.26	1	98.960	3.42	4.00	16.200	0.247	0.753	0.076	0.122	1.598	1.080
ETHYLENE GLYCOL PROPYL ETHER	EGP	0.91	1		4.80	0.60	16.200	0.037	0.963	0.076	0.087	1.141	1.012
2-ETHYLHEXYL ACRYLATE	EAI	0.89	2	184.200	6.35	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
ETHYLIDENE NORBORNENE	ENB	0.90	3		4.10	0.33	16.200	0.020	0.980	0.076	0.081	1.063	1.007
ETHYL METHACRYLATE	ETM	0.92	2		3.94	1.00	16.200	0.062	0.938	0.076	0.090	1.182	1.020
2-ETHYL-3-PROPYLACROLEIN	EPA	0.85	1	126.190	4.35	0.12	16.200	0.007	0.993	0.076	0.078	1.025	1.002
FERRIC CHLORIDE SOLUTIONS	FCS												
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	1.13	1		1.03	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.003

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Mv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Mv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
FORMIC ACID	FMA	1.22	1		1.60	2.10	16.200	0.130	0.870	0.076	0.082	1.078	1.042
FURFURAL	PFA	1.20	1	96.085	3.31	0.15	16.200	0.009	0.991	0.076	0.078	1.021	1.003
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA		1			NF/NC							
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.93	1	116.140	4.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
HEXAMETHYLENIMINE	HMI	0.88	1		1.00	0.50	16.200	0.031	0.969	0.076	0.076	1.000	1.010
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	1.21											
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))													
ISOPRENE	IPR	0.69	7	68.120	2.35	23.00	16.200	1.420	-0.420	0.076	0.222	2.917	1.460
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: KPL)													
MESITYL OXIDE	MSO	0.86	1		3.50	0.67	16.200	0.041	0.959	0.076	0.084	1.103	1.013
METHYL ACRYLATE	MAM	0.95	2	86.091	3.00	4.10	16.200	0.253	0.747	0.076	0.115	1.506	1.082
METHYLCYCLOPENTADIENE DIMER	MCK	0.94	1		0.93	0.15	16.200	0.009	0.991	0.076	0.076	0.999	1.003
METHYL DIETHANOLAMINE	MDE	1.04	1		4.10	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
2-METHYL-5-ETHYLPYRIDINE	MEP	0.92	1	121.000	4.18	0.16	16.200	0.010	0.990	0.076	0.079	1.031	1.003
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)													
METHYL METHACRYLATE	MMM	0.94	2	100.110	3.45	2.02	16.200	0.125	0.875	0.076	0.099	1.306	1.040
2-METHYLPYRIDINE	MPR	0.95	3	93.129	3.20	0.50	16.200	0.031	0.969	0.076	0.081	1.068	1.010
alpha-METHYLSTYRENE	MSR	0.89	2	118.179	4.08	0.40	16.200	0.025	0.975	0.076	0.082	1.076	1.008
MORPHOLINE	MPL	1.00	1	87.122	3.00	0.80	16.200	0.049	0.951	0.076	0.084	1.099	1.016
NITRIC ACID (70% OR LESS)	NCD												
NITROPROPANE (-1, OR -2)	NPM	0.99	1	89.090	3.06	1.05	16.200	0.065	0.935	0.076	0.086	1.134	1.021
OCTYL NITRATES (ALL ISOMERS)	ONE	1.00	1		6.00	0.31	16.200	0.019	0.981	0.076	0.083	1.096	1.006
OLEUM	OLM	1.98			2.76	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
PENTACHLOROETHANE	PCE	1.67				NF/NC							
1, 3-PENTADIENE	PDE	0.68	7	68.060	2.36	17.06	16.200	1.053	-0.053	0.076	0.185	2.432	1.341
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PER	1.62	1	165.820	5.72	NF/NC							
PHOSPHORIC ACID	PAC	1.83											
POLYETHYLENE POLYAMINES	PEB	0.99	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI	1.20	1		13.79	0.00							
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)													
iso-PROPANOLAMINE	MPA	0.96	1	76.000	2.59	0.08	16.200	0.005	0.995	0.076	0.077	1.008	1.002
PROPANOLAMINE (iso-, n-)	PAX	0.96	1		2.59	0.08	16.200	0.005	0.995	0.076	0.077	1.008	1.002
PROPIONIC ACID	PNA	1.00	1	74.080	2.56	0.30	16.200	0.019	0.981	0.076	0.078	1.029	1.006
iso-PROPYLAMINE	IPP	0.69	5	59.112	2.04	23.42	16.200	1.446	-0.446	0.076	0.191	2.504	1.468
iso-PROPYL ETHER	IPE	0.72	1		3.50	6.64	16.200	0.410	0.590	0.076	0.154	2.025	1.133
PYRIDINE	PRD	0.98	1	79.102	2.72	1.30	16.200	0.080	0.920	0.076	0.087	1.138	1.026
SODIUM ALUMINATE SOLUTION	SAU												
SODIUM CHLORATE SOLUTION (50% OR LESS)	SDD	1.63	1			NF/NC							
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDL					NF/NC							
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)													
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)	SHP	1.10				NF/NC							
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SSH	1.32											

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H I S	LIQUID SPECIF. GRAVITY	USCQ VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO SQv (2)	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H2S<200 PPM)	SSI	1.32										
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H2S GREATER THAN 200 PPM)	SSJ	1.32										
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	STS											
STYRENE MONOMER	STY	0.92	104.150	3.60	NF/NC							
SULFURIC ACID	SFA	1.84		3.40	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.000
SULFURIC ACID, SPENT	SAC	1.39			0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	TEC	1.59	147.410	5.09	0.01	16.200	0.001	0.999	0.076	0.076	0.999	1.000
TETRAETHYLENEPENTAMINE	TTP	1.00	1	6.80								
TETRAHYDROFURAN	THF	0.89	1	72.107	0.00	16.200	0.000	1.000	0.076	0.076	1.000	1.000
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	THF	0.89	1	72.107	8.50	16.200	0.525	0.475	0.076	0.090	1.184	1.170
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)	TCM	1.44	1	133.390	1.02	16.200	0.063	0.937	0.076	0.093	1.227	1.020
TRICHLOROETHYLENE	TCL	1.46	1	131.380								
1,2,3-TRICHLOROPROPANE	TCN	1.39	3	147.432	3.46	16.200	0.214	0.786	0.076	0.133	1.748	1.069
TRIETHANOLAMINE	TEA	1.13	1	149.190	0.15	16.200	0.009	0.991	0.076	0.079	1.043	1.003
TRIETHYLAMINE	TEN	0.73	3	101.193	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
TRIETHYLENETETRAMINE	TET	0.98	1	146.240	2.50	16.200	0.154	0.846	0.076	0.105	1.384	1.050
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH3)	UAS		1		0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
VALERALDEHYDE (iso-, n-)		0.79	1	86.134	NF/NC							
VALERALDEHYDE (iso-)	IVA	0.79	1		5.00	16.200	0.309	0.691	0.076	0.123	1.617	1.100
VALERALDEHYDE (n-)	VAL	0.84	1		5.00	16.200	0.309	0.691	0.076	0.123	1.617	1.100
VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	VBL		1		0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
VINYL ACETATE	VAM	0.94	2	86.091								
VINYLTOLUENE	VNT	0.90	2		5.80	16.200	0.358	0.642	0.076	0.130	1.705	1.116
					0.12	16.200	0.007	0.993	0.076	0.078	1.023	1.002

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
46 CFR SUBCHAPT O BUT NOT TABLE 151													
1,1-DICHLOROPROPANE	DPB	1.16	3		3.90	6.30	16.200	0.309	0.611	0.076	0.162	2.128	1.126
1,1,1-TRICHLOROETHANE		1.51	1	133.390	4.60	NF/NC							
1,2-DICHLOROPROPANE	DPP	1.16	3		3.50	2.60	16.200	0.160	0.840	0.076	0.107	1.401	1.052
1,3-CYCLOPENTADIENE			1										
1,3-DICHLOROPROPANE	DPC	1.16	3		3.90	3.80	16.200	0.235	0.765	0.076	0.128	1.680	1.076
2-METHYL-2-HYDROXY-3-BUTYNE	MHB	0.86	1		2.90	1.14	16.200	0.070	0.930	0.076	0.086	1.134	1.023
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70%)	DDA												
3-PENTENENITRILE	PNT (CRUDE ?)		8										
AEROTHEME TT (1,1,1-TRICHLOROETHANE)			8	133.390	4.60								
ALKYLBENZENE			1										
AMINOETHYLPYPERAZINE	AEP		1										
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		0.70			2.80	4.50	16.200	0.278	0.722	0.076	0.114	1.500	1.250
BENZENE SULFONYL CHLORIDE	BSC	1.38	1		6.09	0.00	16.200	0.000	1.000	0.076	0.076	1.000	1.000
BENZYL ACETATE	BZE	1.04	1		5.18	0.02	16.200	0.001	0.999	0.076	0.077	1.005	1.000
BENZYL CHLORIDE (STABILIZED)	BCL	1.10	4		4.36	0.09	16.200	0.006	0.994	0.076	0.078	1.019	1.002
BUTANOL			1										
BUTYL ETHER (n-)	BTE	0.77	3		4.50	0.40	16.200	0.025	0.975	0.076	0.083	1.086	1.008
BUTYLENE OXIDE (1,2-)	BTO	0.83	2		2.49	9.18	16.200	0.567	0.433	0.076	0.140	1.844	1.184
BUTYRIC ACID	BRA	0.96	1		3.00	0.07	16.200	0.004	0.996	0.076	0.077	1.009	1.001
CARBOLIC ACID	CBO	1.04	3		3.25	0.06	16.200	0.004	0.996	0.076	0.077	1.008	1.001
CHLOROACETIC ACID (80% OR LESS)	CHM	1.58			3.26	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	1.26	1		3.70	0.02	16.200	0.001	0.999	0.076	0.076	1.003	1.000
CHLOROTOLUENE (m-)	CTM	1.07	1		4.40	0.32	16.200	0.020	0.980	0.076	0.081	1.067	1.006
CHLOROTOLUENE (o-)	CTO	1.08	1		4.40	0.32	16.200	0.020	0.980	0.076	0.081	1.067	1.006
CHLOROTOLUENE (p)	CRN	1.07	1		4.36	0.09	16.200	0.006	0.994	0.076	0.078	1.019	1.002
CHLOROTOLUENES (MIXED ISOMERS)	CHI	1.08	1		4.40	0.53	16.200	0.033	0.967	0.076	0.085	1.111	1.011
CREOSOTE (ALL ISOMERS)	CCW	1.07	1		3.72	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CRESYLIC ACID TAR	CRX	1.05	1		1.00	0.10	16.200	0.006	0.994	0.076	0.076	1.000	1.002
CYCLOHEPTANE	CYE	0.81	1		3.39	1.40	16.200	0.086	0.914	0.076	0.092	1.207	1.028
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CYX	0.95	1		3.38	1.00	16.200	0.062	0.938	0.076	0.087	1.147	1.020
CYCLOHEXYL ACETATE	CYC	0.97	1		4.90	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CSB	1.50	1		4.55	4.50	16.200	0.278	0.722	0.076	0.151	1.986	1.090
CYCLOPENTANE	CYP	0.74	1		2.40	13.15	16.200	0.812	0.188	0.076	0.163	2.136	1.263
DECANOIC ACID	DCO	5.94	1		5.93	0.00							
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)		0.98											
DICHLOROISOPROPYL ETHER (2,2'-)	DCI	1.11	1		5.90	0.06	16.200	0.004	0.996	0.076	0.078	1.018	1.001
DICHLOROPROPANE		1.16											
DICHLOROPROPENE		1.23											
DIETHYL SULFATE	DSU	1.18	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H R I S	LIQUID, SPECIF. GRAVITY	USCG VAP COL. SYST	MOLEC'R WEIGHT OF CARGO MMc	'SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROW RAT VGR (9)
DIETHYLETHANOLAMINE	DAB	0.89	1	4.03	0.18	16.200	0.011	0.989	0.076	0.079	1.034	1.00
DODECYL BENZENE	DOT		1									
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE			1									
DRISOLENE			1									
ETHANOL (see ethyl alcohol)			1	46.069	1.59							
ETHYL BROMIDE			1	108.966	3.76							
ETHYL TERT-BUTYL ETHER	EBE	0.73	1	3.50	5.00	16.200	0.309	0.691	0.076	0.135	1.772	1.100
ETHYLAMINE	EAM	0.80	6	45.085	1.55	40.80	2.519	-1.519	0.076	0.102	2.305	1.816
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	ETX	1.44	1	4.60	3.70	16.200	0.228	0.772	0.076	0.139	1.822	1.074
ETHYL MERCAPTAN (SAME AS ETHANETHIOL)			6									
ETHYLPHENOL	EPL	1.04	1	4.21	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	MTM	0.79	1	1.10	6.63	16.200	0.409	0.591	0.076	0.079	1.041	1.133
HYDROSULFIDE			8									
INDENES			8									
ISOBUTYL ACETATE	IBA			116.160	4.01	0.36	16.200	0.022	0.978	0.076	0.081	1.068
ISOPRENE, PENTADIENE MIXTURE	IPN											
ISO-PROPYL ALCOHOL			1	60.096	2.07	3.00	16.200	0.185	0.815	0.076	0.091	1.199
LAURIC ACID	LRA	0.79	1	6.910	0.00							
METHACRYLONITRILE	MET	0.80	2	2.31	3.39	16.200	0.209	0.791	0.076	0.097	1.274	1.068
METHANOL		0.79	1	32.042	1.11							
METHYL STYRENE			2									
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES	MIA											
METHYLCYCLOHEXANE	MCY	0.77	1	3.40	2.37	16.200	0.146	0.854	0.076	0.103	1.351	1.047
METHYLHEXANE (SAME AS HEPTANE)			1									
MONOETHANOLAMINE	MEA	1.02		61.084	2.11	0.10	16.200	0.006	0.994	0.076	0.077	1.007
MONOISOPROPANOLAMINE		0.96		75.110	2.59	0.20	16.200	0.012	0.988	0.076	0.078	1.020
NAPHTHALENE (MOLTEN)	NTM	1.15	1	4.41	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
NEODECANOIC ACID	NEA	0.92	1	6.00	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
NITRILOTRIACETIC ACID	NAA (4SALTS ?		8		NF/NC							
NITROPHENOL (MOLTEN)	NTP	1.49	1	4.79	0.00							
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE	NNM	1.05	1	3.06	1.10	16.200	0.068	0.932	0.076	0.087	1.140	1.022
NITROTOLUENE (o-, p-)	NIT	1.16	1	4.72	0.02	16.200	0.001	0.999	0.076	0.076	1.005	1.000
PARALDEHYDE	PDH	0.99	1	4.55	8.30	16.200	0.512	0.488	0.076	0.215	2.819	1.166
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)	PAD	0.81	2	2.00	13.76	16.200	0.849	0.151	0.076	0.141	1.849	1.275
PROPIONALDEHYDE	PAH	1.01	1	4.50	0.11	16.200	0.007	0.993	0.076	0.078	1.024	1.002
PROPIONIC ANHYDRIDE	PCN	0.70	1	1.90	1.17	16.200	0.072	0.928	0.076	0.081	1.065	1.023
PROPIONITRILE	PRA	0.72	1	2.04	13.55	16.200	0.836	0.164	0.076	0.142	1.870	1.271
PROPYLAMINE (n-)			1	0.20	4.14	16.200	0.256	0.744	0.076	0.061	0.796	1.083
PROPYLBENZENE	GPY	0.84	1	2.80	7.30	16.200	0.451	0.549	0.076	0.138	1.811	1.146
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)		0.89										
PYROLYSIS RESIDUAL FUELS	SWR											
SEWAGE, RAW												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO VAPOR SGv (2)	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Ma, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Mv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Mv-a, 115/ Ma, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
SODIUM SULFIDE (SOLID IN WATER)	SDS	1.53	0										
STYRENE	STY	0.92	2	104.152	3.60	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.008
STYRENE CRUDE	STX	0.92	2		3.60	0.40	16.200	0.025	0.975	0.076	0.081	1.064	1.008
STYRENE TAR	STT												
TETRAMETHYLBENZENE (1,2,3,5-)	TTB	0.89	1		4.20	0.14	16.200	0.009	0.991	0.076	0.078	1.028	1.003
TOLUIDINE (o-)	TLI	1.00	1		3.69	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
TRICHLOROBENZENE (1,2,4-)	TCB	1.45	1		6.25	0.03	16.200	0.002	0.998	0.076	0.077	1.010	1.001
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N	TPE		0										
TRIPHENYLBORANE	UDA	0.89	1		6.42	0.00							
UNDECANOIC ACID	HPN	0.85	1		3.40	4.40	16.200	0.272	0.728	0.076	0.126	1.652	1.008
HYDROCARBON 5-9													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY, SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115 (9)	VAPOR- AIR MIX GROW RAT VGR (10)	
46 CFR SUBCHAPTER D, TABLE 30.25-1														
Acetone														
Acetophenone	ACT	0.79	1	58.080	2.00	10.00	16.200	0.617	0.383	0.076	0.123	1.617	1.200	
Acetyl Tributyl Citrate	ACP	1.03	1	120.060	4.14	0.60	16.200	0.037	0.963	0.076	0.085	1.116	1.012	
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALE	1.05		402.460	13.89									
Alcohols (C13 and above)	ALY													
Alcoholic beverages, N.O.S.														
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates														
Alcohol (C12 - C15) Poly(1-3)ethoxylates														
Alcohol (C12 - C15) Poly(3-11)ethoxylates														
Alkenylsuccinic acid														
Alkenylsuccinic Anhydride														
Alkyl (C9 - C17) Benzenes														
Alkylbenzenesulfonic acid (4% or less)	AKB													
Alkyl Phthalates (n-)	ABS													
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)														
Aminoethyldiethanolamine, Aminoethylethanolamine solution														
Amyl Acetate (commercial, iso-, n-, sec-)	AEC	0.87	1		4.50	2.02	16.200	0.125	0.875	0.076	0.109	1.436	1.040	
AMYL ACETATE (n-)	AML	0.88	1		4.48	0.33	16.200	0.020	0.980	0.076	0.082	1.071	1.007	
AMYL ACETATE (iso-)	IAT	0.88	1		4.48	0.33	16.200	0.020	0.980	0.076	0.082	1.071	1.007	
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl alcohol (n-)	AAN	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl alcohol (tert-)	AAI													
AMYL ALCOHOL, PRIMARY	APM	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
AMYL ALCOHOL, (sec-)	ASE	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amylene	AMZ													
AMYL ALCOHOL, (iso-)	IAA	0.82	1		3.04	0.30	16.200	0.019	0.981	0.076	0.079	1.038	1.006	
Amyl Methyl Ketone	AMK													
Amyl Tallate														
Asphalt	ASP	1.04												
ASPHALT BLENDING STOCKS: Roofers flux	ARF													
ASPHALT BLENDING STOCKS: Straight run residue	ASR													
Behenyl alcohol														
Benzene Tricarboxylic acid Trioctyl Ester														
Benzyl alcohol														
Bicyclic Terpenel Polyamide salt	BAL	1.05	1	108.140	3.73	0.10	16.200	0.006	0.994	0.076	0.077	1.017	1.002	
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3)	gBFX													
Butane	BMX	1.03												
Butene, SEE BUTYLENE														
Butene Oligomer	BOL													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY @ 115 F Wv-a, 115/ Wa, 115	VAP GROWTH RATE @ 115 F VG (9)
Butyl Acetate (iso-, n-)	0.87	1	116.160	4.00	0.60	16.200	0.037	0.963	0.076	0.085	1.111	1.01
BUTYL ACETATE (N-)	0.88	1		4.00	0.80	16.200	0.049	0.951	0.076	0.087	1.148	1.01
Butyl Acetate (sec-)	0.89	1		4.00	1.50	16.200	0.093	0.907	0.076	0.097	1.278	1.03
Butyl alcohol (iso-, n-, sec-, tert-)	0.81	1		2.60	0.90	16.200	0.056	0.944	0.076	0.083	1.089	1.01
BUTYL ALCOHOL (ISO-)	0.81	1		2.60	0.90	16.200	0.056	0.944	0.076	0.083	1.089	1.01
BUTYL ALCOHOL (N-)	0.81	1		2.60	0.50	16.200	0.031	0.969	0.076	0.080	1.049	1.01
BUTYL ALCOHOL (SEC-)	0.81	1		2.60	1.30	16.200	0.080	0.920	0.076	0.086	1.128	1.02
BUTYL ALCOHOL (TERT-)	0.78	1		2.60	2.80	16.200	0.173	0.827	0.076	0.097	1.277	1.05
Butyl Benzyl Phthalate	1.12	1		10.80	0.01	16.200	0.001	0.999	0.076	0.077	1.006	1.00
Butylene												
Butylene Glycol												
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL												
Butylene Polyglycol, SEE BUTYLENE GLYCOL												
iso-Butyl Formate			102.134	3.53								
n-Butyl Formate												
Butyl Heptyl Ketone												
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE												
Butyl Stearate												
Butyl Toluene												
Butyrolactone (gamma)	0.85	1		5.11	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
Calcium Alkylphenate												
Calcium Alkyl Salicylate												
Calcium Amino Monyl Phenolate												
Calcium Carboxylate												
Caprolactam solutions												
Carbon black base	1.02	1		3.90	0.05	16.200	0.003	0.997	0.076	0.077	1.009	1.001
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)	0.90											
Cetyl-Stearal alcohol												
Cleaning spirit (unleaded)												
Coal tar												
Cumene	1.11											
Cycloaliphatic resins	0.86	1	120.090	4.20	0.60	16.200	0.037	0.963	0.076	0.085	1.119	1.012
Cyclohexane												
Cyclohexanol	0.78	1	84.162	2.90	4.50	16.200	0.278	0.722	0.076	0.116	1.528	1.090
1,3-Cyclopentadiene dimer (molten)	0.95	1	100.160	3.45	0.15	16.200	0.009	0.991	0.076	0.078	1.023	1.003
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	0.69	2		4.55	0.25	16.200	0.015	0.985	0.076	0.080	1.055	1.005
Cymene (para-)												
Decahydronaphthalene	0.86	1		4.62	0.11	16.200	0.007	0.993	0.076	0.078	1.025	1.002
Decaldehyde (iso-)	0.89	1		4.76	0.10	16.200	0.006	0.994	0.076	0.078	1.023	1.002
Decaldehyde (n-)	0.83	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Decane	0.83	1		5.01	0.00							
Decene												
	0.74	1		4.80	0.12	16.200	0.007	0.993	0.076	0.078	1.028	1.002

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'W WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS • 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
Decyl alcohol (all isomers) (DECANOL)	DAK	0.83	1	158.170	5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
DECYL ALCOHOL (iso-)	ISA	0.83	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
DECYL ALCOHOL (n-)	DAN	0.83	1		5.30	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Decylbenzene (n-)	DBZ	0.86	1		7.52	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Detergent Alkylate													
Diacetone alcohol													
Dialkyl (C10-C14) Benzenes	DAA	0.97	1		4.00	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
Dialkyl (C7-C13) Phthalates	DAB												
Dibutyl Carbinol	DAH												
Dibutyl Phthalate (ortho-)	DPA	1.05	1	278.350	9.59	0.00							
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPT	0.98	2		4.55	0.25	16.200	0.015	0.985	0.076	0.080	1.055	1.005
Diethylbenzene	DEB	0.87	1		4.62	0.08	16.200	0.005	0.995	0.076	0.078	1.010	1.002
Diethylene Glycol	DEG	1.12	1	106.122	3.66	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Diethylene Glycol Butyl Ether	DME	0.95	1		5.50	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diethylene Glycol Butyl Ether Acetate	DEM												
Diethylene Glycol Dibutyl Ether	DIG												
Diethylene Glycol Diethyl Ether													
Diethylene Glycol Ethyl Ether	DGE												
Diethylene Glycol Ethyl Ether Acetate	DGA	0.99	1		4.62	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Diethylene Glycol Methyl Ether	DGM	1.03	1		4.14	0.03	16.200	0.002	0.998	0.076	0.077	1.006	1.001
Diethylene Glycol Methyl Ether Acetate	DGR												
Diethylene Glycol Phenyl Ether	DGP												
Diethylene Glycol Phthalate	DGL												
Di-(2-ethylhexyl)adipate	DEH												
Di-(2-ethylhexyl)phthalate	DIE												
Diethyl Phthalate	DPH												
Diglycidyl Ether of Bisphenol A	BDE												
Diheptyl Phthalate	DHP												
Dihexyl Phthalate	DHA												
Diisobutylcarbinol	DBC	0.81	1		4.97	0.09	16.200	0.006	0.994	0.076	0.078	1.022	1.002
Diisobutylene	DBL	0.72	1		3.86	2.00	16.200	0.123	0.877	0.076	0.103	1.353	1.040
Diisobutyl Ketone	DIK	0.81	1		4.90	0.16	16.200	0.010	0.990	0.076	0.079	1.039	1.003
Diisobutyl Phthalate	DIT												
Diisodecyl Phthalate	DID												
Diisononyl Adipate	DNY												
Diisononyl Phthalate	DIN												
Diisocetyl Phthalate	DIO												
Diisopropylbenzene (all isomers)	DIX	0.86	1		5.60	0.03	16.200	0.002	0.998	0.076	0.077	1.009	1.001
Diisopropyl Naphthalene	DII												
Dimethyl Adipate	DIA												
Dimethylbenzene													
Dimethyl Glutarate	DGT												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCO VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR
Dimethyl Phthalate	DTL	1.19	1		6.69	0.00							
Dimethyl Polysiloxane	DMP												
2,2-Dimethylpropane-1,3-diol	DDI												
Dimethyl Succinate	DSE												
Dinonyl Phthalate	DIF	0.97	1		14.40	0.01	16.200	0.001	0.999	0.076	0.077	1.008	1.000
Di(octylphenyl)amine													
Diocetyl Phthalate	DOP	0.98	1		13.47	0.00							
Dipentene	DPN	0.84	1		4.90	0.10	16.200	0.006	0.994	0.076	0.078	1.024	1.002
Diphenyl	DIL	0.99	1	154.212	5.31	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl, Diphenyl Ether mixture	DDO	1.07	1		5.86	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl Ether	DPE	1.07	1	170.211	5.87	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Diphenyl Ether, Biphenyl Ether mixture	DOB												
Dipropylene Glycol	DPG	1.03	1		4.63	0.07	16.200	0.004	0.996	0.076	0.077	1.016	1.001
Dipropylene Glycol Dibenzate	DGY												
Dipropylene Glycol Methyl Ether	DPY												
DISTILLATES: Flashed feed stocks	DPP	0.75	1		3.40	2.30	16.200	0.142	0.858	0.076	0.102	1.341	1.046
DISTILLATES: Straight run	DSR	0.73	1		3.40	2.30	16.200	0.142	0.858	0.076	0.102	1.341	1.046
Ditridecyl Phthalate	DTP												
Diundecyl Phthalate	DUP												
Dodecane (all isomers)	DOC			170.340	5.88								
Dodecanol	DDN			186.339	6.43								
Dodecene (all isomers)	DOZ	0.76	1	168.324	5.81	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
DODECENE	DOD	0.76	1		5.81	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
Dodecylbenzene	DDB	0.86			8.40	4.70	16.200	0.290	0.710	0.076	0.240	3.147	1.094
Dodecyl Phenol	DOL												
Drilling mud (low toxicity) (if flammable or combustible)/													
Epoxytated linear alcohols, C11-C15													
Ethane	ETH	0.47		30.070	1.04								
2-Ethoxyethanol	EEO	1.04											
2-Ethoxyethyl Acetate	EEA	1.04											
Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES													
Ethoxy Triglycol (crude)	ETG	1.02	1		6.14	0.00							
Ethyl Acetate	ETA	0.90	1	88.107	3.04	4.50	16.200	0.278	0.722	0.076	0.119	1.567	1.090
Ethyl Acetoacetate	EAA	1.03	1		4.48	0.20	16.200	0.012	0.988	0.076	0.079	1.043	1.004
Ethyl alcohol (ETHANOL)	EAL	0.79	1	46.050	1.60	3.50	16.200	0.216	0.784	0.076	0.086	1.130	1.070
Ethyl Amyl Ketone	EAK												
Ethyl Benzene	ETB	0.87	1	106.168	3.56	0.60	16.200	0.037	0.963	0.076	0.083	1.095	1.012
Ethyl Butanol	EBT	0.83	1		3.52	0.12	16.200	0.007	0.993	0.076	0.078	1.019	1.002
Ethyl Butyrate	EBR	0.88	1	116.160	4.00	1.00	16.200	0.062	0.938	0.076	0.090	1.185	1.020
Ethyl Cyclohexane	ECY	0.79	1		3.87	0.50	16.200	0.031	0.969	0.076	0.083	1.089	1.010
Ethylene	ETL			28.054	0.97								
Ethylene Carbonate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR AIR MIX GROWTH RATE VGR
Ethylene Glycol	EGL	1.13	1	62.069	2.21	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
Ethylene Glycol Acetate	EGO												
Ethylene Glycol Butyl Ether	EGM												
ETHYLENE GLYCOL BUTYL ETHER ACETATE	EMA	0.94	1		5.52	0.05	16.200	0.003	0.997	0.076	0.077	1.014	1.001
Ethylene Glycol Ether Acetate													
Ethylene Glycol Tert-Butyl Ether													
Ethylene Glycol Diacetate	EGY	1.10	1		5.03	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Ethylene Glycol Dibutyl Ether	EGB												
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGP												
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGA												
Ethylene Glycol Isopropyl Ether	EGI												
Ethylene Glycol Methyl Butyl Ether													
Ethylene Glycol Methyl Ether	EME	1.10	1		4.80	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Ethylene Glycol Methyl Ether Acetate	EGT												
Ethylene Glycol Phenyl Ether	EPE	1.10	1		4.80	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixtEDX													
Ethylene-Propylene Copolymer (in liquid mixtures)													
Ethyl-3-Ethoxypropionate	EEP												
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	0.82	1		4.41	0.17	16.200	0.010	0.990	0.076	0.079	1.036	1.003
2-Ethylhexanoic acid	EHO												
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHX	0.84	1	130.230	4.50	0.02	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID													
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE												
Ethyl Hexyl Tallate	EHT												
Ethyl Propionate	EPR	0.89	1		1.60	3.50	16.200	0.216	0.784	0.076	0.086	1.130	1.070
Ethyl Toluene	ETE	0.88	1		4.15	0.28	16.200	0.017	0.983	0.076	0.080	1.054	1.006
Fatty acid (saturated, C13 and above)													
Fatty acid Amides													
Formamide	FAM	1.13	1		1.55	0.10	16.200	0.006	0.994	0.076	0.076	1.003	1.002
Furfuryl Alcohol	FAL	1.13	1		3.40	0.05	16.200	0.003	0.997	0.076	0.077	1.007	1.001
Gas oil, cracked	GOC												
GASOLINE BLENDING STOCKS: Alkylates	GAK	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINE BLENDING STOCKS: Reformates	GRP	0.80	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Automotive (containing not over 4.23 grams lead per galGAT		0.74	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Aviation (containing not over 4.86 grams lead per gallonGAV		0.71	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Casinghead (natural)	GCS	0.67	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Polymer	GPL	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
GASOLINES: Straight run	GSR	0.75	1		3.40	12.50	16.200	0.772	0.228	0.076	0.217	2.852	1.250
Glycerine	GCR	1.26	1		3.17	0.00							
Glycerol, SEE GLYCERINE													
Glycerol Polyalkoxylate				92.095	3.18								
Glycerol Triacetate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPO AIR MIX GROW RATI VGR
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID													
Glycidyl Ester of Tridecyl Acetic acid													
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID													
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE													
Glycols, Resins and Solvents mixtures													
Glycol Triacetate, SEE GLYCERYL TRIACETATE													
Glyoxal solution (40% or less)													
Grease													
Heptadecane													
Heptane (all isomers) (METHYHEXANE)	HMX	0.68	1	100.120	3.45	2.50	16.200	0.154	0.846	0.076	0.105	1.378	1.050
HEPTANE (N-)	HPT	0.68	1		3.45	2.50	16.200	0.154	0.846	0.076	0.105	1.378	1.050
Heptanoic acid	HEP	0.92	1		4.49	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Heptanol (all isomers)	HTX	0.82	1		4.00	0.04	16.200	0.002	0.998	0.076	0.077	1.007	1.001
HEPTANOL	HTN	0.82	1		4.00	0.04	16.200	0.002	0.998	0.076	0.077	1.007	1.001
Heptene (all isomers)	HPX	0.70	2		3.40	2.90	16.200	0.179	0.821	0.076	0.109	1.430	1.058
HEPTENE (1-)	HTE	0.70	1		3.40	2.80	16.200	0.173	0.827	0.076	0.108	1.415	1.056
Heptyl Acetate	HPE	0.88	1		5.50	0.10	16.200	0.006	0.994	0.076	0.078	1.028	1.002
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR													
Hexaethylene Glycol													
Hexamethylene Glycol													
Hexamethylenetetramine solutions	HTS												
Hexane (all isomers)	HXS	0.66	1	86.110	3.00	7.00	16.200	0.432	0.568	0.076	0.142	1.864	1.140
HEXANE	HXA	0.66	1		3.00	7.00	16.200	0.432	0.568	0.076	0.142	1.864	1.140
Hexanoic acid	HXO	0.93	1		4.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Hexanol	HXN	0.82	1		3.52	1.00	16.200	0.062	0.938	0.076	0.088	1.156	1.020
Hexene (all isomers)	HEX	0.67	2	84.090	2.90	8.00	16.200	0.494	0.506	0.076	0.148	1.938	1.160
HEXENE (1-)	HXE	0.67	1		2.90	8.20	16.200	0.506	0.494	0.076	0.149	1.962	1.164
HEXENE (2-)	HXT	0.67	1		2.90	8.20	16.200	0.506	0.494	0.076	0.149	1.962	1.164
Hexyl Acetate	HAE												
Hexylene Glycol	HXG	0.92	4		1.10	0.01	16.200	0.001	0.999	0.076	0.076	1.000	1.000
Mog Grease, SEE LARD													
2-Hydroxy-4-(methylthio)butanoic acid	HBA												
HYDROCARBON 5-9 (MOVED TO SUB-O, NON TABLE 151, 6/24/95)	HPN												
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/													
Isophorone	IPH	0.93	1		4.75	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
JET FUELS: JP-1 (Kerosene)	JPO	0.80	1		4.50	0.14	16.200	0.009	0.991	0.076	0.078	1.030	1.003
JET FUELS: JP-3	JPT	0.80	1		4.50	8.51	16.200	0.525	0.475	0.076	0.216	2.839	1.170
JET FUELS: JP-4	JPF	0.81	1		4.00	3.40	16.200	0.210	0.790	0.076	0.124	1.630	1.068
JET FUELS: JP-5 (Kerosene, heavy)	JPV	0.82	1		4.00	0.10	16.200	0.006	0.994	0.076	0.078	1.019	1.002
JET FUELS: JP-8	JPE		1										
Kerosene	KRS	0.81	1		4.50	0.15	16.200	0.009	0.991	0.076	0.079	1.032	1.003
Lactic acid													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF VAPOR SGv	SATUR'D VAPOR PRESS ● 115 F Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115 (9)	VAPOR AIR MIX GROWTH RATE VGR (9)
Lard													
Latex, liquid synthetic, including: Styrene-Butadien rubber	LLS												
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer													
Magnesium Nonyl Phenol Sulfide													
Magnesium Sulfonate	MSE												
Maleic Anhydride Copolymer													
2-Mercaptobenzothiazol (in liquid mixtures)													
Methane	MTM			16.043	0.55								
3-Methoxy-1-Butanol													
3-Methoxybutyl Acetate	MOA												
1-Methoxy-2-Propyl Acetate	MPO												
Methoxy Trigylcol, SEE TRIETHYLENE GLYCOL METHYL ETHER	MTG												
Methyl Acetate	MTT	0.92	1	74.080	2.60	6.10	16.200	0.377	0.623	0.076	0.122	1.603	1.122
Methyl Acetoacetate	MAB												
Methyl alcohol (SEE METHANOL)	MAL	0.79	1		1.10	6.63	16.200	0.409	0.591	0.076	0.079	1.041	1.133
Methyl Amyl Acetate	MAC	0.86	1		4.97	0.33	16.200	0.020	0.980	0.076	0.082	1.081	1.007
Methyl Amyl alcohol	MAA	0.81	1		3.52	0.43	16.200	0.027	0.973	0.076	0.081	1.067	1.009
Methyl Amyl Ketone	MAK			114.188	3.94								
Methyl Butanol, SEE THE AMYL ALCOHOLS													
Methyl Butanol	MBL												
Methyl n-Butyl Ketone	MBK	0.81	1	100.160	3.50	0.97	16.200	0.060	0.940	0.076	0.088	1.150	1.019
Methyl Butynol	MBY												
Methyl Butyrate	MBU	0.90	1	102.134	3.53	1.26	16.200	0.078	0.922	0.076	0.091	1.197	1.025
Methyl Ethyl Ketone	MEK	0.80	1	72.107	2.50	4.50	16.200	0.278	0.722	0.076	0.108	1.417	1.090
Methyl Formal (DIMETHYL FORMAL)	MTF	0.86	1		2.60	15.42	16.200	0.952	0.048	0.076	0.192	2.523	1.308
Methyl Heptyl Ketone	MHK	0.83	1		4.90	0.06	16.200	0.004	0.996	0.076	0.077	1.014	1.001
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	MIC	0.84											
Methyl Isobutyl Ketone	MIK	0.80	1	100.160	3.45	1.15	16.200	0.071	0.929	0.076	0.089	1.174	1.023
3-Methyl-3-Methoxybutanol													
3-Methyl-3-Methoxybutyl Acetate													
1-Methyl Naphthalene	MNA	1.02	1		4.91	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Methyl Pentene													
2-METHYL-1-PENTENE	MPN	0.69	1		2.90	6.30	16.200	0.389	0.611	0.076	0.132	1.739	1.126
5-METHYL-1-PENTENE	MTN	0.67	1		2.90	8.49	16.200	0.524	0.476	0.076	0.152	1.996	1.170
N-Methyl-2-Pyrrolidone	MPY												
Methyl Tert-Butyl Ether (MTBE)	MBE	0.74	1		3.10	0.04	16.200	0.002	0.998	0.076	0.077	1.005	1.001
Metolachlor	MCO												
Mineral spirits	MNS	0.75	1		4.30	0.20	16.200	0.012	0.988	0.076	0.079	1.041	1.004
Myrcene	MRE	0.80	1		4.70	0.17	16.200	0.010	0.990	0.076	0.079	1.039	1.003
NAPHTHA: Aromatic (Having less than 10% Benzene)		0.85	1										
NAPHTHA: Cracking fraction		0.85	1										
NAPHTHA: Heavy		0.85	1										

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	CHRS	LIQUID SPECIF. GRAVITY	USCO VAP COL. SYST. CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (LBm/FT ³)	VAPOR-AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (LBm/FT ³)	VAPOR-AIR MIX SPECIFIC GRAVITY Wv-a, 115/Wa, 115	VAPOR-AIR MIX GROWTH RATE VGR (9)
NAPHTHA: Paraffinic		.6 -.85	1										
NAPHTHA: Petroleum	PTN	.6 -.85	1										
NAPHTHA: Solvent	NSV	0.87	1		3.50	0.20	16.200	0.012	0.988	0.076	0.078	1.031	1.004
NAPHTHA: Stoddard solvent	NSS	0.78	1		4.30	0.20	16.200	0.012	0.988	0.076	0.079	1.041	1.004
NAPHTHA: Varnish makers' and painters' (75#)	NVM	0.77	1		4.30	0.19	16.200	0.012	0.988	0.076	0.079	1.039	1.004
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solNFS	NTI	1.02											
Naphthenic acid	NAX	0.72	1	128.259	4.40	0.27	16.200	0.017	0.983	0.076	0.080	1.057	1.005
Nonane (all isomers)	NAN	0.72	1		4.40	0.27	16.200	0.017	0.983	0.076	0.080	1.057	1.005
NONANE	NNA												
Nonanoic acid (all isomers)													
Nonanoic, Tridecanoic acid mixture													
Nonene	NON	0.73	2	126.140	4.30	0.35	16.200	0.022	0.978	0.076	0.082	1.071	1.007
Nonyl alcohol (all isomers)	NNS	0.94	1	144.160	5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
NONYL ALCOHOL	NNN	0.94	1		5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
NONYL ALCOHOL (iso-)	NNI	0.94	1		5.00	0.10	16.200	0.006	0.994	0.076	0.078	1.025	1.002
Nonyl Methacrylate Monomer													
Nonyl Phenol	NNP	0.95	1		7.60	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Nonyl Phenol Poly(4-12)ethoxylates	NPE												
Nonyl Phenol Sulfide (90% or less)													
Noxious liquid, N.O.S. (17) ("Trade name," contains "principal components"), Category D (if f													
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appendix III													
Octadecane													
Octadecenoamide solution (Oleamide)	ODD												
Octane (all isomers)	OAX	0.70	1		3.90	0.79	16.200	0.049	0.951	0.076	0.087	1.141	1.016
OCTANE	OAN	0.70			3.90	0.79	16.200	0.049	0.951	0.076	0.087	1.141	1.016
Octanoic acid (all isomers)	OAA	0.91	1		5.00	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octanol (all isomers)	OCX	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
OCTANOL	OTA	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octene (all isomers)	OTX	0.72	2	122.200	3.90	0.90	16.200	0.056	0.944	0.076	0.088	1.161	1.018
OCTENE (1-)	OTE	0.72	1		3.86	1.00	16.200	0.062	0.938	0.076	0.090	1.177	1.020
Octyl Acetate													
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OCX	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
OCTYL ALCOHOL	IOA	0.83	1		4.48	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Octyl Aldehydes	OAL												
Octyl Decyl Adipate	ODA												
Octyl Epoxystallate	OET												
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE													
OIL, EDIBLE: Babassu	OBb												
OIL, EDIBLE: Beechnut													
OIL, EDIBLE: Castor	OCA												
OIL, EDIBLE: Cocoa butter													
OIL, EDIBLE: Coconut	OCC	0.95											

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP Vv, 115 (5)	PARTIAL VOLUME OF AIR Va, 115 (6)	AIR WEIGHT DENSITY Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wa, 115	VAPOR AIR MIX GROWTH RATE VGR (9)
OIL, EDIBLE: Cod liver													
OIL, EDIBLE: Corn	OCO	0.96											
OIL, EDIBLE: Cottonseed	OCs	0.96											
OIL, EDIBLE: Fish, N.O.S.													
OIL, EDIBLE: Grapeseed													
OIL, EDIBLE: Groundnut													
OIL, EDIBLE: Hazelnut													
OIL, EDIBLE: Lard	OLD												
OIL, EDIBLE: Maize													
OIL, EDIBLE: Mustard seed													
OIL, EDIBLE: Nutmeg Butter													
OIL, EDIBLE: Olive	OOL												
OIL, EDIBLE: Palm	OPM												
OIL, EDIBLE: Palm kernel	OPO												
OIL, EDIBLE: Peanut	OPN												
OIL, EDIBLE: Poppy													
OIL, EDIBLE: Raisin seed													
OIL, EDIBLE: Rice bran	ORP												
OIL, EDIBLE: Safflower	OSP												
OIL, EDIBLE: Salad													
OIL, EDIBLE: Sesame													
OIL, EDIBLE: Soya bean	OSB	0.96											
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED		0.95											
OIL, EDIBLE: Sunflower seed	OSN												
OIL, EDIBLE: Tucum	OTC												
OIL, EDIBLE: Vegetable, N.O.S.	OVQ	0.96											
OIL, EDIBLE: Walnut													
OIL, FUEL: No. 1 (Kerosene)	ODN												
OIL, FUEL: No. 1-D	OOD												
OIL, FUEL: No. 2	OTW	0.88	1		8.00	0.56	16.200	0.035	0.965	0.076	0.095	1.242	1.011
OIL, FUEL: No. 2-D	OTD												
OIL, FUEL: No. 4	OFR	0.90	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, FUEL: No. 5	OFV	0.94	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, FUEL: No. 6	OSX	0.95	1		3.40	0.15	16.200	0.009	0.991	0.076	0.078	1.022	1.003
OIL, MISC: Absorption	OAS												
OIL, MISC: Aliphatic													
OIL, MISC: Animal, N.O.S.													
OIL, MISC: Aromatic													
OIL, MISC: Aviation F2300													
OIL, MISC: Clarified	OCF												
OIL, MISC: Coal													
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO VAPOR SGV	SATUR'D VAPOR PRESS @ 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS @ 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP @ 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR @ 115 F Va, 115 (6)	AIR WEIGHT DENSITY @ 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY @ 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
OIL, MISC: Coconut oil, fatty acid													
OIL, MISC: Coconut oil, fatty acid Methyl Ester													
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTER													
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID													
OIL, MISC: Croton													
OIL, MISC: Crude													
OIL, MISC: Diesel													
OIL, MISC: Gas, low pour													
OIL, MISC: Gas, low sulfur													
OIL, MISC: Heartcut distillate													
OIL, MISC: Lanolin													
OIL, MISC: Linseed													
OIL, MISC: Lubricating													
OIL, MISC: Mineral													
OIL, MISC: Mineral seal													
OIL, MISC: Motor													
OIL, MISC: Neatsfoot													
OIL, MISC: Oiticica													
OIL, MISC: Palm oil, fatty acid Methyl Ester													
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID													
OIL, MISC: Penetrating													
OIL, MISC: Perilla													
OIL, MISC: Pilchard													
OIL, MISC: Pine													
OIL, MISC: Range													
OIL, MISC: Residual													
OIL, MISC: Resin													
OIL, MISC: Resinous petroleum													
OIL, MISC: Road													
OIL, MISC: Rosin													
OIL, MISC: Seal													
OIL, MISC: Soapstock													
OIL, MISC: Soya bean (epoxidized)													
OIL, MISC: Sperm													
OIL, MISC: Spindle													
OIL, MISC: Spray													
OIL, MISC: Tall													
OIL, MISC: Tall, fatty acid													
OIL, MISC: Tanner's													
OIL, MISC: Transformer													
OIL, MISC: Tung													
OIL, MISC: Turbine													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWC	SPECIF GRAV OF CARGO SGV	SATUR'D, VAPOR PRESS ● 115 F Pv, 115 (3) (15) (PSIA)	TOTAL VAP-AIR PRESS ● 115 F Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP ● 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ● 115 F Va, 115 (6)	AIR WEIGHT DENSITY ● 115 F Wa, 115 (7) (LBm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ● 115 F Wv-a, 115 (8) (LBm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115 (9)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115 (9)
OIL, MISC: Whale												
OIL, MISC: White (mineral)												
OIL, MISC: Wood												
alpha-Olefins (C13 - C18)												
Olefins (C13 and above, all isomers)												
Oleic acid												
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)												
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLUTION												
Palm Stearin												
n-Paraffins (C10 - C20)												
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)												
Pentaethylene Glycol												
Pentaethylenesamine												
Pentane (all isomers)												
PENTANE (iso-)												
PENTANE (n-)												
Pentanoic acid												
Pentene (all isomers)												
PENTENE (1-)												
Petrolatum												
1-Phenyl-1-Xylyl Ethane												
Phosphosulfurized Bicyclic Terpene												
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES												
Pinene												
Polyalkenyl Succinic Anhydride Amine												
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtur												
Polyalkylene Oxide Polyol												
Polyamine, Amide mixture												
Polybutadiene, Hydroxyl terminated												
Polybutene												
Polydimethylsiloxane												
Polyethylene Glycol												
Polyethylene Glycol Dimethyl Ether												
Polyglycerol												
Polyisobutylene, SEE POLYBUTENE												
Polymerized Esters												
Poly(20)oxyethylene Sorbitan Monooleate												
Polypropylene												
Polypropylene Glycol												
Polypropylene Glycol Methyl Ether												
Polysiloxane												
Polystyrene Diakyl Maleate												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MWc	SPECIF GRAV OF CARGO VAPOR SGv	SATUR'D VAPOR PRESS Pv, 115 (3) (PSIA)	TOTAL VAP-AIR PRESS Pt, 115 (4) (PSIA)	PARTIAL VOLUME OF VAP Vv, 115 (5)	PARTIAL VOLUME OF AIR Va, 115 (6)	AIR WEIGHT DENSITY Wa, 115 (7) (Lbm/ FT^3)	VAPOR- AIR MIX WEIGHT DENSITY Wv-a, 115 (8) (Lbm/ FT^3)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115	VAPOR- AIR MIX GROWTH RATE VGR (9)
Potassium Oleate	POE												
Propane	PRP	1.04		44.094	1.52								
n-Propoxypropanol	PPX												
Propyl Acetate (iso-)	IAC	0.89	1		3.52	1.80	16.200	0.111	0.889	0.076	0.097	1.280	1.036
Propyl Acetate (n-)	PAT	0.80	1		3.52	1.85	16.200	0.114	0.886	0.076	0.098	1.288	1.037
Propyl alcohol (iso-)	IPA	0.79	1		2.07	3.00	16.200	0.185	0.815	0.076	0.091	1.198	1.060
Propyl alcohol (n-)	PAL	0.80	1		2.07	1.20	16.200	0.074	0.926	0.076	0.082	1.079	1.024
Propylbenzene (n-)	PBZ	0.86	1	60.060	4.14	0.20	16.200	0.012	0.988	0.076	0.079	1.039	1.004
iso-Propylcyclohexane	IPX	0.80	1	126.243	4.35	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Propylene	PPL	1.04		42.081	1.45								
Propylene-Butylene Copolymer	PBP												
Propylene Dimer	PDR												
Propylene Glycol (1,2-PROPANDIOL)	PPG	1.04	1	76.060	2.62	0.01	16.200	0.001	0.999	0.076	0.076	1.001	1.000
Propylene Glycol Monoalkyl Ether	PGE												
Propylene Glycol Ethyl Ether	PGY												
Propylene Glycol Methyl Ether	PME	0.92	1		3.11	0.70	16.200	0.043	0.957	0.076	0.083	1.091	1.014
Propylene Polymer (in liquid mixtures)													
Propylene Tetramer	PTT	0.29		156.310	1.00	0.02	16.200	0.001	0.999	0.076	0.076	1.000	1.000
Propylene Trimer	PTR												
Pseudocumene, SEE TRIMETHYLBENZENES													
Rum													
Sodium Acetate, Glycol, water solutions													
Sodium Acetate solution	SAN												
Sodium Benzoate solution	SBN												
Sodium Sulfonate													
Stearic acid	SRA												
Stearyl alcohol (Octadecanol)													
Sulfolane	SFL	1.26	1		4.14	0.01	16.200	0.001	0.999	0.076	0.076	1.002	1.000
Tallow	TLO												
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)													
Tallow fatty acid	TFD												
Tallow Alkyl Nitrile													
Tetradecanol	TTN	0.82	1		7.39	0.00							
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTD	0.77	1		6.77	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Tetradecylbenzene	TBD												
Tetraethylene Glycol	TTG	1.12	1		6.70	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
Tetrahydronaphthalene	THN	0.97	1		4.56	0.04	16.200	0.002	0.998	0.076	0.077	1.009	1.001
Tetrapropylbenzene, SEE ALKYL(C9-C17) BENZENES													
Toluene	TOL	0.87	1	92.141	3.14	1.50	16.200	0.093	0.907	0.076	0.091	1.198	1.030
Triaryphosphate													
Tributyl Phosphate	TBP												
Tricresyl Phosphate (less than 1% of the ortho isomer)	TCP	1.16	1		12.69	0.01	16.200	0.001	0.999	0.076	0.077	1.007	1.000

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H I S	LIQUID SPECIF. GRAVITY (1)	USCG VAP COL. SYST CAT. (13)	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO VAPOR SGv (2)	SATUR'D VAPOR PRESS ° 115 F (3)	TOTAL VAP-AIR PRESS ° 115 F Pt, 115 (4)	PARTIAL VOLUME OF VAP ° 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR ° 115 F Va, 115 (6)	AIR WEIGHT DENSITY ° 115 F Wa, 115 (7) (Lbm/ FT ³)	VAPOR- AIR MIX WEIGHT DENSITY ° 115 F Wv-a, 115 (8) (Lbm/ FT ³)	VAPOR- AIR MIX SPECIFIC GRAVITY Wa, 115 (9)	VAPOR AIR MIX GROWTH RATE VGR (9)
Tridecane	TRD	0.76	1		6.40	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
Tridecanoic acid													
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TDN	0.85	1		6.91	0.01	16.200	0.001	0.999	0.076	0.076	1.004	1.000
1-Tridecene	TDC	0.77	1		6.29	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Tridecylbenzene	TRB												
Triethylbenzene	TEB	0.86	1		5.60	0.02	16.200	0.001	0.999	0.076	0.077	1.006	1.000
Triethylene Glycol	TEG	1.12	1		5.17	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Triethylene Glycol Butyl Ether													
Triethylene Glycol Butyl Ether mixture		1.04											
Triethylene Glycol di-(2-ethylbutyrate)	TGD												
Triethylene Glycol Ether mixture													
Triethylene Glycol Ethyl Ether	TGE												
Triethylene Glycol Methyl Ether													
Triethyl Phosphate	TPS	1.07			6.28	0.02	16.200	0.001	0.999	0.076	0.077	1.007	1.000
Triisooctyl Trimellitate													
Triisopropanolamine	TIP	1.02	8	191.270	6.60								
Trimethylbenzenes (all isomers)	TRE	0.89	1		4.20	0.14	16.200	0.009	0.991	0.076	0.078	1.028	1.001
TRIMETHYL BENZENE (1,2,5-)	TMB	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
TRIMETHYL BENZENE (1,2,3-)	TMD	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TME	0.89	1		4.14	0.14	16.200	0.009	0.991	0.076	0.078	1.027	1.001
Trimethylol Propane Polyethoxylate	TPR												
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate													
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	TMP												
Tripropylene, SEE PROPYLENE TRIMER													
Tripropylene Glycol	TGC												
Tripropylene Glycol Methyl Ether	TGM												
Trixylenyl Phosphate	TRP	1.16	1		14.20	0.00							
Turpentine	TPT												
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
Undecanol													
Undecene (1-)	UDC	0.75	1		5.32	0.05	16.200	0.003	0.997	0.076	0.077	1.013	1.001
Undecyl alcohol	UND	0.84	1		5.94	0.01	16.200	0.001	0.999	0.076	0.076	1.003	1.000
Undecylbenzene	UDB												
Vinyl Acetate-fumarate Copolymer													
Waxes:	WAX												
WAXES: Candelilla													
WAXES: Carnauba	WAX, WCA												
WAXES: Paraffin	WAX, WPF												
WAXES: Petroleum													
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
White spirit (low (15 - 20%) aromatic)	WSL												
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY,
SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	C H R I S	LIQUID SPECIF. GRAVITY	USCG VAP COL. SYST CAT.	MOLEC'R WEIGHT OF CARGO MMc (1)	SPECIF GRAV OF CARGO VAPOR SGv (2)	SATUR'D VAPOR PRESS • 115 F Pv, 115 (3)	TOTAL VAP-AIR PRESS • 115 F Pc, 115 (4)	PARTIAL VOLUME OF VAP • 115 F Vv, 115 (5)	PARTIAL VOLUME OF AIR • 115 F Va, 115 (6)	AIR WEIGHT DENSITY • 115 F Wa, 115 (7)	VAPOR- AIR MIX WEIGHT DENSITY • 115 F Wv-a, 115 (8)	VAPOR- AIR MIX SPECIFIC GRAVITY Wv-a, 115/ Wa, 115 (9)	VAPOR AIR MIX GROWTH RATE VGR (10)
Wool grease													
Xylenes (ortho-, meta-, para-)	XLX	0.89	1	106.168	3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENE (M-)	XLH	0.87	1		3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENE (O-)	XLO	0.89	1		3.66	0.40	16.200	0.025	0.975	0.076	0.081	1.066	1.009
XYLENE (P-)	XLP	0.86	1		3.66	0.51	16.200	0.031	0.969	0.076	0.083	1.084	1.010
XYLENOL	XYL	1.01	1		3.66	0.10	16.200	0.006	0.994	0.076	0.077	1.016	1.002
Zinc Dialkyldithiophosphate													

E-2-u

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: VAPOR-AIR MIX DENSITY, SPECIFIC GRAVITY, & VAPOR GROWTH RATE

CARGO	LIQUID SPECIF. GRAVITY (1)	USCO VAP COL. SYST CAT. (13)	MOLEC'R WEIGHT OF CARGO MWC (1)	SPECIF. GRAV OF CARGO VAPOR SGV (2)	SATUR'D VAPOR PRESS @ 115 F (3)	TOTAL VAP-AIR PRESS @ 115 F (4)	PARTIAL VOLUME OF VAP @ 115 F (5)	PARTIAL VOLUME OF AIR @ 115 F (6)	AIR WEIGHT DENSITY @ 115 F (7)	VAPOR-AIR MIX WEIGHT DENSITY @ 115 F (8)	VAPOR-AIR MIX SPECIFIC GRAVITY @ 115 F (9)	VAPOR-AIR MIX GRAVITY @ 115 F (10)
46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1												
AROMATIC RESIN OIL 60	ARS	1.02	1	1.00	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.00
AROMATIC RESIN OIL 80	ARS	1.02	1	1.00	0.15	16.200	0.009	0.991	0.076	0.076	1.000	1.00
AROMATIC RESIN OILS			8									

E-2-v

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS				PIPE SECT II: LOSS				THRU	
	LIQUID	AIR	FM REMOTE TK TO PV		FM REMOTE TK TO PV		FM REMOTE TK TO PV		FM REMOTE TK TO PV		PIP'G	PRESS
	TRANSF	MIX	REQUIRED AIR		PRESS		TOTAL		TOTAL		REMOTE	REMOTE
	RATE	FLOW	EQUIVALENT		ACROSS		LOSS		LOSS		TANK	TANK
	(ML/TR)	RATE	-----		PV	Htot I		Htot II		GRAND	TO P/V	REMOTE
	Q1	Qv-a	Qa	VALVE	PV					TOTAL	* Htot	Ploss
	(10)	(11)	(12)							LOSS	Ploss	Ptk
	(BBL/	(BBL/	(BBL/	(FT^3/						I+II		
	HR)	HR)	HR)	HR)	(PSI)	(FT)		(FT)		(FT)	(PSI)	(PSI)

46 CFR SUBCHAPT 0, TABLE 151

m-3-p

ACETIC ACID	AAC	5,000	5092	5244	29446	1.635	*****	88.7	*****	0.0	88.7	0.050	1.68	OK
ACETIC ANHYDRIDE	ACA	5,000	5040	5193	29150	1.635	*****	87.0	*****	0.0	87.0	0.049	1.68	OK
ACETONITRILE	ATN	5,000	5003	5005	20101	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
ACRYLIC ACID	ACR	5,000	5040	5131	20010	1.635	*****	87.1	*****	0.0	87.1	0.048	1.68	OK
ACRYLONITRILE	ACN	5,000	5500	6142	34403	1.665	*****	102.3	*****	0.0	102.3	0.067	1.73	OK
ADIPONITRILE	ADN	5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
ALUMINUM SULFATE SOLUTION	ASX													
AMINOETHYLETHANOLAMINE	ASE	5,000	5001	5005	20101	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX													
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH													
ANTHRACENE OIL (COAL TAR FRACTION)	AHO													
BENZENE	BNZ	5,000	6250	7655	42970	1.725	*****	130.3	*****	0.0	130.3	0.103	1.83	OK
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BNSHA	5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
iso-BUTYL ACRYLATE	BAI	5,000	5060	5371	30156	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK
n-BUTYL ACRYLATE	BTC	5,000	5040	5247	29462	1.635	*****	86.9	*****	0.0	86.9	0.050	1.68	OK
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	5,000	5060	5371	30156	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK
BUTYL METHACRYLATE	BMH	5,000	5029	5202	29205	1.635	*****	86.6	*****	0.0	86.6	0.049	1.68	OK
iso-BUTYRALDEHYDE	BAD	5,000	5780	7585	42509	1.725	*****	111.1	*****	0.0	111.1	0.101	1.83	OK
n-BUTYRALDEHYDE	BTR	5,000	5780	7585	42509	1.725	*****	111.1	*****	0.0	111.1	0.101	1.83	OK
BUTYRALDEHYDES (CRUDE)	BFA	5,000	5800	7631	42043	1.725	*****	111.9	*****	0.0	111.9	0.102	1.83	OK
BUTYRALDEHYDE (ISO-, N-)	BAE	5,000	5800	7631	42043	1.725	*****	111.9	*****	0.0	111.9	0.102	1.83	OK
CAMPHOR OIL (LIGHT)	CPO													
CARBON TETRACHLORIDE	CBT													
CAUSTIC POTASH SOLUTION	CPS													
CAUSTIC SODA SOLUTION	CSS													
CHLOROBENZENE	CRB	5,000	5080	5429	30483	1.665	*****	88.1	*****	0.0	88.1	0.053	1.72	OK
CHLOROFORM	CRF													
CHLOROSULFONIC ACID	CSA													
COAL TAR NAPHTHA SOLVENT	NCT	5,000	5020	5102	20645	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	OK
CREOSOTE (COAL TAR)	CCT	5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
CREOSOTE (WOOD)	CWD	5,000	5001	5005	20103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
CRESOLS (ALL ISOMERS)	CRS	5,000	5006	5031	20240	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS													
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CFP	5,000	5005	5026	20219	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
CRESYLATE SPENT CAUSTIC	CSC													
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX													
CROTONALDEHYDE	CTA	5,000	5200	5635	31636	1.665	*****	92.3	*****	0.0	92.3	0.057	1.72	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE, TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		PRESS DROPT THRU PIP'G REMO TANK	PRESS @ REMO TANK	Pc MD
		LIQUID TRANSF RATE (MLTR) (10) (BBL/ HR)	AIR MIX FLOW RATE (11) (BBL/ HR)			TOTAL LOSS Htot I (FT)	TOTAL LOSS Htot II (FT)	GRAND TOTAL LOSS Htot = I+II (FT)	TO P/V Wv-a, 11 Ploss (PSI)			
		Q1 (10) (BBL/ HR)	Qv-a (11) (BBL/ HR)	Qa (12) (BBL/ HR)	(FT^3/ HR)							
CYCLOHEXANONE	***											
CYCLOHEXYLAMINE	CCH	5,000	5002	5009	28126	1.635	86.0	0.0	86.0	0.046	1.68	OK
DECYL ACRYLATE (iso-, n-)	CHA	5,000	5062	5291	29709	1.635	87.6	0.0	87.6	0.051	1.69	OK
DICHLOROBENZENE (ALL ISOMERS)	DAT	5,000	5001	5011	28134	1.635	86.0	0.0	86.0	0.046	1.68	OK
1,1-DICHLOROETHANE	DBX	5,000	5010	5073	28481	1.635	86.1	0.0	86.1	0.047	1.68	OK
2,2-DICHLOROETHYL ETHER	DCH	5,000	5990	9419	52886	1.785	117.3	0.0	117.3	0.153	1.94	OK
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DEE	5,000	5004	5028	28231	1.635	86.1	0.0	86.1	0.046	1.68	OK
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DCM											
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DDE											
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DAD											
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DDT											
1,3-DICHLOROPROPENE	DPX	5,000	5630	8213	46110	1.755	104.5	0.0	104.5	0.118	1.87	OK
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DPU	5,000	5550	7778	43673	1.725	102.0	0.0	102.0	0.106	1.83	OK
2,2-DICHLOROPROPIONIC ACID	DMX	5,000	5630	8213	46110	1.755	104.5	0.0	104.5	0.118	1.87	OK
DIETHANOLAMINE	DCN											
DIETHYLAMINE	DEA	5,000	5001	5005	28102	1.635	86.0	0.0	86.0	0.046	1.68	OK
DIETHYLENETRIAMINE	DEN	5,000	5100	5331	29931	1.635	88.9	0.0	88.9	0.051	1.69	OK
DIETHYL ETHER, SEE ETHYL ETHER	DET	5,000	5004	5019	28182	1.635	86.1	0.0	86.1	0.046	1.68	OK
DIISOBUTYLAMINE	DEH											
DIISOPROPANOLAMINE	DBU	5,000	5046	5288	29691	1.635	87.0	0.0	87.0	0.051	1.69	OK
DIISOPROPYLAMINE	DIP	5,000	5001	5007	28110	1.635	86.0	0.0	86.0	0.046	1.68	OK
N,N-DIMETHYLACETAMIDE	DIA	5,000	5370	6731	37791	1.695	96.8	0.0	96.8	0.080	1.78	OK
DIMETHYLETHANOLAMINE	DAC	5,000	5020	5082	28532	1.635	86.5	0.0	86.5	0.047	1.68	OK
DIMETHYLFORMAMIDE	DMD	5,000	5050	5206	29229	1.635	87.3	0.0	87.3	0.049	1.68	OK
1,4-DIOXANE	DMP	5,000	5030	5100	28634	1.635	86.8	0.0	86.8	0.047	1.68	OK
DI-N-PROPYLAMINE	DOX	5,000	5184	5751	32288	1.665	91.3	0.0	91.3	0.059	1.72	OK
ETHANOLAMINE	DNA	5,000	5150	5715	32088	1.665	90.1	0.0	90.1	0.059	1.72	OK
ETHYL ACRYLATE	MEA	5,000	5003	5008	28119	1.635	86.0	0.0	86.0	0.046	1.68	OK
ETHYLAMINE SOLUTION (72% OR LESS)	EAC	5,000	5200	5949	33399	1.665	91.4	0.0	91.4	0.063	1.73	OK
N-ETHYLBUTYLAMINE	EAN	5,000	6550	8117	45576	1.755	142.7	0.0	142.7	0.118	1.87	OK
N-ETHYLCYCLOHEXYLAMINE	EBA	5,000	5120	5574	31296	1.665	89.5	0.0	89.5	0.056	1.72	OK
ETHYLENE CYANOHYDRIN	ECC	5,000	5050	5308	29805	1.635	87.1	0.0	87.1	0.051	1.69	OK
ETHYLENEDIAMINE	ETC	5,000	5001	5003	28092	1.635	86.0	0.0	86.0	0.046	1.68	OK
ETHYLENE DIBROMIDE	EDA	5,000	5090	5243	29439	1.635	88.7	0.0	88.7	0.050	1.68	OK
ETHYLENE DICHLORIDE	EDB											
ETHYLENE GLYCOL PROPYL ETHER	EDC	5,000	5400	6825	38322	1.695	97.5	0.0	97.5	0.082	1.78	OK
2-ETHYLBUTYL ACRYLATE	EOP	5,000	8060	5404	30344	1.665	87.4	0.0	87.4	0.053	1.72	OK
ETHYLIDENE NORBORNENE	EAI	5,000	5002	5019	28177	1.635	86.0	0.0	86.0	0.046	1.68	OK
ETHYL METHACRYLATE	ENB	5,000	5033	5190	29137	1.635	86.7	0.0	86.7	0.049	1.68	OK
2-ETHYL-3-PROPYLACROLEIN	ETM	5,000	5100	5544	31125	1.665	88.8	0.0	88.8	0.055	1.72	OK
FERRIC CHLORIDE SOLUTIONS	EPA	5,000	5012	5074	28488	1.635	86.2	0.0	86.2	0.047	1.68	OK
FORMALDEHYDE SOLUTION (37% TO 50%)	FCS											
	FMS	5,000	5015	5016	28162	1.635	86.4	0.0	86.4	0.046	1.68	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE • REMOTE TANK FOR "VGR" • MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS Htot = I+II (FT)	PRESS DROPTHRU PIP'G THRU REMOTE TANK TO P/V Mv-a,11 • Htot Ploss (PSI)	PRESS • REMOTE TANK PV • Ploss Ptk (PSI)						
		LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)			TOTAL LOSS HtotI (FT)		TOTAL LOSS HtotII (FT)										
FORMIC ACID	...	FMA 5,000	5210	5409	30369	1.665	*****	92.7	*****	0.0	92.7	0.053	1.72	C				
FURFURAL	...	FPA 5,000	5015	5068	20457	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68	C				
GLUTARALDEHYDE SOLUTION (50% OR LESS)	...	GTA 5,000	5001	5006	20105	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	O				
HEXAMETHYLENEDIAMINE SOLUTION	...	HMI 5,000	5050	5050	20354	1.635	*****	87.6	*****	0.0	87.6	0.046	1.68	O				
HEXAMETHYLENIMINE	...	HCS 5,000	5050	5050	20354	1.635	*****	87.6	*****	0.0	87.6	0.046	1.68	O				
HYDROCHLORIC ACID SPENT (15% OR LESS)	...	IPR 5,000	7300	12467	69999	1.890	*****	172.3	*****	0.0	172.3	0.266	2.16	O				
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	...	MSO 5,000	5067	5323	29884	1.635	*****	87.7	*****	0.0	87.7	0.051	1.69	O				
ISOPRENE	...	MAM 5,000	5410	6640	37279	1.695	*****	98.2	*****	0.0	98.2	0.078	1.77	O				
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: KPL	...	MCK 5,000	5015	5013	20148	1.635	*****	86.4	*****	0.0	86.4	0.046	1.68	O				
MESITYL OXIDE	...	MDE 5,000	5010	5058	20397	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	O				
METHYL ACRYLATE	...	MEP 5,000	5016	5094	20602	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	O				
METHYLCYCLOPENTADIENE DIMER	...	MM 5,000	5202	5944	33372	1.665	*****	91.5	*****	0.0	91.5	0.063	1.73	O				
METHYL DIETHANOLAMINE	...	MPR 5,000	5050	5219	29301	1.635	*****	87.3	*****	0.0	87.3	0.049	1.68	O				
2-METHYL-5-ETHYLPYRIDINE	...	MSR 5,000	5040	5228	29354	1.635	*****	86.9	*****	0.0	86.9	0.049	1.68	O				
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	...	MPL 5,000	5080	5325	29898	1.635	*****	88.2	*****	0.0	88.2	0.051	1.69	O				
METHYL METHACRYLATE	...	NPM 5,000	5105	5435	30516	1.665	*****	89.0	*****	0.0	89.0	0.053	1.72	OK				
2-METHYLPYRIDINE	...	ONE 5,000	5031	5266	29568	1.635	*****	86.6	*****	0.0	86.6	0.050	1.69	OK				
alpha-METHYLSTYRENE	...	OLM 5,000	5001	5004	28094	1.635	*****	86.0	*****	0.0	86.0	0.045	1.68	OK				
MORPHOLINE	...	PCE 5,000	6706	10458	58720	1.815	*****	146.7	*****	0.0	146.7	0.189	2.00	OK				
NITRIC ACID (70% OR LESS)	...	PER 5,000	5001	5004	28094	1.635	*****	86.0	*****	0.0	86.0	0.045	1.68	OK				
NITROPROPANE (-1, OR -2)	...	PAC 5,000	5001	5007	20114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
OCTYL NITRATES (ALL ISOMERS)	...	PEB 5,000	5001	5007	20114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
OLEUM	...	PPI 5,000	5001	5007	20114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK				
PENTACHLOROETHANE	...	MPA 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
1, 3-PENTADIENE	...	PAX 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	...	PNA 5,000	5030	5102	20647	1.635	*****	86.8	*****	0.0	86.8	0.047	1.68	OK				
PHOSPHORIC ACID	...	IPP 5,000	7342	11619	65233	1.890	*****	175.0	*****	0.0	175.0	0.232	2.12	OK				
POLYETHYLENE POLYAMINES	...	IPE 5,000	5664	8060	45251	1.755	*****	106.0	*****	0.0	106.0	0.113	1.87	OK				
POLYMETHYLENE POLYPHENYL ISOCYANATE	...	PRD 5,000	5130	5473	30727	1.665	*****	89.8	*****	0.0	89.8	0.054	1.72	OK				
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)	...	SAU 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
iso-PROPANOLAMINE	...	SDD 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
PROPANOLAMINE (iso-, n-)	...	SDI 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
PROPIONIC ACID	...	SHP 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
iso-PROPYLAMINE	...	SSH 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
iso-PROPYL ETHER	...	SAU 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
PYRIDINE	...	SDD 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM ALUMINATE SOLUTION	...	SDI 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM CHLORATE SOLUTION (50% OR LESS)	...	SHP 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM DICHROMATE SOL'N (70% OR LESS)	...	SSH 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)	...	SAU 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)	...	SDD 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	...	SDI 5,000	5008	5028	20228	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK				

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-					PIPE SECT I: LOSS	PIPE SECT II: LOSS	DROP		PRESS @ REMOTE TANK PV . F Ploss Ptk	
	LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV	FM REMOTE TK TO PV	TANK	THRU			
	TRANSF	MIX	EQUIVALENT		ACROSS			PIP'G	PRESS			
	RATE	FLOW			PV			REMOTE	REMOTE			
I	(MLTR)	RATE			PV			TANK	TANK			
S	Q1	Qv-a	Qa		VALVE		TOTAL	TOTAL	GRAND	TO P/V		
	(10)	(11)	(12)		PV		LOSS	LOSS	TOTAL	Wv-a,11	PV . F	
	(BBL/ HR)	(BBL/ HR)	(BBL/ HR)	(FT ³ / HR)	(PSI)		HtotI	HtotII	LOSS	Htot	Ploss	
							(FT)	(FT)	I+II	(PSI)	(PSI)	
...												
SSI												
SSJ												
STS												
STY 5,000		5040	5199	29191	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60
SFA 5,000		5001	5005	28100	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
SAC 5,000		5001	5000	28070	1.635	*****	86.0	*****	0.0	86.0	0.045	1.60
TEC												
TTP 5,000		5000	5001	28079	1.635	*****	86.0	*****	0.0	86.0	0.045	1.60
THP 5,000		5050	6365	35735	1.695	*****	115.7	*****	0.0	115.7	0.072	1.77
TCM 5,000		5102	5651	31727	1.665	*****	88.4	*****	0.0	88.4	0.057	1.72
TCL 5,000		5346	7067	39679	1.695	*****	95.3	*****	0.0	95.3	0.080	1.70
TCN 5,000		5015	5121	28751	1.635	*****	86.3	*****	0.0	86.3	0.048	1.60
TEA 5,000		5001	5007	28115	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
TEN 5,000		5250	6177	34681	1.665	*****	93.2	*****	0.0	93.2	0.068	1.73
TET 5,000		5001	5007	28114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
UAS												
	5,000	5500	6995	39272	1.695	*****	101.2	*****	0.0	101.2	0.087	1.78
IVA 5,000		5500	6995	39272	1.695	*****	101.2	*****	0.0	101.2	0.087	1.78
VAL 5,000		5001	5009	28122	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
VBL												
VAM 5,000		5580	7287	40913	1.725	*****	103.8	*****	0.0	103.8	0.094	1.82
VNT 5,000		5012	5069	28460	1.635	*****	86.2	*****	0.0	86.2	0.047	1.60

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR- LIQUID, AIR TRANSF MIX RATE FLOW (MLTR) RATE					REQUIRED AIR EQUIVALENT (FT ³ /HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V Mv-a,11 + Htot Ploss (PSI)		PRESS @ REMOTE TANK PV + Ploss Ptk (PSI)	
		Q1 (10) (BBL/ HR)	Qv-a (11) (BBL/ HR)	Qa (12) (BBL/ HR)	FM REMOTE TK TO PV	TOTAL LOSS Htot I (FT)			TOTAL LOSS Htot II (FT)	FM REMOTE TK TO PV	TOTAL LOSS Htot II (FT)						
46 CFR SUBCHAPT O BUT NOT TABLE 151																	
1,1-DICHLOROPROPANE		DPB 5,000	5630	8213	46110	1.755	*****	104.5	*****	0.0	104.5	0.110	1.87	OK			
1,1,1-TRICHLOROETHANE		DPP 5,000	5260	6227	34960	1.665	*****	93.2	*****	0.0	93.2	0.069	1.73	OK			
1,2-DICHLOROPROPANE		DPC 5,000	5380	6974	39156	1.695	*****	96.5	*****	0.0	96.5	0.086	1.78	OK			
1,3-CYCLOPENTADIENE		MHB 5,000	5114	5445	30573	1.665	*****	89.3	*****	0.0	89.3	0.054	1.72	OK			
1,3-DICHLOROPROPANE		DDA															
2-METHYL-2-HYDROXY-3-BUTYNE		PNT															
2,4-DICHLOROPHENOXACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70%)		AEP															
3-PENTENITRILE		5,000	6250	7655	42970	1.725	*****	130.3	*****	0.0	130.3	0.103	1.83	OK			
AEROTHEME TT (1,1,1-TRICHLOROETHANE)		BSC 5,000	5000	5001	28070	1.635	*****	86.0	*****	0.0	86.0	0.045	1.60	OK			
ALKYLBENZENE		BZE 5,000	5002	5015	28157	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
AMINOMETHYLPYPERAZINE		BCL 5,000	5009	5056	28385	1.635	*****	86.2	*****	0.0	86.2	0.046	1.60	OK			
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		BTE 5,000	5040	5253	29495	1.635	*****	86.9	*****	0.0	86.9	0.050	1.60	OK			
BENZENE SULFONYL CHLORIDE		BTO 5,000	5910	8037	45125	1.755	*****	115.9	*****	0.0	115.9	0.113	1.87	OK			
BENZYL ACETATE		BRA 5,000	5007	5029	28234	1.635	*****	86.2	*****	0.0	86.2	0.046	1.60	OK			
BENZYL CHLORIDE (STABILIZED)		CBO 5,000	5006	5027	28224	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60	OK			
BUTANOL		CHM 5,000	5001	5005	28099	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
BUTYL ETHER (n-)		CFM 5,000	5002	5010	28131	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
BUTYLENE OXIDE (1,2-)		CTM 5,000	5032	5198	29186	1.635	*****	86.7	*****	0.0	86.7	0.049	1.60	OK			
BUTYRIC ACID		CTO 5,000	5032	5198	29186	1.635	*****	86.7	*****	0.0	86.7	0.049	1.60	OK			
CARBOLIC ACID		CRN 5,000	5009	5056	28385	1.635	*****	86.2	*****	0.0	86.2	0.046	1.60	OK			
CHLOROACETIC ACID (80% OR LESS)		CHI 5,000	5053	5327	29907	1.635	*****	87.2	*****	0.0	87.2	0.051	1.69	OK			
CHLOROPROPIONIC ACID (2- OR 3-)		CCW 5,000	5001	5005	28103	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
CHLOROTOLUENE (m-)		CRX 5,000	5010	5010	28130	1.635	*****	86.3	*****	0.0	86.3	0.046	1.60	OK			
CHLOROTOLUENE (o-)		CYE 5,000	5140	5646	31700	1.665	*****	89.7	*****	0.0	89.7	0.057	1.72	OK			
CHLOROTOLUENE (p)		CYX 5,000	5100	5462	30666	1.665	*****	88.8	*****	0.0	88.8	0.054	1.72	OK			
CHLOROTOLUENES (MIXED ISOMERS)		CYC 5,000	5001	5007	28113	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
CRESOTE (ALL ISOMERS)		CSB 5,000	5450	7681	43124	1.725	*****	98.3	*****	0.0	98.3	0.103	1.83	OK			
CRESYLIC ACID TAR		CYP 5,000	6315	9230	51825	1.785	*****	131.0	*****	0.0	131.0	0.148	1.93	OK			
CYCLOHEPTANE		DCO															
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE		DCI 5,000	5006	5051	28361	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60	OK			
CYCLOHEXYL ACETATE		DSU 5,000	5001	5008	28116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK			
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE																	
CYCLOPENTANE																	
DECAHOIC ACID																	
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)																	
DICHLOROISOPROPYL ETHER (2,2'-)																	
DICHLOROPROPANE																	
DICHLOROPROPENE																	
DIETHYL SULFATE																	

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot-I+II (FT)	THRU PIP'G REMOTE TANK WV-a,11 * Htot Ploss (PSI)	PRESS @ REMOTE TANK PV + Ploss Ptk (PSI)	Pt ME	
					FM REMOTE TK TO PV		FM REMOTE TK TO PV						
					TOTAL LOSS		TOTAL LOSS						
					HtotI (FT)		HtotII (FT)						
DAE	5,000	5018	5102	28645	1.635	*****	86.4	*****	0.0	86.4	0.047	1.68	0
DOT													
EBE	5,000	5500	7321	41103	1.725	*****	100.6	*****	0.0	100.6	0.094	1.82	0
EAM	5,000	9080	14023	78736	1.975	*****	266.3	*****	0.0	266.3	0.336	2.31	0
ETX	5,000	5370	7249	40700	1.725	*****	95.9	*****	0.0	95.9	0.092	1.82	0
EPL	5,000	5002	5012	28140	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	0
MTM	5,000	5663	5778	32440	1.665	*****	109.5	*****	0.0	109.5	0.060	1.73	0
IBA	5,000	5036	5204	29218	1.635	*****	86.8	*****	0.0	86.8	0.049	1.68	0
IPN	5,000	5300	5803	32584	1.665	*****	95.4	*****	0.0	95.4	0.060	1.73	0
LRA	5,000	5339	6027	33837	1.665	*****	96.4	*****	0.0	96.4	0.065	1.73	0
MET	5,000	5237	6087	34178	1.665	*****	92.7	*****	0.0	92.7	0.066	1.73	OK
MIA	5,000	5010	5027	28226	1.635	*****	86.3	*****	0.0	86.3	0.046	1.68	OK
MCY	5,000	5020	5069	28461	1.635	*****	86.5	*****	0.0	86.5	0.047	1.68	OK
MEA	5,000	5001	5006	28109	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
NEA	5,000	5001	5009	28122	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
NAA	5,000	5110	5456	30632	1.665	*****	89.1	*****	0.0	89.1	0.054	1.72	OK
NTP	5,000	5002	5014	28149	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
NNM	5,000	5830	9788	54958	1.785	*****	110.7	*****	0.0	110.7	0.165	1.95	OK
NIT	5,000	6376	8671	48684	1.755	*****	134.3	*****	0.0	134.3	0.131	1.89	OK
PDH	5,000	5011	5070	28467	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68	OK
PGS	5,000	5117	5281	29649	1.635	*****	89.6	*****	0.0	89.6	0.050	1.69	OK
PAD	5,000	6355	8690	48792	1.755	*****	133.1	*****	0.0	133.1	0.132	1.89	OK
PAH	5,000	5414	4829	27113	1.635	*****	101.7	*****	0.0	101.7	0.043	1.68	OK
PCN	5,000	5730	7711	43296	1.725	*****	108.9	*****	0.0	108.9	0.104	1.83	OK
PRA	5,000												
SWR	5,000												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809; CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VOR" = MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX	VAPOR-			PIPE SECT I: LOSS	PIPE SECT II: LOSS	THRU		PRESS				
		LIQUID	AIR			FM REMOTE TK TO PV	FM REMOTE TK TO PV	PIP'G	PRESS					
		TRANSF	MIX	REQUIRED AIR				REMOTE	@					
		RATE	FLOW	EQUIVALENT				TANK	REMOTE					
		(MLTR	RATE			PV	TOTAL	GRAND	TO P/V	TANK	I			
Q1	Qv-a	Qa		VALVE	LOSS	TOTAL	TOTAL	Wv-a,11	PV	Ptk)				
(10)	(11)	(12)	(FT^3/	PV				+ Htot	Ploss	MDA				
(BBL/	(BBL/	(BBL/	HR)			HtotI	HtotII	Htot-I+II	Ploss	Ptk				
HR)	HR)	HR)	HR)	(PSI)		(FT)	(FT)	(FT)	(PSI)	(PSI)				
SODIUM SULFIDE (SOLID IN WATER)	SDS													
STYRENE	STY	5,000	5040	5199	29192	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60	OK
STYRENE CRUDE	STX	5,000	5040	5199	29192	1.635	*****	87.0	*****	0.0	87.0	0.049	1.60	OK
STYRENE TAR	STT													
TETRAMETHYLBENZENE (1,2,3,5-)	TTB	5,000	5014	5083	28539	1.635	*****	86.3	*****	0.0	86.3	0.047	1.60	OK
TOLUIDINE (o-)	TLI	5,000	5001	5005	28102	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK
TRICHLOROBENZENE (1,2,4-)	TCB	5,000	5003	5027	28226	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	OK
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N														
TRIPHENYLBORANE	TPE													
UNDECANOIC ACID	UDA													
HYDROCARBON 5-9	HFN	5,000	5440	6992	39256	1.695	*****	99.0	*****	0.0	99.0	0.086	1.70	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE • REMOTE TANK FOR
"VGR" • MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX VAPOR-		REQUIRED AIR EQUIVALENT	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS Htot-I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V WV-a,11 • Htot Ploss (PSI)		PRESS • REMOTE TANK PV • Pt Ptk MD	
		LIQUID TRANSP RATE (MLTR)	AIR MIX FLOW RATE Q1 (10) (BBL/ HR)											
		Q1 (10) (BBL/ HR)	Qv-a (11) (BBL/ HR)											
		Qa (12) (BBL/ HR)	Qa (12) (BBL/ HR)											
46 CFR SUBCHAPTER D, TABLE 30.25-1														
Acetone	ACT	5,000	6000	7630	42842	1.725	*****	119.7	*****	0.0	119.7	0.102	1.83	OK
Acetophenone	ACP	5,000	5060	5346	30017	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72	OK
Acetyl Tributyl Citrate														
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALE													
Alcohols (C13 and above)	ALY													
Alcoholic beverages, N.O.S.														
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates														
Alcohol (C12 - C15) Poly(1-3)ethoxylates														
Alcohol (C12 - C15) Poly(3-11)ethoxylates														
Alkenylsuccinic acid														
Alkenylsuccinic Anhydride														
Alkyl (C9 - C17) Benzenes	AKB													
Alkylbenzenesulfonic acid (4% or less)	ABS													
Alkyl Phthalates (n-)														
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)														
Aminoethyldiethanolamine, Aminoethylethanolamine solution														
Amyl Acetate (commercial, iso-, n-, sec-)	AEC	5,000	5202	6235	35005	1.695	*****	91.1	*****	0.0	91.1	0.069	1.76	OK
AMYL ACETATE (n-)	AML	5,000	5033	5208	29243	1.635	*****	86.7	*****	0.0	86.7	0.049	1.68	OK
AMYL ACETATE (iso-)	IAT	5,000	5033	5208	29243	1.635	*****	86.7	*****	0.0	86.7	0.049	1.68	OK
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK
Amyl alcohol (n-)	AAN	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK
Amyl alcohol (tert-)	AAI													
AMYL ALCOHOL, PRIMARY	APM	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK
AMYL ALCOHOL, (sec-)	ASE	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK
Amylene	AMZ													
AMYL ALCOHOL, (iso-)	IAA	5,000	5030	5124	28770	1.635	*****	86.8	*****	0.0	86.8	0.048	1.68	OK
Amyl Methyl Ketone	AMK													
Amyl Tallate														
Asphalt	ASP													
ASPHALT BLENDING STOCKS: Roofers flux	ARF													
ASPHALT BLENDING STOCKS: Straight run residue	ASR													
Behenyl alcohol														
Benzene Tricarboxylic acid Trioctyl Ester														
Benzyl alcohol	BAL	5,000	5010	5052	28366	1.635	*****	86.2	*****	0.0	86.2	0.046	1.68	OK
Bicyclic Terpenel Polyamide salt														
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3)	gBFX													
Butane	BMX													
Butene, SEE BUTYLENE														
Butene Oligomer	BOL													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR) (FT^3/ HR)		PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		THRU PIP'G REMOTE TANK TO P/V Mv-a,11 Ploss (PSI)	PRESS @ TANK REMOTE PV Ploss (PSI)	
						FM REMOTE TK TO PV		FM REMOTE TK TO PV				
						TOTAL LOSS		TOTAL LOSS				
						HtotI (FT)		HtotII (FT)				

BAX	5,000	5060	5334	29947	1.635	*****	87.5	*****	0.0	87.5	0.051	1.69
BCN	5,000	5080	5443	30562	1.665	*****	88.1	*****	0.0	88.1	0.053	1.72
BTA	5,000	5150	5822	32686	1.665	*****	90.1	*****	0.0	90.1	0.061	1.73
	5,000	5090	5311	29822	1.635	*****	88.6	*****	0.0	88.6	0.051	1.69
IAL	5,000	5090	5311	29822	1.635	*****	88.6	*****	0.0	88.6	0.051	1.69
BAN	5,000	5050	5173	29046	1.635	*****	87.4	*****	0.0	87.4	0.048	1.68
BAS	5,000	5130	5449	30597	1.665	*****	89.8	*****	0.0	89.8	0.054	1.72
BAT	5,000	5280	5966	33495	1.665	*****	94.7	*****	0.0	94.7	0.064	1.73
BPH	5,000	5001	5016	28164	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68
BTN												
BUG												
BHK												
BUE	5,000	5010	5073	28484	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68
BLA												
CLS	5,000	5005	5027	28227	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68
COR												
CUM	5,000	5060	5352	30047	1.665	*****	87.4	*****	0.0	87.4	0.052	1.72
CHX	5,000	5450	6736	37823	1.695	*****	99.7	*****	0.0	99.7	0.081	1.78
CHN	5,000	5015	5072	28475	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68
CPD	5,000	5025	5161	28976	1.635	*****	86.5	*****	0.0	86.5	0.048	1.68
CMP	5,000	5011	5072	28479	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68
DHN	5,000	5010	5068	28454	1.635	*****	86.1	*****	0.0	86.1	0.047	1.68
IDA	5,000	5001	5007	28114	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68
DAL												
DDC												
DCE	5,000	5012	5082	28534	1.635	*****	86.2	*****	0.0	86.2	0.047	1.68

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC., "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR		PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot = I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V WV-a, 11 * Htot Ploss (PSI)	PRESS @ TANK REMOTE PV + 1 Ploss Pck (PSI)
				EQUIVALENT			FM REMOTE TK TO PV		FM REMOTE TK TO PV				
Decyl alcohol (all isomers) (DECANOL)	DAX	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
DECYL ALCOHOL (iso-)	ISA	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
DECYL ALCOHOL (n-)	DAN	5,000	5001	5008	20116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Decylbenzene (n-)	DBZ	5,000	5001	5011	20135	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Detergent Alkylate													
Diacetone alcohol	DAA	5,000	5010	5056	20389	1.635	*****	86.2	*****	0.0	86.2	0.046	1.60
Dialkyl (C10-C14) Benzenes	DAB												
Dialkyl (C7-C13) Phthalates	DAH												
Dibutyl Carbinol													
Dibutyl Phthalate (ortho-)	DPA												
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPT	5,000	5025	5161	20976	1.635	*****	86.5	*****	0.0	86.5	0.046	1.60
Diethylbenzene	DEB	5,000	5008	5053	20369	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60
Diethylene Glycol	DEG	5,000	5001	5005	20102	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Butyl Ether	DME	5,000	5001	5008	20118	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Butyl Ether Acetate	DEM												
Diethylene Glycol Dibutyl Ether	DIG												
Diethylene Glycol Diethyl Ether													
Diethylene Glycol Ethyl Ether	DGE												
Diethylene Glycol Ethyl Ether Acetate	DGA	5,000	5002	5013	20147	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Methyl Ether	DGM	5,000	5003	5018	20172	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diethylene Glycol Methyl Ether Acetate	DGR												
Diethylene Glycol Phenyl Ether	DGP												
Diethylene Glycol Phthalate	DGL												
Di-(2-ethylhexyl)adipate	DEH												
Di-(2-ethylhexyl)phthalate	DIE												
Diethyl Phthalate	DPH												
Diglycidyl Ether of Bisphenol A	BDE												
Diheptyl Phthalate	DHP												
Dihexyl Phthalate	DHA												
Diisobutylcarbinol	DBC	5,000	5009	5064	20432	1.635	*****	86.1	*****	0.0	86.1	0.047	1.60
Diisobutylene	DBL	5,000	5200	6049	33962	1.665	*****	91.4	*****	0.0	91.4	0.065	1.73
Diisobutyl Ketone	DIK	5,000	5016	5112	20700	1.635	*****	86.3	*****	0.0	86.3	0.047	1.60
Diisobutyl Phthalate	DIT												
Diisodecyl Phthalate	DID												
Diisononyl Adipate	DNY												
Diisononyl Phthalate	DIN												
Diisocetyl Phthalate	DIO												
Diisopropylbenzene (all isomers)	DIX	5,000	5003	5024	20210	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60
Diisopropyl Naphthalene	DII												
Dimethyl Adipate	DLA												
Dimethylbenzene													
Dimethyl Glutarate	DGT												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7020"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" = MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS						PIPE SECT II: LOSS		THRU	PRESS	
	LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV		FM REMOTE TK TO PV		PIP'G	PRESS		
	TRANSF	MIX	EQUIVALENT		ACROSS					REMOTE	REMOTE		
	RATE	FLOW			PV	TOTAL		TOTAL		TANK	TANK		
S	(MLTR	RATE			VALVE	LOSS		LOSS		TO P/V	TANK		
	Q1	Qv-a	Qa		PV					Wv-a,11	PV + P		
	(10)	(11)	(12)	(FT^3/		HtotI		HtotII		+ Htot	Ploss		
	(BBL/	(BBL/	(BBL/	HR)	(PSI)	(FT)		(FT)		Ploss	Ptk		
HR)	HR)	HR)	HR)							(PSI)	(PSI)		
DTL													
DMP													
DDI													
DSE													
DIP	5,000	5001	5022	28195	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DOP													
DPN	5,000	5010	5070	28466	1.635	*****	86.1	*****	0.0	86.1	0.047	1.60	O
DIL	5,000	5001	5008	28116	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DDO	5,000	5001	5009	28121	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DPE	5,000	5001	5009	28121	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DOB													
DPG	5,000	5007	5046	28332	1.635	*****	86.1	*****	0.0	86.1	0.046	1.60	O
DGY													
DPY													
DPP	5,000	5230	6056	34002	1.665	*****	92.5	*****	0.0	92.5	0.066	1.73	O
DSR	5,000	5230	6056	34002	1.665	*****	92.5	*****	0.0	92.5	0.066	1.73	O
DTP													
DUP													
DOC													
DDN													
DOZ	5,000	5002	5017	28160	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DOD	5,000	5002	5017	28160	1.635	*****	86.0	*****	0.0	86.0	0.046	1.60	O
DOB	5,000	5470	9704	54482	1.785	*****	97.4	*****	0.0	97.4	0.162	1.95	O
DOL													
ETH													
EEO													
EEA													
ETG													
ETA	5,000	5450	6822	38301	1.695	*****	99.3	*****	0.0	99.3	0.082	1.78	OK
EAA	5,000	5020	5127	28785	1.635	*****	86.4	*****	0.0	86.4	0.048	1.60	OK
EAL	5,000	5350	5686	31926	1.665	*****	97.7	*****	0.0	97.7	0.058	1.72	OK
EAK													
ETB	5,000	5060	5295	29727	1.635	*****	87.5	*****	0.0	87.5	0.051	1.69	OK
EBT	5,000	5012	5059	28402	1.635	*****	86.3	*****	0.0	86.3	0.046	1.60	OK
EBR	5,000	5100	5552	31174	1.665	*****	88.8	*****	0.0	88.8	0.056	1.72	OK
ECY	5,000	5050	5269	29503	1.635	*****	87.2	*****	0.0	87.2	0.050	1.69	OK
ETL													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR) Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	(FT ³ / HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot= I+II (FT)	PRESS DROP THRU PIP'G REMOTE TANK TO P/V Wv-a,11 * Htot Ploss (PSI)	PRESS @ REMOTE TANK PV * Ploss Pck (PSI)
							FM REMOTE TK TO PV		FM REMOTE TK TO PV				
							TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)			
Ethylene Glycol	EGL	5,000	5001	5003	28089	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Acetate	EQO												
Ethylene Glycol Butyl Ether	EQM												
ETHYLENE GLYCOL BUTYL ETHER ACETATE	EBA	5,000	5005	5040	28297	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Ether Acetate													
Ethylene Glycol Tert-Butyl Ether													
Ethylene Glycol Diacetate	EGY	5,000	5001	5007	28114	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Dibutyl Ether	EGB												
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGP												
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	EGA												
Ethylene Glycol Isopropyl Ether	EGI												
Ethylene Glycol Methyl Butyl Ether													
Ethylene Glycol Methyl Ether	EME	5,000	5001	5007	28112	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Methyl Ether Acetate	EGT												
Ethylene Glycol Phenyl Ether	EPE	5,000	5001	5007	28112	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixt	EDX												
Ethylene-Propylene Copolymer (in liquid mixtures)													
Ethyl-3-Ethoxypropionate	EEP												
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	5,000	5017	5106	28668	1.635	86.3	0.0	86.3	0.047	1.60		
2-Ethylhexanoic acid	EHO												
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHX	5,000	5002	5013	28145	1.635	86.0	0.0	86.0	0.046	1.60		
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID													
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE												
Ethyl Hexyl Tallate	EHT												
Ethyl Propionate	EPR	5,000	5350	5606	31926	1.665	97.7	0.0	97.7	0.058	1.72		
Ethyl Toluene	ETE	5,000	5028	5163	28989	1.635	86.6	0.0	86.6	0.048	1.60		
Fatty acid (saturated, C13 and above)													
Fatty acid Amides													
Formamide	FAM	5,000	5010	5019	28177	1.635	86.3	0.0	86.3	0.046	1.60		
Furfuryl Alcohol	FAL	5,000	5005	5024	28205	1.635	86.1	0.0	86.1	0.046	1.60		
Gas oil, cracked	GOC												
GASOLINE BLENDING STOCKS: Alkylates	GAX	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINE BLENDING STOCKS: Reformates	GRP	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Automotive (containing not over 4.23 grams lead per gal)	GAT	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon)	GAV	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Casinghead (natural)	GCS	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Polymer	GPL	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
GASOLINES: Straight run	GSR	5,000	6250	10555	59261	1.815	127.0	0.0	127.0	0.191	2.01		
Glycerine	GCR												
Glycerol, SEE GLYCERINE													
Glycerol Polyalkoxylate													
Glycerol Triacetate													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-	PIPE SECT I: LOSS					PIPE SECT II: LOSS				DROPTHRU	
	LIQUID	AIR	REQUIRED AIR		PRESS	FM REMOTE TK TO PV		FM REMOTE TK TO PV		PIP'G		PRESS	
	TRANSF	MIX	EQUIVALENT		ACROSS					REMOTE	REMOTE		
	RATE	FLOW			PV	TOTAL		TOTAL		TANK	TANK		
	(MLTR)	RATE			VALVE	LOSS		LOSS		TO P/V	TO P/V		
Q1	Qv-a	Qa			PV			GRAND		Wv-a,11	PV . P		
(10)	(11)	(12)				HtotI		HtotII		* Htot	Ploss M		
(BBL/	(BBL/	(BBL/	(PT^3/			HtotI		HtotII		Ploss	Ptk		
HR)	HR)	HR)	HR)	(PSI)		(PT)		(PT)		(PSI)	(PSI)		
LLS													
Cop													
MSE													
YTH													
NOA													
WPO													
YTG	5,000	5610	7102	39873	1.695	*****	105.3	*****	0.0	105.3	0.009	1.70	OK
AL	5,000	5663	5778	32440	1.665	*****	109.5	*****	0.0	109.5	0.060	1.73	OK
AC	5,000	5033	5233	29379	1.635	*****	86.7	*****	0.0	86.7	0.050	1.68	OK
AA	5,000	5043	5209	29246	1.635	*****	87.1	*****	0.0	87.1	0.049	1.68	OK
AK													
BL													
BK	5,000	5097	5465	30605	1.665	*****	88.7	*****	0.0	88.7	0.054	1.72	OK
BY													
BU	5,000	5126	5608	31485	1.665	*****	89.7	*****	0.0	89.7	0.057	1.72	OK
CK	5,000	5450	6487	36421	1.695	*****	100.0	*****	0.0	100.0	0.075	1.77	OK
CP	5,000	6542	10391	58343	1.815	*****	139.4	*****	0.0	139.4	0.186	2.00	OK
CK	5,000	5006	5042	28309	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
CC													
CK	5,000	5115	5542	31116	1.665	*****	89.3	*****	0.0	89.3	0.055	1.72	OK
DA	5,000	5001	5007	28113	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
DN	5,000	5630	7424	41684	1.725	*****	105.4	*****	0.0	105.4	0.097	1.82	OK
DN	5,000	5049	8263	46394	1.755	*****	113.0	*****	0.0	113.0	0.119	1.87	OK
Y													
RE	5,000	5004	5017	28169	1.635	*****	86.1	*****	0.0	86.1	0.046	1.68	OK
DO													
BS	5,000	5020	5121	28754	1.635	*****	86.4	*****	0.0	86.4	0.048	1.68	OK
BS	5,000	5017	5114	28710	1.635	*****	86.3	*****	0.0	86.3	0.047	1.68	OK

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX ALLOWABLE LIQUID TRANSFER RATE				PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		PRESS DROP THRU PIP'G REMOTE TANK TO P/V		PRESS @ REMOTE TANK Wv-a, 11 + Htot Ploss Ptk (PSI)	
		LIQUID TRANSP RATE (MLTR) Q1 (10) (BBL/ HR)	AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	PRESS ACROSS PV VALVE PV (PSI)	TOTAL LOSS		TOTAL LOSS		GRAND TOTAL LOSS			
						Htot I		Htot II		Htot I+II			
						(FT)		(FT)		(FT)			
NAPHTHA: Paraffinic	PTN	NSV 5,000	5020	5097	28617	1.635	86.4	0.0	86.4	0.047	1.68		
NAPHTHA: Petroleum	NSS	5,000	5020	5121	28754	1.635	86.4	0.0	86.4	0.048	1.68		
NAPHTHA: Solvent	NVM	5,000	5019	5115	28720	1.635	86.4	0.0	86.4	0.047	1.68		
NAPHTHA: Stoddard solvent	NTI												
NAPHTHA: Varnish makers' and painters' (75%)	NAX	5,000	5027	5168	29014	1.635	86.6	0.0	86.6	0.048	1.68		
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt	NAN	5,000	5027	5168	29014	1.635	86.6	0.0	86.6	0.048	1.68		
Naphthenic acid	NNA												
Nonane (all isomers)	NON	5,000	5035	5211	29260	1.635	86.8	0.0	86.8	0.049	1.68		
NONANE	NNS	5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.68		
Nonanoic acid (all isomers)	NNN	5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.68		
Nonanoic, Tridecanoic acid mixture	NNI	5,000	5010	5072	28475	1.635	86.1	0.0	86.1	0.047	1.68		
Nonene	NNP	5,000	5001	5011	28136	1.635	86.0	0.0	86.0	0.046	1.68		
Nonyl alcohol (all isomers)	NPE												
NONYL ALCOHOL	ODD												
NONYL ALCOHOL (iso-)	OAX	5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72		
Nonyl Methacrylate Monomer	OAN	5,000	5079	5426	30467	1.665	88.1	0.0	88.1	0.053	1.72		
Nonyl Phenol	OAA	5,000	5001	5007	28114	1.635	86.0	0.0	86.0	0.046	1.68		
Nonyl Phenol Poly(4-12)ethoxylates	OCK	5,000	5001	5006	28109	1.635	86.0	0.0	86.0	0.046	1.68		
Nonyl Phenol Sulfide (90% or less)	OTA	5,000	5001	5006	28109	1.635	86.0	0.0	86.0	0.046	1.68		
Noxious liquid, N.O.S. (17) ("Trade name," contains principal compone	OTX	5,000	5090	5485	30795	1.665	88.5	0.0	88.5	0.054	1.72		
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal com	OTE	5,000	5100	5532	31060	1.665	88.8	0.0	88.8	0.055	1.72		
Octadecene	OCX	5,000	5001	5006	28109	1.635	86.0	0.0	86.0	0.046	1.68		
Octadecenoamide solution (Oleamide)	IOA	5,000	5001	5006	28109	1.635	86.0	0.0	86.0	0.046	1.68		
Octane (all isomers)	OAL												
OCTANE	ODA												
Octanoic acid (all isomers)	OET												
Octanol (all isomers)	OBH												
OCTANOL	OCA												
Octene (all isomers)	OCC												
OCTENE (1-)													
Octyl Acetate													
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)													
OCTYL ALCOHOL													
Octyl Aldehydes													
Octyl Decyl Adipate													
Octyl Epoxystallate													
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE													
OIL, EDIBLE: Babassu													
OIL, EDIBLE: Beechnut													
OIL, EDIBLE: Castor													
OIL, EDIBLE: Cocoa butter													
OIL, EDIBLE: Coconut													

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9009: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	MAX ALLOWABLE LIQUID TRANSFER RATE										PRESS DROP THRU PIP'G REMOTE TANK TO P/V Wv-a,11 Ploss (PSI)	PRESS @ REMOTE TANK PV * Ploss Ptk (PSI)
	MAX LIQUID TRANSF RATE (MLTR) (10) (BBL/HR)	VAPOR- AIR MIX FLOW RATE (11) (BBL/HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS Htot-I-II (FT)			
					TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI-II (FT)					
OIL, EDIBLE: Cod liver	OCO											
OIL, EDIBLE: Corn	OCS											
OIL, EDIBLE: Cottonseed	OFS											
OIL, EDIBLE: Fish, N.O.S.												
OIL, EDIBLE: Grapeseed												
OIL, EDIBLE: Groundnut												
OIL, EDIBLE: Hazelnut												
OIL, EDIBLE: Lard												
OIL, EDIBLE: Maize	OLD											
OIL, EDIBLE: Mustard seed												
OIL, EDIBLE: Nutmeg Butter												
OIL, EDIBLE: Olive												
OIL, EDIBLE: Palm	OOL											
OIL, EDIBLE: Palm kernel	OPM											
OIL, EDIBLE: Peanut	OPO											
OIL, EDIBLE: Poppy	OPN											
OIL, EDIBLE: Raisin seed												
OIL, EDIBLE: Rice bran												
OIL, EDIBLE: Safflower	ORP											
OIL, EDIBLE: Salad	OSP											
OIL, EDIBLE: Sesame												
OIL, EDIBLE: Soya bean												
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB											
OIL, EDIBLE: Sunflower seed												
OIL, EDIBLE: Tucum	OSN											
OIL, EDIBLE: Vegetable, N.O.S.	OTC											
OIL, EDIBLE: Walnut	OVG											
OIL, FUEL: No. 1 (Kerosene)												
OIL, FUEL: No. 1-D	OON											
OIL, FUEL: No. 2	OOD											
OIL, FUEL: No. 2-D	OTW 5,000	5056	5635	31636	1.665	*****	86.8	*****	0.0	86.8	0.057 1.72 OK	
OIL, FUEL: No. 4	OTD											
OIL, FUEL: No. 5	OPR 5,000	5015	5070	28469	1.635	*****	86.3	*****	0.0	86.3	0.047 1.68 OK	
OIL, FUEL: No. 6	OPV 5,000	5015	5070	28469	1.635	*****	86.3	*****	0.0	86.3	0.047 1.68 OK	
OIL, MISC: Absorption	OSX 5,000	5015	5070	28469	1.635	*****	86.3	*****	0.0	86.3	0.047 1.68 OK	
OIL, MISC: Aliphatic	OAS											
OIL, MISC: Animal, N.O.S.												
OIL, MISC: Aromatic												
OIL, MISC: Aviation F2300												
OIL, MISC: Clarified												
OIL, MISC: Coal	OCF											
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHY												

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"																				
CARGO	C H R I S	"VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE					PRESSURE * REMOTE TANK FOR		PIPE SECT I: LOSS		PIPE SECT II: LOSS		PRESS DROP THRU		PIP'G REMOTE	PRESS * TANK REMOTE	PV * Ploss	Ptk	Pt	MD
		LIQUID	AIR	REQUIRED AIR	PRESS	FM_REMOTE TK TO PV	FM_REMOTE TK TO PV	TOTAL	TOTAL	GRAND	TO P/V	TANK								
		TRANSF	MIX	EQUIVALENT	ACROSS			LOSS	LOSS	TOTAL										
		RATE	FLOW		PV			HtotI	HtotII	Htot-I+II										
		(MLTR)	(10)	(11)	(12)	(FT^3/HR)	(PSI)	(FT)	(FT)	(FT)	(PSI)	(PSI)								
		(BBL/HR)	(BBL/HR)	(BBL/HR)	(BBL/HR)	(BBL/HR)	(PSI)	(FT)	(FT)	(FT)	(PSI)	(PSI)								
OIL, MISC: Coconut oil, fatty acid	...																			
OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM																			
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL, FATTY ACID METH																				
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACIDCFY																				
OIL, MISC: Croton																				
OIL, MISC: Crude																				
OIL, MISC: Diesel		OIL 5,000	6250	6319	35479	1.695	*****	132.7	*****	0.0	132.7	0.072	1.77	OK						
OIL, MISC: Gas, low pour		ODS 5,000	5069	5322	29000	1.635	*****	87.8	*****	0.0	87.8	0.051	1.69	OK						
OIL, MISC: Gas, low sulfur																				
OIL, MISC: Heartcut distillate																				
OIL, MISC: Lanolin																				
OIL, MISC: Linseed																				
OIL, MISC: Lubricating																				
OIL, MISC: Mineral		OLB 5,000	5015	5015	28150	1.635	*****	86.4	*****	0.0	86.4	0.046	1.60	OK						
OIL, MISC: Mineral seal																				
OIL, MISC: Motor	OMS																			
OIL, MISC: Neatsfoot	OMT																			
OIL, MISC: Oiticica	ONF																			
OIL, MISC: Palm oil, fatty acid Methyl Ester	OOI																			
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID MOPE	OPE																			
OIL, MISC: Penetrating	MOPE																			
OIL, MISC: Perilla	OPT																			
OIL, MISC: Pilchard																				
OIL, MISC: Pine	OPI																			
OIL, MISC: Range	ORG																			
OIL, MISC: Residual																				
OIL, MISC: Resin																				
OIL, MISC: Resinous petroleum	ORS 5,000	5015	5015	28150	1.635	*****		86.4	*****	0.0	86.4	0.046	1.60	OK						
OIL, MISC: Road	ORD																			
OIL, MISC: Rosin	ORN																			
OIL, MISC: Seal																				
OIL, MISC: Soapstock	OIS																			
OIL, MISC: Soya bean (epoxidized)																				
OIL, MISC: Sperm																				
OIL, MISC: Spindle	OSP																			
OIL, MISC: Spray	OSD																			
OIL, MISC: Tall	OSY																			
OIL, MISC: Tall, fatty acid	OTL																			
OIL, MISC: Tanner's	TOP																			
OIL, MISC: Transformer	OTN																			
OIL, MISC: Tung	OTP																			
OIL, MISC: Turbine	OTG																			
	OTB 5,000	5030	5231	29370	1.635	*****		86.6	*****	0.0	86.6	0.050	1.60	OK						

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR
"VOR" @ MAX ALLOWABLE LIQUID TRANSFER RATE

CARGO	C H R I S	MAX LIQUID TRANSF RATE (MLTR Q1 (10) (BBL/ HR)	VAPOR- AIR MIX FLOW RATE Qv-a (11) (BBL/ HR)	REQUIRED AIR EQUIVALENT Qa (12) (BBL/ HR)	(FT^3/ HR)	PRESS ACROSS PV VALVE PV (PSI)	PIPE SECT I: LOSS		PIPE SECT II: LOSS		GRAND TOTAL LOSS Htot-I+II (FT)	THRU PIP'G REMOTE TANK TO P/V Hv-a,11 Htot Ploss (PSI)	PRESS @ REMOTE TANK PV + Ploss Ptk (PSI)	Pt MD
							FM REMOTE TK TO PV		FM REMOTE TK TO PV					
							TOTAL LOSS		TOTAL LOSS					
							Htot I (FT)		Htot II (FT)					
OIL, MISC: Whale														
OIL, MISC: White (mineral)														
OIL, MISC: Wood														
alpha-Olefins (C13 - C18)														
Olefins (C13 and above, all isomers)	OAM													
Oleic acid	OLA													
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)														
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMI														
Palm Stearin	PMS													
n-Paraffins (C10 - C20)	PFN													
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PDC	5,000	5001	5012	28139	1.635	*****	86.0	*****	0.0	86.0	0.046	1.68	OK
Pentaethylene Glycol														
Pentaethylenhexamine	PEP													
Pentane (all isomers)	PTY	5,000	7100	12130	68103	1.890	*****	163.1	*****	0.0	163.1	0.252	2.14	OK
PENTANE (iso-)	IPT	5,000	7700	14337	80495	2.015	*****	190.5	*****	0.0	190.5	0.349	2.36	OK
PENTANE (n-)	PTA	5,000	7044	11980	67265	1.890	*****	160.5	*****	0.0	160.5	0.246	2.14	OK
Pentanoic acid														
Pentene (all isomers)	PTX	5,000	7490	13298	74660	1.930	*****	180.9	*****	0.0	180.9	0.301	2.23	OK
PENTENE (1-)	PTE	5,000	7490	13298	74660	1.930	*****	180.9	*****	0.0	180.9	0.301	2.23	OK
Petrolatum	PTL													
1-Phenyl-1-Xylol Ethane	PXE													
Phosphosulfurized Bicyclic Terpene														
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES														
Pinene	PIN	5,000	5035	5232	29378	1.635	*****	86.7	*****	0.0	86.7	0.050	1.68	OK
Polyalkenyl Succinic Anhydride Amine														
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtur	PPX													
Polyalkylene Oxide Polyol	PAO													
Palamine, Amide mixture														
Polybutadiene, Hydroxyl terminated														
Polybutene	PLB	5,000	5001	5121	28750	1.635	*****	85.7	*****	0.0	85.7	0.048	1.68	OK
Polydimethylsiloxane														
Polyethylene Glycol														
Polyethylene Glycol Dimethyl Ether														
Polyglycerol														
Polyisobutylene, SEE POLYBUTENE														
Polymerized Esters														
Poly(20)oxyethylene Sorbitan Monooleate	PSM													
Polypropylene	PLP													
Polypropylene Glycol	PGC	5,000	5010	5010	28130	1.635	*****	86.3	*****	0.0	86.3	0.046	1.68	OK
Polypropylene Glycol Methyl Ether	PGM	5,000	5080	5338	29972	1.635	*****	88.2	*****	0.0	88.2	0.051	1.69	OK
Polysiloxane														
Polystyrene Diakyl Maleate														

CALCULATIONS FOR CAPACITY OF CARGO TANK VENTING SYSTEM

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE III: MAX PRESSURE @ REMOTE TANK FOR "VGR" * MAX ALLOWABLE LIQUID TRANSFER RATE

C H R I S	MAX	VAPOR-					PIPE SECT I: LOSS	PIPE SECT II: LOSS			DROP	PRESS
	LIQUID	AIR					FM REMOTE TK TO PV	FM REMOTE TK TO PV			PIP'G	THRU
	TRANSF	MIX	REQUIRED AIR	PRESS							REMOTE	TANK
	RATE	FLOW	EQUIVALENT	ACROSS							TANK	REMOTE
	(MLTR)	RATE		PV			TOTAL		TOTAL	GRAND	TO P/V	TANK
	Q1	Qv-a	Qa	VALVE			LOSS		LOSS	TOTAL	Mv-a, 11	PV + P
	(10)	(11)	(12)	PV			HtotI		HtotII	LOSS	* Htot	Ploss
	(BBL/	(BBL/	(BBL/							Htot-I+II	Ploss	Ptk
	HR)	HR)	HR)	(PSI)			(FT)		(FT)	(FT)	(PSI)	(PSI)

OAM												
OLA												
OLAMI												
PMS												
PFN												
PDC 5,000	5001	5012	28139	1.635	*****		86.0	*****	0.0	86.0	0.046	1.68 O
PEP												
PTY 5,000	7100	12130	68103	1.890	*****		163.1	*****	0.0	163.1	0.252	2.14 OI
IPT 5,000	7700	14337	80495	2.015	*****		190.5	*****	0.0	190.5	0.349	2.36 OI
PTA 5,000	7044	11980	67265	1.890	*****		160.5	*****	0.0	160.5	0.246	2.14 OI
PTX 5,000	7490	13298	74660	1.930	*****		180.9	*****	0.0	180.9	0.301	2.23 OI
PTE 5,000	7490	13298	74660	1.930	*****		180.9	*****	0.0	180.9	0.301	2.23 OI
PTL												
PXE												
PIN 5,000	5035	5232	29378	1.635	*****		86.7	*****	0.0	86.7	0.050	1.68 OK
PPX												
PAO												
PLB 5,000	5001	5121	28750	1.635	*****		85.7	*****	0.0	85.7	0.048	1.68 OK
PSM												
PLP												
PGC 5,000	5010	5010	28130	1.635	*****		86.3	*****	0.0	86.3	0.046	1.68 OK
PGM 5,000	5080	5338	29972	1.635	*****		88.2	*****	0.0	88.2	0.051	1.69 OK

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

MAX VAPOR- PIPE SE

חזק

STDVAPI

BARGES: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE II: MAX PRESSURE @ REMOTE TANK FOR
"VGR" * ALLOWABLE LIQUID TRANSFER RATE

CARGO

CARGO	C	MAX LIQUID TRANSF RATE (MLTR)	VAPOR- AIR MIX FLOW RATE (Qv-a) (BBL/HR)	REQUIRED AIR EQUIVALENT (Qa) (BBL/HR)	PRESS ACROSS PV VALVE (FT ³ /HR) (PSI)	PIPE SECT I: LOSS FM REMOTE TK TO PV		PIPE SECT II: LOSS FM REMOTE TK TO PV		GRAND TOTAL LOSS I+II (FT)	PRESS @ REMOTE TANK		IS Ptk MDW
						TOTAL LOSS HtotI (FT)	TOTAL LOSS HtotII (FT)	TOTAL LOSS HtotI+II (FT)	TOTAL LOSS HtotI+II (FT)		TO P/V Wv-a, 11 * Htot Ploss (PSI)	REMOTE TANK Ploss Ptk (PSI)	
Tridecane	TRD	5,000	5002	5019	28178	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Tridecanoic acid	TDN	5,000	5001	5010	28130	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TDC	5,000	5001	5009	28125	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
1-Tridecane	TRB	5,000	5002	5016	28164	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Tridecylbenzene	TEB	5,000	5001	5008	28115	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Triethylbenzene	TEG	5,000	5001	5008	28115	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Triethylene Glycol	TGD												
Triethylene Glycol Butyl Ether	TGE												
Triethylene Glycol Butyl Ether mixture													
Triethylene Glycol di-(2-ethylbutyrate)													
Triethylene Glycol Ether mixture													
Triethylene Glycol Ether													
Triethylene Glycol Methyl Ether	TPS	5,000	5002	5018	28176	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Triethyl Phosphate	TIP												
Triisooctyl Trimellitate	TRB	5,000	5014	5083	28539	1.635	*****	86.3	*****	86.3	0.047	1.60	OK
Triisopropanolamine	TMB	5,000	5014	5082	28531	1.635	*****	86.3	*****	86.3	0.047	1.60	OK
Trimethylbenzenes (all isomers)	TMD	5,000	5014	5082	28531	1.635	*****	86.3	*****	86.3	0.047	1.60	OK
TRIMETHYL BENZENE (1,2,5-)	TME	5,000	5014	5082	28531	1.635	*****	86.3	*****	86.3	0.047	1.60	OK
TRIMETHYL BENZENE (1,2,3-)	TPR												
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)													
Trimethylol Propane Polyethoxylate													
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate	TMP												
2,2,4-Trimethyl-3-pentanol-1-isobutyrate													
Tripropylene, SEE PROPYLENE TRIMER	TGC												
Tripropylene Glycol	TGM												
Tripropylene Glycol Methyl Ether	TRP												
Trixylenyl Phosphate	TPT												
Turpentine													
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%))													
Undecanol	UDC	5,000	5005	5038	28288	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Undecene (1-)	UND	5,000	5001	5009	28122	1.635	*****	86.0	*****	86.0	0.046	1.60	OK
Undecyl alcohol	UDB												
Undecylbenzene													
Vinyl Acetate-fumarate Copolymer													
Waxes:	WAX												
WAXES: Candelilla													
WAXES: Carnauba													
WAXES: Paraffin													
WAXES: Petroleum													
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)													
White spirit (low (15 - 20%) aromatic)	WSL												
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.													

SUMMARY TABLE FOR "GASOLINE"

(VGR = 1.25) (S.G. mix = 2.911)


PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR CONNECTION
PRESSURE DROP IS BASED ON VAPOR-AIR MIX @ VGR * THE INDICATED LIQUID TRANSFER RATE
(TABULATED DATA IS FOR THE INDICATED PRESSURE AT THE SHORE CONNECTION)

LIQUID TRANSFER RATE				PRESSURE DROP (PSI)				
PERCENT MAX XFER RATE	LIQUID BBL PER HR	LIQUID GAL PER MIN	LIQUID CU FT PER MIN	1.0 PSIG PRESS. ● VAP. CONN.	0.5 PSIG PRESS. ● VAP. CONN.	0.0 PSIG PRESS. ● VAP. CONN.	-0.5 PSIG PRESS. ● VAP. CONN.	-1.0 PSIG PRESS. ● VAP. CONN.
20	1000.0	700.00	93.8	0.0137	0.0133	0.0129	0.0125	0.0121
40	2000.0	1400.00	187.2	0.0521	0.0505	0.0491	0.0474	0.0461
60	3000.0	2100.00	280.7	0.1143	0.1108	0.1074	0.1037	0.1004
80	4000.0	2800.00	374.3	0.1996	0.1936	0.1877	0.1817	0.1758
100 *	5000.0	3500.00	467.8	0.3087	0.2994	0.2900	0.2805	0.2711

* MAXIMUM LIQUID TRANSFER RATE

GRAPH FOR "GASOLINE"

PRESSURE DROP vs LIQUID TRANSFER RATE

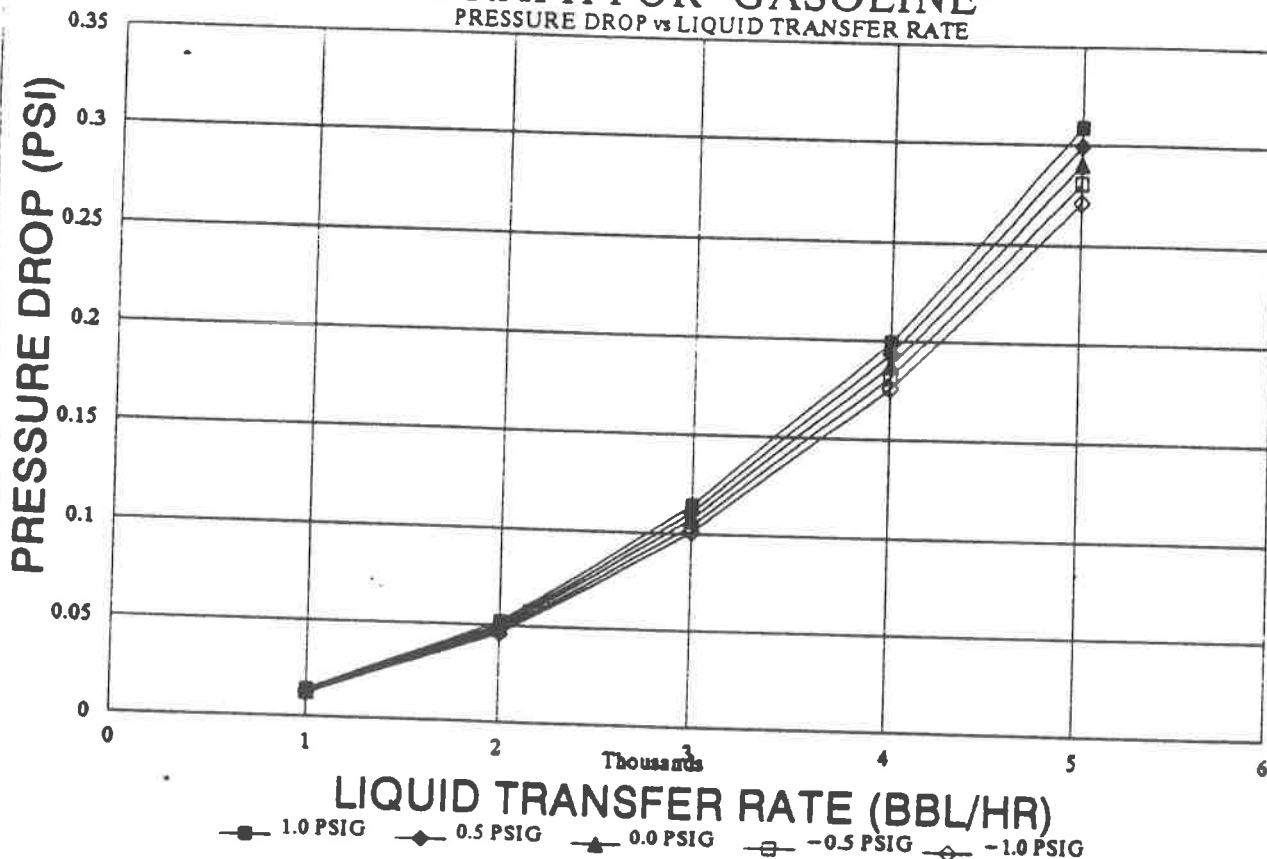

PRESSURE DROP IS BASED ON VAPOR-AIR MIX @ VGR * THE INDICATED LIQUID TRANSFER RATE
(TABULATED DATA IS FOR THE INDICATED PRESSURE AT THE SHORE CONNECTION)
(VGR = 1.25) (S.G. mix = 2.911)

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

1.0 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	Wg/Wa	LBS/CU FT	0.215	0.215	0.215	0.215	0.215
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5		# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % * P	Pcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60		GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)		CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
PRESSURE @ REQ'D FLOW	INPUT	P2	PSIG	1.0	1.0	1.0	1.0	1.0
	J +14.7		PSIA	15.7	15.7	15.7	15.7	15.7
	K*144		PSFA	2260.8	2260.8	2260.8	2260.8	2260.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12		FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		6.28E+04	1.26E+05	1.88E+05	2.51E+05	3.14E+05
RELATIVE ROUGHNESS	P/N	e/D		0.00023	0.00023	0.00023	0.00023	0.00023
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02118	0.01892	0.01783	0.01711	0.01670
HEAD LOSS: PIPE	DD*(Q/W)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.361	15.579	33.045	56.352	85.949
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.203	34.945	76.618	133.816	206.985
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12		FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/W)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.203	34.945	76.618	133.816	206.985
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2262.78	2268.31	2277.26	2289.54	2305.26
	GG/144		PSIA	15.71	15.75	15.81	15.90	16.01
	HH-14.7		PSIG	1.01	1.05	1.11	1.20	1.31
(P1 - P2) / P1	(HH-K) / HH			0.14	0.34	0.74	1.34	1.94
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1-P2)	(II-J)		PSI	0.0137	0.0521	0.1143	0.1996	0.3087

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

0.5 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _s /W _{av}	LBS/CU FT	0.208	0.208	0.208	0.208	0.208
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
"	D*2.09E-5	"	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	F	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	X % * P	Fcg	BBL/HR	1250	2500	3750	5000	6250
"	G*42/60	"	GAL/MIN	875	1750	2625	3500	4375
"	H/(7.48*60)	"	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	0.5	0.5	0.5	0.5	0.5
"	J*14.7	"	PSIA	15.2	15.2	15.2	15.2	15.2
"	K*144	"	PSFA	2188.8	2188.8	2188.8	2188.8	2188.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
"	M/12	"	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		6.08E+04	1.22E+05	1.82E+05	2.43E+05	3.04E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02131	0.01892	0.01783	0.01719	0.01676
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.388	15.579	33.045	56.627	86.252
HEAD LOSS: TOTAL	X*Y+Z*AA+EE	HL	FT PROD. (GAS)	9.230	34.945	76.618	134.090	207.289
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
"	M/12	"	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC					
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X*Y+Z*AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.230	34.945	76.618	134.090	207.289
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2190.72	2196.07	2204.73	2216.68	2231.91
"	GG/144	"	PSIA	15.21	15.25	15.31	15.39	15.50
"	HH-14.7	"	PSIG	0.51	0.55	0.61	0.69	0.80
(P1 - P2) / P1	(HH-K) / HH	"		0.1%	0.3%	0.7%	1.3%	1.9%
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1 - P2)	(II-J)		PSI	0.0133	0.0505	0.1106	0.1936	0.2994

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

0.0 PSIG

TP	ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
A	CARGO:								
B	"GASOLINE"								
C	SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
D	SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _s /W _{av}	LBS/CU FT	0.201	0.201	0.201	0.201	0.201
E	ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
F	BARGE:	D*2.09E-5	"	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
G	VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
H	% OF VGR*MAX ALLOW TRANS RATE	X % = P	Fcg	BBL/HR	1250	2500	3750	5000	6250
I		G*42/60	"	GAL/MIN	875	1750	2625	3500	4375
J	SHORE CONNECTION	H/(7.48*60)	"	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
K	SETTING	INPUT	P2	PSIG	0.0	0.0	0.0	0.0	0.0
L		J +14.7	"	PSIA	14.7	14.7	14.7	14.7	14.7
M		K*144	"	PSFA	2116.8	2116.8	2116.8	2116.8	2116.8
N	VAP RECOV'Y PIPING: SECTION I								
O	INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
P		M/12	"	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
Q	INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
R	ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
S	LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
T	ANALYSIS: SECTION I								
U	VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
V	COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
W	COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
X	NO. OF BENDS	INPUT	N		9	9	9	9	9
Y	COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
Z	COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
AA	HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
AB	HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
AC	HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
AD	HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
AE	REYNOLDS NO.	R*N*C/E*32.2	R		5.88E+04	1.18E+05	1.76E+05	2.35E+05	2.94E+05
AF	RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
AG	MOODY DIAG FRICTION FACTOR	INPUT	f		0.02145	0.01918	0.01797	0.01728	0.01682
AH	HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.416	15.795	33.304	56.920	86.572
AI	HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.258	35.161	76.877	134.383	207.609
AJ	VAP RECOV'Y PIPING: SECTION II								
AK	INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
AL		M/12	"	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
AM	INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
AN	ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
AO	LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
AP	ANALYSIS: SECTION II								
AQ	VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	0.0000	0.0000	0.0000	0.0000	0.0000
AR	COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
AS	COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
AT	NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
AV	COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
AW	COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
AX	HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
AY	HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
AZ	HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BA	HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BB	REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
BC	RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
BD	MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
BE	HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BF	HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
BG	HEAD LOSS: GRAND TOTAL	FF(I) + FF(II)	HLtot	FT PROD. (GAS)	9.258	35.161	76.877	134.383	207.609
BH	PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2116.66	2123.87	2132.26	2143.83	2158.55
BI		GG/144	"	PSIA	14.71	14.75	14.81	14.89	14.99
BJ		HH-14.7	"	PSIG	0.01	0.05	0.11	0.19	0.29
BK	(P1 - P2) / P1	(HH-K) / HH	"		0.1%	0.3%	0.7%	1.3%	1.9%
BL	(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
BM	(P1 - P2)	(II-J)		PSI	0.0129	0.0491	0.1074	0.1877	0.2900

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR = 1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

-0.5 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO:								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _v /W _{av}	LBS/CU FT	0.194	0.194	0.194	0.194	0.194
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5	*	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	P	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % = P	Pcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60	*	GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)	*	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	-0.5	-0.5	-0.5	-0.5	-0.5
	J*14.7	*	PSIA	14.2	14.2	14.2	14.2	14.2
	K*144	*	PSFA	2044.8	2044.8	2044.8	2044.8	2044.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12	*	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R=N*C/E*32.2	R		5.68E+04	1.14E+05	1.70E+05	2.27E+05	2.84E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02159	0.01918	0.01797	0.01737	0.01689
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.446	15.795	33.304	57.233	86.910
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.287	35.161	76.877	134.697	207.947
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12	*	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R=N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	FP(I) + FP(II)	HLtot	FT PROD. (GAS)	9.287	35.161	76.877	134.697	207.947
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	2046.60	2051.63	2059.74	2070.97	2085.20
	GG/144	*	PSIA	14.21	14.25	14.30	14.38	14.48
	HH-14.7	*	PSIG	-0.49	-0.45	-0.40	-0.32	-0.22
(P1 - P2) / P1	(HH-K) / HH	*		0.14	0.34	0.74	1.34	1.94
(P1 - P2) / P1 < 10% ??				YES	YES	YES	YES	YES
(P1-P2)	(II-J)		PSI	0.0125	0.0474	0.1037	0.1817	0.2805

DATA FOR VAPOR-AIR MIX PRESSURE DROP VS LIQUID TRANSFER RATE
FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION

CARGO = "GASOLINE"

VGR =

1.25

PRESSURE AT VESSEL VAPOR CONNECTION IS ASSUMED =

-1.0 PSIG

ITEM	DATA "SOURCE"	SYMBOL	UNITS	20 PERCENT VGR*MAX TRANSFER RATE	40 PERCENT VGR*MAX TRANSFER RATE	60 PERCENT VGR*MAX TRANSFER RATE	80 PERCENT VGR*MAX TRANSFER RATE	100 PERCENT VGR*MAX TRANSFER RATE
CARGO								
"GASOLINE"								
SPEC GRAV VAP-AIR MIX	INPUT	SG		2.911	2.911	2.911	2.911	2.911
SPEC WT VAP-AIR MIX	(SEE NOTE b)	W _g /W _{av}	LBS/CU FT	0.187	0.187	0.187	0.187	0.187
ABS VISCOS. VAP-AIR MIX	INPUT (SEE NOTE c)	u	CENTIPOISE	0.0190	0.0190	0.0190	0.0190	0.0190
	D*2.09E-5	*	# SEC/FT^2	3.97E-07	3.97E-07	3.97E-07	3.97E-07	3.97E-07
BARGE:								
VGR*MAX ALLOW TRANS RATE	INPUT	F	BBL/HR	6250	6250	6250	6250	6250
% OF VGR*MAX ALLOW TRANS RATE	x % = P -	Fcg	BBL/HR	1250	2500	3750	5000	6250
	G*42/60	*	GAL/MIN	875	1750	2625	3500	4375
	H/(7.48*60)	*	CU FT/SEC	1.950	3.899	5.849	7.799	9.748
SHORE CONNECTION								
SETTING	INPUT	P2	PSIG	-1.0	-1.0	-1.0	-1.0	-1.0
	J +14.7	*	PSIA	13.7	13.7	13.7	13.7	13.7
	K*144	*	PSFA	1972.8	1972.8	1972.8	1972.8	1972.8
VAP RECOV'Y PIPING: SECTION I								
INSIDE DIAMETER	INPUT	ID	INCHES	7.981	7.981	7.981	7.981	7.981
	M/12	*	FEET	0.6651	0.6651	0.6651	0.6651	0.6651
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.3474	0.3474	0.3474	0.3474	0.3474
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	280	280	280	280	280
ANALYSIS: SECTION I								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	5.61	11.22	16.84	22.45	28.06
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0.5	0.5	0.5	0.5	0.5
COEFF.: HEAD LOSS, BENDS	INPUT (SEE NOTE e)	KB		0.972	0.972	0.972	0.972	0.972
NO. OF BENDS	INPUT	N		9	9	9	9	9
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0.65	0.65	0.65	0.65	0.65
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.245	0.978	2.201	3.912	6.113
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	4.279	17.116	38.512	68.465	106.977
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.318	1.271	2.861	5.086	7.947
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		5.48E+04	1.10E+05	1.64E+05	2.19E+05	2.74E+05
RELATIVE ROUGHNESS	P/N	e/D		0.000226	0.000226	0.000226	0.000226	0.000226
MOODY DIAG FRICTION FACTOR	INPUT	f		0.02174	0.01948	0.01813	0.01748	0.01695
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	4.477	16.041	33.587	57.570	87.268
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	9.318	35.407	77.160	135.033	208.305
VAP RECOV'Y PIPING: SECTION II								
INSIDE DIAMETER	INPUT	ID	INCHES	1.0E-14	1.0E-14	1.0E-14	1.0E-14	1.0E-14
	M/12	*	FEET	0.0000	0.0000	0.0000	0.0000	0.0000
INSIDE AREA	3.14159*N^2/4	IA	SQ FT	0.0000	0.0000	0.0000	0.0000	0.0000
ROUGHNESS OF PIPE	INPUT	e	FEET	0.00015	0.00015	0.00015	0.00015	0.00015
LENGTH	INPUT (SEE NOTE d)	L	FEET	0	0	0	0	0
ANALYSIS: SECTION II								
VELOC. THRU VAP REC PIPING	I/O	V	FT/SEC	*****	*****	*****	*****	*****
COEFF.: HEAD LOSS, ENTRANCE	INPUT	KE		0	0	0	0	0
COEFF.: HEAD LOSS, PER BEND	INPUT (SEE NOTE e)	KB		0.000	0.000	0.000	0.000	0.000
NO. OF BENDS	INPUT	N		1.0E-11	1.0E-11	1.0E-11	1.0E-11	1.0E-11
COEFF.: HEAD LOSS, VALVE	INPUT	KV		0	0	0	0	0
COEFF.: HEAD LOSS, EXIT	INPUT	KX		0	0	0	0	0
HEAD LOSS: ENTRANCE	S*(R^2/2*32.2)	HE	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: BENDS	U*T*(R^2/2*32.2)	HB	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: VALVE	V*(R^2/2*32.2)	HV	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: EXIT	W*(R^2/2*32.2)	HX	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
REYNOLDS NO.	R*N*C/E*32.2	R		N/A	N/A	N/A	N/A	N/A
RELATIVE ROUGHNESS	P/N	e/D		1.8E+11	1.8E+11	1.8E+11	1.8E+11	1.8E+11
MOODY DIAG FRICTION FACTOR	INPUT	f		N/A	N/A	N/A	N/A	N/A
HEAD LOSS: PIPE	DD*(Q/N)*(R^2/2*32.2)	HP	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: TOTAL	X+Y+Z+AA+EE	HL	FT PROD. (GAS)	0.000	0.000	0.000	0.000	0.000
HEAD LOSS: GRAND TOTAL	PF(I) + PF(II)	HLtot	FT PROD. (GAS)	9.318	35.407	77.160	135.033	208.305
PRESSURE @ TANK	(SEE NOTE f)	P1	PSFA	1974.55	1979.44	1987.26	1998.11	2011.84
	GG/144	*	PSIA	13.71	13.75	13.80	13.88	13.97
	HH-14.7	*	PSIG	-0.99	-0.95	-0.90	-0.82	-0.73
	(HH-K)/HH	*		0.1%	0.3%	0.7%	1.3%	1.9%
(P1 - P2) / P1				YES	YES	YES	YES	YES
(P1 - P2) / P1 < 10% ??				0.0121	0.0461	0.1004	0.1758	0.2711
(P1-P2)	(II-J)		PSI					

A FOR TRANSFER RATE VS PRESSURE DROP

NOTES:

1. 46 CFR 39.30.1 (b) REQUIRES THAT, FOR GASOLINE, CRUDE OIL, AND BENZENE, PRESSURE DROP THROUGH THE VAPOR COLLECTION SYSTEM FROM THE MOST REMOTE CARGO TANK TO THE VESSEL VAPOR CONNECTION MUST BE DETERMINED BASED ON A 50 PERCENT CARGO VAPOR AND AIR MIXTURE. PER DALTON'S LAW OF PARTIAL PRESSURES, AND ASSUMING THE MIXTURE IS 50/50 BY VOLUME, THE SPECIFIC GRAVITY OF THE MIXTURE CAN BE DETERMINED AS FOLLOWS:

$$SG_{mix} = \{ (N/2) \cdot MW_{air} \} + \{ (N/2) \cdot MW_{cargo} \} / (N \cdot MW_{air})$$

WHERE
 N = TOTAL NO. MOLECULES PER UNIT VOLUME
 MW_{air} = MOLECULAR WEIGHT OF AIR
 MW_{cargo} = MOLECULAR WEIGHT OF CARGO VAPOR

$$SG_{mix} = 0.5 \cdot (MW_{air} + MW_{cargo}) / MW_{air}$$

A CORRESPONDING RELATIONSHIP IN TERMS OF SPECIFIC GRAVITY IS:

$$SG_{mix} = (SG_{air} + SG_{cargo}) / 2$$

FOR PRODUCTS OTHER THAN THOSE CITED ABOVE, THE SPECIFIC GRAVITY OF THE MIX CAN BE DETERMINED AS:

$$SG_{mix} = W_{v-a,115} / W_{a,115}$$

WHERE
 $W_{v-a,115}$ = VAPOR-AIR MIX WEIGHT DENSITY, & $W_{a,115}$ = AIR WEIGHT DENSITY, BOTH AT 115 DEG F.

- b. THE SPECIFIC WEIGHT OF THE VAPOR/AIR MIXTURE IS OBTAINED BY MULTIPLYING THE SPECIFIC GRAVITY OF THE VAPOR/AIR MIXTURE BY THE WEIGHT OF AIR AS OBTAINED FROM THE FORMULA IN CRANE T.P. 410 (PAGE A-10) [I.E.,
 $W_a = (M \cdot P) / (10.72 \cdot T)$ WHERE M IS THE MOLECULAR WEIGHT OF AIR (28.97), P IS PRESSURE IN PSIA (SEE BELOW), AND T IS ABSOLUTE TEMPERATURE IN RANKINE ($F + 460$) WITH $T = 115$ DEGREES FAHRENHEIT PER USCG GUIDANCE.

IF $(P_1 - P_2) / P_1 < 10\%$ THE ASSUMPTION THAT $W_s = W_{s1} = W_{s2}$ (WITH W_{s2} EVALUATED @ P_2) CAN BE CONSIDERED TO BE APPROPRIATE; OTHERWISE, A SECOND ITERATION SHOULD BE PERFORMED USING

$$W_s = W_{sav} = (W_{s1} + W_{s2}) / 2 \text{ (WITH } W_{s1} \text{ EVALUATED @ } P_1 \text{ AND } W_{s2} \text{ @ } P_2).$$

- c. THE PRECISE VISCOSITY OF THE CARGO VAPOR-AIR MIXTURE IS NOT KNOWN; HOWEVER, THE VISCOSITY OF AIR @ 100 DEGREES F IS 0.019 CENTIPOISE (SEE CRANE T.P. 410 (PAGE A-5)).

FOR PURPOSES OF THESE CALCULATIONS, ASSUMPTION THAT THE VISCOSITY OF THE CARGO-AIR MIXTURE IS THAT OF AIR AT 100 DEGREES F IS CONSIDERED REASONABLE.

FOR REFERENCE AND COMPARISON, REPRESENTATIVE VALUES OF ABSOLUTE (DYNAMIC) VISCOSITY OF VARIOUS HYDROCARBON VAPOR AND NATURAL GASES MAY BE FOUND IN CRANE T.P. 410 (PAGE A-5).

"LENGTH" IS THE DISTANCE BETWEEN THE MOST REMOTE CARGO TANK VAPOR INLET AND THE VESSEL'S VAPOR CONNECTION, AND IS ESTIMATED CONSERVATIVELY HIGH.

BEND HEAD LOSS ASSUMES

SECTION I:

TEE (THRU RUN)

TEE (THRU BRANCH)

OTHER

TOTAL QTY FITTINGS:

SECTION II:

TEE (THRU RUN)

TEE (THRU BRANCH)

OTHER

TOTAL QTY FITTINGS:

BASED ON FROM DARCY'S EQUATION:

$$P_1 - P_2 = W_s \cdot f \cdot L_{eq} \cdot (V^2 / (2 \cdot G)) / D \text{ (ADJUSTED AS REQ'D FOR UNIT COMPATIBILITY)}$$

QTY	LOSS	QT	LOSS
	COEFF.		COEFF.
3	0.60	90 DEG EL L.R.1	0.75
3	1.80	90 DEG EL	0 N/A
0	0.75	45 DEG EL L.R.2	0.40
9		AVERAGE COEFF.:	0.972
0	0.6	90 DEG EL L.R.0	0.75
0	1.8	90 DEG EL	0 N/A
0	0.75	45 DEG EL L.R.0	0.40
0		AVERAGE COEFF.:	0.000

CALCULATIONS FOR PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VESSEL VAPOR SHORE CONNECTION
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 DESIGN TEMPERATURE
 "TARGET" MAX LIQUID TRANSFER RATE
 PRESSURE AT VESSEL VAPOR SHORE CONNECTION
 PIPING SECTION I:

MOST REMOTE CARGO TANK OUTLET TO SHORE CONN
 DISTANCE ENROUTE TO PV
 ENTRANCE LOSS (K_e)
 BEND LOSS (K_b)

VALVE LOSS (K_v)

EXIT LOSS (K_{ex})
 PIPING SECTION II:

I MOST REMOTE CARGO TANK OUTLET TO SHORE CONN
 DISTANCE ENROUTE TO PV
 ENTRANCE LOSS (K_e)
 BEND LOSS (K_b)

VALVE LOSS (K_v)

EXIT LOSS (K_{ex})
 CARGO VISCOSITY

- NOTES: 1. LIQUID SPECIFIC GRAVITY; MOLECULAR WEIGHT OF CARGO
 2. SPECIFIC GRAVITY OF CARGO VAPOR
 3. SATURATED VAPOR PRESSURE @ 115 F
 4. TOTAL VAPOR-AIR PRESSURE @ 115 F
 5. PARTIAL VOLUME OF VAPOR @ 115 F
 6. PARTIAL VOLUME OF AIR @ 115 F
 7. AIR WEIGHT DENSITY @ 115 F & SHORE CONN. PRESS.

8. VAPOR-AIR WEIGHT DENSITY @ 115 F & SHORE CONN. PRESS.
 9. VAPOR GROWTH RATE (SEE ALSO NOTE NO. 14)
 10. LIQUID TRANSFER RATE
 11. VAPOR-AIR MIXTURE FLOW RATE
 12. REQUIRED AIR EQUIVALENT FLOW RATE

TABLE IV: INPUT DATA & NOTES

(MDWP)	> =	N/A	PSIG	
(T)		115	F	
(TMLTR)		5000	BPH	
(Pa/c)		1.00	PSIG	15.7 PSIA
NOM I.D.		8	IN	I.D.
ROUGHNESS		0.00015		AREA 0.347 FT ²

INCREMENTS FOR PERCENT OF MLTR:

1.	20.0%	*
2.	40.0%	*
3.	60.0%	*
4.	80.0%	*
5.	100.0%	*
6.	100.0%	*
7.	100.0%	*

280	FT		
0.5			
QTY	LOSS COEF	TOTAL	
TEE (THRU RUN)	3 0.60	1.800	90 DEG EL L.R.
TEE (THRU BRANCH)	3 1.80	5.400	90 DEG EL
OTHER	0 0.75	0.000	45 DEG EL L.R.
TOTAL:	9 AVG:	0.972	
GATE	0	0.19	0.000
BUTTERFLY	1 0.65	0.650	
OTHER	0 N/A	0.000	
	1 AVG:	0.650	
	0		
NOM I.D.	N/A	IN	I.D.
ROUGHNESS	0.00015	AREA	0.000 IN
			0.000 FT ²

QTY	LOSS COEFF	TOTAL
1	0.75	0.750
0	N/A	0.000
2	0.40	0.800

0	FT		
0			
QTY	LOSS COEF	TOTAL	
TEE (THRU RUN)	0 0.60	0.000	90 DEG EL L.R.
TEE (THRU BRANCH)	0 1.80	0.000	90 DEG EL
OTHER	0 0.75	0.000	45 DEG EL L.R.
TOTAL:	0 AVG:	0.000	
GATE	0	0.19	0.000
BUTTERFLY	0 0.65	0.000	
OTHER	0 N/A	0.000	
	0 AVG:	0.000	
	0		

0.019 CP ----> 3.97E-07 LB SEC/FT²

SGv OBTAIN FROM REFERENCE SOURCE
 Pv,115 (CARGO MM / AIR MM), OR FM REF. SOURCE
 Pt,115 OBTAIN FROM REFERENCE SOURCE
 EST'D TO BE SAME SHORE PRESS (Pa/c)
 Vv,115 Pv,115 / Pt,115
 Va,115 (Pt,115 - Pv,115) / Pt,115
 Wa,115 Mwa * Pa/c Mwa = MOLEC. WT. OF AIR
 10.72*(460+T)
 Wv-a,115 [(SGv*Vv,115)+Va,115]*(0.0047*Pa/c)
 VGR ESTIMATED TO BE 1 + (0.25*Pv,115/12.5)
 Q1 Q1 * VGR
 Qv-a Qv-a*(Wv-a,115/Wa,115)^.5

13. USCG VAP COLLECT'N SYS. CARGO CATEGORIES
 1. NO ADD'L VCS REQMTS ABOVE THOSE FOR BENZENE, GASOLINE & CRUDE OIL
 2. POLYMERIZES
 3. HIGHLY TOXIC
 4. POLYMERIZES & HIGHLY TOXIC
 5. HIGH VAPOR GROWTH RATE
 6. HIGH VAP GROWTH RATE & HIGHLY TOXIC
 7. HIGH VAP GROWTH RATE & POLYMERIZES
 8. MORE INFO NEEDED BEFORE REQMTS CAN BE DETERMINED
 14. VGR = 1.25 FOR GASOLINE, CRUDE OIL, AND BENZENE.
 15. NF/NC = NON-FLAMMABLE/NON-COMBUSTIBLE

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)
		1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
46 CFR SUBCHAPT D, TABLE 151						
ACETIC ACID	AAC	0.004	0.014	0.030	0.052	0.080
ACETIC ANHYDRIDE	ACA	0.004	0.014	0.030	0.051	0.079
ACETONITRILE	ATN	0.003	0.013	0.028	0.048	0.074
ACRYLIC ACID	ACR	0.004	0.013	0.029	0.050	0.077
ACRYLONITRILE	ACN	0.005	0.019	0.041	0.071	0.109
ADIPONITRILE	ADN	0.003	0.013	0.028	0.048	0.074
ALUMINUM SULFATE SOLUTION	ASX					
AMINOETHYLETHANOLAMINE	AEE	0.003	0.013	0.028	0.048	0.074
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX					
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH					
ANTHRACENE OIL (COAL TAR FRACTION)	AHO					
BENZENE	BNZ	0.008	0.028	0.062	0.108	0.166
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	0.008	0.029	0.063	0.109	0.168
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	0.008	0.029	0.063	0.109	0.168
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	0.008	0.029	0.063	0.109	0.168
iso-BUTYL ACRYLATE	BAI	0.004	0.015	0.032	0.055	0.084
n-BUTYL ACRYLATE	BTC	0.004	0.014	0.030	0.052	0.080
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	0.004	0.015	0.032	0.055	0.084
BUTYL METHACRYLATE	BMH	0.004	0.014	0.030	0.052	0.079
iso-BUTYRALDEHYDE	BAD	0.007	0.028	0.061	0.106	0.163
n-BUTYRALDEHYDE	BTR	0.007	0.028	0.061	0.106	0.163
BUTYRALDEHYDES (CRUDE)	BFA	0.008	0.028	0.062	0.107	0.165
BUTYRALDEHYDE (ISO-, N-)	BAE	0.008	0.028	0.062	0.107	0.165
AMPHOR OIL (LIGHT)	CPO					
ARBON TETRACHLORIDE	CBT					
AUSTIC POTASH SOLUTION	CPS					
CAUSTIC SODA SOLUTION	CSS					
CHLOROBENZENE	CRB	0.004	0.015	0.032	0.056	0.086
CHLOROPFORM	CRP					
CHLOROSULFONIC ACID	CSA					
COAL TAR NAPHTHA SOLVENT	NCT	0.004	0.013	0.029	0.050	0.076
CREOSOTE (COAL TAR)	CCT	0.003	0.013	0.028	0.048	0.074
CREOSOTE (WOOD)	CMD	0.003	0.013	0.028	0.048	0.074
CRESOLS (ALL ISOMERS)	CRS	0.004	0.013	0.028	0.048	0.074
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CPP	0.004	0.013	0.028	0.048	0.074
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CSC					
CRESYLATE SPENT CAUSTIC	CAX					
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CYA	0.004	0.016	0.035	0.060	0.093
CROTONALDEHYDE	CCR	0.003	0.013	0.028	0.048	0.074
CYCLOHEXANONE	CHA	0.004	0.014	0.031	0.053	0.082
CYCLOHEXYLAMINE	DAT	0.003	0.013	0.028	0.048	0.074
DECYL ACRYLATE (iso-, n-)	DBX	0.004	0.013	0.028	0.049	0.075
DICHLOROBENZENE (ALL ISOMERS)	DCH	0.011	0.042	0.092	0.161	0.247
1,1-DICHLOROETHANE	DEE	0.004	0.013	0.028	0.048	0.074
2,2-DICHLOROETHYL ETHER	DCM					
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DOS					
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DAD					
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DTI					
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DPK	0.009	0.032	0.071	0.123	0.190
1,1-,1,2- OR 1,3- DICHLOROPROPANE	DFU	0.008	0.029	0.064	0.111	0.171
1,3-DICHLOROPROPENE	DMX	0.009	0.032	0.071	0.123	0.190
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DCW					
2,2-DICHLOROPROPIONIC ACID	DEA	0.003	0.013	0.028	0.048	0.074
DIETHANOLAMINE	DEH	0.004	0.014	0.031	0.054	0.083
DIETHYLAMINE	DET	0.003	0.013	0.028	0.048	0.074
DIETHYLENETRIAMINE	DEH					
DIETHYL ETHER, SEE ETHYL ETHER	DBU	0.004	0.014	0.031	0.053	0.082
DIISOBUTYLAMINE	DIP	0.003	0.013	0.028	0.048	0.074
DIISOPROPANOLAMINE						

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSP RATE (MLTR)	MAX LIQUID TRANSP RATE (MLTR)	MAX LIQUID TRANSP RATE (MLTR)	MAX LIQUID TRANSP RATE (MLTR)	MAX LIQUID TRANSP RATE (MLTR)
		1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
DIISOPROPYLAMINE	DIA	0.006	0.022	0.048	0.085	0.130
N,N-DIMETHYLACETAMIDE	DAC	0.004	0.013	0.028	0.049	0.076
DIMETHYLETHANOLAMINE	DME	0.004	0.014	0.030	0.052	0.079
DIMETHYLFORMAMIDE	DMP	0.004	0.013	0.029	0.050	0.076
1,4-DIOXANE	DOX	0.004	0.017	0.036	0.062	0.096
DI-N-PROPYLAMINE	DNA	0.004	0.016	0.036	0.062	0.095
ETHANOLAMINE	MEA	0.003	0.013	0.028	0.048	0.074
ETHYL ACRYLATE	EAC	0.005	0.018	0.038	0.067	0.103
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.008	0.032	0.070	0.121	0.187
N-ETHYLBUTYLAMINE	EBA	0.004	0.016	0.034	0.059	0.091
N-ETHYLCYCLOHEXYLAMINE	ECC	0.004	0.014	0.031	0.054	0.082
ETHYLENE CYANOHYDRIN	ETC	0.003	0.013	0.028	0.048	0.073
ETHYLENEDIAMINE	EDA	0.004	0.014	0.030	0.052	0.080
ETHYLENE DIBROMIDE	EDB					
ETHYLENE DICHLORIDE	EDC	0.006	0.023	0.050	0.086	0.133
ETHYLENE GLYCOL PROPYL ETHER	EGP	0.004	0.015	0.032	0.055	0.085
2-ETHYLHEXYL ACRYLATE	EAI	0.003	0.013	0.028	0.048	0.074
ETHYLIDENE NORBORNENE	ENB	0.004	0.014	0.030	0.051	0.079
ETHYL METHACRYLATE	ETM	0.004	0.016	0.034	0.058	0.090
2-ETHYL-3-PROPYLACROLEIN	EPA	0.004	0.013	0.028	0.049	0.076
FERRIC CHLORIDE SOLUTIONS	FCS					
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	0.003	0.013	0.028	0.048	0.074
FORMIC ACID	FMA	0.004	0.015	0.032	0.056	0.085
FURFURAL	PFA	0.004	0.013	0.028	0.049	0.075
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA					
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.003	0.013	0.028	0.048	0.074
HEXAMETHYLENEIMINE	HMI	0.004	0.013	0.028	0.049	0.075
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS					
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	IPR	0.019	0.072	0.158	0.277	0.428
ISOPRENE	KPL					
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT >= 3%) (INCL'G: BLACK, GREEN OR WHITE)	MSO	0.004	0.014	0.031	0.054	0.083
MESITYL OXIDE	MMW	0.006	0.022	0.047	0.082	0.126
METHYL ACRYLATE	MCK	0.003	0.013	0.028	0.048	0.074
METHYLCYCLOPENTADIENE DIMER	MDE	0.004	0.013	0.028	0.049	0.075
METHYL DIETHANOLAMINE	MEP	0.004	0.013	0.029	0.050	0.076
2-METHYL-5-ETHYLPYRIDINE	MMH	0.005	0.018	0.038	0.066	0.103
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	MMP	0.004	0.014	0.030	0.052	0.080
METHYL METHACRYLATE	MSR	0.004	0.014	0.030	0.052	0.080
2-METHYLPYRIDINE	MPL	0.004	0.014	0.031	0.054	0.083
alpha-METHYLSTYRENE	NCD					
MORPHOLINE	NPM	0.004	0.015	0.032	0.056	0.086
NITRIC ACID (70% OR LESS)	ONE	0.004	0.014	0.030	0.053	0.081
NITROPROPANE (-1, OR -2)	OLM	0.003	0.013	0.028	0.048	0.074
OCTYL NITRATES (ALL ISOMERS)	PCE					
OLEUM	PDE	0.014	0.051	0.112	0.197	0.304
PENTACHLOROETHANE	PER					
1, 3-PENTADIENE	PAC					
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PEB	0.003	0.013	0.028	0.048	0.074
PHOSPHORIC ACID	PPI	0.003	0.013	0.028	0.048	0.073
POLYETHYLENE POLYAMINES	MPA	0.004	0.013	0.028	0.048	0.074
POLYMETHYLENE POLYPHENYL ISOCYANATE	PAI	0.004	0.013	0.028	0.048	0.074
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)	PMA	0.004	0.013	0.029	0.050	0.076
iso-PROPANOLAMINE	IPP	0.017	0.063	0.138	0.241	0.373
PROPANOLAMINE (iso-, n-)	IPB	0.008	0.031	0.068	0.119	0.183
PROPIONIC ACID	PRD	0.004	0.015	0.033	0.057	0.087
iso-PROPYLAMINE	SAU					
iso-PROPYL ETHER	SDO					
PYRIDINE	SDL					
SODIUM ALUMINATE SOLUTION						
SODIUM CHLORATE SOLUTION (50% OR LESS)						
SODIUM DICHROMATE SOL'N (70% OR LESS)						
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)						

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

SODIUM HYPOCHLORITE SOL'N (15% OR LESS)
 SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H₂S 15 PPM OR LESS)
 SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H₂S<200 PPM)
 SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H₂S GREATER THAN 200 PPM)
 SODIUM THIOCYANATE SOLUTION (56% OR LESS)
 STYRENE MONOMER
 SULFURIC ACID
 SULFURIC ACID, SPENT
 1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)
 TETRAETHYLENEPENTAMINE
 TETRAHYDROFURAN
 1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)
 TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)
 TRICHLOROETHYLENE
 1,2,3-TRICHLOROPROPANE
 TRIETHANOLAMINE
 TRIETHYLAMINE
 TRIETHYLENETETRAMINE
 UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH₃)
 VALERALDEHYDE (iso-, n-)
 VALERALDEHYDE (iso-)
 VALERALDEHYDE (n-)
 VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)
 VINYL ACETATE
 VINYL TOLUENE

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSP	TRANSP	TRANSP	TRANSP	TRANSP
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BBL/	(BBL/	(BBL/	(BBL/	(BBL/
	HR)	HR)	HR)	HR)	HR)

SHP					
SSH					
SSI					
SSJ					
STS					
STY	0.004	0.014	0.030	0.052	0.079
SPA	0.003	0.013	0.028	0.048	0.074
SAC	0.003	0.013	0.028	0.048	0.073
TEC					
TTP	0.003	0.013	0.028	0.048	0.073
THP	0.005	0.020	0.044	0.076	0.117
TCM	0.004	0.016	0.035	0.060	0.093
TCL	0.007	0.024	0.053	0.092	0.142
TCN	0.004	0.013	0.029	0.050	0.077
TEA	0.003	0.013	0.028	0.048	0.074
TEN	0.005	0.019	0.041	0.071	0.110
TET	0.003	0.013	0.028	0.048	0.074
UAS					
	0.006	0.024	0.052	0.091	0.140
IVA	0.006	0.024	0.052	0.091	0.140
VAL	0.003	0.013	0.028	0.048	0.074
VBL					
VAM	0.007	0.026	0.056	0.098	0.151
VNT	0.004	0.013	0.028	0.049	0.075

CARGO: C9809: COMOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSP	TRANSP	TRANSP	TRANSP	TRANSP
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BBL/	(BBL/	(BBL/	(BBL/	(BBL/
	HR)	HR)	HR)	HR)	HR)

CARGO

46 CFR SUBCHAPTER O BUT NOT TABLE 151

1,1-DICHLOROPROPANE	DPB	0.009	0.032	0.071	0.123	0.190
1,1,1-TRICHLOROETHANE	DPP	0.005	0.019	0.042	0.073	0.112
1,2-DICHLOROPROPANE	DPC	0.006	0.024	0.052	0.090	0.139
1,3-CYCLOPENTADIENE	MHB	0.004	0.015	0.032	0.056	0.086
1,3-DICHLOROPROPANE	DDA					
2-METHYL-2-HYDROXY-3-BUTYNE	PNT					
2,4-DICHLOROPHENOXACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)						
3-PENTHENITRILE						
AEROTHENE TT (1,1,1-TRICHLOROETHANE)						
ALKYLBENZENE	ASP	0.008	0.028	0.062	0.108	0.165
AMINOSTHYLPIPERAZINE	BSC	0.003	0.013	0.028	0.048	0.073
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)	BZE	0.003	0.013	0.028	0.048	0.074
BENZENE SULFONYL CHLORIDE	BCL	0.004	0.013	0.028	0.049	0.075
BENZYL ACETATE						
BENZYL CHLORIDE (STABILIZED)	BTE	0.004	0.014	0.030	0.053	0.081
BUTANOL	BTO	0.008	0.031	0.068	0.118	0.182
BUTYL ETHER (n-)	BRA	0.004	0.013	0.028	0.048	0.074
BUTYLENE OXIDE (1,2-)	CBO	0.004	0.013	0.028	0.048	0.074
BUTYRIC ACID	CHM	0.003	0.013	0.028	0.048	0.074
CARBOLIC ACID	CPM	0.003	0.013	0.028	0.048	0.074
CHLOROACETIC ACID (80% OR LESS)	CTM	0.004	0.014	0.030	0.051	0.079
CHLOROPROPIONIC ACID (2- OR 3-)	CTO	0.004	0.014	0.030	0.051	0.079
CHLOROTOLUENE (m-)	CRN	0.004	0.013	0.028	0.049	0.075
CHLOROTOLUENE (o-)	CHI	0.004	0.014	0.031	0.054	0.083
CHLOROTOLUENE (p)	CCW	0.003	0.013	0.028	0.048	0.074
CHLOROTOLUENES (MIXED ISOMERS)	CRX	0.003	0.013	0.028	0.048	0.074
CREOSOTE (ALL ISOMERS)	CYE	0.004	0.016	0.035	0.060	0.093
CRESYLIC ACID TAR	CYX	0.004	0.015	0.033	0.057	0.087
CYCLOHEPTANE	CYC	0.003	0.013	0.028	0.048	0.074
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CSB	0.008	0.028	0.062	0.108	0.167
CYCLOHEXYL ACETATE	CYP	0.011	0.040	0.088	0.155	0.235
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	DCO	0.003	0.013	0.028	0.048	0.073
CYCLOPENTANE	DCI	0.004	0.013	0.028	0.049	0.075
DECAOIC ACID						
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)	DSU	0.003	0.013	0.028	0.048	0.074
DICHLOROISOPROPYL ETHER (2,2'-)	DAB	0.004	0.013	0.029	0.050	0.076
DICHLOROPROPANE	DOT					
DICHLOROPROPENE						
DIETHYL SULFATE						
DIETHYLETHANOLAMINE						
DODECYL BENZENE						
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE						
DRIPOLINE						
ETHANOL (see ethyl alcohol)						
ETHYL BROMIDE						
ETHYL TERT-BUTYL ETHER						
ETHYLAMINE						
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EDE	0.007	0.026	0.057	0.099	0.152
ETHYLMERCAPTAN (SAME AS ETHANETHIOL)	EAM	0.024	0.090	0.199	0.348	0.539
ETHYLPHENOL	ETX	0.007	0.026	0.056	0.097	0.149
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES						
HYDROSULFIDE	EPL	0.003	0.013	0.028	0.048	0.074
INDENES	MTM	0.005	0.017	0.036	0.063	0.097
ISOBUTYL ACETATE						
ISOPRENE, PENTADIENE MIXTURE						
ISO-PROPYL ALCOHOL	IBA	0.004	0.014	0.030	0.052	0.079
LAURIC ACID	IPW	0.005	0.017	0.037	0.064	0.098
METHACRYLONITRILE	LRA					
METHANOL	MBT	0.005	0.018	0.039	0.068	0.105

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
	LIQUID TRANSF RATE (MLTR)	LIQUID TRANSF RATE (MLTR)	LIQUID TRANSF RATE (MLTR)	LIQUID TRANSF RATE (MLTR)	LIQUID TRANSF RATE (MLTR)
	1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
METHYL STYRENE					
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES					
METHYLCYCLOHEXANE					
METHYLHEXANE (SAME AS HEPTANE)					
MONOETHANOLAMINE					
MONOISOPROPANOLAMINE					
NAPHTHALENE (MOLTEN)					
NEODECANOIC ACID					
NITRILOTRIACETIC ACID					
NITROPHENOL (MOLTEN)					
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE					
NITROTOLUENE (o-, p-)					
PARALDEHYDE					
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)					
PROPIONALDEHYDE					
PROPIONIC ANHYDRIDE					
PROPIONITRILE					
PROPYLAMINE (n-)					
PROPYLBENZENE					
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)					
PYROLYSIS RESIDUAL FUELS					
SEWAGE, RAW					
SODIUM SULFIDE (SOLID IN WATER)					
STYRENE					
STYRENE CRUDE					
STYRENE TAR					
TETRAMETHYLBENZENE (1,2,3,5-)					
TOLUIDINE (o-)					
TRICHLOROBENZENE (1,2,4-)					
TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N					
TRIPHENYLBORANE					
UNDECANOIC ACID					
HYDROCARBON 5-9					
MIA					
MCY	0.005	0.018	0.040	0.070	0.107
MEA	0.004	0.013	0.028	0.048	0.074
NTM	0.004	0.013	0.028	0.049	0.075
NEA	0.003	0.013	0.028	0.048	0.074
NAA	0.003	0.013	0.028	0.048	0.074
NTP					
NRM	0.004	0.015	0.033	0.056	0.087
NIT	0.003	0.013	0.028	0.048	0.074
PDH	0.012	0.045	0.099	0.172	0.267
PGS					
PAD	0.010	0.036	0.079	0.137	0.212
PAH	0.004	0.013	0.028	0.049	0.075
PCN	0.004	0.014	0.031	0.053	0.081
PRA	0.010	0.036	0.079	0.138	0.213
	0.003	0.012	0.026	0.045	0.069
GPY	0.008	0.029	0.063	0.109	0.168
SWR					
SDS					
STY	0.004	0.014	0.030	0.052	0.079
STX	0.004	0.014	0.030	0.052	0.079
STT					
TTB	0.004	0.013	0.028	0.049	0.076
TLI	0.003	0.013	0.028	0.048	0.074
TCB	0.004	0.013	0.028	0.048	0.074
TPE					
UDA	0.003	0.013	0.028	0.048	0.073
HPN	0.006	0.024	0.052	0.091	0.140

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
C	MAX	MAX	MAX	MAX	MAX
H	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
R	TRANSP	TRANSP	TRANSP	TRANSP	TRANSP
I	RATE	RATE	RATE	RATE	RATE
S	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
	1,000	2,000	3,000	4,000	5,000
	(DBL/	(DBL/	(DBL/	(DBL/	(DBL/
	HR)	HR)	HR)	HR)	HR)

46 CFR SUBCHAPTER D, TABLE 30.25-1

Acetone					
Acetophenone					
Acetyl Tributyl Citrate	ACT	0.008	0.028	0.062	0.107
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ACP	0.004	0.014	0.031	0.054
Alcohols (C13 and above)					
Alcoholic beverages, N.O.S.	ALF				
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates	ALY				
Alcohol (C12 - C15) Poly(1-3)ethoxylates					
Alcohol (C12 - C15) Poly(3-11)ethoxylates					
Alkenylsuccinic acid					
Alkenylsuccinic Anhydride					
Alkyl (C9 - C17) Benzenes					
Alkylbenzenesulfonic acid (4% or less)	AKB				
Alkyl Phthalates (n-)	ABS				
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)					
Aminoethyldiethanolamine, Aminoethylethanolamine solution					
Amyl Acetate (commercial, iso-, n-, sec-)					
AMYL ACETATE (n-)	ARC	0.005	0.019	0.042	0.073
AMYL ACETATE (iso-)	AML	0.004	0.014	0.030	0.052
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	IAT	0.004	0.014	0.030	0.052
Amyl alcohol (n-)	AAI	0.004	0.013	0.029	0.050
Amyl alcohol (tert-)	AAH	0.004	0.013	0.029	0.050
AMYL ALCOHOL, PRIMARY	AAI				
AMYL ALCOHOL, (sec-)	APM	0.004	0.013	0.029	0.050
Amylene	ASE	0.004	0.013	0.029	0.050
AMYL ALCOHOL, (iso-)	AMZ				
Amyl Methyl Ketone	IAA	0.004	0.013	0.029	0.050
Amyl Tallate	AMK				
Asphalt					
ASPHALT BLENDING STOCKS: Roofers flux	ASP				
ASPHALT BLENDING STOCKS: Straight run residue	ARF				
Behenyl alcohol	ASR				
Benzene Tricarboxylic acid Trioctyl Ester					
Benzyl alcohol					
Bicyclic Terpenol Polyamide salt	BAL	0.004	0.013	0.028	0.049
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, Polyalkyls	SPX				
Butane	BMC				
Butene, SEE BUTYLENE					
Butene Oligomer					
Butyl Acetate (iso-, n-)	BOL				
BUTYL ACETATE (n-)	BAX	0.004	0.014	0.031	0.054
Butyl Acetate (sec-)	BCN	0.004	0.015	0.032	0.056
Butyl alcohol (iso-, n-, sec-, tert-)	STA	0.005	0.017	0.037	0.064
BUTYL ALCOHOL (ISO-)		0.004	0.014	0.031	0.054
BUTYL ALCOHOL (N-)	IAL	0.004	0.014	0.031	0.054
BUTYL ALCOHOL (SEC-)	BAW	0.004	0.014	0.029	0.051
BUTYL ALCOHOL (TERT-)	BAS	0.004	0.015	0.032	0.056
Butyl Benzyl Phthalate	BAT	0.005	0.018	0.039	0.067
Butylene	BPH	0.003	0.013	0.028	0.048
Butylene Glycol	BTN				
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL	BUG				
Butylene Polyglycol, SEE BUTYLENE GLYCOL					
iso-Butyl Formate					
n-Butyl Formate					
Butyl Heptyl Ketone					
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE					
Butyl Stearate					
Butyl Toluene					
Butyrolactone (gamma)					

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	CARGO	20.0t	40.0t	60.0t	80.0t	100.0t
		MAX	MAX	MAX	MAX	MAX
		LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)
		1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
CLS	Calcium Alkylphenate Calcium Alkyl Salicylate Calcium Amino Nonyl Phenolate Calcium Carboxylate Caprolactam solutions Carbon black base Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE) Cetyl-Stearal alcohol Cleaning spirit (unleaded) Coal tar Cumene Cycloaliphatic resins Cyclohexane Cyclohexanol 1,3-Cyclopentadiene dimer (molten) Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN) Cymene (para-) Decahydronaphthalene Decaldehyde (iso-) Decaldehyde (n-) Decane Decene Decyl alcohol (all isomers) (DECANOL) DECYL ALCOHOL (iso-) DECYL ALCOHOL (n-) Decylbenzene (n-) Detergent Alkylate Diacetone alcohol Dialkyl (C10-C14) Benzenes Dialkyl (C7-C13) Phthalates Dibutyl Carbinol Dibutyl Phthalate (ortho-) Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN) Diethylbenzene Diethylene Glycol Diethylene Glycol Butyl Ether Diethylene Glycol Butyl Ether Acetate Diethylene Glycol Dibutyl Ether Diethylene Glycol Diethyl Ether Diethylene Glycol Ethyl Ether Diethylene Glycol Ethyl Ether Acetate Diethylene Glycol Methyl Ether Diethylene Glycol Methyl Ether Acetate Diethylene Glycol Phenyl Ether Diethylene Glycol Phthalate Di-(2-ethylhexyl)adipate Di-(2-ethylhexyl)phthalate Diethyl Phthalate Diglycidyl Ether of Bisphenol A Dibutyl Phthalate Dibutyl Phthalate Diisobutylcarbinol Diisobutylene Diisobutyl Ketone Diisobutyl Phthalate Diisodecyl Phthalate Diisononyl Adipate Diisononyl Phthalate Diisocetyl Phthalate Diisopropylbenzene (all isomers) Diisopropyl Naphthalene Dimethyl Adipate	0.004	0.013	0.028	0.048	0.074
COR						
CUM		0.004	0.014	0.031	0.054	0.084
CHX		0.006	0.022	0.048	0.085	0.135
CHW		0.004	0.013	0.028	0.049	0.075
CPD		0.004	0.014	0.029	0.051	0.078
CHP		0.004	0.013	0.028	0.049	0.075
DEW		0.004	0.013	0.028	0.049	0.075
IDA		0.003	0.013	0.028	0.048	0.074
DAL		0.003	0.013	0.028	0.048	0.073
DOC						
DCE		0.004	0.013	0.028	0.049	0.075
DAX		0.003	0.013	0.028	0.048	0.074
ISA		0.003	0.013	0.028	0.048	0.074
DAN		0.003	0.013	0.028	0.048	0.074
DBZ		0.003	0.013	0.028	0.048	0.074
DAA		0.004	0.013	0.028	0.049	0.075
DAB						
DAH						
DPA						
DPT		0.004	0.014	0.029	0.051	0.078
DEB		0.004	0.013	0.028	0.049	0.075
DEG		0.003	0.013	0.028	0.048	0.074
DME		0.003	0.013	0.028	0.048	0.074
DEM						
DIG						
DGE						
DGA		0.003	0.013	0.028	0.048	0.074
DGM		0.003	0.013	0.028	0.048	0.074
DGR						
DGP						
DGL						
DEH						
DIE						
DPH						
BDH						
DEP						
DEA						
DBC		0.004	0.013	0.028	0.049	0.075
DBL		0.005	0.018	0.040	0.069	0.106
DIK		0.004	0.013	0.029	0.050	0.077
DIT						
DID						
DMY						
DIN						
DIO						
DIX		0.004	0.013	0.028	0.048	0.074
DII						
DIA						

BARGE: C9809: COMOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0% MAX LIQUID TRANSP RATE (MLTR)	40.0% MAX LIQUID TRANSP RATE (MLTR)	60.0% MAX LIQUID TRANSP RATE (MLTR)	80.0% MAX LIQUID TRANSP RATE (MLTR)	100.0% MAX LIQUID TRANSP RATE (MLTR)
	1,000 (BDL/ HR)	2,000 (BDL/ HR)	3,000 (BDL/ HR)	4,000 (BDL/ HR)	5,000 (BDL/ HR)
Dimethylbenzene					
Dimethyl Glutarate					
Dimethyl Phthalate					
Dimethyl Polysiloxane					
2,2-Dimethylpropane-1,3-diol					
Dimethyl Succinate					
Dinonyl Phthalate					
Di(octylphenyl)amine					
Diocetyl Phthalate					
Dipentene					
Diphenyl					
Diphenyl, Diphenyl Ether mixture					
Diphenyl Ether					
Diphenyl Ether, Biphenyl Ether mixture					
Dipropylene Glycol					
Dipropylene Glycol Dibenzoate					
Dipropylene Glycol Methyl Ether					
DISTILLATES: Flashed feed stocks					
DISTILLATES: Straight run					
Ditridacyl Phthalate					
Diundecyl Phthalate					
Dodecane (all isomers)					
Dodecanol					
Dodecene (all isomers)					
DODECENE					
Dodecylbenzene					
Dodecyl Phenol					
Drilling mud (low toxicity) (if flammable or combustible)/					
Epoxyated linear alcohols, C11-C15					
Ethane					
2-Ethoxyethanol					
2-Ethoxyethyl Acetate					
Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES					
Ethoxy Triglycol (crude)					
Ethyl Acetate					
Ethyl Acetoacetate					
Ethyl alcohol (ETHANOL)					
Ethyl Amyl Ketone					
Ethyl Benzene					
Ethyl Butanol					
Ethyl Butyrate					
Ethyl Cyclohexane					
Ethylene					
Ethylene Carbonate					
Ethylene Glycol					
Ethylene Glycol Acetate					
Ethylene Glycol Butyl Ether					
ETHYLENE GLYCOL BUTYL ETHER ACETATE					
Ethylene Glycol Ether Acetate					
Ethylene Glycol Tert-Butyl Ether					
Ethylene Glycol Diacetate					
Ethylene Glycol Dibutyl Ether					
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL					
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE					
Ethylene Glycol Isopropyl Ether					
Ethylene Glycol Methyl Butyl Ether					
Ethylene Glycol Methyl Ether					
Ethylene Glycol Methyl Ether Acetate					
Ethylene Glycol Phenyl Ether					
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture					
Ethylene-Propylene Copolymer (in liquid mixtures)					
Ethyl-3-Ethoxypropionate					
DOT					
DTL	0.003	0.013	0.028	0.048	0.073
DMP					
DDI					
DSE					
DIP	0.004	0.013	0.028	0.048	0.074
DOP	0.003	0.013	0.028	0.048	0.073
DPW	0.004	0.013	0.028	0.049	0.075
DIL	0.003	0.013	0.028	0.048	0.074
DDO	0.003	0.013	0.028	0.048	0.074
DPE	0.003	0.013	0.028	0.048	0.074
DOB					
DPG	0.004	0.013	0.028	0.049	0.075
DGY					
DPY					
DFF	0.005	0.018	0.040	0.069	0.106
DSR	0.005	0.018	0.040	0.069	0.106
DTP					
DUP					
DOC					
DDN					
DOZ	0.003	0.013	0.028	0.048	0.074
DDO	0.003	0.013	0.028	0.048	0.074
DOB	0.012	0.044	0.097	0.169	0.262
DOL					
ETH					
EBO					
EEA					
ETG	0.003	0.013	0.028	0.048	0.073
ETA	0.006	0.023	0.050	0.087	0.133
EAA	0.004	0.013	0.029	0.050	0.077
EAL	0.004	0.016	0.035	0.061	0.094
EAK					
ETS	0.004	0.014	0.031	0.053	0.082
EST	0.004	0.013	0.028	0.049	0.075
EBR	0.004	0.016	0.034	0.058	0.090
ECY	0.004	0.014	0.031	0.053	0.081
ETL					
EGL	0.003	0.013	0.028	0.048	0.073
EGO					
EGM					
EGA	0.004	0.013	0.028	0.049	0.075
EGY	0.003	0.013	0.028	0.048	0.074
EGB					
EGP					
EGA					
EGI					
EGS	0.003	0.013	0.028	0.048	0.074
EGT					
EPE	0.003	0.013	0.028	0.048	0.074
EDX					
EEP					

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0% MAX LIQUID TRANSP RATE (MLTR)	40.0% MAX LIQUID TRANSP RATE (MLTR)	60.0% MAX LIQUID TRANSP RATE (MLTR)	80.0% MAX LIQUID TRANSP RATE (MLTR)	100.0% MAX LIQUID TRANSP RATE (MLTR)
	1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES					
2-Ethylhexanoic acid					
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)					
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID					
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)					
Ethyl Hexyl Tallate					
Ethyl Propionate					
Ethyl Toluene					
Fatty acid (saturated, C13 and above)					
Fatty acid Amides					
Formamide					
Purfuryl Alcohol					
Gas oil, cracked					
GASOLINE BLENDING STOCKS: Alkylates					
GASOLINE BLENDING STOCKS: Reformates					
GASOLINES: Automotive (containing not over 4.23 grams lead per gallon)					
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon) Aviation					
GASOLINES: Casinghead (natural)					
GASOLINES: Polymer					
GASOLINES: Straight run					
Glycerine					
Glycerol, SEE GLYCERINE					
Glycerol Polyalkoxylate					
Glycerol Triacetate					
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC AC					
Glycidyl Ester of Tridecyl Acetic acid					
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID					
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE					
Glycols, Resins and Solvents mixtures					
Gylcol Triacetate, SEE GLYCERYL TRIACETATE					
Glyoxal solution (40% or less)					
Grease					
Heptadecane					
Heptane (all isomers) (METHYHEXANE)					
HEPTANE (N-)					
Heptanoic acid					
Heptanol (all isomers)					
HEPTANOL					
Heptene (all isomers)					
HEPTENE (1-)					
Heptyl Acetate					
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR					
Hexaethylene Glycol					
Hexamethylene Glycol					
Hexamethylenetetramine solutions					
Hexane (all isomers)					
HEXANE					
Hexanoic acid					
Hexanol					
Hexene (all isomers)					
HEXENE (1-)					
HEXENE (2-)					
Hexyl Acetate					
Hexylene Glycol					
Hog Grease, SEE LARD					
2-Hydroxy-4-(methylthio)butanoic acid					
HYDROCARBON 5-9 (MOVED TO SUB-O, NON TABLE 151, 6/24/95)					
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/					
Isophorone					
JET FUELS: JP-1 (Kerosene)					
JET FUELS: JP-3					
JET FUELS: JP-4					

EHA	0.004	0.013	0.029	0.050	0.076
EHO					
EHX	0.003	0.013	0.028	0.048	0.074
EHZ					
EHT					
EPR	0.004	0.016	0.035	0.061	0.094
ETE	0.004	0.014	0.029	0.051	0.078
FAM	0.003	0.013	0.028	0.048	0.074
FAL	0.004	0.013	0.028	0.048	0.074
GOC					
GAK	0.014	0.052	0.114	0.200	0.309
GRF	0.014	0.052	0.114	0.200	0.309
GAT	0.014	0.052	0.114	0.200	0.309
GAV	0.014	0.052	0.114	0.200	0.309
GCS	0.014	0.052	0.114	0.200	0.309
GPL	0.014	0.052	0.114	0.200	0.309
GSR	0.014	0.052	0.114	0.200	0.309
GCR	0.003	0.013	0.028	0.048	0.073
GLT					
HMX	0.005	0.019	0.041	0.071	0.110
HPT	0.005	0.019	0.041	0.071	0.110
HBP	0.003	0.013	0.028	0.048	0.074
HTX	0.004	0.013	0.028	0.048	0.074
HTW	0.004	0.013	0.028	0.048	0.074
HPX	0.005	0.020	0.043	0.075	0.115
ETE	0.005	0.020	0.042	0.074	0.114
HPE	0.004	0.013	0.028	0.049	0.076
HTS					
HXS	0.008	0.029	0.064	0.112	0.172
HXA	0.008	0.029	0.064	0.112	0.172
HKO	0.003	0.013	0.028	0.048	0.074
HON	0.004	0.015	0.033	0.057	0.088
HXX	0.008	0.031	0.069	0.120	0.184
HXE	0.009	0.032	0.070	0.122	0.188
HXT	0.009	0.032	0.070	0.122	0.188
HAE					
HIG	0.003	0.013	0.028	0.048	0.073
HBA					
HPW					
IPH	0.003	0.013	0.028	0.048	0.074
JPO	0.004	0.013	0.029	0.049	0.076
JPT	0.012	0.046	0.100	0.175	0.270
JPP	0.006	0.023	0.050	0.086	0.133

RESORP1

BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	20.0% MAX LIQUID TRANSP RATE (MLTR) S	40.0% MAX LIQUID TRANSP RATE (MLTR)	60.0% MAX LIQUID TRANSP RATE (MLTR)	80.0% MAX LIQUID TRANSP RATE (MLTR)	100.0% MAX LIQUID TRANSP RATE (MLTR)
	1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
JET FUELS: JP-5 (Kerosene, heavy)					
JET FUELS: JP-8					
Kerosene					
Lactic acid					
Lard					
Latex, liquid synthetic, including: Styrene-Butadien rubber					
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer					
Magnesium Monyl Phenol Sulfide					
Magnesium Sulfonate					
Maleic Anhydride Copolymer					
2-Mercaptobenzothiazol (in liquid mixtures)					
Methane					
3-Methoxy-1-Butanol					
3-Methoxybutyl Acetate					
1-Methoxy-2-Propyl Acetate					
Methoxy Triglycol, SEE TRIETHYLENE GLYCOL METHYL ETHER					
Methyl Acetate					
Methyl Acetoacetate					
Methyl alcohol (SEE METHANOL)					
Methyl Amyl Acetate					
Methyl Amyl alcohol					
Methyl Amyl Ketone					
Methyl Butanol, SEE THE AMYL ALCOHOLS					
Methyl Butenol					
Methyl n-Butyl Ketone					
Methyl Butynol					
Methyl Butyrate					
Methyl Ethyl Ketone					
Methyl Formal (DIMETHYL FORMAL)					
Methyl Heptyl Ketone					
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL					
Methyl Isobutyl Ketone					
3-Methyl-3-Methoxybutanol					
3-Methyl-3-Methoxybutyl Acetate					
1-Methyl Naphthalene					
Methyl Pentene					
2-METHYL-1-PENTENE					
5-METHYL-1-PENTENE					
N-Methyl-2-Pyrrolidone					
Methyl Tert-Butyl Ether (MTBE)					
Metolachlor					
Mineral spirits					
Myrcene					
NAPHTHA: Aromatic (Having less than 10% Benzene)					
NAPHTHA: Cracking fraction					
NAPHTHA: Heavy					
NAPHTHA: Paraffinic					
NAPHTHA: Petroleum					
NAPHTHA: Solvent					
NAPHTHA: Stoddard solvent					
NAPHTHA: Varnish makers' and painters' (75%)					
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution					
Naphthenic acid					
Nonane (all isomers)					
NONANE					
Nonanoic acid (all isomers)					
Nonanoic, Tridecanoic acid mixture					
Nonene					
Nonyl alcohol (all isomers)					
NONYL ALCOHOL					
NONYL ALCOHOL (iso-)					
Nonyl Methacrylate Monomer					

JTV	0.004	0.013	0.028	0.049	0.075
JPE					
KRS	0.004	0.013	0.029	0.050	0.076
LLS					
MSE					
MTH					
MOA					
MPO					
MTG					
MTT	0.007	0.025	0.054	0.094	0.144
MAE					
MAL	0.005	0.017	0.036	0.063	0.097
MAC	0.004	0.014	0.030	0.052	0.080
MAA	0.004	0.014	0.030	0.052	0.079
MAK					
MBL					
MBK	0.004	0.015	0.033	0.057	0.087
MBY					
MSU	0.004	0.016	0.034	0.059	0.092
MEK	0.006	0.021	0.045	0.079	0.121
MTP	0.013	0.051	0.111	0.194	0.300
MEK	0.004	0.013	0.028	0.049	0.075
MIC					
MIK	0.004	0.015	0.034	0.058	0.090
MOA	0.003	0.013	0.028	0.048	0.074
MPW	0.007	0.027	0.058	0.102	0.156
MTW	0.009	0.033	0.072	0.125	0.192
MPY					
MSE	0.003	0.013	0.028	0.048	0.074
MCO					
MMS	0.004	0.013	0.029	0.050	0.077
MRE	0.004	0.013	0.029	0.050	0.077
PTW					
RSV	0.004	0.013	0.029	0.050	0.076
RSS	0.004	0.013	0.029	0.050	0.077
RVM	0.004	0.013	0.029	0.050	0.077
RFS					
RTI					
RAX	0.004	0.014	0.029	0.051	0.078
RAN	0.004	0.014	0.029	0.051	0.078
RNA					
RON	0.004	0.014	0.030	0.052	0.079
RMS	0.004	0.013	0.028	0.049	0.075
RGN	0.004	0.013	0.028	0.049	0.075
RNI	0.004	0.013	0.028	0.049	0.075

BARGE: C9809: CONOCO, INC., "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)	MAX LIQUID TRANSF RATE (MLTR)
		1,000 (BBL/ HR)	2,000 (BBL/ HR)	3,000 (BBL/ HR)	4,000 (BBL/ HR)	5,000 (BBL/ HR)
Monyl Phenol	***					
Monyl Phenol Poly(4-12)ethoxylates	BNP	0.003	0.013	0.028	0.048	0.074
Monyl Phenol Sulfide (90% or less)	JFE					
Mortious liquid, N.O.S. (17) ("Trade name," contains "principal components"), Category						
Non-Mortious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appe						
Octadecane						
Octadecenoamide solution (Oleamide)	ODD					
Octane (all isomers)	OAX	0.004	0.015	0.032	0.056	0.086
OCTANE	OAN	0.004	0.015	0.032	0.056	0.086
Octanoic acid (all isomers)	OAA	0.003	0.013	0.028	0.048	0.074
Octanol (all isomers)	OCX	0.003	0.013	0.028	0.048	0.074
OCTANOL	OTA	0.003	0.013	0.028	0.048	0.074
Octene (all isomers)	OTE	0.004	0.015	0.033	0.057	0.088
OCTENE (1-)	OTE	0.004	0.015	0.033	0.058	0.089
Octyl Acetate						
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OCX	0.003	0.013	0.028	0.048	0.074
OCTYL ALCOHOL	IOA	0.003	0.013	0.028	0.048	0.074
Octyl Aldehydes	OAL					
Octyl Decyl Adipate	ODA					
Octyl Epoxystallate	OST					
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE						
OIL, EDIBLE: Babassu	ORB					
OIL, EDIBLE: Beechnut						
OIL, EDIBLE: Castor	OCA					
OIL, EDIBLE: Cocoa butter						
OIL, EDIBLE: Coconut						
OIL, EDIBLE: Cod liver	CCC					
OIL, EDIBLE: Corn						
OIL, EDIBLE: Cottonseed	CCO					
OIL, EDIBLE: Fish, N.O.S.	OCS					
OIL, EDIBLE: Grapeseed	OFS					
OIL, EDIBLE: Groundnut						
OIL, EDIBLE: Hazelnut						
OIL, EDIBLE: Lard						
OIL, EDIBLE: Maize	OLD					
OIL, EDIBLE: Mustard seed						
OIL, EDIBLE: Nutmeg Butter						
OIL, EDIBLE: Olive						
OIL, EDIBLE: Palm	OOL					
OIL, EDIBLE: Palm kernel	OPM					
OIL, EDIBLE: Peanut	OPO					
OIL, EDIBLE: Poppy	OPN					
OIL, EDIBLE: Raisin seed						
OIL, EDIBLE: Rice bran						
OIL, EDIBLE: Safflower	ORP					
OIL, EDIBLE: Salad	OST					
OIL, EDIBLE: Sesame						
OIL, EDIBLE: Soya bean						
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB					
OIL, EDIBLE: Sunflower seed						
OIL, EDIBLE: Tucum	OSM					
OIL, EDIBLE: Vegetable, N.O.S.	OTC					
OIL, EDIBLE: Walnut	OVG					
OIL, FUEL: No. 1 (Kerosene)						
OIL, FUEL: No. 1-D	OCN					
OIL, FUEL: No. 2	OOD					
OIL, FUEL: No. 2-D	OTW	0.004	0.016	0.035	0.060	0.093
OIL, FUEL: No. 4	OTD					
OIL, FUEL: No. 5	OPR	0.004	0.013	0.028	0.049	0.075
OIL, FUEL: No. 6	OPV	0.004	0.013	0.028	0.049	0.075
OIL, MISC: Absorption	OSX	0.004	0.013	0.028	0.049	0.075
OIL, MISC: Aliphatic	OAS					

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

C H R I S	CARGO		20.0%	40.0%	60.0%	80.0%	100.0%
			MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSP RATE (MLTR) (BBL/ HR)
	OIL, MISC: Animal, N.O.S.		1,000	2,000	3,000	4,000	5,000
	OIL, MISC: Aromatic						
	OIL, MISC: Aviation F2300						
	OIL, MISC: Clarified						
	OIL, MISC: Coal	OCF					
	OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER						
	OIL, MISC: Coconut oil, fatty acid						
	OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM					
	OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTER						
	OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID	CFY					
	OIL, MISC: Croton						
	OIL, MISC: Crude						
	OIL, MISC: Diesel						
	OIL, MISC: Gas, low pour		0.005	0.020	0.043	0.075	0.115
	OIL, MISC: Gas, low sulfur	ODS	0.004	0.014	0.031	0.054	0.083
	OIL, MISC: Heartcut distillate						
	OIL, MISC: Lanolin						
	OIL, MISC: Linseed						
	OIL, MISC: Lubricating						
	OIL, MISC: Mineral						
	OIL, MISC: Mineral seal	OLB	0.003	0.013	0.028	0.048	0.074
	OIL, MISC: Motor						
	OIL, MISC: Neatsfoot	OMS					
	OIL, MISC: Oiticica	OMT					
	OIL, MISC: Palm oil, fatty acid Methyl Ester	ONP					
	OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID METHYL ESTER	OOI					
	OIL, MISC: Penetrating	OPE					
	OIL, MISC: Perilla	OPE					
	OIL, MISC: Pilchard	OPT					
	OIL, MISC: Pine						
	OIL, MISC: Range	OPI					
	OIL, MISC: Residual	ORG					
	OIL, MISC: Resin						
	OIL, MISC: Resinous petroleum	ORS	0.003	0.013	0.028	0.048	0.074
	OIL, MISC: Road						
	OIL, MISC: Rosin	ORD					
	OIL, MISC: Seal	ORN					
	OIL, MISC: Soapstock						
	OIL, MISC: Soya bean (epoxidized)	OIS					
	OIL, MISC: Speru						
	OIL, MISC: Spindle	OSP					
	OIL, MISC: Spray	OSD					
	OIL, MISC: Tall	OSY					
	OIL, MISC: Tall, fatty acid	OTL					
	OIL, MISC: Tanner's	TOP					
	OIL, MISC: Transformer	OTN					
	OIL, MISC: Tung	OTF					
	OIL, MISC: Turbine	OTG					
	OIL, MISC: Whale	OTB	0.004	0.014	0.030	0.052	0.080
	OIL, MISC: White (mineral)						
	OIL, MISC: Wood						
	alpha-Olefins (C13 - C18)	OAM					
	Olefins (C13 and above, all isomers)	OLA					
	Oleic acid						
	Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)						
	Organic Amine 70, SEE AMINOSTHYLDIETHANOLAMINE, AMINOSTHYL-ETHANOLAMINE SOLUTION						
	Palm Stearin						
	n-Paraffins (C10 - C20)	PMS					
	Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PFM					
	Pentaethylene Glycol	POC	0.003	0.013	0.028	0.048	0.074
	Pentaethylenhexamine						
	Pentane (all isomers)	PEP					
		PTY	0.018	0.068	0.150	0.262	0.405

PRESDRPI

BARGE: C9809: CONOCO, INC.; *7027* AND *7028*

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

C H R I S	CARGO	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX	MAX	MAX	MAX	MAX
		LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)	LIQUID TRANSP RATE (MLTR)
		1,000 (BSL/ HR)	2,000 (BSL/ HR)	3,000 (BSL/ HR)	4,000 (BSL/ HR)	5,000 (BSL/ HR)
	PENTANE (iso-)	...				
	PENTANE (n-)	IPT 0.025	0.094	0.206	0.362	0.561
	Pentanoic acid	PTA 0.017	0.066	0.146	0.256	0.396
	Pentene (all isomers)					
	PENTENE (1-)	PTX 0.021	0.081	0.179	0.313	0.485
	Petrolatum	PTE 0.021	0.081	0.179	0.313	0.485
	1-Phenyl-1-Xylyl Ethane	PTL				
	Phosphosulfurized Bicyclic Terpene	PKE				
	Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES					
	Pinene					
	Polyalkenyl Succinic Anhydride Amine	PIN 0.004	0.014	0.030	0.052	0.080
	Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures					
	Polyalkylene Oxide Polyol	PPX				
	Polamines, Amide mixture	PAO				
	Polybutadiene, Hydroxyl terminated					
	Polybutene					
	Polydimethylsiloxane	PLB 0.004	0.013	0.029	0.050	0.077
	Polyethylene Glycol					
	Polyethylene Glycol Dimethyl Ether					
	Polyglycerol					
	Polyisobutylene, SEE POLYBUTENE					
	Polymerized Esters					
	Poly(20)oxyethylene Sorbitan Monooleate					
	Polypropylene	PSM				
	Polypropylene Glycol	PLP				
	Polypropylene Glycol Methyl Ether	POC 0.003	0.013	0.028	0.048	0.074
	Polyisiloxane	PGM 0.004	0.014	0.031	0.054	0.083
	Polystyrene Diakyl Maleate					
	Potassium Oleate					
	Propane	POE				
	n-Propoxypropanol	PRP				
	Propyl Acetate (iso-)	PKP				
	Propyl Acetate (n-)	IAC 0.005	0.017	0.037	0.065	0.100
	Propyl alcohol (iso-)	PAT 0.005	0.017	0.038	0.065	0.100
	Propyl alcohol (n-)	IPA 0.005	0.017	0.037	0.064	0.098
	Propylbenzene (n-)	PAL 0.004	0.014	0.031	0.054	0.083
	iso-Propylcyclohexane	PBZ 0.004	0.013	0.029	0.050	0.077
	Propylene	IPX 0.003	0.013	0.028	0.048	0.074
	Propylene-Butylene Copolymer	PFL				
	Propylene Dimer	PBP				
	Propylene Glycol (1,2-PROPANDIOL)	PDR				
	Propylene Glycol Monoalkyl Ether	PPG 0.003	0.013	0.028	0.048	0.074
	Propylene Glycol Ethyl Ether	PGE				
	Propylene Glycol Methyl Ether	PGY				
	Propylene Polymer (in liquid mixtures)	PME 0.004	0.014	0.031	0.053	0.082
	Propylene Tetramer					
	Propylene Trimer	PTT 0.003	0.013	0.028	0.048	0.073
	Pseudocumene, SEE TRIMETHYLBENZENES	PTR				
	Rum					
	Sodium Acetate, Glycol, water solutions					
	Sodium Acetate solution					
	Sodium Benzoate solution	SAN				
	Sodium Sulfonate	SEN				
	Stearic acid					
	Stearyl alcohol (Octadecanol)	SRA				
	Sulfolane					
	Tallow	SFL	0.003	0.013	0.028	0.048
	Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)	TLO				0.074
	Tallow fatty acid					
	Tallow Alkyl Nitrile	TFD				
	Tetradecanol					
	1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTM				
		TTD 0.003	0.013	0.028	0.048	0.074

PRESDRP1

BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO	C H R I S	20.0%	40.0%	60.0%	80.0%	100.0%
		MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)	MAX LIQUID TRANSF RATE (MLTR) (BBL/ HR)
Tetradecylbenzene	TBD					
Tetraethylene Glycol	TTG	0.003	0.013	0.028	0.048	0.074
Tetrahydronaphthalene	THN	0.004	0.013	0.028	0.048	0.074
Tetrapropylbenzene, SEE ALKYL(C9-C17) BENZENES						
Toluene	TOL	0.004	0.016	0.035	0.060	0.093
Triarylphosphate	TBP					
Tributyl Phosphate	TCP	0.003	0.013	0.028	0.048	0.074
Tricresyl Phosphate (less than 1% of the ortho isomer)	TRD	0.003	0.013	0.028	0.048	0.074
Tridecane	TDN	0.003	0.013	0.028	0.048	0.074
Tridecanoic acid	TDC	0.003	0.013	0.028	0.048	0.074
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TRB					
1-Tridecene	TEB	0.003	0.013	0.028	0.048	0.074
Tridecylbenzene	TEG	0.003	0.013	0.028	0.048	0.074
Triethylbenzene						
Triethylene Glycol	TGD					
Triethylene Glycol Butyl Ether	TGE					
Triethylene Glycol Butyl Ether mixture						
Triethylene Glycol di-(2-ethylbutyrate)						
Triethylene Glycol Ether mixture						
Triethylene Glycol Ethyl Ether						
Triethylene Glycol Methyl Ether						
Triethyl Phosphate						
Triisooctyl Trimellitate	TPS	0.003	0.013	0.028	0.048	0.074
Triisopropanolamine	TIP					
Trimethylbenzenes (all isomers)	TRB	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,5-)	TMB	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,3-)	TMD	0.004	0.013	0.028	0.049	0.076
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TME	0.004	0.013	0.028	0.049	0.076
Trimethylol Propane Polyethoxylate	TMR					
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate						
2,2,4-Trimethyl-3-pentanol-1-isobutyrate						
Tripropylene, SEE PROPYLENE TRIMER						
Tripropylene Glycol	TGP					
Tripropylene Glycol Methyl Ether	TGC					
Trixylenyl Phosphate	TGM					
Turpentine	TRP					
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)	TPT					
Undecanol						
Undecene (1-)	UDC	0.004	0.013	0.028	0.049	0.074
Undecyl alcohol	UND	0.003	0.013	0.028	0.048	0.074
Undecylbenzene	UDB					
Vinyl Acetate-fumarate Copolymer						
Waxes:						
WAXES: Candelilla	WAX					
WAXES: Carnauba						
WAXES: Paraffin	WAX					
WAXES: Petroleum	WAX					
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)						
White spirit (low (15 - 20%) aromatic)						
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.	WSL					
Wool grease						
Xylenes (ortho-, meta-, para-)						
XYLENE (M-)	XLX	0.004	0.014	0.030	0.053	0.081
XYLENE (O-)	XLM	0.004	0.014	0.030	0.053	0.081
XYLENE (P-)	XLO	0.004	0.014	0.030	0.052	0.079
XYLENOL	XLP	0.004	0.014	0.030	0.053	0.081
Zinc Dialkyldithiophosphate	XYL	0.004	0.013	0.028	0.049	0.075

RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

TABLE V: SUMMARY OF PRESSURE DROP FROM MOST REMOTE CARGO TANK TO VAPOR SHORE CONNECTION

	20.0%	40.0%	60.0%	80.0%	100.0%
	MAX	MAX	MAX	MAX	MAX
C	LIQUID	LIQUID	LIQUID	LIQUID	LIQUID
H	TRANSF	TRANSF	TRANSF	TRANSF	TRANSF
R	RATE	RATE	RATE	RATE	RATE
I	(MLTR)	(MLTR)	(MLTR)	(MLTR)	(MLTR)
S					
	1,000	2,000	3,000	4,000	5,000
	(BBL/	(BBL/	(BBL/	(BBL/	(BBL/
	HR)	HR)	HR)	HR)	HR)

(SEE "TABLE IV" FOR APPLICABLE CONDITIONS)

CARGO

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1

AROMATIC RESIN OIL 60
AROMATIC RESIN OIL 80
AROMATIC RESIN OILS

ARS 0.003 0.013 0.028 0.048 0.074
ARS 0.003 0.013 0.028 0.048 0.074

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SG1 ^{0.5} (BPH)	Qv <= (Qv) max
-------	-----------------------	--------------------------------------	---	--	----------------

46 CFR SUBCHAPTER O, TABLE 151

ACETIC ACID	AAC	1.05	5,000	5,123	OK
ACETIC ANHYDRIDE	ACA	1.08	5,000	5,203	OK
ACETONITRILE	ATN	0.78	5,000	4,416	OK
ACRYLIC ACID	ACE	1.05	5,000	5,123	OK
ACRYLONITRILE	ACN	0.81	5,000	4,500	OK
ADIPONITRILE	ADN	0.95	5,000	4,873	OK
ALUMINUM SULFATE SOLUTION	ASX	1.76	5,000	6,633	OK
AMINOTHYLETHANOLAMINE	AEE	1.03	5,000	5,070	OK
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	1.44	5,000	6,000	OK
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH				
ANTHRACENE OIL (COAL TAR FRACTION)	AHO				
BENZENE	BNZ	0.88	5,000	4,688	OK
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	0.84	5,000	4,583	OK
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	0.84	5,000	4,583	OK
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	0.84	5,000	4,583	OK
iso-BUTYL ACRYLATE	BAI	0.88	5,000	4,690	OK
n-BUTYL ACRYLATE	BTC	0.90	5,000	4,741	OK
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	0.90	5,000	4,743	OK
BUTYL METHACRYLATE	BMH	0.88	5,000	4,690	OK
iso-BUTYRALDEHYDE	BAD	0.80	5,000	4,481	OK
n-BUTYRALDEHYDE	BTR	0.80	5,000	4,472	OK
BUTYRALDEHYDES (CRUDE)	BFA	0.82	5,000	4,528	OK
BUTYRALDEHYDE (ISO-, N-)	BAE	0.82	5,000	4,528	OK
CAMPOR OIL (LIGHT)	CPO	0.92	5,000	4,804	OK
CARBON TETRACHLORIDE	CBT	1.59	5,000	6,305	OK
CAUSTIC POTASH SOLUTION	CPS	1.50	5,000	6,124	OK
CAUSTIC SODA SOLUTION	CSS	1.50	5,000	6,124	OK
CHLOROBENZENE	CRB	1.11	5,000	5,268	OK
CHLOROPROM	CRP	1.48	5,000	6,083	OK
CHLOROSULFONIC ACID	CSA	1.79	5,000	6,690	OK
COAL TAR NAPHTHA SOLVENT	NCT	0.88	5,000	4,690	OK
CREOSOTE (COAL TAR)	CCT	1.07	5,000	5,172	OK
CREOSOTE (WOOD)	CWD	1.07	5,000	5,172	OK
CRESOLS (ALL ISOMERS)	CRS	1.05	5,000	5,123	OK
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS	1.05	5,000	5,123	OK
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CRP	1.07	5,000	5,172	OK
CRESYLATE SPENT CAUSTIC	CSC	1.55	5,000	6,225	OK
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CAX (TAR ?)				
CROTONALDEHYDE	CTA	0.85	5,000	4,610	OK
CYCLOHEXANONE	CCH	0.95	5,000	4,873	OK
CYCLOHEXYLAMINE	CHA	0.87	5,000	4,664	OK
DECYL ACRYLATE (iso-, n-)	DAT	0.89	5,000	4,717	OK
DICHLOROBENZENE (ALL ISOMERS)	DBX	1.30	5,000	5,701	OK
1,1-DICHLOROETHANE	DCH	1.18	5,000	5,431	OK
2,2-DICHLOROETHYL ETHER	DDE	1.22	5,000	5,523	OK
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DCM	1.32	5,000	5,745	OK
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DDC				
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DAD				
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DTI				
1,1-, 1,2- OR 1,3- DICHLOROPROPANE	DPX	1.16	5,000	5,385	OK
1,3-DICHLOROPROPENE	DFU	1.23	5,000	5,545	OK
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DMX	1.21	5,000	5,500	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
"TARGET" MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_v = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_v \leq (Q_v)_{max}$
2,2-DICHLOROPROPIONIC ACID	DCN				
DIETHANOLAMINE	DEA	1.09	5,000	5,220	OK
DIETHYLAMINE	DEM	0.71	5,000	4,213	OK
DIETHYLENTRIAMINE	DET	0.96	5,000	4,899	OK
DIETHYL ETHER, SEE ETHYL ETHER	DEH				
DIISOBUTYLAMINE	DBU	0.75	5,000	4,330	OK
DIISOPROPANOLAMINE	DIP	0.98	5,000	4,950	OK
DIISOPROPYLAMINE	DIA	0.72	5,000	4,243	OK
N,N-DIMETHYLACETAMIDE	DAC	0.95	5,000	4,873	OK
DI-METHYLETHANOLAMINE	DMS	0.89	5,000	4,717	OK
DI-METHYLFORMAMIDE	DMP	0.95	5,000	4,873	OK
1,4-DIOXANE	DOX	1.04	5,000	5,099	OK
DI-N-PROPYLAMINE	DNA	0.74	5,000	4,301	OK
ETHANOLAMINE	MEA	1.02	5,000	5,050	OK
ETHYL ACRYLATE	EAC	0.93	5,000	4,822	OK
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	0.80	5,000	4,472	OK
N-ETHYLBUTYLAMINE	EBA	0.74	5,000	4,301	OK
N-ETHYLCYCLOHEXYLAMINE	BCC	0.86	5,000	4,637	OK
ETHYLENE CYANOHYDRIN	ETC	1.04	5,000	5,099	OK
ETHYLENEDIAMINE	EDA	0.91	5,000	4,770	OK
ETHYLENE DIBROMIDE	EDB	2.17	4,582	6,750	OK
ETHYLENE DICHLORIDE	EDC	1.26	5,000	5,612	OK
ETHYLENE GLYCOL PROPYL ETHER	BGP	0.91	5,000	4,770	OK
2-ETHYLHEXYL ACRYLATE	EAI	0.89	5,000	4,717	OK
ETHYLIDENE NORBORNENE	ENB	0.90	5,000	4,743	OK
ETHYL METHACRYLATE	ETM	0.92	5,000	4,796	OK
2-ETHYL-3-PROPYLACROLEIN	EPA	0.85	5,000	4,610	OK
FERRIC CHLORIDE SOLUTIONS	PCS				
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	1.13	5,000	5,315	OK
FORMIC ACID	FMA	1.22	5,000	5,523	OK
FORMFURAL	FFA	1.20	5,000	5,477	OK
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA				
HEXAMETHYLENEDIAMINE SOLUTION	HMC	0.93	5,000	4,822	OK
HEXAMETHYLENIMINE	HMI	0.88	5,000	4,690	OK
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	1.21	5,000	5,500	OK
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))	IPR	0.69	5,000	4,153	OK
ISOPRENE	MSO	0.86	5,000	4,637	OK
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: BLACK, GREYPL	MAM	0.95	5,000	4,873	OK
MESITYL OXIDE	MCK	0.94	5,000	4,848	OK
METHYL ACRYLATE	MDE	1.04	5,000	5,099	OK
METHYLCYCLOPENTADIENE DIMER	MEP	0.92	5,000	4,796	OK
METHYL DIETHANOLAMINE	MMH	0.94	5,000	4,848	OK
2-METHYL-5-ETHYLPYRIDINE	MFR	0.95	5,000	4,873	OK
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)	MER	0.89	5,000	4,717	OK
METHYL METHACRYLATE	MPL	1.00	5,000	5,000	OK
2-METHYLPYRIDINE	MCD				
alpha-METHYLSTYRENE	NPM	0.99	5,000	4,975	OK
MORPHOLINE	ONE	1.00	5,000	5,000	OK
NITRIC ACID (70% OR LESS)	OLM	1.98	4,797	6,750	OK
NITROPROPANE (-1, OR -2)	PCE	1.67	5,000	6,461	OK
OCTYL NITRATES (ALL ISOMERS)	PDE	0.68	5,000	4,123	OK
OLEUM	PER	1.62	5,000	6,364	OK
PENTACHLOROETHANE					
1, 3-PENTADIENE					
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C98094 CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
"TARGET" MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qw)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
PHOSPHORIC ACID	PAC 1.83	4,990	6,750	OK
POLYETHYLENE POLYAMINES	PEB 0.99	5,000	4,975	OK
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI 1.20	5,000	5,477	OK
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)				
iso-PROPANOLAMINE				
PROPANOLAMINE (iso-, n-)	MPA 0.96	5,000	4,899	OK
PROPIONIC ACID	PAX 0.96	5,000	4,899	OK
iso-PROPYLAMINE	PNA 1.00	5,000	5,000	OK
iso-PROPYL ETHER	IPP 0.69	5,000	4,153	OK
PYRIDINE	IPE 0.72	5,000	4,243	OK
SODIUM ALUMINATE SOLUTION	PRD 0.98	5,000	4,950	OK
SODIUM CHLORATE SOLUTION (50% OR LESS)	SAU			
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDO 1.63	5,000	6,384	OK
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)	SOL			
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)				
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SHP 1.10	5,000	5,244	OK
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM < H2S < 200 PPM)	SSH 1.32	5,000	5,745	OK
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H2S GREATER THAN 200 PPM)	SSI 1.32	5,000	5,745	OK
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	SSJ 1.32	5,000	5,745	OK
STYRENE MONOMER	STS			
SULFURIC ACID	STY 0.92	5,000	4,796	OK
SULFURIC ACID, SPENT	SPA 1.84	4,976	6,750	OK
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	SAC 1.39	5,000	5,895	OK
TETRAETHYLENEPENTAMINE	TEC 1.59	5,000	6,311	OK
TETRAHYDROFURAN	TTP 1.00	5,000	5,000	OK
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	THP 0.89	5,000	4,717	OK
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)	TOM 1.44	5,000	6,000	OK
TRICHLOROETHYLENE				
1,2,3-TRICHLOROPROPANE	TCL 1.46	5,000	6,042	OK
TRIETHANOLAMINE	TCN 1.39	5,000	5,895	OK
TRIETHYLAMINE	TEA 1.13	5,000	5,315	OK
TRIETHYLENETETRAMINE	TEN 0.73	5,000	4,272	OK
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH3)	TET 0.98	5,000	4,950	OK
VALERALDEHYDE (iso-, n-)	UAS			
VALERALDEHYDE (iso-)				
VALERALDEHYDE (n-)	0.79	5,000	4,444	OK
VANILLAN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	IYA 0.79	5,000	4,444	OK
VINYL ACETATE	VAL 0.84	5,000	4,583	OK
VINYLTOLUENE	VBL			
	VAM 0.94	5,000	4,848	OK
	VNT 0.90	5,000	4,743	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) MAX 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER - LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{MAX}$
-----------------------	--------------------------------------	---	---	------------------------

46 CFR SUBCHAPT O BUT NOT TABLE 151

1,1-DICHLOROPROPANE	DPB	1.16	5,000	5,385	OK
1,1,1-TRICHLOROETHANE		1.51	5,000	6,144	OK
1,2-DICHLOROPROPANE	DPP	1.16	5,000	5,385	OK
1,3-CYCLOPENTADIENE					
1,3-DICHLOROPROPANE					
2-METHYL-2-HYDROXY-3-BUTYNE	DPC	1.16	5,000	5,385	OK
2,4-DICHLOROPHENOXACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)	MMB	0.86	5,000	4,637	OK
3-PENTAMETHYLENE	DDA				
AMETHYLENE TT (1,1,1-TRICHLOROETHANE)	PWT (CRUDE ?)				
ALKYLARSENES					
AMINOSTHYLPIPERAZINE	ARP				
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)		0.70	5,000	4,183	OK
BENZENE SULFONYL CHLORIDE	BSC	1.38	5,000	5,874	OK
BENZYL ACETATE	BZE	1.04	5,000	5,099	OK
BENZYL CHLORIDE (STABILIZED)	BCL	1.10	5,000	5,244	OK
BUTANOL					
BUTYL ETHER (n-)	BTE	0.77	5,000	4,387	OK
BUTYLENE OXIDE (1,2-)	BTO	0.83	5,000	4,555	OK
BUTYRIC ACID	BRA	0.96	5,000	4,899	OK
CARBOIC ACID	CBO	1.04	5,000	5,099	OK
CHLOROACETIC ACID (80% OR LESS)	CHM	1.58	5,000	6,285	OK
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	1.26	5,000	5,612	OK
CHLOROTOLUENE (m-)	CTM	1.07	5,000	5,172	OK
CHLOROTOLUENE (o-)	CTO	1.08	5,000	5,196	OK
CHLOROTOLUENE (p)	CRN	1.07	5,000	5,172	OK
CHLOROTOLUENES (MIXED ISOMERS)	CHI	1.08	5,000	5,196	OK
CHLOROTE (ALL ISOMERS)	CCW	1.07	5,000	5,172	OK
CHLOROTOLUENE	CRX	1.05	5,000	5,123	OK
CYCLOHEPTANE	CYE	0.81	5,000	4,500	OK
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CYX	0.95	5,000	4,873	OK
CYCLOHEXYL ACETATE	CYC	0.97	5,000	4,924	OK
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CSB	1.50	5,000	6,124	OK
CYCLOPENTANE	CYP	0.74	5,000	4,301	OK
DECAOIC ACID	DCO	5.94	2,770	6,750	OK
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)		0.98	5,000	4,955	OK
DICHLOROISOPROPYL ETHER (2,2'-)	DCI	1.11	5,000	5,268	OK
DICHLOROPROPANE		1.16	5,000	5,385	OK
DICHLOROPROPENE		1.23	5,000	5,545	OK
DISTYL SULFATE	DSU	1.18	5,000	5,431	OK
DISTYLSULFANOLAMINE	DAS	0.89	5,000	4,717	OK
DODECYL BENZENE					
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE	DOT				
DRIFOLINE					
ETHANOL (see ethyl alcohol)					
ETHYL BROMIDE					
ETHYL TERT-BUTYL ETHER					
ETHYLAMINE	EBE	0.73	5,000	4,272	OK
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EAM	0.80	5,000	4,472	OK
ETHYLAMCAPTAN (SAME AS ETHANETHIOL)	ETX	1.44	5,000	6,000	OK
ETHYLPHENOL					
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	SPL	1.04	5,000	5,099	OK
HYDROSULFIDE	MTM	0.79	5,000	4,444	OK

SPILLVALV

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SG1 ^{0.5} (BPH)	Qw <= (Qw) max
-----------------------	--------------------------------------	---	--	----------------

INDENES
 ISOBUTYL ACETATE
 ISOPRENE, PENTADIENE MIXTURE
 ISO-PROPYL ALCOHOL
 LAURIC ACID
 METHACRYLONITRILE
 METHANOL
 METHYL STYRENE
 METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES
 METHYLCYCLOHEXANE
 METHYLCYCLOHEXANE (SAME AS HEPTANE)
 MONOETHANOLAMINE
 MONOISOPROPANOLAMINE
 NAPHTHALENE (MOLTEN)
 NEODECANOIC ACID
 NITRILOTRIACETIC ACID
 NITROPHENOL (MOLTEN)
 NITROPROPANE (60%), NITROETHANE (40%) MIXTURE
 NITROTOLUENE (o-,p-)
 PARALDEHYDE
 POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)
 PROPIONALDEHYDE
 PROPIONIC ANHYDRIDE
 PROPIONITRILE
 PROPYLAMINE (n-)
 PROPYLBENZENE
 PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)
 PYROLYSIS RESIDUAL FUELS
 SENGAGE, RAW
 SODIUM SULFIDE (SOLID IN WATER)
 STYRENE
 STYRENE CRUDE
 STYRENE TAR
 TETRAMETHYLBENZENE (1,2,3,5-)
 TOLUIDINE (o-)
 TRICHLOROBENZENE (1,2,4-)
 TRIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N
 TRIPHENYLBORANE
 UNDECANOIC ACID
 HYDROCARBON 5-9

IBA				
IPN				
LRA	0.79	5,000	4,444	OK
MET	0.88	5,000	4,690	OK
	0.80	5,000	4,472	OK
	0.79	5,000	4,447	OK
MIA				
MCY	0.77	5,000	4,387	OK
MEA	1.02	5,000	5,050	OK
	0.96	5,000	4,899	OK
NTM	1.15	5,000	5,362	OK
NEA	0.92	5,000	4,796	OK
NAA (SALTS ?)				
NTP	1.49	5,000	6,103	OK
NNM	1.05	5,000	5,123	OK
NTT	1.16	5,000	5,385	OK
PDH	0.99	5,000	4,975	OK
PGS				
PAD	0.81	5,000	4,500	OK
PAH	1.01	5,000	5,025	OK
PCN	0.70	5,000	4,183	OK
PRA	0.72	5,000	4,243	OK
GPY	0.84	5,000	4,583	OK
	0.89	5,000	4,717	OK
SWR				
SDS	1.53	5,000	6,185	OK
STY	0.92	5,000	4,796	OK
STX	0.92	5,000	4,796	OK
STT				
TTB	0.89	5,000	4,717	OK
TLI	1.00	5,000	5,000	OK
TCB	1.45	5,000	6,021	OK
TPE				
UDA	0.89	5,000	4,717	OK
HPN	0.85	5,000	4,610	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MOWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SGL ^{0.5} (BPH)	Qw <= (Qv) max
-----------------------	--------------------------------------	---	--	----------------

46 CFR SUBCHAPTER D, TABLE 30.25-1

Acetone	ACT	0.79	5,000	4,450	OK
Acetophenone	ACP	1.03	5,000	5,065	OK
Acetyl Tributyl Citrate	ALC	1.05	5,000	5,114	OK
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALY				
Alcohols (C13 and above)					
Alcoholic beverages, N.O.S.					
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates					
Alcohol (C12 - C15) Poly(1-3)ethoxylates					
Alcohol (C12 - C15) Poly(3-11)ethoxylates					
Alkenylsuccinic acid					
Alkenylsuccinic Anhydride					
Alkyl (C9 - C17) Benzenes					
Alkylbenzenesulfonic acid (4% or less)	AKB				
Alkyl Phthalates (n-)	ABS				
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2% or less)					
Aminoethyldiethanolamine, Aminoethylethanolamine solution					
Amyl Acetate (commercial, iso-, n-, sec-)					
AMYL ACETATE (n-)	ARC	0.87	5,000	4,664	OK
AMYL ACETATE (iso-)	AMC	0.88	5,000	4,690	OK
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	IAT	0.88	5,000	4,690	OK
Amyl alcohol (n-)	AAI	0.82	5,000	4,528	OK
Amyl alcohol (tert-)	AAN	0.82	5,000	4,528	OK
AMYL ALCOHOL, PRIMARY	AAI				
AMYL ALCOHOL, (sec-)	APM	0.82	5,000	4,528	OK
Amylene	ASE	0.82	5,000	4,528	OK
AMYL ALCOHOL, (iso-)	AMZ				
Amyl Methyl Ketone	IAA	0.82	5,000	4,528	OK
Amyl Tallate	AMK				
Asphalt					
ASPHALT BLENDING STOCKS: Roofers flux	ASP	1.04	5,000	5,087	OK
ASPHALT BLENDING STOCKS: Straight run residue	ARF				
Behenyl alcohol	ASR				
Benzene Tricarboxylic acid Trioctyl Ester					
Benzyol alcohol					
Bicyclic Terpenol Polyamide salt	BAL	1.05	5,000	5,123	OK
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, PolBFX	BMX	1.03	5,000	5,074	OK
Butane					
Butene, SEE BUTYLENE					
Butene Oligomer	BOL				
Butyl Acetate (iso-, n-)	BAX	0.87	5,000	4,664	OK
BUTYL ACETATE (N-)	BCN	0.88	5,000	4,690	OK
Butyl Acetate (sec-)	STA	0.89	5,000	4,717	OK
Butyl alcohol (iso-, n-, sec-, tert-)					
BUTYL ALCOHOL (ISO-)	IAL	0.81	5,000	4,500	OK
BUTYL ALCOHOL (N-)	BAW	0.81	5,000	4,500	OK
BUTYL ALCOHOL (SEC-)	BAS	0.81	5,000	4,500	OK
BUTYL ALCOHOL (TERT-)	BAT	0.78	5,000	4,416	OK
Butyl Benzyl Phthalate	BPH	1.12	5,000	5,292	OK
Butylene	BTW				
Butylene Glycol	BUG				
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL					
Butylene Polyglycol, SEE BUTYLENE GLYCOL					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5.000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_v = (Q_1) \cdot SG_1^{1.5}$ (BPH)	$Q_v \leq (Q_v)_{max}$
iso-Butyl Formate					
n-Butyl Formate					
Butyl Heptyl Ketone					
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE	BHX				
Butyl Stearate					
Butyl Toluene					
Butyrolactone (gamma)	BUE	0.85	5,000	4,610	OK
Calcium Alkylphenate	BLA				
Calcium Alkyl Salicylate					
Calcium Amino Nonyl Phenolate					
Calcium Carboxylate					
Caprolactam solutions					
Carbon black base	CLS	1.02	5,000	5,050	OK
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)		0.90	5,000	4,743	OK
Cetyl-Stearal alcohol					
Cleaning spirit (unleaded)					
Coal tar					
Cumene					
Cycloaliphatic resins	COR	1.11	5,000	5,268	OK
Cyclohexane	COM	0.86	5,000	4,640	OK
Cyclohexanol					
1,3-Cyclopentadiene dimer (molten)	CHK	0.78	5,000	4,413	OK
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	CHN	0.95	5,000	4,873	OK
Cymene (para-)	CPD	0.69	5,000	4,153	OK
Decahydronaphthalene	CHP	0.86	5,000	4,637	OK
Decaldehyde (iso-)	CHN	0.89	5,000	4,717	OK
Decaldehyde (n-)	IDA	0.83	5,000	4,555	OK
Decane	DAL	0.83	5,000	4,555	OK
Decene	DDC				
Decyl alcohol (all isomers) (DECANOL)	DCE	0.74	5,000	4,301	OK
DECYL ALCOHOL (iso-)	DAK	0.83	5,000	4,555	OK
DECYL ALCOHOL (n-)	ISA	0.83	5,000	4,555	OK
Decylbenzene (n-)	DAN	0.83	5,000	4,555	OK
Detergent Alkylate	DBZ	0.86	5,000	4,637	OK
Diacetone alcohol					
Dialkyl (C10-C14) Benzenes	DAA	0.97	5,000	4,933	OK
Dialkyl (C7-C13) Phthalates	DAB				
Dibutyl Carbinol	DAR				
Dibutyl Phthalate (ortho-)					
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPA	1.05	5,000	5,123	OK
Diethylbenzene	DPT	0.98	5,000	4,950	OK
Diethylene Glycol	DEB	0.87	5,000	4,664	OK
Diethylene Glycol Butyl Ether	DEG	1.12	5,000	5,292	OK
Diethylene Glycol Butyl Ether Acetate	DME	0.95	5,000	4,873	OK
Diethylene Glycol Dibutyl Ether	DEM				
Diethylene Glycol Diethyl Ether	DIG				
Diethylene Glycol Ethyl Ether					
Diethylene Glycol Ethyl Ether Acetate	DGE				
Diethylene Glycol Methyl Ether	DGA	0.99	5,000	4,975	OK
Diethylene Glycol Methyl Ether Acetate	DGM	1.03	5,000	5,074	OK
Diethylene Glycol Phenyl Ether	DGR				
Diethylene Glycol Phthalate	DGP				
Di-(2-ethylhexyl) adipate	DGL				
Di-(2-ethylhexyl) phthalate	DEN				
Diethyl Phthalate	DIE				
	DPH				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC., "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V-SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 1.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) MAX 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG_1^{0.5}$ (BPH)	$Q_w \leq (Q_w)_{MAX}$
Diglycidyl Ether of Bisphenol A				
Diheptyl Phthalate				
Dihexyl Phthalate				
Diisobutylcarbinol				
Diisobutylene				
Diisobutyl Ketone				
Diisobutyl Phthalate				
Diisodecyl Phthalate				
Diisononyl Adipate				
Diisononyl Phthalate				
Diisooctyl Phthalate				
Diisopropylbenzene (all isomers)				
Diisopropyl Naphthalene				
Dimethyl Adipate				
Dimethylbenzene				
Dimethyl Glutarate				
Dimethyl Phthalate				
Dimethyl Polysiloxane				
2,2-Dimethylpropane-1,3-diol				
Dimethyl Succinate				
Dinonyl Phthalate				
Di(octylphenyl)amine				
Diocetyl Phthalate				
Dipentene				
Diphenyl				
Diphenyl, Diphenyl Ether mixture				
Diphenyl Ether				
Diphenyl Ether, Biphenyl Ether mixture				
Dipropylene Glycol				
Dipropylene Glycol Dibenzate				
Dipropylene Glycol Methyl Ether				
DISTILLATES: Flashed feed stocks				
DISTILLATES: Straight run				
Ditridecyl Phthalate				
Diundecyl Phthalate				
Dodecane (all isomers)				
Dodecanol				
Dodecene (all isomers)				
DODECENE				
Dodecylbenzene				
Dodecyl Phenol				
Drilling mud (low toxicity) (if flammable or combustible)/				
Epoxyated linear alcohols, C11-C15				
Ethane				
2-Ethoxyethanol				
2-Ethoxyethyl Acetate				
Ethoxyated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES				
Ethoxy Triglycol (crude)				
Ethyl Acetate				
Ethyl Acetoacetate				
Ethyl alcohol (ETHANOL)				
Ethyl Amyl Ketone				
Ethyl Benzene				
Ethyl Butanol				
Ethyl Butyrate				
DEB				
DEP				
DEA				
DBC	0.81	5,000	4,500	OK
DBL	0.72	5,000	4,243	OK
DIK	0.81	5,000	4,500	OK
DIT				
DID				
DMY				
DIN				
DIO				
DIX	0.86	5,000	4,637	OK
DII				
DLA				
DGT				
DTL	1.19	5,000	5,454	OK
DMP				
DDI				
DSE				
DIP	0.97	5,000	4,924	OK
DOP	0.98	5,000	4,950	OK
DPN	0.84	5,000	4,583	OK
DIL	0.99	5,000	4,975	OK
DDO	1.07	5,000	5,172	OK
DPE	1.07	5,000	5,172	OK
DOB				
DPG	1.03	5,000	5,074	OK
DGY				
DPY				
DFF	0.75	5,000	4,330	OK
DSR	0.73	5,000	4,272	OK
OTF				
DUP				
DOC				
DEW				
DOZ	0.76	5,000	4,359	OK
DDO	0.76	5,000	4,359	OK
DOB	0.86	5,000	4,637	OK
DOL				
ETH	0.47	5,000	3,410	OK
EBO	1.04	5,000	5,099	OK
EEA	1.04	5,000	5,099	OK
ETG	1.02	5,000	5,050	OK
ETA	0.90	5,000	4,743	OK
EAA	1.03	5,000	5,074	OK
EAL	0.79	5,000	4,441	OK
EAK				
ETB	0.87	5,000	4,664	OK
EST	0.83	5,000	4,555	OK
EBR	0.88	5,000	4,690	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; *7027* AND *7028*

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 TARGET MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw)max 6,750 BPH

CARGO	C N R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
Ethyl Cyclohexane	ECY	0.79	5,000	4,444	OK
Ethylene	ETL				
Ethylene Carbonate	EGL	1.13	5,000	5,315	OK
Ethylene Glycol	EGG				
Ethylene Glycol Acetate	EGM				
Ethylene Glycol Butyl Ether	EGA	0.94	5,000	4,848	OK
ETHYLENE GLYCOL BUTYL ETHER ACETATE					
Ethylene Glycol Ether Acetate	EGY	1.10	5,000	5,244	OK
Ethylene Glycol Tert-Butyl Ether	EGB				
Ethylene Glycol Diacetate	EGP				
Ethylene Glycol Dibutyl Ether	EGA				
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHANOL	EGI				
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE					
Ethylene Glycol Isopropyl Ether	EME	1.10	5,000	5,244	OK
Ethylene Glycol Methyl Butyl Ether	EGT				
Ethylene Glycol Methyl Ether	EPE	1.10	5,000	5,244	OK
Ethylene Glycol Methyl Ether Acetate	EDI				
Ethylene Glycol Phenyl Ether					
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture	EEP	0.82	5,000	4,528	OK
Ethylene-Propylene Copolymer (in liquid mixtures)	EHA				
Ethyl-3-Ethoxypropionate	EHO	0.84	5,000	4,583	OK
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHK				
2-Ethylhexanoic acid	EHE				
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHT				
Ethylhexanoic acid, SEE 2-ETHYLHEXANOIC ACID	EPR	0.89	5,000	4,717	OK
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	ETE	0.88	5,000	4,690	OK
Ethyl Hexyl Tallate					
Ethyl Propionate					
Ethyl Toluene					
Fatty acid (saturated, C13 and above)					
Fatty acid Amides					
Formamide					
Furfuryl Alcohol	FAM	1.13	5,000	5,315	OK
Gas oil, cracked	FAL	1.13	5,000	5,315	OK
GASOLINE BLENDING STOCKS: Alkylates	GOC				
GASOLINE BLENDING STOCKS: Reformates	GAK	0.75	5,000	4,330	OK
GASOLINES: Automotive (containing not over 4.23 grams lead per gallon)	GRF	0.80	5,000	4,472	OK
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon)	GAT	0.74	5,000	4,301	OK
GASOLINES: Casinghead (natural)	GAU	0.71	5,000	4,213	OK
GASOLINES: Polymer	GCS	0.67	5,000	4,093	OK
GASOLINES: Straight run	GPL	0.75	5,000	4,330	OK
Glycerine	GSR	0.75	5,000	4,330	OK
Glycerol, SEE GLYCERINE	GCR	1.26	5,000	5,612	OK
Glycerol Polyalkoxylate					
Glycerol Triacetate					
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID					
Glycidyl Ester of Tridacyl Acetic acid					
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID	GLT				
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE					
Glycols, Resins and Solvents mixtures					
Gylcol Triacetate, SEE GLYCERYL TRIACETATE					
Glyoxal solution (40% or less)					
Grease					
Heptadecane					
Heptane (all isomers) (METHYLCYCANE)	HMK	0.68	5,000	4,135	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
BARGE: C9809: COMOCO, INC.; *7027* AND *7028*

MAX DESIGN WORKING PRESS
SPILL VALVE SET PRESSURE
CARGO TANK P/V SETTING
TARGET MAX LIQUID TRANSFER RATE
SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
(Ps/v) 1.750 PSIG
(Pp/v) 1.500 PSIG
(TMLTR) 5,000 BPH
(Qw)max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
HEPTANE (N-)	HPT	0.68	5,000	4,123	OK
Heptanoic acid	HEP	0.92	5,000	4,796	OK
Heptanol (all isomers)	HTX	0.82	5,000	4,528	OK
HEPTANOL	HTN	0.82	5,000	4,528	OK
Heptene (all isomers)	HPK	0.70	5,000	4,183	OK
HEPTENE (1-)	HTE	0.70	5,000	4,183	OK
Heptyl Acetate	HPE	0.88	5,000	4,690	OK
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR					
Hexaethylene Glycol	HTS				
Hexamethylene Glycol	HXS	0.66	5,000	4,062	OK
Hexamethylenetetramine solutions	HXA	0.66	5,000	4,062	OK
Hexane (all isomers)	HKO	0.93	5,000	4,822	OK
HEXANE	HKN	0.82	5,000	4,528	OK
Hexanoic acid	HEX	0.67	5,000	4,093	OK
Hexanol	HKE	0.67	5,000	4,093	OK
Hexene (all isomers)	HKT	0.67	5,000	4,093	OK
HEXENE (1-)	HAE				
HEXENE (2-)	HAG	0.92	5,000	4,796	OK
Hexyl Acetate					
Hexylene Glycol	HBA				
Hog Grease, SEE LARD	HPN				
2-Hydroxy-4-(methylthio)butanoic acid					
HYDROCARBON 5-9 (MOVED TO SUB-0, NON TABLE 151, 6/24/95)					
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/					
Isophorone	IPH	0.93	5,000	4,822	OK
JET FUELS: JP-1 (Kerosene)	JPO	0.80	5,000	4,472	OK
JET FUELS: JP-3	JPT	0.80	5,000	4,472	OK
JET FUELS: JP-4	JPP	0.81	5,000	4,500	OK
JET FUELS: JP-5 (Kerosene, heavy)	JPV	0.82	5,000	4,528	OK
JET FUELS: JP-8	JPE				
Kerosene	KRS	0.81	5,000	4,500	OK
Lactic acid					
Lard					
Latex, liquid synthetic, including: Styrene-Butadien rubber	LLS				
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer					
Magnesium Methyl Phenyl Sulfide					
Magnesium Sulfonate	MSE				
Maleic Anhydride Copolymer					
2-Mercaptobenzothiazol (in liquid mixtures)					
Methane	MTH				
3-Methoxy-1-Butanol					
3-Methoxybutyl Acetate	MOA				
1-Methoxy-2-Propyl Acetate	MPO				
Methoxy Trigylcol, SEE TRIETHYLENE GLYCOL METHYL ETHER	MTG				
Methyl Acetate	MTT	0.92	5,000	4,796	OK
Methyl Acetoacetate	MAE				
Methyl alcohol (SEE METHANOL)	MAL	0.79	5,000	4,444	OK
Methyl Amyl Acetate	MAC	0.86	5,000	4,637	OK
Methyl Amyl alcohol	MAA	0.81	5,000	4,500	OK
Methyl Amyl Ketone	MAK				
Methyl Butanol, SEE THE AMYL ALCOHOLS					
Methyl Butanol	MBL				
Methyl n-Butyl Ketone	MBK	0.81	5,000	4,500	OK
Methyl Butynol	MBY				
Methyl Butyrate	MBU	0.90	5,000	4,743	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 2.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_v = (Q_1) \cdot SG^{1.25}$ (BPH)	$Q_v \leq (Q_v)_{max}$
Methyl Ethyl Ketone	MEK	0.80	5,000	4,472	OK
Methyl Formal (DIMETHYL FORMAL)	MTP	0.86	5,000	4,637	OK
Methyl Heptyl Ketone	MHK	0.83	5,000	4,555	OK
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	MIC	0.84	5,000	4,583	OK
Methyl Isobutyl Ketone	MIK	0.80	5,000	4,472	OK
3-Methyl-3-Methoxybutanol					
3-Methyl-3-Methoxybutyl Acetate					
1-Methyl Naphthalene					
Methyl Pentene	MNA	1.02	5,000	5,050	OK
2-METHYL-1-PENTENE	MPN	0.69	5,000	4,153	OK
5-METHYL-1-PENTENE	MTN	0.67	5,000	4,093	OK
N-Methyl-2-Pyrrolidone	MPY				
Methyl Tert-Butyl Ether (MTBE)	MBE	0.74	5,000	4,301	OK
Metolachlor	MCO				
Mineral spirits	MNS	0.75	5,000	4,330	OK
Myrcene	MRE	0.80	5,000	4,472	OK
NAPHTHA: Aromatic (Having less than 10% Benzene)		.6 -.85			
NAPHTHA: Cracking fraction		.6 -.85			
NAPHTHA: Heavy		.6 -.85			
NAPHTHA: Paraffinic		.6 -.85			
NAPHTHA: Petroleum		.6 -.85			
NAPHTHA: Solvent	PTN	.6 -.85			
NAPHTHA: Stoddard solvent	NSV	0.87	5,000	4,664	OK
NAPHTHA: Varnish makers' and painters' (75%)	NSS	0.78	5,000	4,416	OK
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution	NVM	0.77	5,000	4,387	OK
Naphthenic acid	NPS				
Nonane (all isomers)	NTI	1.02	5,000	5,050	OK
NONANE	NAX	0.72	5,000	4,243	OK
Nonanoic acid (all isomers)	NAN	0.72	5,000	4,243	OK
Nonanoic, Tridecanoic acid mixture	NDA				
Nonene					
Nonyl alcohol (all isomers)	NON	0.73	5,000	4,272	OK
NONYL ALCOHOL	NNS	0.94	5,000	4,848	OK
NONYL ALCOHOL (iso-)	NNN	0.94	5,000	4,848	OK
Nonyl Methacrylate Monomer	NNI	0.94	5,000	4,848	OK
Nonyl Phenol					
Nonyl Phenol Poly(4-12)ethoxylates	NWP	0.95	5,000	4,873	OK
Nonyl Phenol Sulfide (90% or less)	NPE				
Noxious liquid, N.O.S. (17) ("Trade name," contains "principal components"), Category D (i					
Non-Noxious liquid, N.O.S. (18) ("Trade name," contains principal components"), Appendix					
Octadecene					
Octadecenoamide solution (Oleamide)	ODD				
Octane (all isomers)	OAX	0.70	5,000	4,183	OK
OCTANE	OAN	0.70	5,000	4,183	OK
Octanoic acid (all isomers)	OAA	0.91	5,000	4,770	OK
Octanol (all isomers)	OCC	0.83	5,000	4,555	OK
OCTANOL	OTA	0.83	5,000	4,555	OK
Octene (all isomers)	OTX	0.72	5,000	4,243	OK
OCTENE (1-)	OTE	0.72	5,000	4,243	OK
Octyl Acetate					
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)	OCC	0.83	5,000	4,555	OK
OCTYL ALCOHOL	IOA	0.83	5,000	4,555	OK
Octyl Aldehydes	OAL				
Octyl Decyl Adipate	ODA				
Octyl Epoxystallate	OET				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C E R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{0.5}$ (BPH)	$Q_w < (Q_v)_{max}$
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE					
OIL, EDIBLE: Babassu	OB8				
OIL, EDIBLE: Beechnut	OCA				
OIL, EDIBLE: Castor					
OIL, EDIBLE: Cocoa butter					
OIL, EDIBLE: Coconut					
OIL, EDIBLE: Cod liver	OCC	0.95	5,000	4,884	OK
OIL, EDIBLE: Corn					
OIL, EDIBLE: Cottonseed	OCO	0.96	5,000	4,886	OK
OIL, EDIBLE: Fish, N.O.S.	OCS				
OIL, EDIBLE: Grapeseed	OPS	0.96	5,000	4,899	OK
OIL, EDIBLE: Groundnut					
OIL, EDIBLE: Hazelnut					
OIL, EDIBLE: Lard					
OIL, EDIBLE: Maize					
OIL, EDIBLE: Mustard seed	OLD				
OIL, EDIBLE: Nutmeg Butter					
OIL, EDIBLE: Olive					
OIL, EDIBLE: Palm	OOL				
OIL, EDIBLE: Palm kernel	OPM				
OIL, EDIBLE: Peanut	OPO				
OIL, EDIBLE: Poppy	OPW				
OIL, EDIBLE: Raisin seed					
OIL, EDIBLE: Rice bran					
OIL, EDIBLE: Safflower	ORP				
OIL, EDIBLE: Salad	OSP				
OIL, EDIBLE: Sesame					
OIL, EDIBLE: Soya bean					
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB	0.96	5,000	4,899	OK
OIL, EDIBLE: Sunflower seed		0.95	5,000	4,873	OK
OIL, EDIBLE: Tucum	OSN				
OIL, EDIBLE: Vegetable, N.O.S.	OTC				
OIL, EDIBLE: Walnut	OVG	0.96	5,000	4,899	OK
OIL, FUEL: No. 1 (Kerosene)					
OIL, FUEL: No. 1-D	OCW				
OIL, FUEL: No. 2	OOD				
OIL, FUEL: No. 2-D	OTW	0.88	5,000	4,690	OK
OIL, FUEL: No. 4	OTD				
OIL, FUEL: No. 5	OFR	0.90	5,000	4,743	OK
OIL, FUEL: No. 6	OFV	0.94	5,000	4,848	OK
OIL, MISC: Absorption	OSX	0.95	5,000	4,873	OK
OIL, MISC: Aliphatic	OAS				
OIL, MISC: Animal, N.O.S.					
OIL, MISC: Aromatic					
OIL, MISC: Aviation P2300					
OIL, MISC: Clarified					
OIL, MISC: Coal	OCF				
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER					
OIL, MISC: Coconut oil, fatty acid					
OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM				
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTER	CFY	0.95	5,000	4,873	OK
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID					
OIL, MISC: Croton	OIL	0.95	5,000	4,873	OK
OIL, MISC: Crude	ODS	0.90	5,000	4,743	OK
OIL, MISC: Diesel					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv) max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
OIL, MISC: Gas, low pour					
OIL, MISC: Gas, low sulfur					
OIL, MISC: Heartcut distillate					
OIL, MISC: Lanolin					
OIL, MISC: Linseed					
OIL, MISC: Lubricating					
OIL, MISC: Mineral					
OIL, MISC: Mineral seal	OLB	0.90	5,000	4,743	OK
OIL, MISC: Motor					
OIL, MISC: Neefsfoot	OMS				
OIL, MISC: Oiticica	OMT				
OIL, MISC: Palm oil, fatty acid Methyl Ester	OMF				
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID METHYL ESTER	OOI				
OIL, MISC: Penetrating	OPE	0.95	5,000	4,873	OK
OIL, MISC: Perilla	OPT				
OIL, MISC: Pilchard					
OIL, MISC: Pine					
OIL, MISC: Range	OPI				
OIL, MISC: Residual	ORG				
OIL, MISC: Resin					
OIL, MISC: Resinous petroleum	ORS	1.02	5,000	5,050	OK
OIL, MISC: Road					
OIL, MISC: Rosin	ORD				
OIL, MISC: Seal	ORN				
OIL, MISC: Soapstock					
OIL, MISC: Soya bean (epoxidized)	OIS				
OIL, MISC: Sperm					
OIL, MISC: Spindle	OSP				
OIL, MISC: Spray	OSD				
OIL, MISC: Tall	OSY				
OIL, MISC: Tall, fatty acid	OTL				
OIL, MISC: Tanner's	TOP				
OIL, MISC: Transformer	OTN				
OIL, MISC: Tung	OTF				
OIL, MISC: Turbine	OTG				
OIL, MISC: Whale	OTB	0.87	5,000	4,664	OK
OIL, MISC: White (mineral)					
OIL, MISC: Wood					
alpha-Olefins (C13 - C18)					
Olefins (C13 and above, all isomers)	OAM				
Oleic acid	OLA	0.72	5,000	4,243	OK
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)					
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLUTION					
Palm Stearin					
n-Paraffins (C10 - C20)	PMS				
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PPN				
Pentaethylene Glycol	PDC	0.83	5,000	4,555	OK
Pentaethylenhexamine					
Pentane (all isomers)	PEP				
PENTANE (iso-)	PTY	0.63	5,000	3,957	OK
PENTANE (n-)	IPT	0.62	5,000	3,937	OK
Pentanoic acid	PTA	0.63	5,000	3,969	OK
Pentane (all isomers)					
PENTENE (1-)	PTX	0.64	5,000	4,000	OK
Petrolatum	PTE	0.64	5,000	4,000	OK
	PTL				

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG

(Ps/v) 1.750 PSIG

(Pp/v) 1.500 PSIG

(TMLTR) 5,000 BPH

(Qv) max 6,750 BPH

CARGO

C M R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q1) \cdot SG1^{1.5}$ (BPH)	$Q_w \leq (Q_v)_{max}$
-----------------------	--------------------------------------	---	--	------------------------

1-Phenyl-1-Xylyl Ethane

Phosphosulfurized Bicyclic Terpene

Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES

Pinene

Polyalkenyl Succinic Anhydride Amine

Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures

Polyalkylene Oxide Polyol

Polamine, Amide mixture

Polybutadiene, Hydroxyl terminated

Polybutene

Polydimethylsiloxane

Polyethylene Glycol

Polyethylene Glycol Dimethyl Ether

Polyglycerol

Polyisobutylene, SEE POLYBUTENE

Polymerized Esters

Poly(20)oxyethylene Sorbitan Monooleate

Polypropylene

Polypropylene Glycol

Polypropylene Glycol Methyl Ether

Polysiloxane

Polystyrene Diakyl Maleate

Potassium Oleate

Propane

n-Propoxypropanol

Propyl Acetate (iso-)

Propyl Acetate (n-)

Propyl alcohol (iso-)

Propyl alcohol (n-)

Propylbenzene (n-)

iso-Propylcyclohexane

Propylene

Propylene-Butylene Copolymer

Propylene Dimer

Propylene Glycol (1,2-PROPANDIOL)

Propylene Glycol Monoalkyl Ether

Propylene Glycol Ethyl Ether

Propylene Glycol Methyl Ether

Propylene Polymer (in liquid mixtures)

Propylene Tetramer

Propylene Trimer

Pseudocumene, SEE TRIMETHYLBENZENES

Rum

Sodium Acetate, Glycol, water solutions

Sodium Acetate solution

Sodium Benzoate solution

Sodium Sulfonate

Stearic acid

Stearyl alcohol (Octadecanol)

Sulfolane

Tallow

Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)

Tallow fatty acid

Tallow Alkyl Nitrile

Tetradecanol

PKE

PIN	0.86	5,000	4,637	OK
-----	------	-------	-------	----

PPX				
-----	--	--	--	--

PAO	1.04	5,000	5,099	OK
-----	------	-------	-------	----

PLB	0.91	5,000	4,770	OK
-----	------	-------	-------	----

	1.04	5,000	5,099	OK
--	------	-------	-------	----

	1.04	5,000	5,099	OK
--	------	-------	-------	----

PSM

PLP

PGC	1.01	5,000	5,025	OK
-----	------	-------	-------	----

PGM	0.92	5,000	4,796	OK
-----	------	-------	-------	----

POE

PRP	1.04	5,000	5,099	OK
-----	------	-------	-------	----

PKP				
-----	--	--	--	--

IAC	0.89	5,000	4,717	OK
-----	------	-------	-------	----

PAT	0.00			
-----	------	--	--	--

IPA	0.79	5,000	4,444	OK
-----	------	-------	-------	----

PAL	0.80	5,000	4,472	OK
-----	------	-------	-------	----

PBZ	0.86	5,000	4,637	OK
-----	------	-------	-------	----

IPX	0.80	5,000	4,472	OK
-----	------	-------	-------	----

PPL	1.04	5,000	5,099	OK
-----	------	-------	-------	----

PBP				
-----	--	--	--	--

PDR				
-----	--	--	--	--

PFG	1.04	5,000	5,099	OK
-----	------	-------	-------	----

PGE				
-----	--	--	--	--

PGY				
-----	--	--	--	--

PME	0.92	5,000	4,796	OK
-----	------	-------	-------	----

PTT	0.29	5,000	2,693	OK
-----	------	-------	-------	----

PTR				
-----	--	--	--	--

SAN

SEN

SRA

SFL	1.26	5,000	5,612	OK
-----	------	-------	-------	----

TLO				
-----	--	--	--	--

TFD				
-----	--	--	--	--

TTM	0.82	5,000	4,528	OK
-----	------	-------	-------	----

SPILLVLV

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809; CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS

SPILL VALVE SET PRESSURE

CARGO TANK P/V SETTING

"TARGET" MAX LIQUID TRANSFER RATE

SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MOWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5.000 BPH
 (Qw)max 6,750 BPH

CARGO	C H R I S	LIQUID SPECIFIC GRAVITY (1)	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE $Q_w = (Q_1) \cdot SG^{1.5}$ (BPH)	$Q_w \leq (Q_w)_{max}$
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TTD	0.77	5,000	4,387	OK
Tetradecylbenzene	TBD				
Tetraethylene Glycol	TTG	1.12	5,000	5,292	OK
Tetrahydronaphthalene	TBN	0.97	5,000	4,924	OK
Tetrapropylbenzene, SEE ALKYL (C9-C17) BENZENES					
Toluene	TOL	0.87	5,000	4,664	OK
Triaryphosphate	TBP				
Tributyl Phosphate	TCP	1.16	5,000	5,385	OK
Tricresyl Phosphate (less than 1% of the ortho isomer)	TRD	0.76	5,000	4,359	OK
Tridecane	TDW	0.85	5,000	4,610	OK
Tridecanoic acid	TDC	0.77	5,000	4,387	OK
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)	TRB				
1-Tridecene	TEB	0.86	5,000	4,637	OK
Tridecylbenzene	TEG	1.12	5,000	5,292	OK
Triethylbenzene		1.04	5,000	5,099	OK
Triethylene Glycol	TGD				
Triethylene Glycol Butyl Ether	TGE				
Triethylene Glycol Butyl Ether mixture	TPS	1.07	5,000	5,172	OK
Triethylene Glycol di-(2-ethylbutyrate)	TIP	1.02	5,000	5,050	OK
Triethylene Glycol Ether mixture	TRE	0.89	5,000	4,717	OK
Triethylene Glycol Ethyl Ether	TMB	0.89	5,000	4,717	OK
Triethylene Glycol Methyl Ether	TMD	0.89	5,000	4,717	OK
Triethyl Phosphate	TME	0.89	5,000	4,717	OK
Triisooctyl Trimellitate	TPR				
Triisopropanolamine	THP				
Trimethylbenzenes (all isomers)	TGC				
TRIMETHYL BENZENE (1,2,5-)	TGM				
TRIMETHYL BENZENE (1,2,3-)	TRP	1.16	5,000	5,385	OK
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TPT				
Trimethylol Propane Polyethoxylate	UDC	0.75	5,000	4,330	OK
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate	UND	0.84	5,000	4,583	OK
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	UDB				
Tripropylene, SEE PROPYLENE TRIMER	MAX				
Tripropylene Glycol	MAX, WCA				
Tripropylene Glycol Methyl Ether	MAX, WPP				
Trixylenyl Phosphate					
Turpentine	NSL				
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)					
Undecanol					
Undecene (1-)					
Undecyl alcohol	ULX	0.89	5,000	4,717	OK
Undecylbenzene	ULM	0.87	5,000	4,664	OK
Vinyl Acetate-fumarate Copolymer	ULO	0.89	5,000	4,717	OK
Waxes:					
WAXES: Candelilla					
WAXES: Carnauba					
WAXES: Paraffin					
WAXES: Petroleum					
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)					
White spirit (low (15 - 20%) aromatic)					
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.					
Wool grease					
Xylenes (ortho-, meta-, para-)					
XYLENE (M-)					
XYLENE (O-)					

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qw) max 6,750 BPH

CARGO

C	LIQUID	CARGO	EQUIVALENT	
H	SPECIFIC	MAX	WATER	
R	GRAVITY	LIQUID	LIQUID	$Q_w \leq (Q_w)_{max}$
I		TRANSFER	TRANSFER	
S	(1)	RATE	RATE	
		(Q1)	$Q_w = (Q1) \cdot SG1^{.5}$	
		(BPH)	(BPH)	

XYLENE (P-)
 XYLENOL
 Zinc Dialkyldithiophosphate

XLP	0.86	5,000	4,637	OK
XYL	1.01	5,000	5,025	OK

CALCULATIONS FOR CAPACITY OF SPILL VALVE
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

MAX DESIGN WORKING PRESS
 SPILL VALVE SET PRESSURE
 CARGO TANK P/V SETTING
 "TARGET" MAX LIQUID TRANSFER RATE
 SPILL VALVE CAPACITY (WATER) @ MAX DESIGN WORKING PRESSURE

(MDWP) 3.000 PSIG
 (Ps/v) 1.750 PSIG
 (Pp/v) 1.500 PSIG
 (TMLTR) 5,000 BPH
 (Qv)max 6,750 BPH

CARGO

C H R I S	LIQUID SPECIFIC GRAVITY	CARGO MAX LIQUID TRANSFER RATE (Q1) (BPH)	EQUIVALENT WATER LIQUID TRANSFER RATE Qw = (Q1) * SG1 ^{0.5} (BPH)	Qw <= (Qv) max
(1)				

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1

AROMATIC RESIN OIL 60
 AROMATIC RESIN OIL 80
 AROMATIC RESIN OILS

ARS	1.02	5,000	5,050	OK
ARS	1.02	5,000	5,050	OK

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
-------	-----------------------	--	--

46 CFR SUBCHAPT O, TABLE 151

ACETIC ACID	AAC	5,000	5,000
ACETIC ANHYDRIDE	ACA	5,000	5,000
ACETONITRILE	ATN	5,000	5,000
ACRYLIC ACID	ACR	5,000	5,000
ACRYLONITRILE	ACN	5,000	5,000
ADIPONITRILE	ADN	5,000	5,000
ALUMINUM SULFATE SOLUTION	ASX	5,000	
AMINOETHYLETHANOLAMINE	AEE	5,000	5,000
AMMONIUM BISULFITE SOLN (70% OR LESS)	ABX	5,000	
AMMONIUM HYDROXIDE (28% OR LESS NH3)	AMH		
ANTHRACENE OIL (COAL TAR FRACTION)	ANO		
BENZENE	BNZ	5,000	5,000
BENZENE HYDROCARBON MIXTURES (W/ACETYLENES) (W/10% BENZENE OR MORE)	BHA	5,000	5,000
BENZENE HYDROCARBON MIXTURES (W/10% BENZENE OR MORE)	BHB	5,000	5,000
BENZENE, TOLUENE, XYLENE MIXTURES (HAVING 10% BENZENE OR MORE)	BTX	5,000	5,000
iso-BUTYL ACRYLATE	BAI	5,000	5,000
n-BUTYL ACRYLATE	BTC	5,000	5,000
BUTYL ACRYLATE (SEE ISO- & N- BUTYL ACRYLATE)	BAR	5,000	5,000
BUTYL METHACRYLATE	BMH	5,000	5,000
iso-BUTYRALDEHYDE	BAD	5,000	5,000
n-BUTYRALDEHYDE	BTR	5,000	5,000
BUTYRALDEHYDES (CRUDE)	BFA	5,000	5,000
BUTYRALDEHYDE (ISO-, N-)	BAE	5,000	5,000
CAMPHOR OIL (LIGHT)	CPO	5,000	
CARBON TETRACHLORIDE	CBT	5,000	
CAUSTIC POTASH SOLUTION	CPS	5,000	
CAUSTIC SODA SOLUTION	CSS	5,000	
CHLOROBENZENE	CRB	5,000	5,000
CHLOROPFORM	CRP	5,000	
CHLOROSULFONIC ACID	CSA	5,000	
COAL TAR NAPHTHA SOLVENT	NCT	5,000	5,000
CREOSOTE (COAL TAR)	CCT	5,000	5,000
CREOSOTE (WOOD)	CWD	5,000	5,000
CRESOLS (ALL ISOMERS)	CRS	5,000	5,000
CRESOLS WITH LESS THAN 5% PHENOL (SEE CRESOLS (ALL ISOMERS))	CRS	5,000	
CRESOLS WITH 5% OR MORE PHENOL (SEE PHENOL)	CRS	5,000	
CRESYLATE SPENT CAUSTIC	CFP	5,000	5,000
CRESYLIC ACID, SODIUM SALT SOLUTION, SEE CRESYLATE SPENT CAUSTIC	CSC	5,000	
CROTONALDEHYDE	CAX		
CYCLOHEXANONE	CTA	5,000	5,000
CYCLOHEXYLAMINE	CCH	5,000	5,000
DECYL ACRYLATE (iso-, n-)	CHA	5,000	5,000
DICHLOROBENZENE (ALL ISOMERS)	DAT	5,000	5,000
1,1-DICHLOROETHANE	DBX	5,000	5,000
2,2-DICHLOROETHYL ETHER	DCH	5,000	5,000
DICHLOROMETHANE (ALSO KNOWN AS METHYLENE CHLORIDE)	DEE	5,000	5,000
2,4-DICHLOROPHENOXYACETIC ACID DIETHANOLAMINE SALT SOLUTION	DCM	5,000	
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION	DDE		
2,4-DICHLOROPHENOXYACETIC ACID, TRIISOPROPANOLAMINE SALT SOLUTION	DAD		
1,1-, 1,2- OR 1,3- DICHLOROPROPANE	DTI		
1,3-DICHLOROPROPENE	DPX	5,000	5,000
DICHLOROPROPENE, DICHLOROPROPANE MIXTURES	DPD	5,000	5,000
2,2-DICHLOROPROPIONIC ACID	DMK	5,000	5,000
DIETHANOLAMINE	DCN		
DIETHYLAMINE	DEA	5,000	5,000
DIETHYLENEDIAMINE	DEM	5,000	5,000
DIETHYL ETHER, SEE ETHYL ETHER	DET	5,000	5,000
	DEE		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
DIISOBUTYLAMINE	DBU	5,000	5,000
DIISOPROPANOLAMINE	DIP	5,000	5,000
DIISOPROPYLAMINE	DIA	5,000	5,000
N,N-DIMETHYLACETAMIDE	DAC	5,000	5,000
DIMETHYLETHANOLAMINE	DME	5,000	5,000
DIMETHYLFORMAMIDE	DMP	5,000	5,000
1,4-DIOXANE	DOX	5,000	5,000
DI-N-PROPYLAMINE	DNA	5,000	5,000
ETHANOLAMINE	MEA	5,000	5,000
ETHYL ACRYLATE	EAC	5,000	5,000
ETHYLAMINE SOLUTION (72% OR LESS)	EAN	5,000	5,000
N-ETHYLBUTYLAMINE	EBA	5,000	5,000
N-ETHYLCYCLOHEXYLAMINE	ECC	5,000	5,000
ETHYLENE CYANOHYDRIN	ETC	5,000	5,000
ETHYLENEDIAMINE	EDA	5,000	5,000
ETHYLENE DIIBROMIDE	EDB	4,582	
ETHYLENE DICHLORIDE	EDC	5,000	5,000
ETHYLENE GLYCOL PROPYL ETHER	EGP	5,000	5,000
2-ETHYLBUTYL ACRYLATE	EAI	5,000	5,000
ETHYLIDENE NORBORNENE	ENB	5,000	5,000
ETHYL METHACRYLATE	ETM	5,000	5,000
2-ETHYL-3-PROPYLACROLEIN	EPA	5,000	5,000
FERRIC CHLORIDE SOLUTIONS	FCS		
FORMALDEHYDE SOLUTION (37% TO 50%)	FMS	5,000	5,000
FORMIC ACID	FMA	5,000	5,000
FORMFURAL	FFA	5,000	5,000
GLUTARALDEHYDE SOLUTION (50% OR LESS)	GTA		
HEXAMETHYLENEDIAMINE SOLUTION	HMC	5,000	5,000
HEXAMETHYLENEIMINE	HMI	5,000	5,000
HYDROCHLORIC ACID SPENT (15% OR LESS)	HCS	5,000	
ISOPENTALDEHYDE (MIXED ISOMERS) (SEE VALERALDEHYDE (ISO-, N-))			
ISOPRENE	IPR	5,000	5,000
KRAFT PULPING LIQUORS (FREE ALKALI CONTENT 3% OR MORE) (INCLUDING: BLACK, KPL)	KPL		
MESITYL OXIDE	MSO	5,000	5,000
METHYL ACRYLATE	MAM	5,000	5,000
METHYLCYCLOPENTADIENE DIMER	MCK	5,000	5,000
METHYL DIETHANOLAMINE	MDE	5,000	5,000
2-METHYL-5-ETHYLPYRIDINE	MEP	5,000	5,000
METHYLENE CHLORIDE (SEE DICHLOROMETHANE)			
METHYL METHACRYLATE	MMH	5,000	5,000
2-METHYLPYRIDINE	MPR	5,000	5,000
alpha-METHYLSTYRENE	MSR	5,000	5,000
MORPHOLINE	MPL	5,000	5,000
NITRIC ACID (70% OR LESS)	NCD		
NITROPROPANE (-1, OR -2)	NPM	5,000	5,000
OCTYL NITRATES (ALL ISOMERS)	ONE	5,000	5,000
OLEUM	OLM	4,797	5,000
PENTACHLOROETHANE	PCE	5,000	
1, 3-PENTADIENE	PDE	5,000	5,000
PERCHLOROETHYLENE (SAME AS TETRACHLOROETHYLENE)	PER	5,000	
PHOSPHORIC ACID	PAC	4,990	
POLYETHYLENE POLYAMINES	PEB	5,000	5,000
POLYMETHYLENE POLYPHENYL ISOCYANATE	PPI	5,000	
POTASSIUM HYDROXIDE SOLUTION (SEE CAUSTIC POTASH SOLUTION)			
iso-PROPANOLAMINE	MPA	5,000	5,000
PROPANOLAMINE (iso-, n-)	PAX	5,000	5,000
PROPIONIC ACID	PMA	5,000	5,000
iso-PROPYLAMINE	IPP	5,000	5,000
iso-PROPYL ETHER	IPB	5,000	5,000
PYRIDINE	PRD	5,000	5,000
SODIUM ALUMINATE SOLUTION	SAD		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C E R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
SODIUM CHLORATE SOLUTION (50% OR LESS)	SDO	5,000	
SODIUM DICHROMATE SOL'N (70% OR LESS)	SDL		
SODIUM HYDROXIDE SOLUTION (SEE CAUSTIC SODA SOLUTION)			
SODIUM HYPOCHLORITE SOL'N (15% OR LESS)	SEP	5,000	
SODIUM SULFIDE, HYDROSULFIDE SOLUTIONS (H2S 15 PPM OR LESS)	SSH	5,000	
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (15 PPM<H2S<200 PPM)	SSI	5,000	
SODIUM SULFIDE HYDROSULFIDE SOLUTIONS (H2S GREATER THAN 200 PPM)	SSJ	5,000	
SODIUM THIOCYANATE SOLUTION (56% OR LESS)	STS		
STYRENE MONOMER	STY	5,000	5,000
SULFURIC ACID	SFA	4,976	5,000
SULFURIC ACID, SPENT	SAC	5,000	5,000
1,1,2,2-TETRACHLOROETHANE (ACETYLENE TETRACHLORIDE)	TBC	5,000	
TETRAETHYLENEPENTAMINE	TTP	5,000	5,000
TETRAHYDROFURAN	THF	5,000	5,000
1,1,2-TRICHLOROETHANE (VINYL TRICHLORIDE)	TCM	5,000	5,000
TRICHLOROETHANE (SEE 1,1,2-TRICHLOROETHANE)			
TRICHLOROETHYLENE	TCL	5,000	5,000
1,2,3-TRICHLOROPROPANE	TCN	5,000	5,000
TRIETHANOLAMINE	TEA	5,000	5,000
TRIETHYLAMINE	TEN	5,000	5,000
TRIETHYLENETETRAMINE	TET	5,000	5,000
UREA, AMMONIUM NITRATE SOL'N (CONTAINING MORE THAN 2% NH3)	UAS		
VALERALDEHYDE (iso-, n-)		5,000	5,000
VALERALDEHYDE (iso-)	IVA	5,000	5,000
VALERALDEHYDE (n-)	VAL	5,000	5,000
VANILLIN BLACK LIQUOR (FREE ALKALI CONTENT 3% OR MORE)	VBL		
VINYL ACETATE	VAM	5,000	5,000
VINYLTOLUENE	VMT	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BDL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BDL/ HR)
46 CFR SUBCHAPT O BUT NOT TABLE 151 *****			
1,1-DICHLOROPROPANE	DPB	5,000	5,000
1,1,1-TRICHLOROETHANE		5,000	
1,2-DICHLOROPROPANE	DPP	5,000	5,000
1,3 CYCLOPENTADIENE			
1,3-DICHLOROPROPANE	DPC	5,000	5,000
2-METHYL-2-HYDROXY-3-BUTYNE	MHB	5,000	5,000
2,4-DICHLOROPHENOXYACETIC ACID, DIMETHYLAMINE SALT SOLUTION (70% OR LESS)	SSDDA		
3-PENTENITRILE	PNT		
AEROTHEME TT (1,1,1-TRICHLOROETHANE)			
ALKYLBENZENE			
AMINOETHYLPIPERAZINE	AEP	5,000	5,000
BENZENE RAFFINATE (ASSUME VAPOR PROPERTIES SIMILAR TO BENZENE)	BSC	5,000	5,000
BENZENE SULFONYL CHLORIDE	BZE	5,000	5,000
BENZYL ACETATE	BCL	5,000	5,000
BENZYL CHLORIDE (STABILIZED)			
BUTANOL			
BUTYL ETHER (n-)	BTE	5,000	5,000
BUTYLENE OXIDE (i,2-)	BTO	5,000	5,000
BUTYRIC ACID	BRA	5,000	5,000
CARBOLIC ACID	CBO	5,000	5,000
CHLOROACETIC ACID (80% OR LESS)	CPM	5,000	5,000
CHLOROPROPIONIC ACID (2- OR 3-)	CPM	5,000	5,000
CHLOROTOLUENE (m-)	CTM	5,000	5,000
CHLOROTOLUENE (o-)	CTO	5,000	5,000
CHLOROTOLUENE (p)	CTM	5,000	5,000
CHLOROTOLUENES (MIXED ISOMERS)	CTO	5,000	5,000
CRESOTE (ALL ISOMERS)	CRN	5,000	5,000
CRESYLIC ACID TAR	CHI	5,000	5,000
CYCLOHEPTANE	CCW	5,000	5,000
CYCLOHEXANONE, CYCLOHEXANOL MIXTURE	CRK	5,000	5,000
CYCLOHEXYL ACETATE	CYE	5,000	5,000
CYCLOPENTADIENE, STYRENE, BENZENE MIXTURE	CYX	5,000	5,000
CYCLOPENTANE	CYC	5,000	5,000
DECAHOIC ACID	CSB	5,000	5,000
DI 2 ETHYLHEXYL PHTHALATE (SEE ALSO ETHYLHEXYL PHTHALATE)	CYP	5,000	5,000
DICHLOROISOPROPYL ETHER (2,2'-)	DCO	2,770	
DICHLOROPROPANE		5,000	
DICHLOROPROPENE	DCI	5,000	5,000
DITHYL SULFATE		5,000	
DITHYLETHANOLAMINE	DSU	5,000	5,000
DODECYL BENZENE	DAB	5,000	5,000
DODECYLDIMETHYLAMINE TETRADECYLDIMETHYLAMINE MIXTURE			
DRIPOLENE	DOT		
ETHANOL (see ethyl alcohol)			
ETHYL BROMIDE			
ETHYL TERT-BUTYL ETHER			
ETHYLAMINE	EBE	5,000	5,000
ETHYLENE DICHLORIDE 1,1,2-TRICHLOROETHANE MIXTURE	EAM	5,000	5,000
ETHYLMERCAPTAN (SAME AS ETHANETHIOL)	ETX	5,000	5,000
ETHYLPHENOL			
FORMALDEHYDE SOLUTION (50% OR MORE), METHANOL MIXTURES	EPL	5,000	5,000
HYDROSULFIDE	MTM	5,000	5,000
INDENES			
ISOBUTYL ACETATE			
ISOPRENE, PENTADIENE MIXTURE	IRA		5,000
ISO-PROPYL ALCOHOL	IPW		
LAURIC ACID		5,000	5,000
METHACRYLONITRILE	LRA	5,000	
	MET	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
METHANOL			
METHYL STYRENE		5,000	
METHYL STYRENE, INDENES, ALKYL BENZENE MIXTURES			
METHYLCYCLOHEXANE	MIA		
METHYLCYCLOHEXANE (SAME AS HEPTANE)	MCY	5,000	5,000
MONOETHANOLAMINE			
MONOISOPROPANOLAMINE	MEA	5,000	5,000
NAPHTHALENE (MOLTEN)		5,000	5,000
NEODECANOIC ACID	NTM	5,000	5,000
NITRILOTRIACETIC ACID	NEA	5,000	5,000
NITROPHENOL (MOLTEN)	NAA		
NITROPROPANE (60%), NITROETHANE (40%) MIXTURE	NTP	5,000	
NITROTOLUENE (o-,p-)	NNM	5,000	5,000
PARALDEHYDE	NIT	5,000	5,000
POLYGLYCERINE, SODIUM SALT SOLN (CONTAINING 3% OR MORE SODIUM HYDROXIDE)	PDB	5,000	5,000
PROPIONALDEHYDE	PGS		
PROPYONIC ANHYDRIDE	PAD	5,000	5,000
PROPYONITRILE	PAH	5,000	5,000
PROPYLAMINE (n-)	PCN	5,000	5,000
PROPYLBENZENE	PRA	5,000	5,000
PYROLYSIS GASOLINE (GREATER THAN 5% BENZENE)			5,000
PYROLYSIS RESIDUAL FUELS	GPY	5,000	5,000
SEWAGE, RAW		5,000	
SODIUM SULFIDE (SOLID IN WATER)	SWR		
STYRENE	SDS	5,000	
STYRENE CRUDE	STY	5,000	5,000
STYRENE TAR	STI	5,000	5,000
TETRAMETHYLBENZENE (1,2,3,5-)	STT		
TOLUIDINE (o-)	TTB	5,000	5,000
TRICHLOROBENZENE (1,2,4-)	TLI	5,000	5,000
TRIIISOPROPANOLAMINE SALT OF 2,4-DICHLOROPHENOXY ACETIC ACID SOL'N	TCB	5,000	5,000
TRIPHENYLBORANE			
UNDECANOIC ACID	TPE		
HYDROCARBON 5-9	UDA	5,000	
	HFW	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BDL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BDL/ HR)
46 CFR SUBCHAPTER D, TABLE 30.25-1 *****			
Acetone	ACT	5,000	5,000
Acetophenone	ACP	5,000	5,000
Acetyl Tributyl Citrate		5,000	
Acrylonitrile-Styrene Copolymer dispersion in Polyether Polyol	ALC		
Alcohols (C13 and above)	ALY		
Alcoholic beverages, N.O.S.			
Alcohol (C6 - C17) (secondary) Poly(3-6)ethoxylates			
Alcohol (C12 - C15) Poly(1-3)ethoxylates			
Alcohol (C12 - C15) Poly(3-11)ethoxylates			
Alkenylsuccinic acid			
Alkenylsuccinic Anhydride			
Alkyl (C9 - C17) Benzenes	AKB		
Alkylbenzenesulfonic acid (4t or less)	ABS		
Alkyl Phthalates (n-)			
Alkyl Succinate Formaldehyde Hydr- oxyamino condensate (3.2t or less)			
Aminoethyldiethanolamine, Aminoethylethanolamine solution			
Amyl Acetate-(commercial, iso-, n-, sec-)	AMC	5,000	5,000
AMYL ACETATE (n-)	AML	5,000	5,000
AMYL ACETATE (iso-)	IAT	5,000	5,000
Amyl alcohol (iso-, n-, sec-, primary) (SEE ALSO IAA)	AAI	5,000	5,000
Amyl alcohol (n-)	AAN	5,000	5,000
Amyl alcohol (tert-)	AAI		
AMYL ALCOHOL, PRIMARY	APM	5,000	5,000
AMYL ALCOHOL, (sec-)	ASE	5,000	5,000
Amylene	AME		
AMYL ALCOHOL, (iso-)	IAA	5,000	5,000
Amyl Methyl Ketone	AMK		
Amyl Tallate			
Asphalt	ASP	5,000	
ASPHALT BLENDING STOCKS: Roofers flux	ARF		
ASPHALT BLENDING STOCKS: Straight run residue	ASR		
Behenyl alcohol			
Benzene Tricarboxylic acid Trioctyl Ester			
Benzyl alcohol	BAL	5,000	5,000
Bicyclic Terpenel Polyamide salt			
Brake fluid base mixtures (containing Poly(2-8)alkylene (C2-C3) glycols, BFX	BMX	5,000	
Butane			
Butene, SEE BUTYLENE			
Butene Oligomer	BOL		
Butyl Acetate (iso-, n-)	BAX	5,000	5,000
BUTYL ACETATE (N-)	BCN	5,000	5,000
Butyl Acetate (sec-)	ETA	5,000	5,000
Butyl alcohol (iso-, n-, sec-, tert-)			
BUTYL ALCOHOL (ISO-)	IAL	5,000	5,000
BUTYL ALCOHOL (N-)	BAW	5,000	5,000
BUTYL ALCOHOL (SEC-)	BAS	5,000	5,000
BUTYL ALCOHOL (TERT-)	BAT	5,000	5,000
Butyl Benzyl Phthalate	BPH	5,000	5,000
Butylene	BTW		
Butylene Glycol	BUG		
1,3-Butylene Glycol, SEE BUTYLENE GLYCOL			
Butylene Polyglycol, SEE BUTYLENE GLYCOL			
iso-Butyl Formate			
n-Butyl Formate			
Butyl Heptyl Ketone	BHK		
Butyl Methyl Ketone, SEE METHYL BUTYL KETONE			
Butyl Stearate			
Butyl Toluene	BUE	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
Butyrolactone (gamma)	BLA		
Calcium Alkylphenate			
Calcium Alkyl Salicylate			
Calcium Amino Monyl Phenolate			
Calcium Carboxylate			
Caprolactam solutions			
Carbon black base	CLS	5,000	5,000
Cetyl alcohol (HEXADECANOL) SEE ALCOHOLS (C13 AND ABOVE)		5,000	
Cetyl-Stearal alcohol			
Cleaning spirit (unleaded)			
Coal tar			
Cumene	COR	5,000	
Cycloaliphatic resins	CUM	5,000	5,000
Cyclohexane			
Cyclohexanol	CHK	5,000	5,000
1,3-Cyclopentadiene dimer (molten)	CHN	5,000	5,000
Cyclopentadiene polymers, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	CPD	5,000	5,000
Cymene (para-)			
Decahydronaphthalene	CHP	5,000	5,000
Decaldehyde (iso-)	CHN	5,000	5,000
Decaldehyde (n-)	IDA	5,000	5,000
Decane	DAL	5,000	
Decene	DDC		
Decyl alcohol (all isomers) (DECANOL)	DCE	5,000	5,000
DECYL ALCOHOL (iso-)	DAX	5,000	5,000
DECYL ALCOHOL (n-)	ISA	5,000	5,000
Decylbenzene (n-)	DAN	5,000	5,000
Detergent Alkylate	DBZ	5,000	5,000
Diacetone alcohol			
Dialkyl (C10-C14) Benzenes	DAA	5,000	5,000
Dialkyl (C7-C13) Phthalates	DAB		
Dibutyl Carbinol	DAH		
Dibutyl Phthalate (ortho-)			
Dicyclopentadiene, SEE 1,3-CYCLOPENTADIENE DIMER (MOLTEN)	DPA	5,000	
Diethylbenzene	DPT	5,000	5,000
Diethylene Glycol	DEB	5,000	5,000
Diethylene Glycol Butyl Ether	DEG	5,000	5,000
Diethylene Glycol Butyl Ether Acetate	DNE	5,000	5,000
Diethylene Glycol Dibutyl Ether	DEM		
Diethylene Glycol Diethyl Ether	DIG		
Diethylene Glycol Ethyl Ether			
Diethylene Glycol Ethyl Ether Acetate	DGE		
Diethylene Glycol Methyl Ether	DGA	5,000	5,000
Diethylene Glycol Methyl Ether Acetate	DGM	5,000	5,000
Diethylene Glycol Phenyl Ether	DGR		
Diethylene Glycol Phthalate	DGP		
Di-(2-ethylhexyl) adipate	DGL		
Di-(2-ethylhexyl) phthalate	DEH		
Diethyl Phthalate	DIE		
Diglycidyl Ether of Bisphenol A	DPH		
Diheptyl Phthalate	BDE		
Dihexyl Phthalate	DHP		
Diisobutylcarbinol	DHA		
Diisobutylene	DBC	5,000	5,000
Diisobutyl Ketone	DBL	5,000	5,000
Diisobutyl Phthalate	DIK	5,000	5,000
Diisodecyl Phthalate	DIT		
Diisononyl Adipate	DID		
Diisononyl Phthalate	DNY		
Diisocetyl Phthalate	DIN		
Diisopropylbenzene (all isomers)	DIO		
	DIX	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Diisopropyl Naphthalene	DII		
Dimethyl Adipate	DLA		
Dimethylbenzene			
Dimethyl Glutarate			
Dimethyl Phthalate	DOT		
Dimethyl Polysiloxane	DTL	5,000	
2,2-Dimethylpropane-1,3-diol	DMP		
Dimethyl Succinate	DDI		
Dinonyl Phthalate	DSE		
Di(octylphenyl)amine	DIF	5,000	5,000
Diocetyl Phthalate			
Dipentene	DOP	5,000	
Diphenyl	DPN	5,000	5,000
Diphenyl, Diphenyl Ether mixture	DIL	5,000	5,000
Diphenyl Ether	DDO	5,000	5,000
Diphenyl Ether, Biphenyl Ether mixture	DPE	5,000	5,000
Dipropylene Glycol	DOB		
Dipropylene Glycol Dibenzosate	DPG	5,000	5,000
Dipropylene Glycol Methyl Ether	DGY		
DISTILLATES: Flashed feed stocks	DPY		
DISTILLATES: Straight run	DFF	5,000	5,000
Ditridecyl Phthalate	DSR	5,000	5,000
Diundecyl Phthalate	DTP		
Dodecane (all isomers)	DUP		
Dodecanol	DOC		
Dodecene (all isomers)	DDN		
DODECENE	DOZ	5,000	5,000
Dodecylbenzene	DDO	5,000	5,000
Dodecyl Phenol	DOB	5,000	5,000
Drilling mud (low toxicity) (if flammable or combustible)/ Epoxyated linear alcohols, C11-C15	DOL		
Ethane			
2-Ethoxyethanol	ETH	5,000	
2-Ethoxyethyl Acetate	EEO	5,000	
Ethoxylated alcohols, C11-C15, SEE THE ALCOHOL POLYETHOXYLATES	EEA	5,000	
Ethoxy Triglycol (crude)			
Ethyl Acetate	ETG	5,000	
Ethyl Acetoacetate	ETA	5,000	5,000
Ethyl alcohol (ETHANOL)	EAA	5,000	5,000
Ethyl Amyl Ketone	EAL	5,000	5,000
Ethyl Benzene	EAK		
Ethyl Butanol	ETB	5,000	5,000
Ethyl Butyrate	EBT	5,000	5,000
Ethyl Cyclohexane	EBR	5,000	5,000
Ethylene	ECY	5,000	5,000
Ethylene Carbonate	ETL		
Ethylene Glycol			
Ethylene Glycol Acetate	BGL	5,000	5,000
Ethylene Glycol Butyl Ether	BGO		
ETHYLENE GLYCOL BUTYL ETHER ACETATE	BGM		
Ethylene Glycol Ether Acetate	BMA	5,000	5,000
Ethylene Glycol Tert-Butyl Ether			
Ethylene Glycol Diacetate			
Ethylene Glycol Dibutyl Ether	BGY	5,000	5,000
Ethylene Glycol Ethyl Ether, SEE 2-ETHOXYETHYL ACETATE	BGB		
Ethylene Glycol Ethyl Ether Acetate, SEE 2-ETHOXYETHYL ACETATE	BGP		
Ethylene Glycol Isopropyl Ether	BGA		
Ethylene Glycol Methyl Butyl Ether	BGI		
Ethylene Glycol Methyl Ether			
Ethylene Glycol Methyl Ether Acetate	EME	5,000	5,000
Ethylene Glycol Phenyl Ether	EGT		
	EPE	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; '7027' AND '7028'

CARGO	C N R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
-----	---	---	---
Ethylene Glycol Phenyl Ether, Diethylene Glycol Phenyl Ether mixture	KDX		
Ethylene-Propylene Copolymer (in liquid mixtures)			
Ethyl-3-Ethoxypropionate	EEP		
2-Ethylhexaldehyde, SEE OCTYL ALDEHYDES	EHA	5,000	5,000
2-Ethylhexanoic acid	EHO		
2-Ethylhexanol, SEE OCTANOL (ALL ISOMERS)	EHX	5,000	5,000
Ethylhexoic acid, SEE 2-ETHYLHEXANOIC ACID			
Ethyl Hexyl Phthalate (SEE ALSO DI 2-ETHYLHEXYL PHTHALATE)	EHE		
Ethyl Hexyl Tallate	EHT		
Ethyl Propionate	EPR	5,000	5,000
Ethyl Toluene	ETE	5,000	5,000
Fatty acid (saturated, C13 and above)			
Fatty acid Amides			
Formamide	FAM	5,000	5,000
Furfuryl Alcohol	FAL	5,000	5,000
Gas oil, cracked	GOC		
GASOLINE BLENDING STOCKS: Alkylates	GAX	5,000	5,000
GASOLINE BLENDING STOCKS: Reformates	GRF	5,000	5,000
GASOLINES: Automotive (containing not over 4.23 grams lead per gallon)	GAT	5,000	5,000
GASOLINES: Aviation (containing not over 4.86 grams lead per gallon) Avia	GAV	5,000	5,000
GASOLINES: Casinghead (natural)	GCS	5,000	5,000
GASOLINES: Polymer	GPL	5,000	5,000
GASOLINES: Straight run	GSR	5,000	5,000
Glycerine	GCR	5,000	
Glycerol, SEE GLYCERINE			
Glycerol Polyalkoxylate			
Glycerol Triacetate			
Glycidyl Ester of Tertiary Carboxylic acid, SEE GLYCIDYL ESTER OF TRIDECYL A			
Glycidyl Ester of Tridecyl Acetic acid	GLT		
Glycidyl Ester of Versatic acid, SEE GLYCIDYL ESTER OF TRIDECYL ACETIC ACID			
Glycol Diacetate, SEE ETHYLENE GLYCOL DIACETATE			
Glycols, Resins and Solvents mixtures			
Gylcol Triacetate, SEE GLYCERYL TRIACETATE			
Glyoxal solution (40% or less)			
Grease			
Heptadecane			
Heptane (all isomers) (METHYHEXANE)	HPX	5,000	5,000
HEPTANE (N-)	HPT	5,000	5,000
Heptanoic acid	HEP	5,000	5,000
Heptanol (all isomers)	HTX	5,000	5,000
HEPTANOL	HTN	5,000	5,000
Heptene (all isomers)	HPE	5,000	5,000
HEPTENE (1-)	HTE	5,000	5,000
Heptyl Acetate	HPE	5,000	5,000
Herbicide (C15 -H22 -NO2 -CI), SEE METOLACHLOR			
Hexaethylene Glycol			
Hexamethylene Glycol			
Hexamethylenetetramine solutions	HTS		
Hexane (all isomers)	HXS	5,000	5,000
HEXANE	HXA	5,000	5,000
Hexanoic acid	HKO	5,000	5,000
Hexanol	HON	5,000	5,000
Hexene (all isomers)	HKE	5,000	5,000
HEXENE (1-)	HKE	5,000	5,000
HEXENE (2-)	HKT	5,000	5,000
Hexyl Acetate	HAR		
Hexylene Glycol	HIG	5,000	5,000
Hog Grease, SEE LARD			
2-Hydroxy-4-(methylthio)butanoic acid	HBA		
HYDROCARBON 5-9 (MOVED TO SUB-O, NOW TABLE 151, 6/24/95)	HFN		
Hydroxy terminated Polybutadiene, SEE POLYBUTADIENE, HYDROXYL TERMINATED/			

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: COMOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
Isophorone			
JET FUELS: JP-1 (Kerosene)	IPH	5,000	5,000
JET FUELS: JP-3	JPO	5,000	5,000
JET FUELS: JP-4	JPT	5,000	5,000
JET FUELS: JP-5 (Kerosene, heavy)	JPF	5,000	5,000
JET FUELS: JP-8	JPV	5,000	5,000
Kerosene	JPE		
Lactic acid	KLS	5,000	5,000
Lard			
Latex, liquid synthetic, including: Styrene-Butadien rubber	LLS		
Latex, liquid synthetic, including: Carboxylated Styrene-Butadien Copolymer			
Magnesium Nonyl Phenol Sulfide			
Magnesium Sulfonate	MSE		
Maleic Anhydride Copolymer			
2-Mercaptobenzothiazol (in liquid mixtures)			
Methane	MTM		
3-Methoxy-1-Butanol			
3-Methoxybutyl Acetate	MOA		
1-Methoxy-2-Propyl Acetate	MPO		
Methoxy Triglycol, SEE TRIETHYLENE GLYCOL METHYL ETHER	MTG		
Methyl Acetate	MTT	5,000	5,000
Methyl Acetoacetate	MAE		
Methyl alcohol (SEE METHANOL)	MAL	5,000	5,000
Methyl Amyl Acetate	MAC	5,000	5,000
Methyl Amyl alcohol	MAA	5,000	5,000
Methyl Amyl Ketone	MAK		
Methyl Butanol, SEE THE AMYL ALCOHOLS			
Methyl Butanol	MBL		
Methyl n-Butyl Ketone	MBK	5,000	5,000
Methyl Butynol	MBY		
Methyl Butyrate	MBU	5,000	5,000
Methyl Ethyl Ketone	MEK	5,000	5,000
Methyl Formal (DIMETHYL FORMAL)	MTF	5,000	5,000
Methyl Heptyl Ketone	MEH	5,000	5,000
Methyl Isobutyl Carbinol, SEE METHYL AMYL ALCOHOL	MIC	5,000	5,000
Methyl Isobutyl Ketone	MIK	5,000	5,000
3-Methyl-3-Methoxybutanol			
3-Methyl-3-Methoxybutyl Acetate			
1-Methyl Naphthalene	MNA	5,000	5,000
Methyl Pentene			
2-METHYL-1-PENTENE	MPN	5,000	5,000
5-METHYL-1-PENTENE	MTN	5,000	5,000
N-Methyl-2-Pyrrolidone	MPY		
Methyl Tert-Butyl Ether (MTBE)	MBE	5,000	5,000
Metolachlor	MCO		
Mineral spirits	MMS	5,000	5,000
Myrcene	MRE	5,000	5,000
NAPHTHA: Aromatic (Having less than 10% Benzene)			
NAPHTHA: Cracking fraction			
NAPHTHA: Heavy			
NAPHTHA: Paraffinic			
NAPHTHA: Petroleum			
NAPHTHA: Solvent	PTN		
NAPHTHA: Stoddard solvent	MSV	5,000	5,000
NAPHTHA: Varnish makers' and painters' (75%)	MSS	5,000	5,000
Naphthalene Sulfonic acid-Formaldehyde Copolymer, Sodium salt solution	NVM	5,000	5,000
Naphtheneic acid	NFS		
Nonane (all isomers)	NTI	5,000	
NONANE	NAX	5,000	5,000
Nonanoic acid (all isomers)	NAN	5,000	5,000
Nonanoic, Tridecanoic acid mixture	NDA		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C N R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Nonene			
Nonyl alcohol (all isomers)	NON	5,000	5,000
NONYL ALCOHOL	NNS	5,000	5,000
NONYL ALCOHOL (iso-)	NNN	5,000	5,000
Nonyl Methacrylate Monomer	NMT	5,000	5,000
Nonyl Phenol			
Nonyl Phenol Poly(4-12)ethoxylates	NKP	5,000	5,000
Nonyl Phenol Sulfide (90% or less)	NPE		
Toxic liquid, N.O.S. (17) ("Trade name," contains "principal components"),			
Non-Toxic liquid, N.O.S. (18) ("Trade name," contains principal components)			
Octadecene			
Octadecenoamide solution (Oleamide)			
Octane (all isomers)	OOD		
OCTANE	OAX	5,000	5,000
Octanoic acid (all isomers)	OAN	5,000	5,000
Octanol (all isomers)	OAA	5,000	5,000
OCTANOL	OCC	5,000	5,000
Octene (all isomers)	OTA	5,000	5,000
OCTENE (1-)	OTX	5,000	5,000
Octyl Acetate	OTE	5,000	5,000
Octyl alcohol (iso-, n-) (all isomers), SEE OCTANOL (ALL ISOMERS)			
OCTYL ALCOHOL	OCK	5,000	5,000
Octyl Aldehydes	ICA	5,000	5,000
Octyl Decyl Adipate	OAL		
Octyl Epoxystallate	ODA		
Octyl Phthalate. SEE DI-(2-ETHYLHEXYL) PHTHALATE	OET		
OIL, EDIBLE: Babassu			
OIL, EDIBLE: Beechnut	OBB		
OIL, EDIBLE: Castor			
OIL, EDIBLE: Cocoa butter	OCA		
OIL, EDIBLE: Coconut			
OIL, EDIBLE: Cod liver	OCC	5,000	
OIL, EDIBLE: Corn			
OIL, EDIBLE: Cottonseed	OCO	5,000	
OIL, EDIBLE: Fish, N.O.S.	OCS		
OIL, EDIBLE: Grapeseed	OFS	5,000	
OIL, EDIBLE: Groundnut			
OIL, EDIBLE: Hazelnut			
OIL, EDIBLE: Lard			
OIL, EDIBLE: Maize	OLD		
OIL, EDIBLE: Mustard seed			
OIL, EDIBLE: Nutmeg Butter			
OIL, EDIBLE: Olive			
OIL, EDIBLE: Palm	OOL		
OIL, EDIBLE: Palm kernel	OPM		
OIL, EDIBLE: Peanut	OPO		
OIL, EDIBLE: Poppy	OPW		
OIL, EDIBLE: Raisin seed			
OIL, EDIBLE: Rice bran			
OIL, EDIBLE: Safflower	ORP		
OIL, EDIBLE: Salad	OSF		
OIL, EDIBLE: Sesame			
OIL, EDIBLE: Soya bean			
OIL, EDIBLE: Sunflower, SEE SUNFLOWER SEED	OSB	5,000	
OIL, EDIBLE: Sunflower seed		5,000	
OIL, EDIBLE: Tucum	OSW		
OIL, EDIBLE: Vegetable, N.O.S.	OTC		
OIL, EDIBLE: Walnut	OVG	5,000	
OIL, FUEL: No. 1 (Kerosene)	OCW		
OIL, FUEL: No. 1-D	OOD		
OIL, FUEL: No. 2	OTW	5,000	5,000

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
OIL, FUEL: No. 2-D			
OIL, FUEL: No. 4	OTD		
OIL, FUEL: No. 5	OPR	5,000	5,000
OIL, FUEL: No. 6	OPV	5,000	5,000
OIL, MISC: Absorption	OSX	5,000	5,000
OIL, MISC: Aliphatic	OAS		
OIL, MISC: Animal, N.O.S.			
OIL, MISC: Aromatic			
OIL, MISC: Aviation F2300			
OIL, MISC: Clarified			
OIL, MISC: Coal	OCF		
OIL, MISC: Coconut oil, esterified, SEE COCONUT OIL, FATTY ACID METHYL ESTER			
OIL, MISC: Coconut oil, fatty acid			
OIL, MISC: Coconut oil, fatty acid Methyl Ester	OCM		
OIL, MISC: Coconut oil, Methyl Ester, SEE COCONUT OIL FATTY ACID METHYL ESTE			
OIL, MISC: Cottonseed, fatty acid, SEE COTTONSEED OIL, FATTY ACID	CFY	5,000	
OIL, MISC: Croton			
OIL, MISC: Crude			
OIL, MISC: Diesel	OIL	5,000	5,000
OIL, MISC: Gas, low pour	ODS	5,000	5,000
OIL, MISC: Gas, low sulfur			
OIL, MISC: Heartcut distillate			
OIL, MISC: Lanolin			
OIL, MISC: Linseed			
OIL, MISC: Lubricating			
OIL, MISC: Mineral	OLB	5,000	5,000
OIL, MISC: Mineral seal			
OIL, MISC: Motor	OMS		
OIL, MISC: Neatsfoot	OMT		
OIL, MISC: Oiticica	OMF		
OIL, MISC: Palm oil, fatty acid Methyl Ester	OOI		
OIL, MISC: Palm oil, Methyl Ester, SEE SEE PALM OIL, FATTY ACID METHYL	OPE	5,000	
OIL, MISC: Penetrating	EOPE		
OIL, MISC: Perilla	OPT		
OIL, MISC: Pilchard			
OIL, MISC: Pine			
OIL, MISC: Range	OPI		
OIL, MISC: Residual	ORG		
OIL, MISC: Resin			
OIL, MISC: Resinous petroleum	ORS	5,000	5,000
OIL, MISC: Road			
OIL, MISC: Rosin	ORD		
OIL, MISC: Seal	ORN		
OIL, MISC: Soapstock			
OIL, MISC: Soya bean (epoxidized)	OIS		
OIL, MISC: Speru			
OIL, MISC: Spindle	OSP		
OIL, MISC: Spray	OSD		
OIL, MISC: Tall	OSY		
OIL, MISC: Tall, fatty acid	OTL		
OIL, MISC: Tanner's	TOP		
OIL, MISC: Transformer	OTN		
OIL, MISC: Tung	OTF		
OIL, MISC: Turbine	OTG		
OIL, MISC: Whale	OTB	5,000	5,000
OIL, MISC: White (mineral)			
OIL, MISC: Wood			
alpha-Olefing (C13 - C18)	OAM		
Olefins (C13 and above, all isomers)			
Oleic acid		5,000	
Oleyl alcohol (OCTADECENOL), SEE ALCOHOLS (C13 AND ABOVE)	OLA		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BSL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BSL/ HR)
Organic Amine 70, SEE AMINOETHYLDIETHANOLAMINE, AMINOETHYL-ETHANOLAMINE SOLU			
Palm Stearin	PMS		
n-Paraffins (C10 - C20)	PFN		
Pentadecanol, SEE SEE ALCOHOLS (C13 AND ABOVE)	PDC	5,000	5,000
Pentaethylene Glycol			
Pentaethylenhexamine	PEP		
Pentane (all isomers)	PTY	5,000	5,000
PENTANE (iso-)	IPT	5,000	5,000
PENTANE (n-)	PTA	5,000	5,000
Pentanoic acid			
Pentene (all isomers)			
PENTENE (1-)	PTX	5,000	5,000
Petrolatum	PTE	5,000	5,000
1-Phenyl-1-Xylol Ethane	PTL		
Phosphosulfurized Bicyclic Terpene	PKE		
Phthalate plasticizers, SEE INDIVIDUAL PHTHALATES			
Pinene			
Polyalkenyl Succinic Anhydride Amine	PIN	5,000	5,000
Polyalkylene Glycols, Polyalkylene Glycol Monoalkyl Ethers mixtures	PFY		
Polyalkylene Oxide Polyol	PAO	5,000	
Polamine, Amide mixture			
Polybutadiene, Hydroxyl terminated			
Polybutene			
Polydimethylsiloxane	PLB	5,000	5,000
Polyethylene Glycol		5,000	
Polyethylene Glycol Dimethyl Ether		5,000	
Polyglycerol			
Polyisobutylene, SEE POLYBUTENE			
Polymerized Esters			
Poly(20)oxyethylene Sorbitan Monooleate			
Polypropylene	PSM		
Polypropylene Glycol	PLP		
Polypropylene Glycol Methyl Ether	PGC	5,000	5,000
Polysiloxane	PGM	5,000	5,000
Polystyrene Diakyl Maleate			
Potassium Oleate			
Propane	POE		
n-Propoxypropanol	PRP	5,000	
Propyl Acetate (iso-)	FKP		
Propyl Acetate (n-)	LAC	5,000	5,000
Propyl alcohol (iso-)	PAT		5,000
Propyl alcohol (n-)	IPA	5,000	5,000
Propylbenzene (n-)	PAL	5,000	5,000
iso-Propylcyclohexane	PBZ	5,000	5,000
Propylene	IPX	5,000	5,000
Propylene-Butylene Copolymer	PPL	5,000	
Propylene Dimer	PBP		
Propylene Glycol (1,2-PROPANDIOL)	PDR		
Propylene Glycol Monoalkyl Ether	PPG	5,000	5,000
Propylene Glycol Ethyl Ether	PGE		
Propylene Glycol Methyl Ether	PGY		
Propylene Polymer (in liquid mixtures)	PWE	5,000	5,000
Propylene Tetramer			
Propylene Trimer	PTT	5,000	5,000
Pseudocumene, SEE TRIMETHYLBENZENES	PTR		
Rum			
Sodium Acetate, Glycol, water solutions			
Sodium Acetate solution	SAN		
Sodium Benzoate solution	SNB		
Sodium Sulfonate			
Stearic acid	SRA		

SUMMARY COMPARISON OF "SPILL VALVE" VS "P/V" MAX LIQUID TRANSFER RATES
 RANGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BDL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BDL/ HR)
Stearyl alcohol (Octadecanol)			
Sulfolane			
Tallow	SFL	5,000	5,000
Tallow alcohol, SEE ALCOHOLS (C13 AND ABOVE)	TLO		
Tallow fatty acid			
Tallow Alkyl Nitrile	TFD		
Tetradecanol			
1-Tetradecene, SEE THE OLEFIN OR ALPHA-OLEFIN ENTRIES	TIN	5,000	
Tetradecylbenzene	TTD	5,000	5,000
Tetraethylene Glycol	TED		
Tetrahydronaphthalene	TTG	5,000	5,000
Tetrapropylbenzene, SEE ALKYL (C9-C17) BENZENES	TEN	5,000	5,000
Toluene			
Triaryphosphate	TOL	5,000	5,000
Tributyl Phosphate			
Tricresyl Phosphate (less than 1% of the ortho isomer)	TBP		
Tridecane	TCP	5,000	5,000
Tridecanoic acid	TRD	5,000	5,000
Tridecanol, SEE ALCOHOLS (C13 AND ABOVE)			
1-Tridecane	TDN	5,000	5,000
Tridecylbenzene	TDC	5,000	5,000
Triethylbenzene	TEB	5,000	5,000
Triethylene Glycol	TEG	5,000	5,000
Triethylene Glycol Butyl Ether			
Triethylene Glycol Butyl Ether mixture			
Triethylene Glycol di-(2-ethylbutyrate)		5,000	
Triethylene Glycol Ether mixture	TGD		
Triethylene Glycol Ethyl Ether	TGE		
Triethylene Glycol Methyl Ether			
Triethyl Phosphate			
Triisooctyl Trimellitate	TPS	5,000	5,000
Triisopropanolamine			
Trimethylbenzenes (all isomers)	TIP	5,000	
TRIMETHYL BENZENE (1,2,5-)	TRE	5,000	5,000
TRIMETHYL BENZENE (1,2,3-)	TMB	5,000	5,000
TRIMETHYL BENZENE (1,2,4-) (PSEUDOCUMENE)	TMD	5,000	5,000
Trimethylol Propane Polyethoxylate	TME	5,000	5,000
2,2,4-Trimethyl pentanediol-1,3-diisobutyrate	TFR		
2,2,4-Trimethyl-3-pentanol-1-isobutyrate			
Tripropylene, SEE PROPYLENE TRIMER	TMP		
Tripropylene Glycol			
Tripropylene Glycol Methyl Ether	TOC		
Trixylenyl Phosphate	TGM		
Turpentine	TRP	5,000	
Turpentine substitute (White spirit), SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)	TPT		
Undecanol			
Undecene (1-)	UDC	5,000	5,000
Undecyl alcohol	UND	5,000	5,000
Undecylbenzene	UDB		
Vinyl Acetate-fumarate Copolymer			
Waxes:			
WAXES: Candelilla	WAX		
WAXES: Carnauba			
WAXES: Paraffin	WAX,		
WAXES: Petroleum	WAX,		
White spirit, SEE WHITE SPIRIT (LOW (15-20%) AROMATIC)			
White spirit (low (15 - 20%) aromatic)			
Wine, SEE ALCOHOLIC BEVERAGES, N.O.S.	WSL		
Wool grease			
Xylenes (ortho-, meta-, para-)	XLM	5,000	5,000
XYLENE (M-)	XLM	5,000	5,000

MLTSUM1

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

C H R I S	MAX LIQUID TRANSFER RATE PER SPILL VALVE (BBL/ HR)	MAX LIQUID TRANSFER RATE PER P/V VALVE (BBL/ HR)
CARGO		

XYLENE (O-)	XLO 5,000	5,000
XYLENE (P-)	XLP 5,000	5,000
XYLENOL	XYL 5,000	5,000
Zinc Dialkyldithiophosphate		

SUMMARY COMPARISON OF "SPILL VALVE" vs "P/V" MAX LIQUID TRANSFER RATES
 BARGE: C9809: CONOCO, INC.; "7027" AND "7028"

CARGO	C	MAX	MAX
	H	LIQUID	LIQUID
	R	TRANSFER	TRANSFER
	I	RATE	RATE
	S	PER	PER
		SPILL	P/V
		VALVE	VALVE
		(BBL/	(BBL/
		HR)	HR)

46 CFR SUBCHAPTER D, BUT NOT TABLE 30.25-1

AROMATIC RESIN OIL 60	ARS	5,000	5,000
AROMATIC RESIN OIL 80	ARS	5,000	5,000
AROMATIC RESIN OILS			