

light on your work

X-ECO

6X160W 48V LED - 9M



TRIME

Lighting Tower Specialist



X-ECO

6x160W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-ECO has been created beginning from these characteristics. It is the best solution to your needs and guarantees 4200 sqm of illuminated area. 14 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



920Kg



340°



4200 sqm



110(l) - 0,55 (l/h)

- Multi-directionally adjustable and tiltable floodlights
- 6x160W, 48V LED lights
- 48V power between the generator and the lights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 14 units per truck
- Central lifting eye, longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- IP67 level protection certified
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 height adjustable stabilizers
- On board levels for guidance during stabilization
- Amoss safety breake

✓ **Transport costs Reduced by 45%**
14 Lighting Towers on a truck

✓ **45% Reduction**
in Yard Space

✓ **Kubota 1500 rpm 2 cyl water cooled diesel engine c/w 2 years warranty**

✓ **LED lamps**
mean NO replacement of

- bulbs
- lamp glass
- ballast
- capacitors

Reducing Call Out Costs

✓ **LED Flood Light guaranteed for 50.000 hours**

✓ **Vertical mast with Life time warranty**



Illuminated area
4200 sqm



Ease of transport and handling



14
Units Per Truck



You can place 14 units on a single vehicle thanks to one of the compactest footprints on the market.

APPLICATIONS



Special events



Rural & hard to reach areas



Emergency response



Construction & work sites



Gas, oil & mining operations



Military applications



LIGHT SENSOR
FEATURED AS STANDARD

SAFETY HYDRAULIC
VERTICAL MAST

48 VOLT COILED CABLE

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

SAFETY AMOSS KIT
automatic mast
LOWERING SYSTEM

FORK LIFT POCKET

technical data

Dimensions & weight	
Dimensions min. (mm)	2320x1380x2420
Dimensions max. (mm)	2320x1550x8500
Total weight without fuel	920 Kg


Features	
Rotation	340°
Floodlights	6x160W
Lamps	LED
Options	Timer

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1,2 kVA

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	110
Running time (h)	200
Noise level (dBA) at 7m	65
Fuel Consumption	0,55 l/h

Standard load delivery



14 sets



Units Per Truck

Illuminated area

4200 sqm

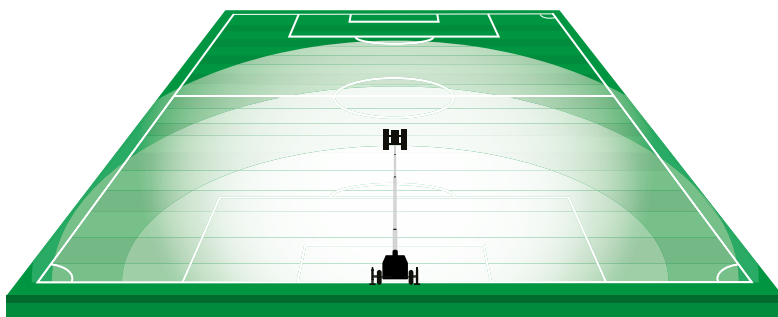

Headings	Standard Lighting Tower	X-ECO Lighting Tower	Monthly Savings when using X-ECO Light Tower
Fuel usage	1,93 l/h	0,55 l/h	1.38 l/h
Fuel costs per month	€ 550,00	€ 150,00	€ 400,00
CO'2 Omissionmonth	1.224 kg	336 kg	888 kg
Run time on full tank	60 h	200 h	140 h
Lamp type	Metal halide	LED	
Light sensor	Optional	Standard	
Amoss kit	Optional	Standard	

marcovitdesign®



TRIME s.r.l.

Strada per Robecco, snc
20081 Cassinetta di Lugagnano (MI) - Italy
Tel. +39 02 942 1724
Sales Dept. +39 0382 406 252
www.trime.it - info@trime.it