

Green Pin® Rotating Hoist Ring UNC GR8




ADAUNC

Green Pin® Rotating Hoist Ring UNC GR8

Grade 8 rotating hoist ring UNC

- Material: alloy steel, grade 8, quenched and tempered
- Safety factor: MBL equals 5 x WLL
- Standard: EN1677-1 and generally to ASME B30.26
- Finish: painted red or white
- Temperature range: -40 °C up to +200 °C
- Certification: 2.1 2.2 3.1 MTC * MPI * CE IIA
- Article code: scan QR code to see article codes
- Note: Rolled thread bolt. WLL indicated below are given in the worst conditions of use, i.e. 90°

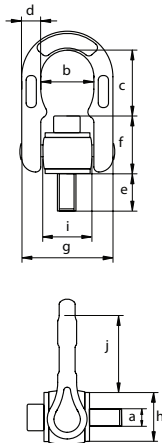

working load limit	diameter thread	width inside	length inside	diameter	length	thickness base	width outside	diameter base	diameter base	length inside	hex key	torque value	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	mm	Nm	kg
0.4	5/16 - 18UNC	36	42	12	18	35	69	34	35	43	6	6.5	0.43
0.6	3/8 - 16UNC	36	40	12	18	37	69	34	35	43	8	13	0.44
1	1/2 - 13UNC	36	38	12	24	39	69	34	35	43	10	22	0.46
1.7	5/8 - 11UNC	36	43	12	31	43	69	34	35	52	13	55	0.55
2.5	3/4 - 10UNC	36	39	12	31	47	69	34	35	52	16	110	0.55
3.5	7/8 - 9UNC	53	57	19	35	70	104	49	52	71	19	150	1.88
4.5	1 - 8UNC	53	54	19	41	73	104	49	52	71	19	190	1.93
6.8	1 1/4 - 7UNC	53	62	19	55	64	104	49	52	71	19	380	2.11
10.8	1 1/2 - 6UNC	73	92	30	75	83	146	68	72	98	19	600	5.55
13.6	2 - 4 1/2 UNC	73	96	30	75	80	146	68	72	98	19	1000	6.20