

Green Pin® Lifting Eye UNC GR8




ALUNC

Green Pin® Lifting Eye UNC GR8

Grade 8 lifting eye UNC

- Material: alloy steel, grade 8, quenched and tempered
- Safety factor: MBL equals 5 x WLL
- Standard: EN1677-1 and ASME B30.26
- Finish: painted red or white
- Temperature range: -40 °C up to +200 °C
- Certification: 2.1 2.2 3.1 MTC * MPI * CE IIA
- Article code: scan QR code to see article codes

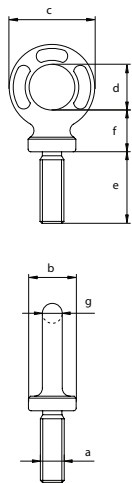

working load limit	diameter thread	diameter base	diameter eye outside	diameter eye inside	length	thickness base	diameter	weight each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm	kg
0.2	1/4 - 20UNC	20	34	20	20	17	7	0.05
0.7	3/8 - 16UNC	20	38	22	30	19	8	0.08
1	1/2 - 13UNC	25	47	26	36	23	10	0.14
1.5	5/8 - 11UNC	36	65	35	53	30	14	0.38
2.5	3/4 - 10UNC	40	73	39	58	34	16	0.55
3	7/8 - 9UNC	42	82	44	64	38	19	0.81
4	1 - 8UNC	55	95	54	84	40	20	1.14
5	1 1/8 - 7UNC	55	95	54	84	40	20	1.21
6	1 1/4 - 7UNC	60	108	59	99	49	24	1.90
8	1 1/2 - 6UNC	65	118	67	117	45	25	2.52
10	1 3/4 - 5UNC	70	142	80	135	61	31	4.26
15	2 - 4 1/2 UNC	70	142	80	135	61	31	4.66
25	2 1/2 - 4UNC	95	181	97	150	69	42	9.55