



BENEFITS:

-  **PU-Foamed** for maximum strength and acoustic insulation (**USP**)
- ✓ Integrated Earthing
- ✓ Low water consumption (4LPF)
- ✓ Compatible with Frame Systems
- ✓ Certified to EN 33 and EN 997
-  **Made in Spain** by PORTINOX

SOLD SEPARATELY:

-  **DM-OVC-BLACK** | SAN00035
-  **DM-OVC-WHITE** | SAN00045
-  **DM-OVC-WOOD** | SAN00032
-  **DM-OVC-SEAT** | SON00008
-  **LG-OVC-SEAT**  | X0319930


CLASSIC LINE - WALL HUNG WC PAN

INS-535-OVC | SWN00118

Fully shrouded wall-mounted toilet featuring elegant, clean lines. Specially designed for high-traffic public bathrooms where safety, hygiene, and water-saving are paramount. Made from high-quality stainless steel AISI 304, with a 1.5 / 3.0mm thickness and brushed finish ensuring long-lasting durability of its surface. Seamless welded construction with rounded edges to improve safety. Splash-proof, elongated toilet bowl, crafted from a single pressed piece for easy maintenance and superior hygiene. Equipped with a concealed perimetral flushing rim for easy cleaning. Compatible with all certified standard frame systems and direct flush valves available in the market.

- **Filled with expanded PU-Foam** for acoustic insulation and added strength.
- **Optional Toilet Seat:** Supplied with 2 seat holes sealed by security TORX screws, enabling the seat installation without uninstalling the WC pan.
- **Water connections:** Back Water Inlet of Ø55mm with integrated **Venturi System** for efficient water distribution. P-Trap of Ø100mm equipped with an installation-friendly rounded outlet **Head Connector**.
- **Water-saving:** Requires only 4L while delivering stable and powerful flush.
- **Integrated Earthing** ensuring user safety.
- **Front Installation:** Quick and easy by a **3mm sturdy** mounting plate with versatile fixing points at **180/230mm**, fixed by 6 lateral TORX security screws.
- Robust construction, engineered to withstand loads of up to 405 kg.
- **CE marked.** Complies to **EN 33 and EN 997** for minimum 4L flush.
- **Dimensions:** L.535 x W.360 x H.360mm | **Net / Gross Weight:** 14 kg / 16 kg

ALTERNATIVE ITEMS:



INS-535-OVC-M10 | WSP00199

Wall-hung Prison Toilet for Cross-Wall mounting





INS-535-OVC-MED | SWN00118 + **MED** Line

Gloss White Teflon Coated Wall-Hung Toilet

INS-535-OVC-P1 | SWN00034 – Polished Finish



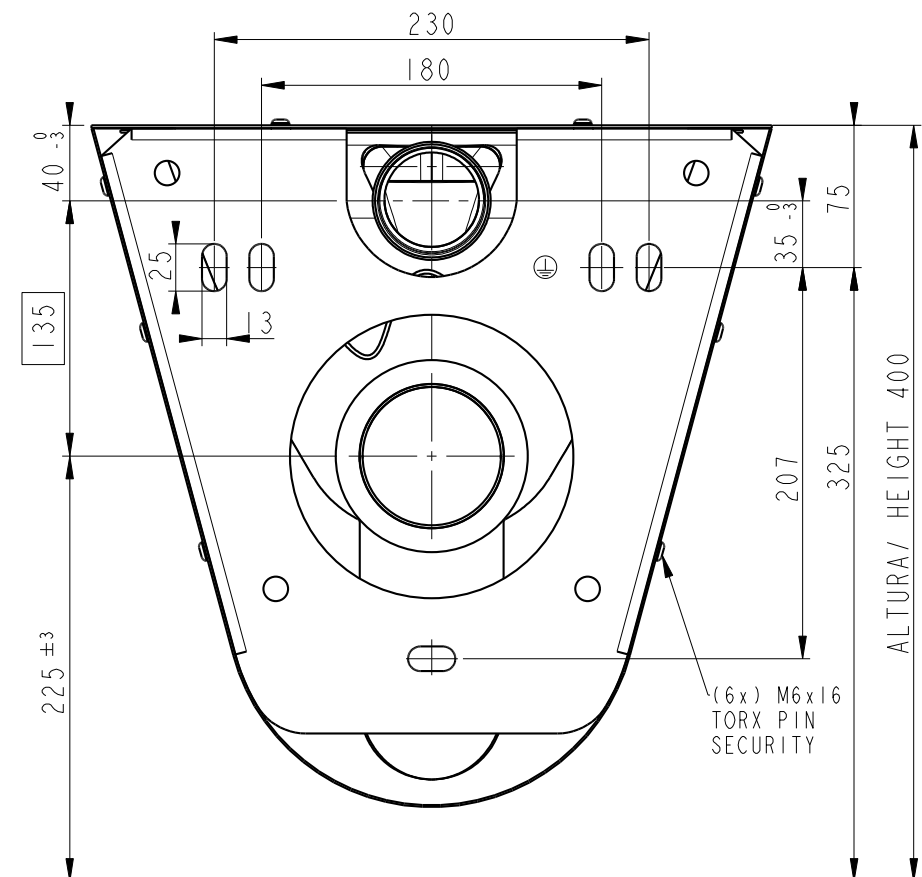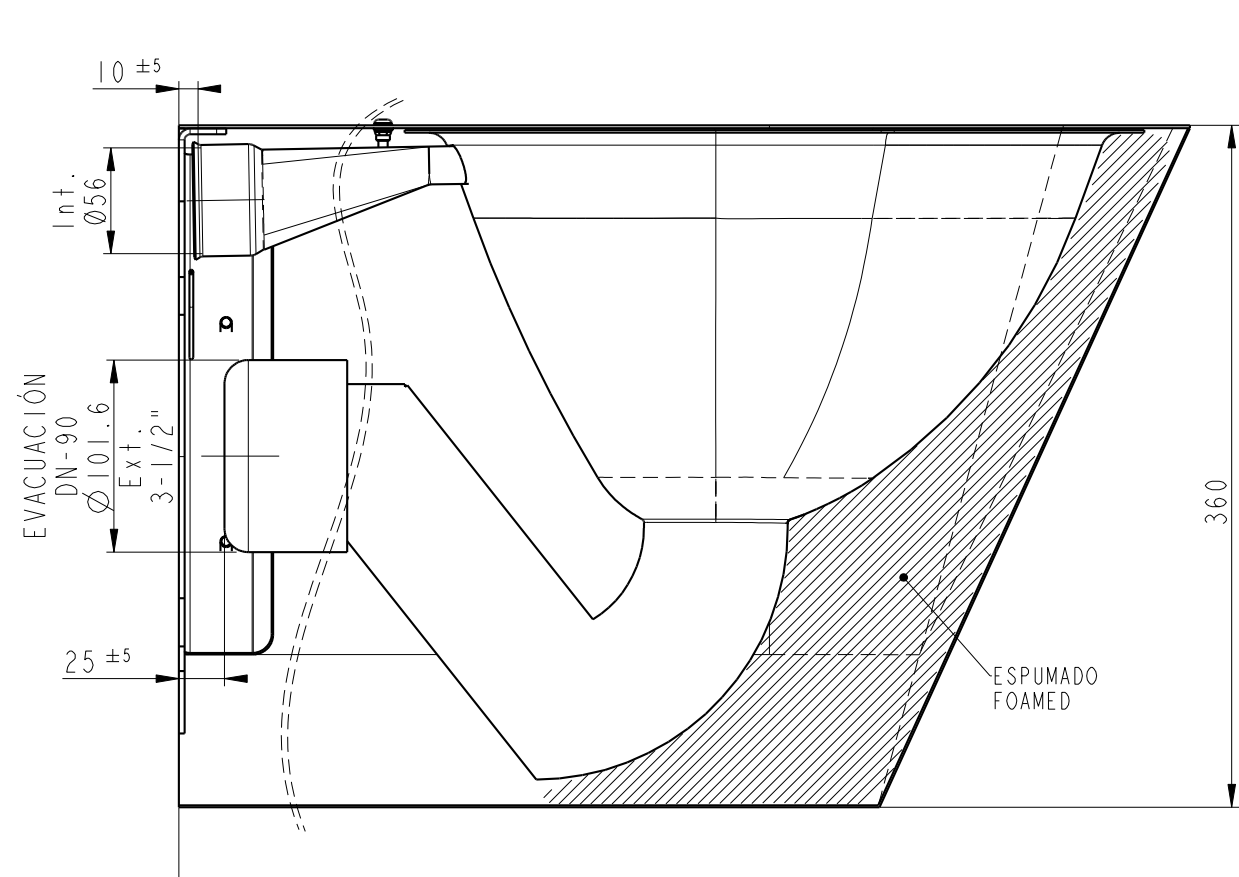

- DESCRIPCION PRODUCTO/ DESCRIPTION PRODUCT

INS: INODORO SUSPENDIDO/ WALL MOUNTING TOILET
INP: INODORO PEANA/ TOILET FLOOR STANDING
535/700: (L) LONGITUD DE INODORO/ TOILET LENGTH
OVC: DISEÑO OVAL CLASICO/ CLASSICAL OVAL DESIGN
LF: LINEA FABRICACION/ MANUFACTURING LINE
TI: TALADROS PARA INSTALACION ASIENTO TAPAD./ WITH DRILLS FOR INSTALLATION SEAT COVER
SI: ACABADO SATINADO + ESPUMADO INTERIOR/ SATIN FINISH + FOAMED INSIDE
TO: SIN TALADROS DE ASIENTO TAPAD./ WITHOUT SEAT COVER DRILLS
SO: ACABADO SATINADO Y SIN ESPUMADO INTERIOR/ SATIN FINISH WITHOUT FOAMED INSIDE
PO: ACABADO PULIDO Y SIN ESPUMADO INTERIOR/ POLISHED FINISH NOT FOAM INSIDE
PI: ACABADO PULIDO + ESPUMADO INTERIOR/ POLISHED TOILET FINISH + FOAM INSIDE
DM-OVC: ASIENTO TAPADERA/ SEAT COVER
SP-OVC: ALMOHADILLAS POSADERAS/ SEAT PADS
INLET: GOMA ENCHUFE Ø56-Ø28/32 RUBBER INLET
OUTLET: MANGUITO AJUST. 90-112, A PVC Ø110-Ø90 CONNECTOR SEAL 90-112, TO PVC Ø110-Ø90
FRAME: BASTIDOR INODORO CISTERNA EMPOTRADA/ CISTERN/ FLUSH CONCEALED SYSTEM FRAME

MODELO/ MODEL:

INS-535-OVC-LF

ESTANDAR/ STANDARD □ (TI-SI)

OPCIONES BAJO PEDIDO/ OPTIONS ON REQUEST:

□ (TI-SO)
□ (TI-PO)
□ (TI-PI)

□ (TO-SO)
□ (TO-SI)
□ (TO-PO)
□ (TO-PI)

ACCESORIOS/ COMPLEMENT:

□ SP-OVC: SEAT PADS BLACK
□ DM-OVC: COVER BLACK
□ DM-OVC: COVER WHITE
□ INLET: RUBBER 56
□ OUTLET: CONNec. PVC Ø110
□ OUTLET: CONNec. PVC Ø 90
□ FRAME

LONGITUD WC (L)/ LENGTH WC (L):



(**)ESTANDAR/ STANDARD

L=535mm: INS-535-OVC-LF


BAJO PEDIDO/ ON REQUEST:

L=700mm: INS-700-OVC-LF

L=SPEmm: INS-□□□-OVC-LF

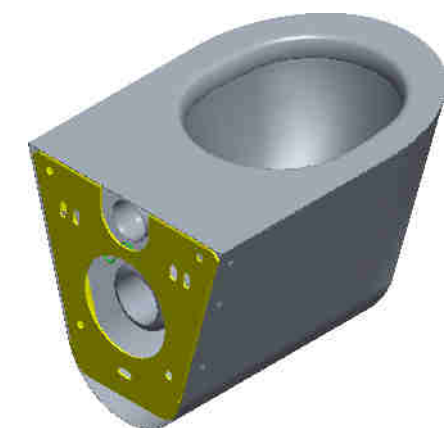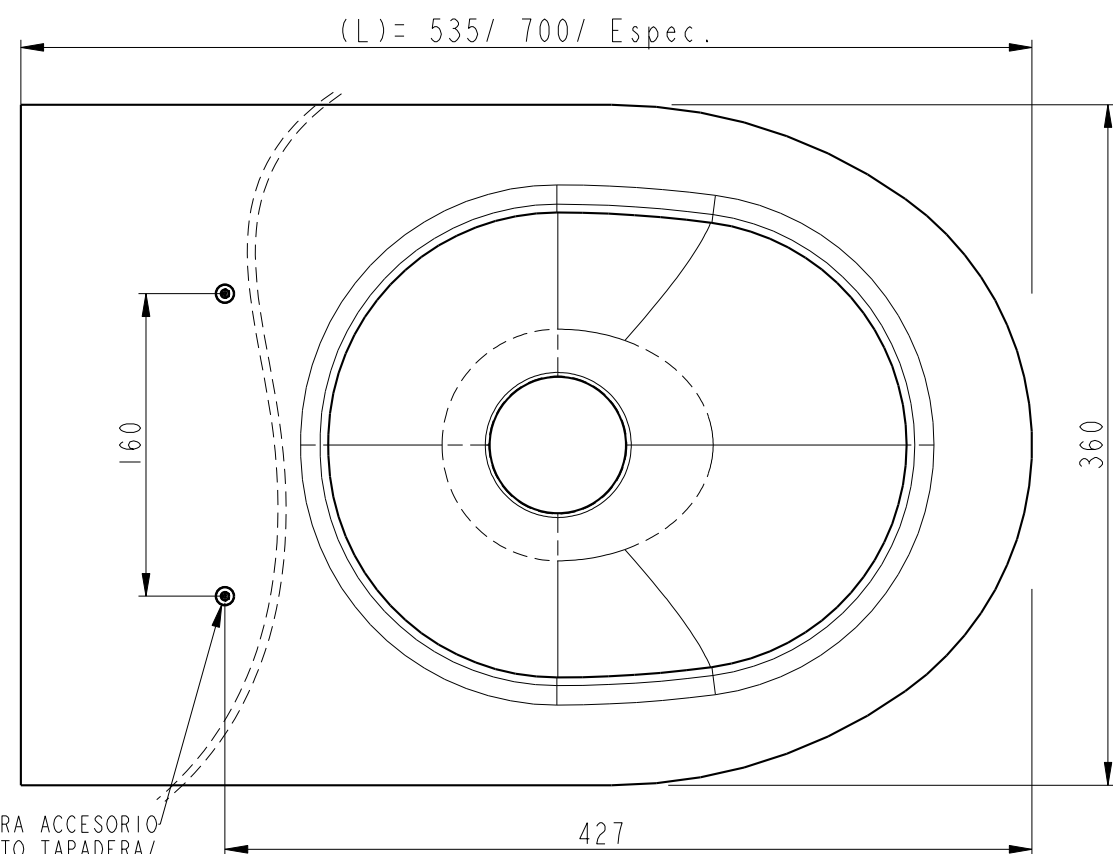

INS-535-OVC-LC (TO-SI)

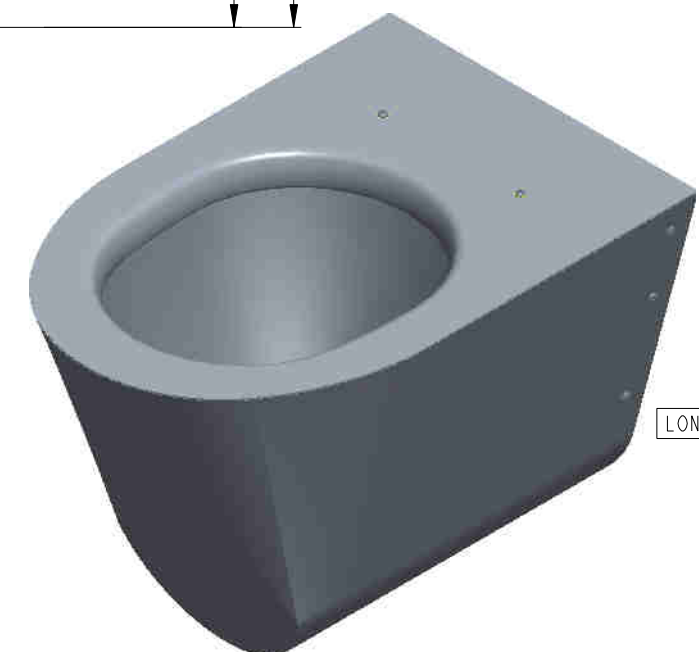

INS-535-OVC-LF (TI-SI) (STANDARD MODEL)

CARACTERISTICAS MATERIAL/ MATERIAL SPECIFICATIONS			Norma armonizada/ Harmonised Standard
Ac. Inox/ St. Steel	Acabado/Finish	Espesores/THs	UNE-EN997:2013+A1:2016 UNE-EN33:2012
EN-10088 X5CrNi18-10 1.4301 (Aisi-304)	(SAT- FOAMED)SI / TI	3/2/1.5/1	

A	04/03/2020	Jacob Q.	Jacob Q.	Ampliación de gama y accesorios
REV.	FECHA	DISEÑO	DIBUJADO	DESCRIPCION
MODIFICACIONES				
DISEÑO	10/04/2019	Jacob Q.		
DIBUJADO	10/04/2019	Jacob Q.		
VERIFICADO	11/04/2019	Jacob Q.		
Escala		Inodoro Mural suspendido/ Wall Mounted Toilet		DIVISION: Colectividades / Sanitarios
0.200		Mod.: INS-535-OVC-LF		Nº Plano
Norma		(TI-SI)		Nº Pieza/s:
EH056-SH101.6 (DN-90)		(**)535x360x360		Archivo: Pieza/Conjunto:
				GI-1820_01
				1 / 2
				Tolerancia
				UNE-EN 22678-c
				A-3

MONTAGE ANWEISUNG (DE)
MOUNTING INSTRUCTIONS (EN)
INSTRUCCIONES DE MONTAJE (ES)
INSTRUCTIONS POUR L'INSTALLATION (FR)
MONTERINGSANVISNING (NO)
MONTERINGSANVISNING (SV)
KÄYTTÖOHJE (FI)
MONTERINGSVEJLEDNING (DA)

RECOMMENDATIONS:
INSTALLATION, CLEANING AND USE

Installation is recommended by a qualified person.

Using stainless steel fasteners will prevent staining contamination of other non-stainless material.

Once installed and after cleaning the premises, remove any protective film from the product.

For cleaning avoid the use of acid and abrasive liquids. Brushes made of steel bristles or scouring pads. It is recommended to use a microfiber cloth, plenty of water and neutral soap or special cleaners for stainless steel.

You can use vinegar diluted in water (20% vinegar, 80% water) to dissolve lime incrustations.

For a sporadic need for disinfection, use bleach Domestic (Bottles max. concentration 65gr./L active chlorine) very diluted in water: (10% bleach, 90% water) leave on for a few minutes and rinse with plenty of clean water. Always remove all traces of cleaning products. This operation can cause corrosion and invalidates the warranty.

Take care of the product, in cleaning and in use, to maintain the original appearance of the first day.

RECOMENDACIONES: INSTALACION,
LIMPIEZA Y USO

Se recomienda la instalación por personal cualificado.

Usar elementos de fijación de acero inoxidable, se evitara las manchas por contaminación de otro material no inoxidable.



Una vez instalado y después de realizar la limpieza del local retire cualquier lámina de recubrimiento protector del producto.

Para la limpieza evitar el uso de líquidos ácidos y abrasivos. Cepillos de cerdas de acero o estropajos. Se recomienda el uso de un paño de microfibras, agua abundante y jabón neutro o limpiadores especiales para el acero inoxidable.

Se puede utilizar vinagre diluido en agua (20 % de vinagre, 80 % de agua) para incrustaciones de cal.

Por una necesidad esporádica para desinfección y con precaución, utilizar lejía doméstica (max. concentración del envase 65gr./L cloro activo) muy diluida en agua: (10% lejía, 90% de agua) dejar actuar y aclarar con abundante agua limpia. Eliminar siempre todos los residuos de productos de limpieza. Esta operación puede causar corrosión e invalidar la garantía.

Cuide el producto, en la limpieza y en el uso, para mantener el aspecto original del primer día.

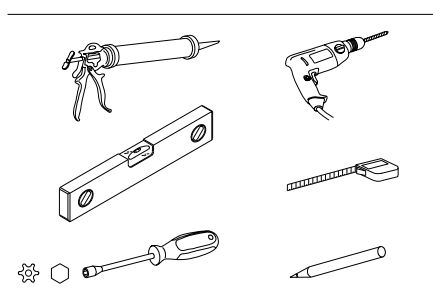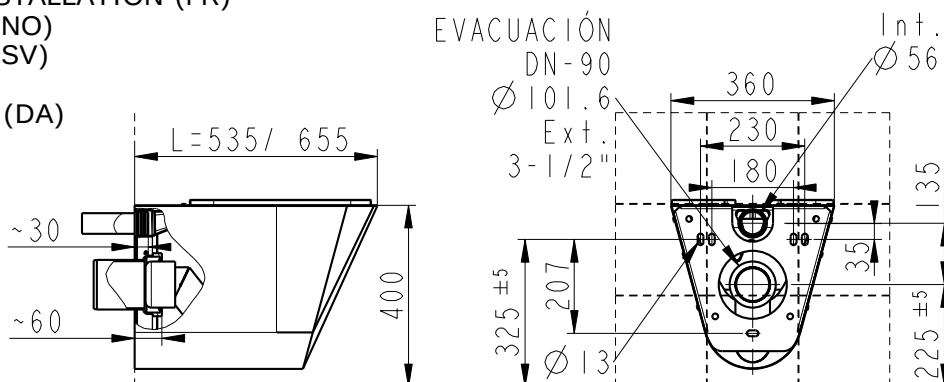

	535/ 655	1x	✓
	TX30	1x	✓
	Ø56	0x	✗
	Ø90-112	0x	✗
		0x	✗
		0x	✗

