



WALL-MOUNTED WASHBASIN WITH FLAT SIPHON AND HIDDEN BOTTOM ACCESS PANEL

LVR-32-S | WSBoo546 - SPBoo179

Robust closed wall-mounted washbasin made of high-quality stainless steel AISI 304 (1.4301) of 1/1.2mm thickness. Designed and developed for highly frequented public bathrooms, which demand high safety and hygiene. Fully welded and seamless construction and at the same time stylish looking. Pressed worktop. Round edges prevent injury. Integrated fixing brackets. Quick and easy to install from the front, accessible through a hidden access panel. Cleaning-friendly design.

- **Bowl:** Pressed bowl of Ø320 x 140mm.
- **Brushed Surface Finish**
- **Tap hole / Overflow hole:** Without (optional)
- Supplied with a flat and swivel **Siphon 1 ½" x 70 mm**
- **Fixation:** Concealed fixings and plumbings. Robust front mounting accessible through an access panel with theft prevention Torx security screws. Comes with fixing elements.
- **Integrated Earthing Lug** ensuring user safety.
- Robust and Compact construction.
- **CE marked.** Complies with European standards **EN 14688**.
- **Overall size:** L.420 x W.410 x H.250 mm | **Net/Gross Weight** 4 kg. / 5.5 kg.
- **HS-Code:** 73 241 000

MAIN ADVANTAGES:

- ✓ Robust and Compact Construction
- ✓ Small-sized and Versatile Washbasin
- ✓ Integrated Earthing
- ✓ CE marked. Certified to EN 14688

▶ Made in Spain by PORTINOX

SOLD SEPARATELY:




PDS-DRAIN | Xo309935
1 ½" x 70 mm



PTX-33000 | SONo0003-01




PTX-33120-AB | SONo0003-02
With Anti-Blocking-System



PDS-SLIM | SPS00003
Prison Shower Tray for Cross-Wall mounting





LVR-36-S | SBS00141
Wall mounted Washbasin with Brushed Finish



INS-535-OVC-S1 | WSWoo483 - SWNoo118
Wall-Hung Toilet with Brushed Finish




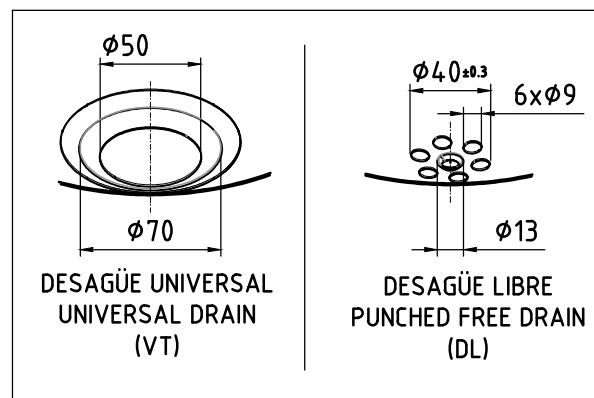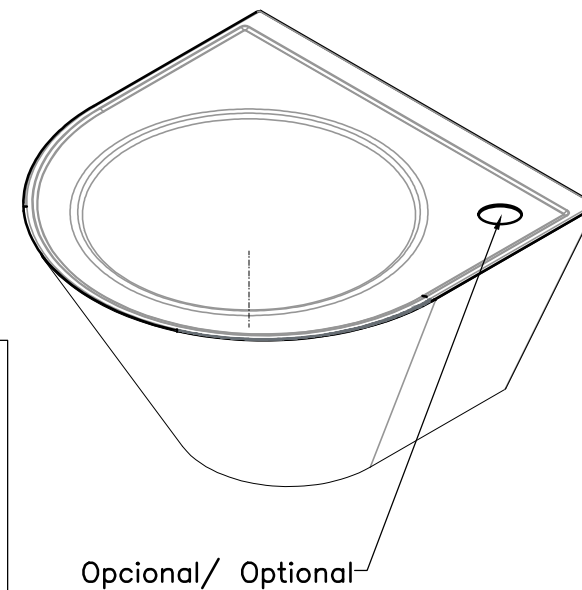

CARACTERISTICAS MATERIAL/ MATERIAL SPECIFICATIONS		
Ac. Inox/ St. Steel	Acabado/Finish	Espesor/TH.
1.4 301 (Aisi-304)	SAT	1

2	07.05.2018	J. Quesada	V. Rodríguez	J. Quesada	Se modifican los tornillos de la puerta de registro por M5 TORX.	
1	31.08.2017	J. Quesada	A. Martín	J. Quesada	Se suprimen las jaboneras	
Rev. Rev.	FECHA DATE	PROYECTO DESIGNER	DIBUJO DESIGN	COMPROBO VERIFY	DESCRIPCION DESCRIPTION	
PROYECTO PROJECT		FECHA DATE	NOMBRE NAME	FIRMA SIGNATURE	 PORTINOX THIELMANN CONTAINER SYSTEMS	
DIBUJO DESIGN		28.04.2016	J. Quesada		DEPARTAMENTO: DEPARTMENT Oficina Técnica de Diseño	
COMPROBÓ CHECKED		28.04.2016			PROYECTO: PROJECT ----	
Escala: Scale S/C		LAVABO MURAL, WASH BASIN WALL Mod. LVR-32-S 420x410x250			Nº Plano Drawing Number: GI_1455	
Norma Norm 					Rev.: ---- Tolerancia General según: ISO 2768-c Tolerances	
					Ruta: GI_1455.dwg	

MONTAGE ANWEISUNG (DE)
MOUNTING INSTRUCTIONS (EN)
INSTRUCCIONES DE MONTAJE (ES)
INSTRUCTIONS POUR L'INSTALLATION (FR)
MONTERINGSANVISNING (NO)
MONTERINGSANVISNING (SV)
KÄYTTÖOHJE (FI)
MONTERINGSVEJLEDNING (DA)



	1x ✓
	4x ✓
	1x ✓
	1x ✓
	0x ✗

RECOMMENDATIONS:
INSTALLATION, CLEANING AND USE

Installation is recommended by a qualified person.

Using stainless steel fasteners will prevent staining contamination of other non-stainless material.

Once installed and after cleaning the premises, remove any protective film from the product.

For cleaning avoid the use of acid and abrasive liquids. Brushes made of steel bristles or scouring pads. It is recommended to use a microfiber cloth, plenty of water and neutral soap or special cleaners for stainless steel.

You can use vinegar diluted in water (20% vinegar, 80% water) to dissolve lime incrustations.

For the necessity of bacterial disinfection and with caution, use bleach diluted in water: (10% bleach, 90% water) leave on for a few minutes and rinse with plenty of clean water. Always remove all traces of cleaning products.

Take care of the product, in cleaning and in use, to maintain the original appearance of the first day.

RECOMENDACIONES:
INSTALACION, LIMPIEZA Y USO

Se recomienda la instalación por personal cualificado.

Usar elementos de fijación de acero inoxidable, se evitara las manchas por contaminación de otro material no inoxidable.


Una vez instalado y después de realizar la limpieza del local retire cualquier lámina de recubrimiento protector del producto.

Para la limpieza evitar el uso de líquidos ácidos y abrasivos. Cepillos de cerdas de acero o estropajos. Se recomienda el uso de un paño de microfibras, agua abundante y jabón neutro o limpiadores especiales para el acero inoxidable.


Se puede utilizar vinagre diluido en agua (20 % de vinagre, 80 % de agua) para incrustaciones de cal.

Por necesidad de desinfección bacteriana y con precaución, utilizar lejía diluida en agua: (10% lejía, 90% de agua) dejar actuar unos minutos y aclarar con abundante agua limpia. Eliminar siempre todos los residuos de productos de limpieza.

Cuide el producto, en la limpieza y en el uso, para mantener el aspecto original del primer día.

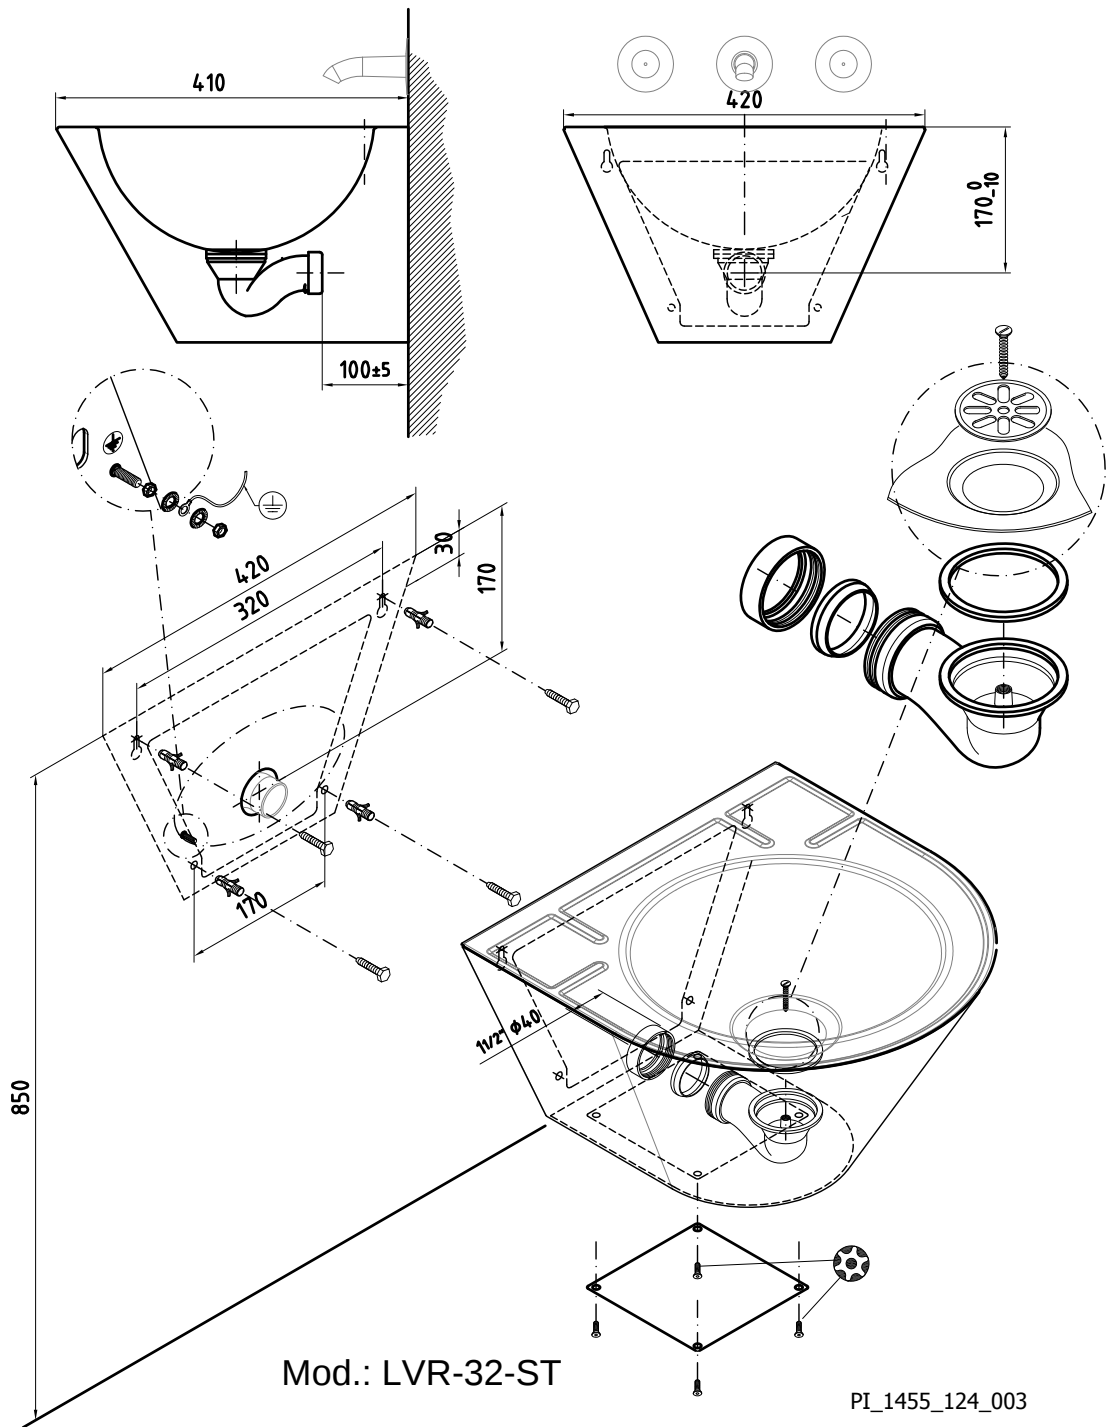

MONTAGE ANWEISUNG (DE)
MOUNTING INSTRUCTIONS (EN)
INSTRUCCIONES DE MONTAJE (ES)
INSTRUCTIONS POUR L'INSTALLATION (FR)
MONTERINGSANVISNING (NO)
MONTERINGSANVISNING (SV)
KÄYTTÖOHJE (FI)
MONTERINGSVEJLEDNING (DA)



	1x ✓
	4x ✓
	1x ✓
	1x ✓
	0x ✗

RECOMMENDATIONS:
INSTALLATION, CLEANING AND USE

Installation is recommended by a qualified person.

Using stainless steel fasteners will prevent staining contamination of other non-stainless material.

Once installed and after cleaning the premises, remove any protective film from the product.

For cleaning avoid the use of acid and abrasive liquids. Brushes made of steel bristles or scouring pads. It is recommended to use a microfiber cloth, plenty of water and neutral soap or special cleaners for stainless steel.

You can use vinegar diluted in water (20% vinegar, 80% water) to dissolve lime incrustations.

For the necessity of bacterial disinfection and with caution, use bleach diluted in water: (10% bleach, 90% water) leave on for a few minutes and rinse with plenty of clean water. Always remove all traces of cleaning products.

Take care of the product, in cleaning and in use, to maintain the original appearance of the first day.

RECOMENDACIONES:
INSTALACION, LIMPIEZA Y USO

Se recomienda la instalación por personal cualificado.

Usar elementos de fijación de acero inoxidable, se evitara las manchas por contaminación de otro material no inoxidable.

Una vez instalado y después de realizar la limpieza del local retire cualquier lámina de recubrimiento protector del producto.

Para la limpieza evitar el uso de líquidos ácidos y abrasivos. Cepillos de cerdas de acero o estropajos. Se recomienda el uso de un paño de microfibras, agua abundante y jabón neutro o limpiadores especiales para el acero inoxidable.

Se puede utilizar vinagre diluido en agua (20 % de vinagre, 80 % de agua) para incrustaciones de cal.

Por necesidad de desinfección bacteriana y con precaución, utilizar lejía diluida en agua: (10% lejía, 90% de agua) dejar actuar unos minutos y aclarar con abundante agua limpia. Eliminar siempre todos los residuos de productos de limpieza.

Cuide el producto, en la limpieza y en el uso, para mantener el aspecto original del primer día.

