


FT2 PICKUP

SPECIFICATIONS



No. PERFORMANCE			No. WARRANTY			No. TIRES			No. OPTIONS		
1	Payload on land	2000 lb (905 kg)	23	Limited 1 year / 1000 hours (Whichever comes first)		40	Front & Rear	FAT TRUCK® LGP 52 x 24 x 20 in	60	Air conditioning	
2	Payload on water	1500 lb (679 kg)	ENGINE			41	Pressure	0.5 to 6 PSI (0.0035 to 0.42 kg/cm ²)	61	Front winch	
3	Passenger capacity	4 (2 front + 2 rear)	24	Make	HATZ	FUEL SYSTEM			62	Additional battery	
4	Maximum speed on land	20 mph (32 km/h)	25	Model	3H50TICD	42	Capacity	19.5 US Gal (74 L)	63	Rear hitch	
5	Maximum speed on water	3.1 mph (5 km/h)	26	Emission standards	EPA Tier 4 final	43	Average fuel autonomy	12 h	64	Front and rear shackles	
6	Maximum uphill & downhill	35°/ 70%			EURO Stage V	STANDARD EQUIPMENT			65	Studs for ice	
7	Maximum sidehill	22°/ 40%	27	Number of cylinders	3 cylinders	44	Standard color: Black		66	Engine & hydraulic heater 110 V	
8	Turning radius	0°	28	Displacement	89 in ³ (1.46 L)	45	Super Fat TiresMD		67	Canopy with openable windows, dome light	
9	Base vehicle shipping weight	4200 lb (1900 kg)	29	Horsepower @ 2400 RPM	56 hp (42 kW)	46	Front doors		68	Heater/Defroster	
10	Ground pressure fully loaded	2 lb/po ² (0.14 kg/cm ²)	30	Torque @ 1600 RPM	136 lb-ft (184 N-m)	47	Operator seats		69	Extra heater	
11	Towing Capacity	3,000 lbs (1,600 kg)	31	Cooling system	Liquid cooled	48	Lights: Front, brakes, position, flashers, dome		70	Front windshield with wiper	
SAFETY FEATURES			ELECTRICAL			49	Electric horn		71	Custom color	
12	ROPS	ISO 3471	32	Voltage	12 V	50	Fire extinguisher 2.5 lb ABC		72	Front roof rack	
13	EPA / Emission	Tier 4 Final/Stage V	33	Alternator capacity	110 A	51	2 front seats with 3-point seat belts		73	Rear roof rack	
14	Brakes	Automatic safety brake	34	Battery capacity	960 CCA	52	Rear tailgate with ladder		74	Rear vinyl canopy	
DIMENSIONS			35	Battery type	AGM	53	Retractable front ladder and handles		75	Exterior mirrors	
15	Height with roof rack	91.5 in (2323 mm)	TRANSMISSION			54	Bilge pump		76	Back-up camera	
16	Height with air conditioning	101 in (2562 mm)	36	Type	Hydrostatic	55	First aid kit		77	Back-up alarm	
17	Length	129 in (3283 mm)	37	Final drive	4 Hydraulic motors	56	Front and rear bumpers		78	4-Way camera system	
18	Width	98 in (2489 mm)	BRAKES			57	Lockable fuel cap		79	Rear ROPS	
19	Ground clearance	18 in (457 mm)	38	Brakes	Positive deceleration through hydrostatic transmission	58	Cup holders		80	Rear seats with safety belts	
CONTROLS						59	Operator & Maintenance manual		81	Directional light with remote control	
20	Controllor	Microprocessor	39	Parking brakes	Brake disc applied, pressure released				82	Front, side and rear light LED bar	
21	Steering	Joystick							83	LED strobe light	
22	Display	Color display									

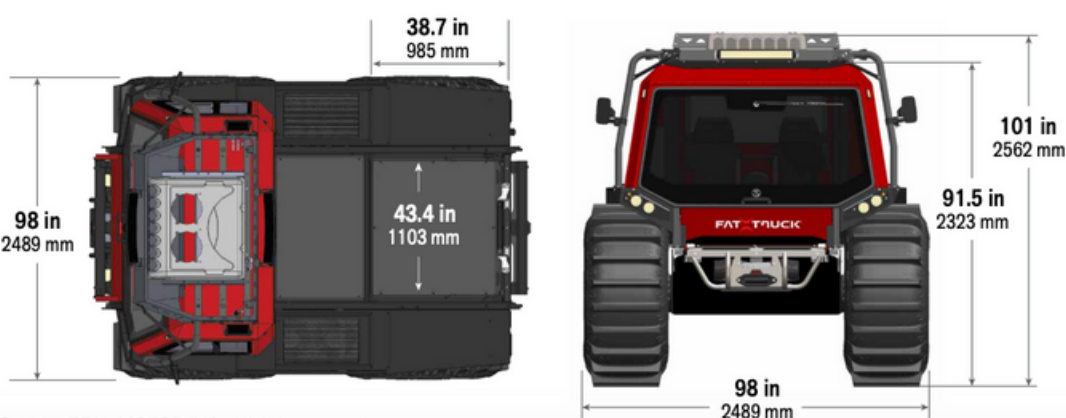

RufDiamond LTD.

62 Smelter Road

Coniston, Ontario - Canada

POM 1M0 - 705-419-2653

info@rufdiamond.com

www.rufdiamond.com

