

B.

Select Pro

Made with high performance targets in mind, Select Pro exceeds expectations. As a durable solution, its additional thickness at 2.5mm includes a 0.55mm wear layer, almost double the residential average. A great choice for high traffic areas such as passages, hotel foyers, or shops. Not least, it carries a 10-year commercial and 20-year residential warranty for long-term convenience.

Extended Specifications

Type of Installation:	Dry Back (Stick Down)
Use Classification:	Heavy Commercial
Total Mass:	4310 (g/m²) 139.02 (oz/yd²)
Wear Layer Thickness:	0.55 (mm) 0.021 (in)
Total Thickness:	2.5 (mm) 0.098 (in)
Tile Size (l x w):	1219.2 × 228.6 (mm) 9 × 48 (in)
Quantity Per Box:	12
Chemical Resistance:	Yes (EN ISO 26987)
Fire Classification:	Bfl-s1 (EN 13501-1)
Slip Resistance:	R10 (DIN 51130)



B.

Select Pro

Extended Specifications

Residual Indentation:	<0.1mm (EN ISO 24343-1)
Thermal Resistance:	0.028(m ² *K)/W (EN 12664)
Electrostatic Propensity: (Body Voltage Test)	0.1kV (EN 1815 Method A)
Dimensional Stability:	≤0.25% (EN ISO 23999)
Colour Fastness:	>6 Grade (ISO 105-B02)
Sound Absorption:	Approx. 3 dB (EN ISO 10140-3)
Castor Chair Suitability:	Yes, Type W (EN ISO 4918)
Floor Heating System:	Yes, max 27°C
VOC Emissions:	Floorscore SCS-FS-03336
Warranty:	10 year commercial / 20 year residential
Sustainability:	Floorscore



B.



Fab




Chic




Fine



Uber

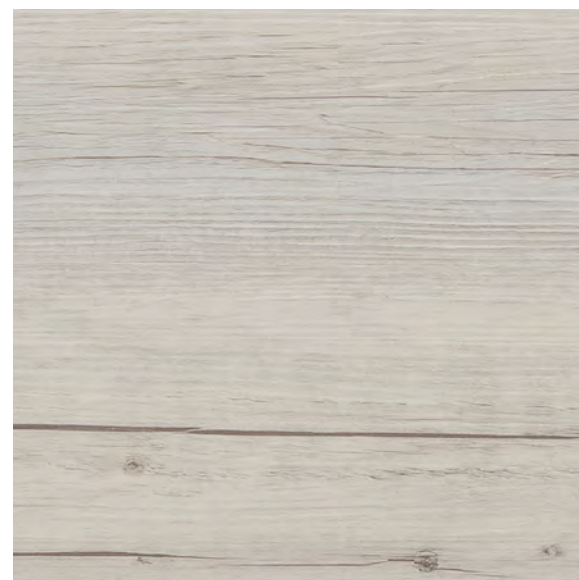

Rad

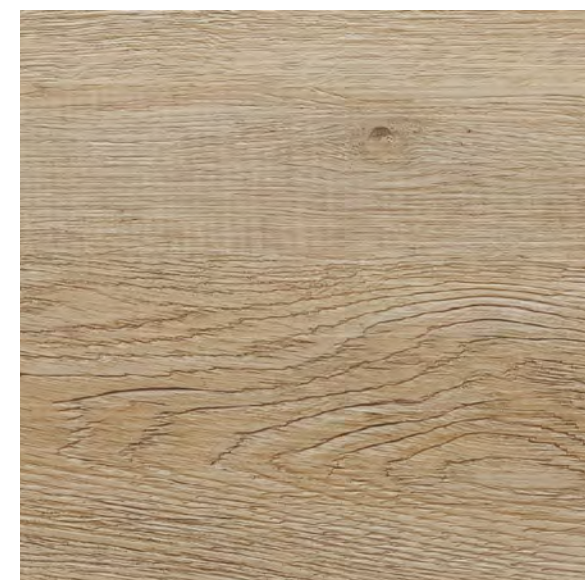

Snazzy

Select Pro



Heavy Residential





Heavy Commercial




COMMERCIAL WARRANTY
10 YEAR



RESIDENTIAL WARRANTY
20 YEAR



Suitable for Staircases




Office Chair Castor Wheels



POLYURETHANE-TREATED SURFACE
PU




BN-S1



Natural Look



Anti-Bacterial



Underfloor Heating



E1
MCHO



bsi ISO 9001
Quality Management Systems
CERTIFIED



bsi ISO 14001
Environmental Management
CERTIFIED



bsi ISO 45001
Occupational Health and Safety Management
CERTIFIED



Bill of Quantities

- Belgotex's SELECT PRO is available as $\pm 2.5\text{mm}$ (total thickness) Heavy Commercial Use Dry back-stick down LVT vinyl.
- $1219.2 \times 228.6\text{mm}$ with 0.55mm wear layer.
- 20 year residential warranty and 10 year commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- GreenTag Level A Gold Rated Certification.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.