

B_

Strata

Transform floors into a creative canvas with Strata, the solution for designers seeking to enhance brand equity in commercial spaces. This medium-sized dry-back LVT boasts high-performance commercial-grade specifications, including scratch master technology, designed to endure high-traffic zones. The elegant chevron shape and 5 curated colours - two ‘pure oak’ timbers paired with striking black and white marble - offer endless possibilities. With Strata’s distinctive layouts, you can layer enduring beauty, flexibility, and functionality into retail, hotel or office spaces.

Extended Specifications

Type of Installation:	Dry Back (Stick Down)
Use Classification: (EN 1307)	Heavy Residential / Light Commercial
Wear Layer Thickness:	0.30 (mm) 0.011 (in)
Total Thickness:	2.0 (mm) 0.078 (in)
Tile Size (l x w):	571.5 × 114.3 (mm) 22.5 X 4.5 (in)
Number of tiles per box:	46
Quantity Per Box:	2.8m²
Chemical Resistance: (EN ISO 26987)	Yes
Fire Classification: (EN 13501-1)	Bfl-s1
Slip Resistance: (DIN 51130)	R10
Residual Indentation: (EN ISO 24343-1)	<0.1mm




B.

Extended Specifications

Thermal Resistance: (EN 12664)	0.028 (m) K/W
Electrostatic Propensity: (Body Voltage Test) (EN 1815 Method A)	0.1kV
Dimensional Stability: (EN ISO 23999)	≤0.25%
Colour Fastness: (ISO 105-B02)	>6 Grade
Sound Absorption: (EN ISO 10140-3)	Approx. 3 dB
Castor Chair Suitability: (EN ISO 4918)	Yes, Type W
Floor Heating System:	Yes, max 27°C
VOC Emissions:	Floorscore SCS-FS-03336
Warranty:	20 year Heavy Residential 10 year Light Commercial
Sustainability:	Floorscore



B.

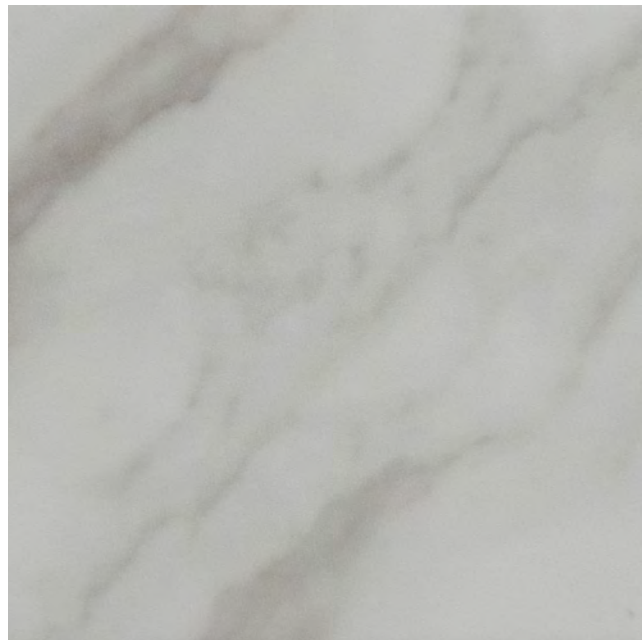


Blanco




Cenere



Crema

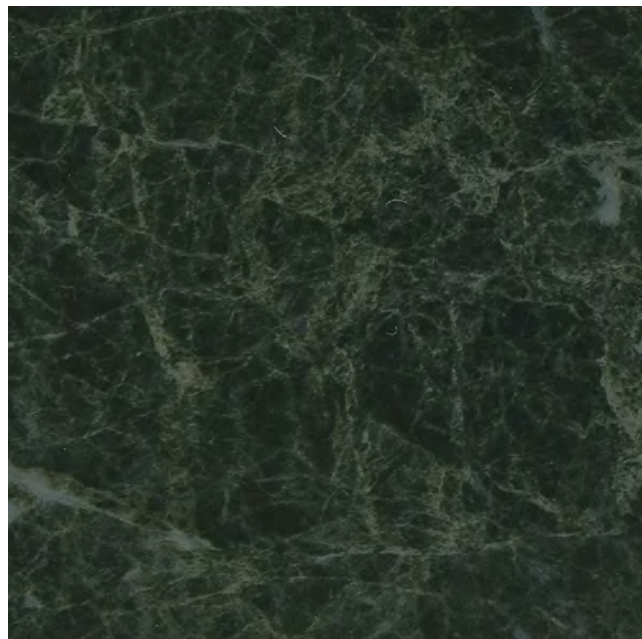


Emerald

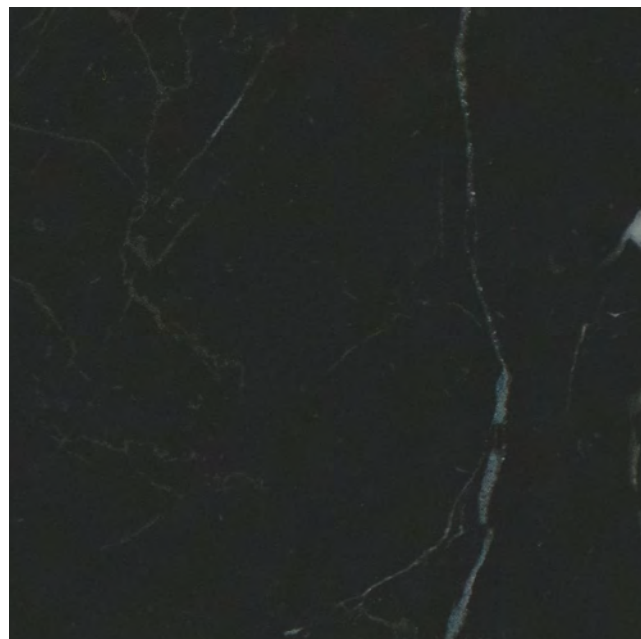

Noir

Strata

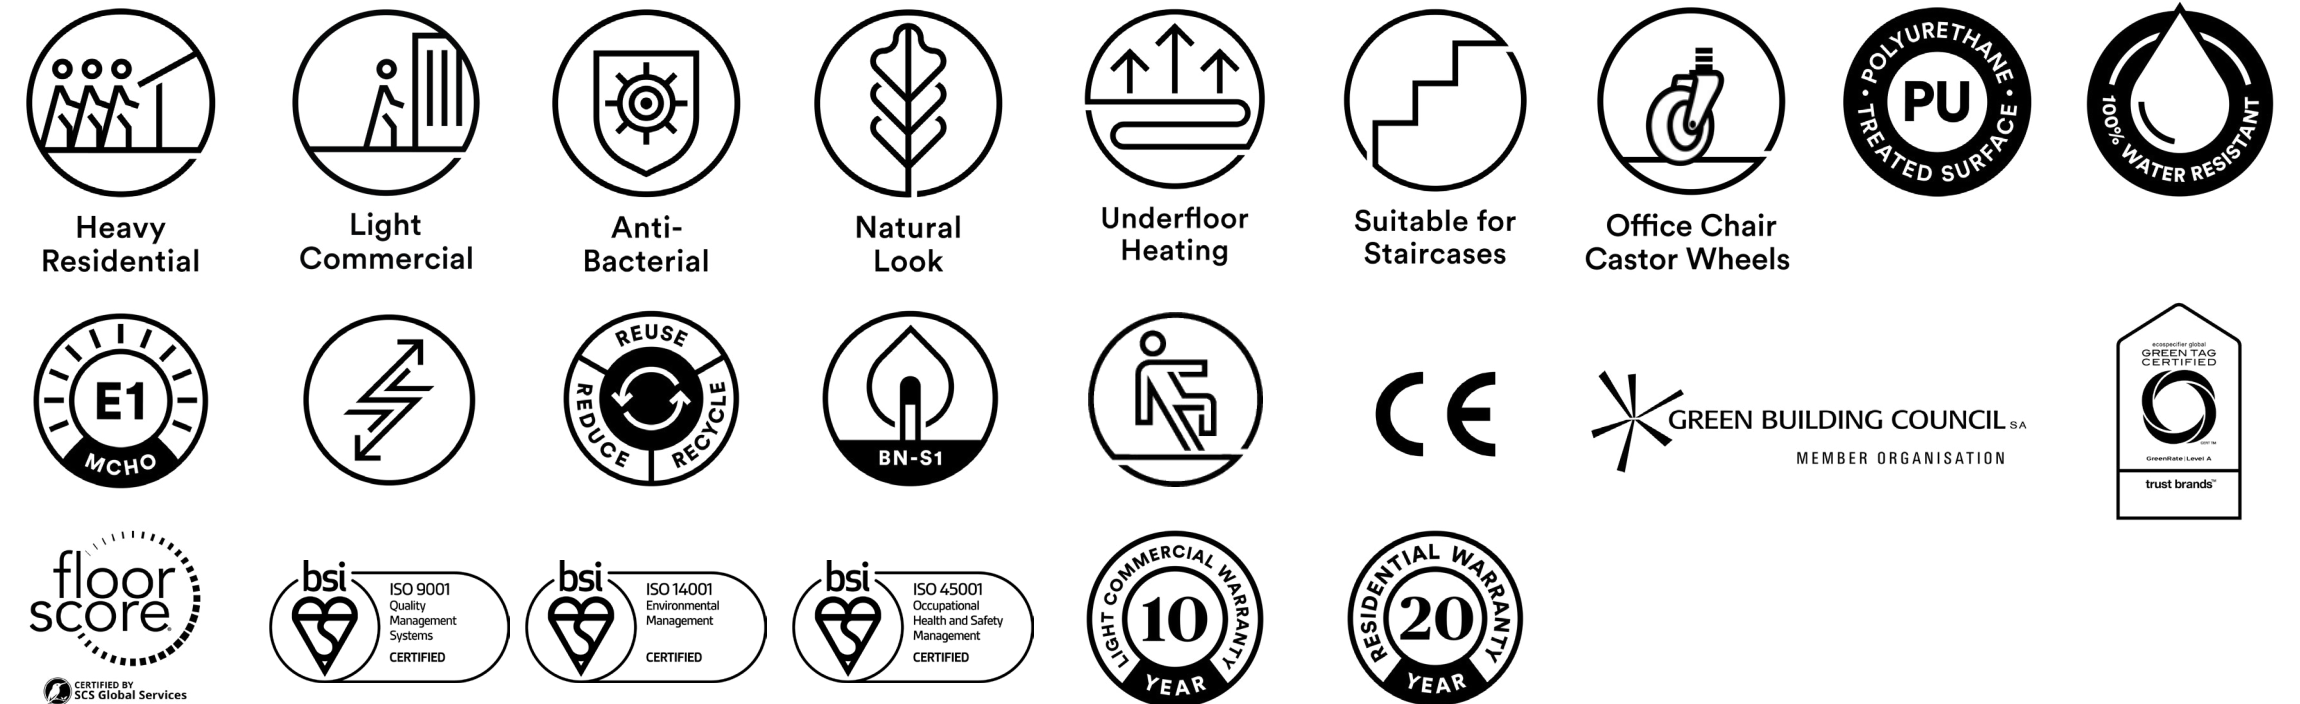

Bill of Quantities

- Belgotex STRATA 2.0mm width Heavy Residential / Light Commercial Use Dry back-stick down LVT vinyl.
- 571.5 × 114.3mm with 0.30mm wear layer.
- 20-year residential warranty / 10-year Light Commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- Green tag level A Gold rated certification.

Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation. A join line will be visible on plank and tile products due to the format of the design repeat - if you would not like a visible join, alternate the direction of the installation to your desired aesthetic. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.