

B_

Aggregate

Introducing our attractive designer range, Aggregate, which combines the allure of composite floors with the benefits of LVT. We have curated our favourite existing concrete-look and terrazzo styles, infusing new trending colours. This improved selection features warm hues, a coarse aggregate, and a striking black marmoreal mid-century terrazzo, each adding a distinctive X-factor to any project. The unique commercial-grade heavy-duty dry back LVT format is available in a convenient 50cm x 50cm size, ensuring seamless compatibility with our carpet tiles. Elevate your design with Aggregate - where style, comfort and versatility merge.

Extended Specifications

Type of Installation:	Dry Back (Stick Down)
Use Classification: (EN 1307)	Heavy Commercial
Wear Layer Thickness:	0.55 (mm) 0.021 (in)
Total Thickness:	2.5 (mm) 0.098 (in)
Plank Size (l x w):	500 × 500 (mm) 19.68 × 19.68 (in)
Quantity Per Box:	4.0m²
Chemical Resistance: (EN ISO 26987)	Yes
Fire Classification: (EN 13501-1)	Bfl-s1
Slip Resistance: (DIN 51130)	R10
Residual Indentation: (EN ISO 24343-1)	<0.1mm
Thermal Resistance: (EN 12664)	0.091(mK)/W




B.

Extended Specifications

Electrostatic Propensity: (Body Voltage Test) (EN 1815 Method A)	0.1kV
Dimensional Stability: (EN ISO 23999)	≤0.25%
Colour Fastness: (ISO 105-B02)	>6 Grade
Sound Absorption: (EN ISO 10140-3)	Approx. 3 dB
Castor Chair Suitability: (EN ISO 4918)	Yes, Type W
Floor Heating System:	Yes, max 27°C
VOC Emissions:	Floorscore SCS-FS-03336
Warranty:	20 years residential 10 years commercial
Sustainability:	Floorscore




B.

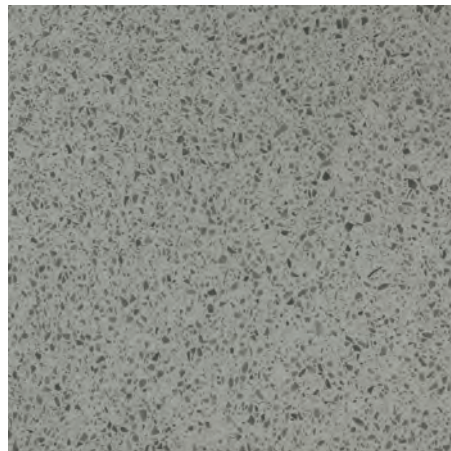

Affogato




Cement

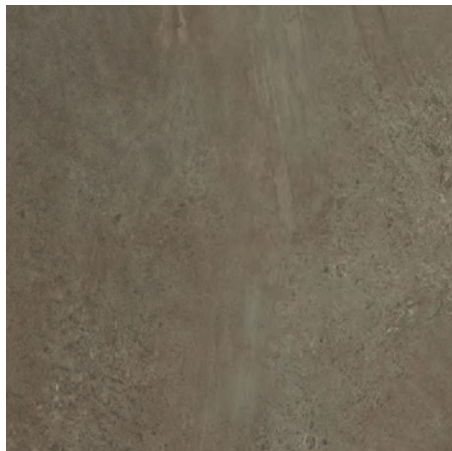

Cruda




Fango

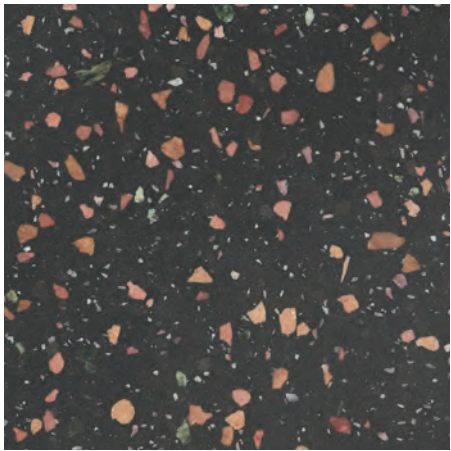

Marmoreo




Sand

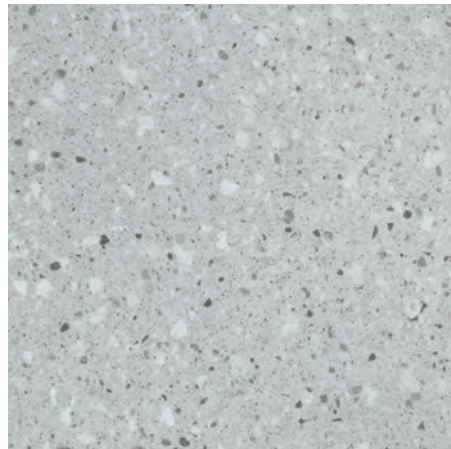

Sardegna



Stone

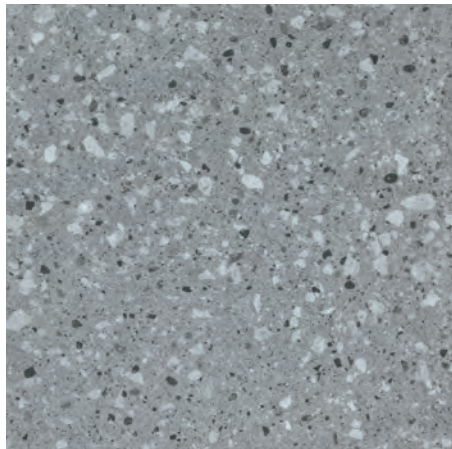

Vaticano

Aggregate

Heavy Commercial

Anti-Bacterial

Suitable for Staircases

Natural Look

Underfloor Heating

Office Chair Castor Wheels

100% WATERPROOF

BN-S1

POLYURETHANE TREATED SURFACE
PU

E1
MCHO

GREEN TAG CERTIFIED
trust brands

bsi ISO 9001 Quality Management Systems CERTIFIED

bsi ISO 14001 Environmental Management CERTIFIED

bsi ISO 45001 Occupational Health and Safety Management CERTIFIED

floor score
CERTIFIED BY SCS Global Services

RESIDENTIAL WARRANTY
20 YEAR

COMMERCIAL WARRANTY
10 YEAR

GREEN BUILDING COUNCIL[®]
MEMBER ORGANISATION

Bill of Quantities

- Belgotex AGGREGATE 2.5mm Heavy Commercial Use Dry back-stick down LVT vinyl.
- 500 × 500mm with 0.55mm wear layer.
- 20-year residential warranty and 10-year commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice.
- Belgotex recommends the use of a 60mm unhooded soft castor, with a 23mm or 38mm diameter, designed for a 60kg loading capacity per a castor. Recommended material is high impact nylon core and hub with soft grey/black PU treads on the wheel.
- Green tag level A Gold rated certification.

Note: Belgotex offers customization of this product in colour. Please contact a Belgotex representative for more information.

Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation. A join line will be visible on plank and tile products due to the format of the design repeat - if you would not like a visible join, alternate the direction of the installation to your desired aesthetic. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.