

B.

iQ Eminent

Inspired by the refined beauty of natural stone, iQ Eminent offers a rich, sophisticated tonal palette—both muted and bold—ideal for biophilic design and spaces centered on well-being. With a 2mm total thickness and advanced iQ PUR surface treatment, this high-performance vinyl delivers outstanding durability, resisting wear, stains, and abrasions in even the busiest environments. No wax or polish needed—just a dry buff restores its elegant finish. Greentag certified, iQ Eminent is a sustainable choice, crafted for comfort, performance, and long-lasting style.

Extended Specifications

Type of Installation:	Non-directional vinyl sheeting
Use Classification: (EN ISO 10874)	Heavy Residential - 34 / Heavy Commercial - 43
Total Weight: (EN ISO 23997)	2750 (g/m²) 81.10 (oz/yd²)
Wear Layer Thickness: (EN ISO 24340)	2.0 (mm) 0.07 (in)
Total Thickness: (EN ISO 24346)	2.0 (mm) 0.07 (in)
Roll Size (l x w):	23 × 2 (m) 905.51 × 78.74 (in)
Sqm per Roll:	46
Backing Type:	Homogenous Vinyl Floor Covering
Number of Designs:	26
Declaration of performance: (EN 14041)	0019-0008-DoP-2013-07
Dimensional stability: (EN ISO 23999)	≤0.25%



B.


IQ Eminent

Extended Specifications


Slip Resistance: (DIN 51130)	R9
Residual Indentation: (EN ISO 24343-1)	<0.10mm
Thermal Resistance: (EN ISO 12667)	-0.01m2 K/W
Electrostatic Propensity: (Body Voltage Test) (EN 1815 Method A)	≤2.0kV
Fire Index: (EN ISO 13501-1)	Bfl-s1
Light Fastness: (EN ISO 105-B02)	≥7
Seam Strength: (EN 684)	Average value ≥ 400N/50mm
Chemical Resistance: (EN ISO 26987)	Excellent
Underfloor Heating System	Yes, max 27°C
Curl Resistant to Heat: (EN ISO 23999)	≤8mm
Clean Room: (ISO 14644-1)	ISO class 4
Erase of decontamination: (EN ISO 8690-DIN 25415)	Excellent
VOC Emissions: (EN 16516)	Platinum ≤10 µg/m3
Bacterial Resistance: (ISO 846 Part C)	Does not promote growth
Sustainability:	Floorscore
Warranty:	25yr Residential / 10yr Commercial



B.

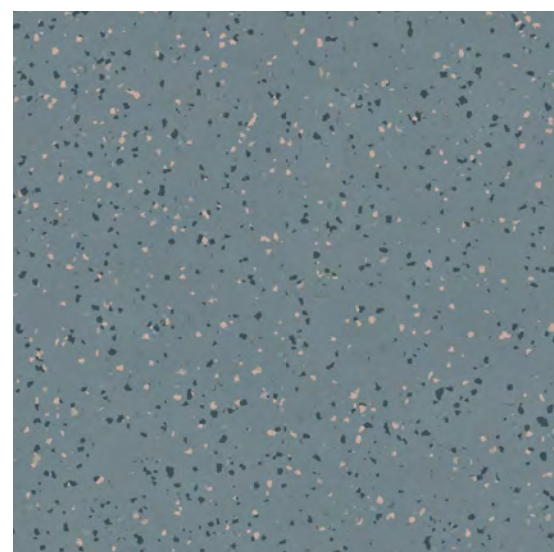

Dusty Blue

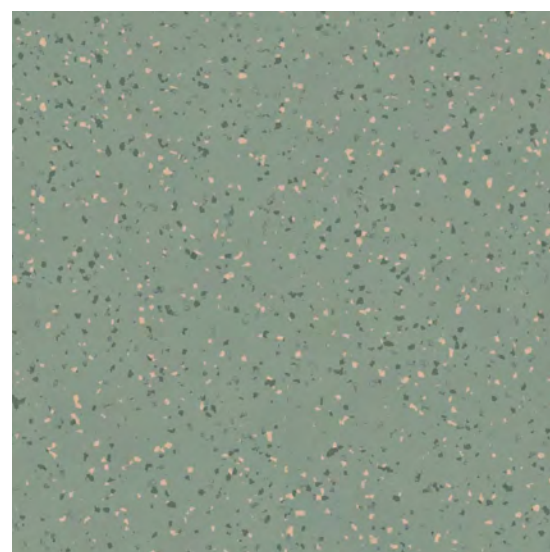

Dusty Green




Dusty Grey



Dusty Sand




Dusty White

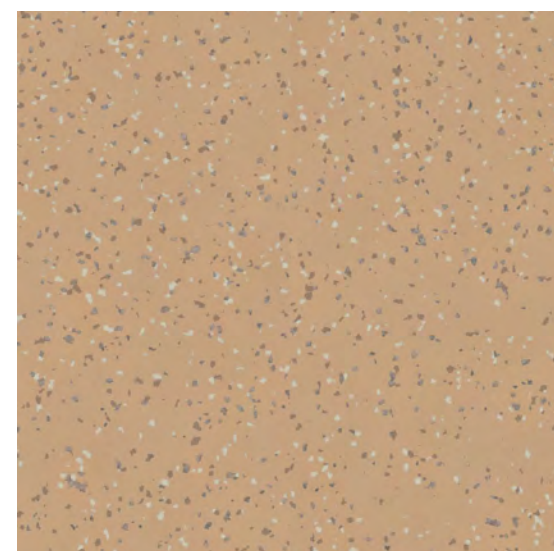

Dusty Yellow

IQ Eminent

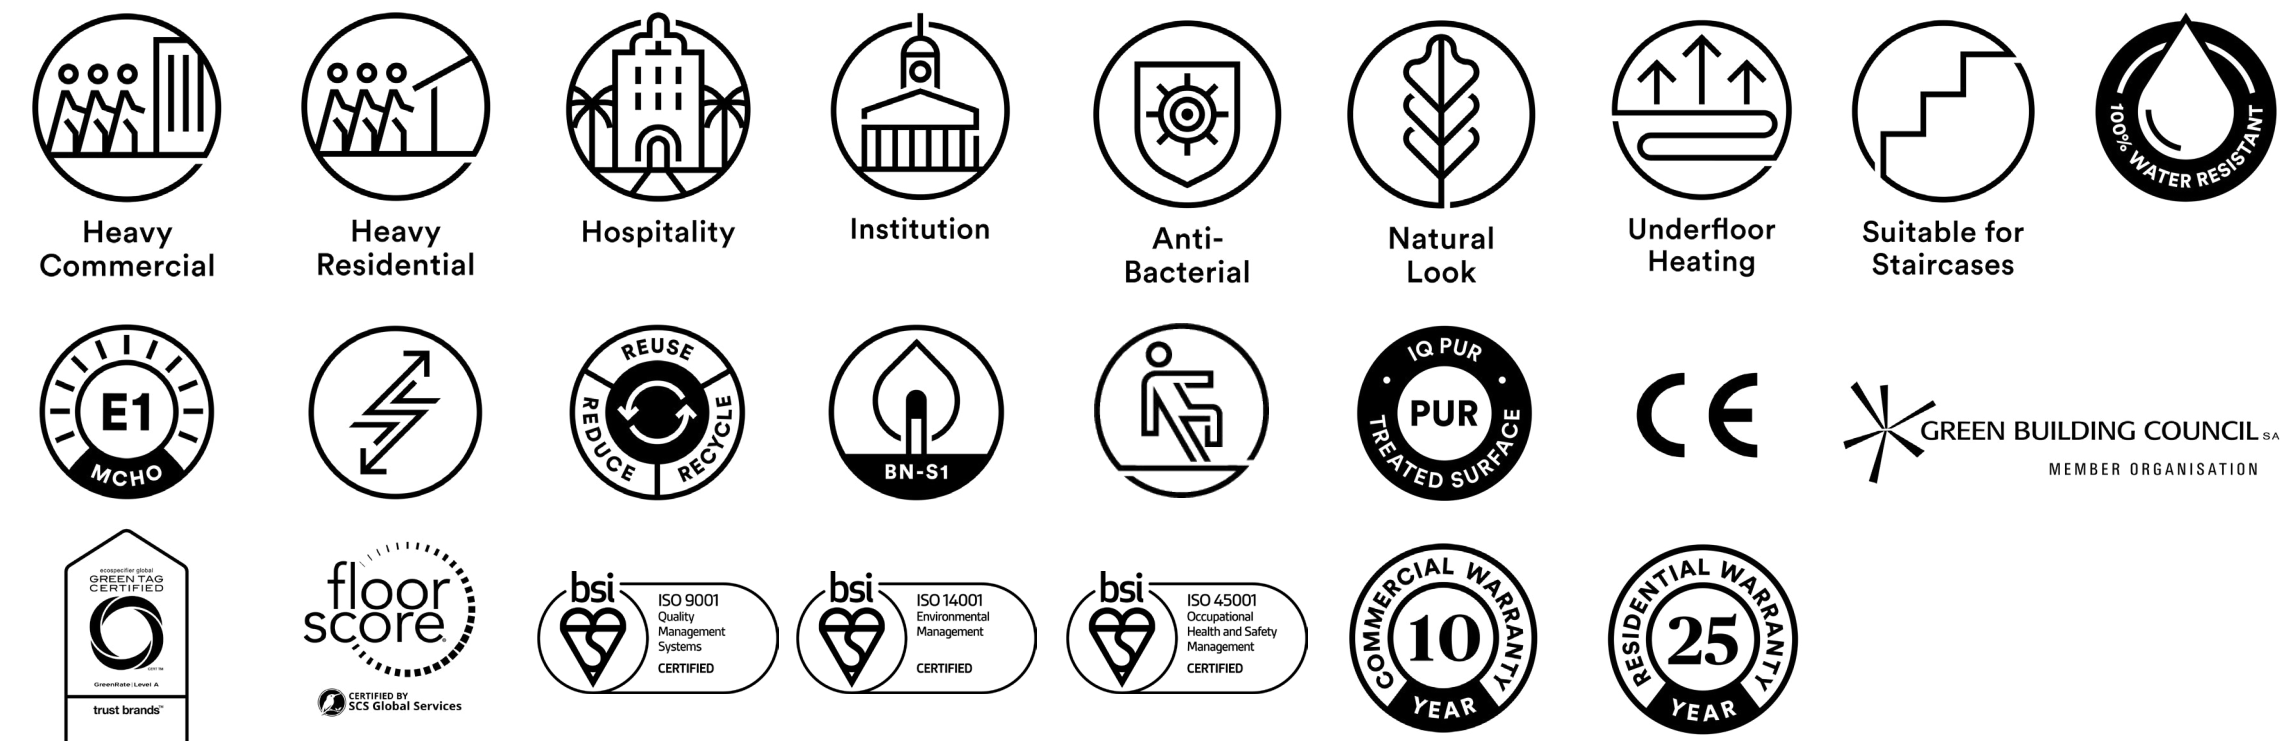

Bill of Quantities

- Belgotex IQ EMINENT 2.0mm width Homogenous Heavy Residential and Heavy Commercial non-directional vinyl sheeting.
- 23 × 2 m with 2.0mm total thickness.
- 25-year residential warranty / 10 - year commercial warranty.
- This product is to be laid in accordance with SANS 10070 fitting code of practice, applied onto a previously prepared class 1 sub-floor, using Mapei Ultrabond Eco self-levelling compound and Primer G or equally approved, with a sub-floor moisture reading of 2% and below and then adhered to the prepared sub-floor with Mapei Mapecryl Eco Acrylic emulsion or equally approved, spread using a 1.5mm x 1.5mm notched trowel as per manufacturers recommendations and rolled with a 68kg heavy roller. The joins to be hot welded at least 48 hours after installation using the recommended welding rods.
- Green tag level A Gold rated certification.

Product characteristics may vary due to the nature of manufacturing. To combat colour variance do not install more than one dye lot in a single installation. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.

*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.