

M6 P-TYPE MODULE

410W-425W

Premium Quality *Monofacial*

132 CELL

M6 MONO PERC

21.28%

MAXIMUM EFFICIENCY

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power



For Environment For Future



Optimize the Temperature Coefficient



Reduce Equipment & Material Cost




Module Type		PW-66M410HM6		PW-66M415HM6		PW-66M420HM6		PW-66M425HM6	
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	$P_{MAX}(W)$	410	306.2	415	309.9	420	313.7	425	317.4
Maximum Power Voltage	$V_{MPP}(V)$	38.00	35.38	38.20	35.57	38.40	35.76	38.60	35.94
Maximum Power Current	$I_{MPP}(A)$	10.79	8.65	10.87	8.71	10.94	8.77	11.02	8.83
Open Circuit Voltage	$V_{OC}(V)$	45.20	42.37	45.40	42.56	45.60	42.75	45.80	42.94
Short Circuit Current	$I_{SC}(A)$	11.57	9.36	11.65	9.42	11.73	9.49	11.81	9.55
Tolerance	(W)	0 - +5		0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	20.53		20.78		21.03		21.28	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1



NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

DIMENSIONS OF PV MODULE

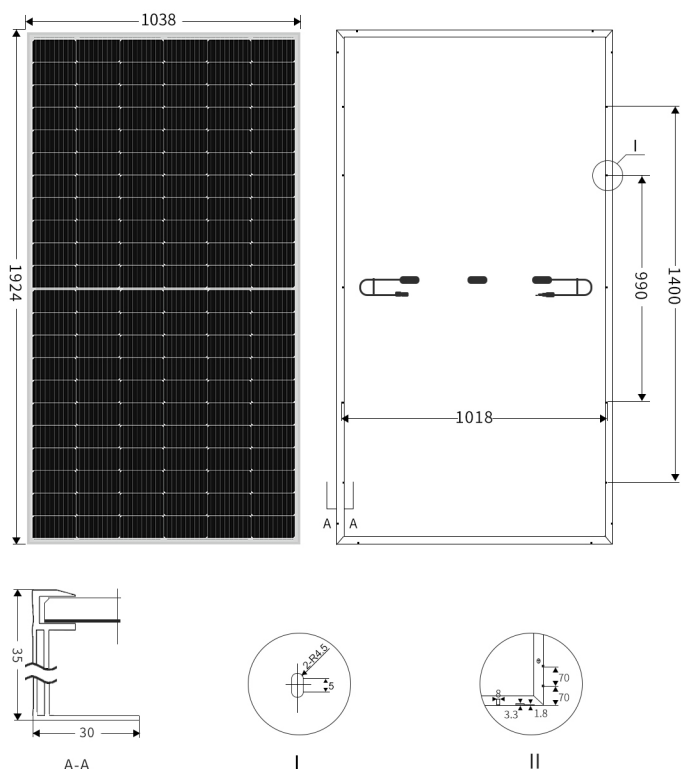

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty 30 Year Linear Power Warranty

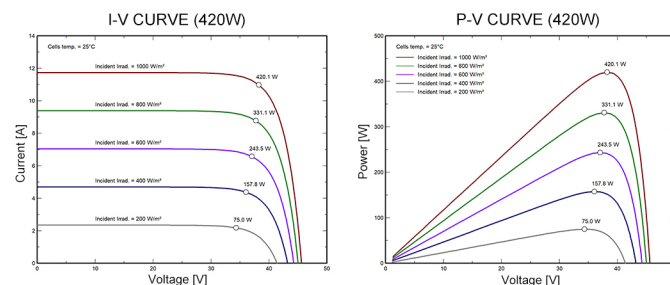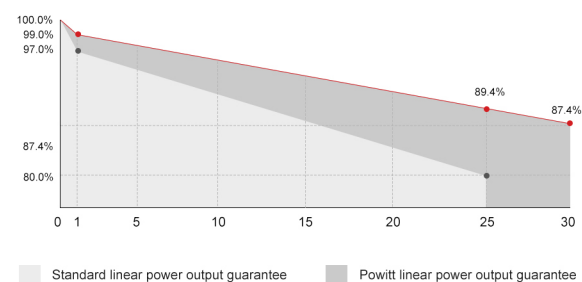

MECHANICAL DATA

Cell Type	Mono PERC	TEMPERATURE RATINGS	
No. of Cells	132 (6 x 22)	Nominal Operating Cell Temperature(NOCT)	45±2°C
Module Dimensions	1924 x 1038 x 35mm	Temperature Coefficient of P_{MAX}	-0.35%/°C
Weight	22.0kg	Temperature Coefficient of V_{OC}	-0.28%/°C
Glass	Anti-Reflective, AR Coated and Heat Tempered Solar Glass-3.2mm	Temperature Coefficient of I_{SC}	+0.048%/°C
Backsheet	White	MAXIMUM RATINGS	
Frame	Anodized Aluminium Alloy	Operational Temperature	-40 to +85°C
Junction Box	IP 68 Rated	Maximum System Voltage	1500V DC
Cables	4.0mm ² , 350mm or Customized Length	Max Series Fuse Rating	20A
Connector	MC4 Compatible	Mechanical Load	5400pa
PACKAGING CONFIGURATION		Wind Load	2400pa

31 pcs/Pallet, 792 pcs/40'HQ

All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version No. PWS202311V03



Powitt Solar Co., Ltd
www.powitt.com
info@powitt.com
+86 519 8899 2132

FUTURE POWER AT TODAY