




Soften Acoustic tour

Air

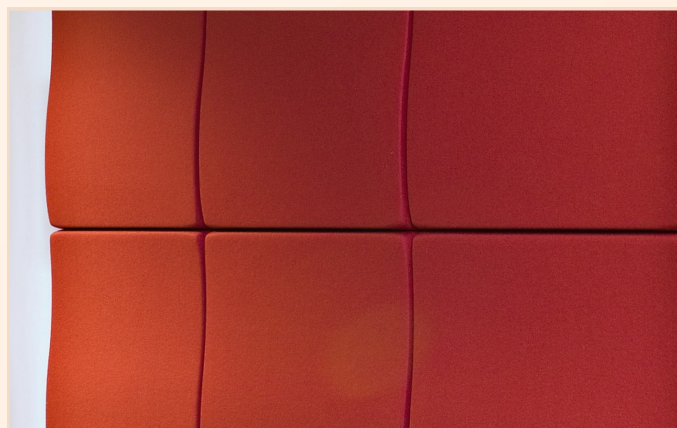

Sound absorption

Class A

Fire classification

B-s1, d0

Material classification

M1

Raw materials:

**Recycled PET /
approved**

Mitat ja materiaali

Maksimi korkeus

Modulaarinen, vaihteleva korkeus

Leveys

Modulaarinen, vaihteleva leveys

Paneelikoko

550 × 550 mm

(myös 500 × 500 mm saatavilla)

Elementin paksuus

11 cm

Paino

Vaihtelee koon mukaan

Rakennetaan modulaarisesti 550 × 550 mm paneeleista — koko muokattavissa tarpeen mukaan.

Materiaali

Materiaalina kotimainen 100% polyesterihuopa, jonka valmistuksessa hyödynnetään kierrätettyjä Pet-pulloja. Valmistus ilman kemikaaleja ja liuottimia.

Asennus

Pystytys omilla jaloilla vapaasti seisovaksi tai ripustus vaimereiden varaan.

Measures and Material

Max height

Modular, variable height

Width

Modular, variable width

Panel size

550 × 550 mm

(also available in 500 × 500 mm)

Element thickness

11 cm

Weight

Varies depending on size

Built modularly from 550 × 550 mm panels — size can be customised to need.

Material

The material is domestic 100% polyester felt, made using recycled PET bottles. Manufactured without chemicals and solvents.

Installation

Free-standing on its own legs, or suspended using cables.

Vakiovärit

Valkoinen

Maleo

Vaalean harmaa

Tumman harmaa

Musta

Tilausvärit

Saatavana myös villakankaalla verhoiltuna. Useampia eri vaihtoehtoja mm. Gabrielin ja Camiran mallistoista. (www.gabriel.dk)

Standard colors

White

Maleo

Light grey

Dark grey

Black

Special colors

Various colors available in wool fabric upholstery. Several alternatives from Gabriel and Camira. (www.gabriel.dk)

soften® ACOUSTIC SOLUTIONS

02-534 4440
myynti@soften.fi



Soften Oy • Kärämäentie 35 • 20360 Turku • Finland